



SCHOOL OF COMPUTER APPLICATIONS

PROJECT

NO SQL and DBaas 101 (NO SQL)
(BCADSN13202)

Submitted By:-

Name – Aditya Prajapati

Section – BCADS21

Roll Number – 1240258035

Submitted To:-

Mr. Ankit Verma

PROJECT


1. Complex Filters & Projections

Q1: - List the names and departments of students who have more than 85% attendance and are skilled in both "MongoDB" and "Python".

Query: -

```
db.students_full.find(
  { attendance: { $gt: 85 }, skills: { $in: ["MongoDB", "Python"] } })
```

Output: -

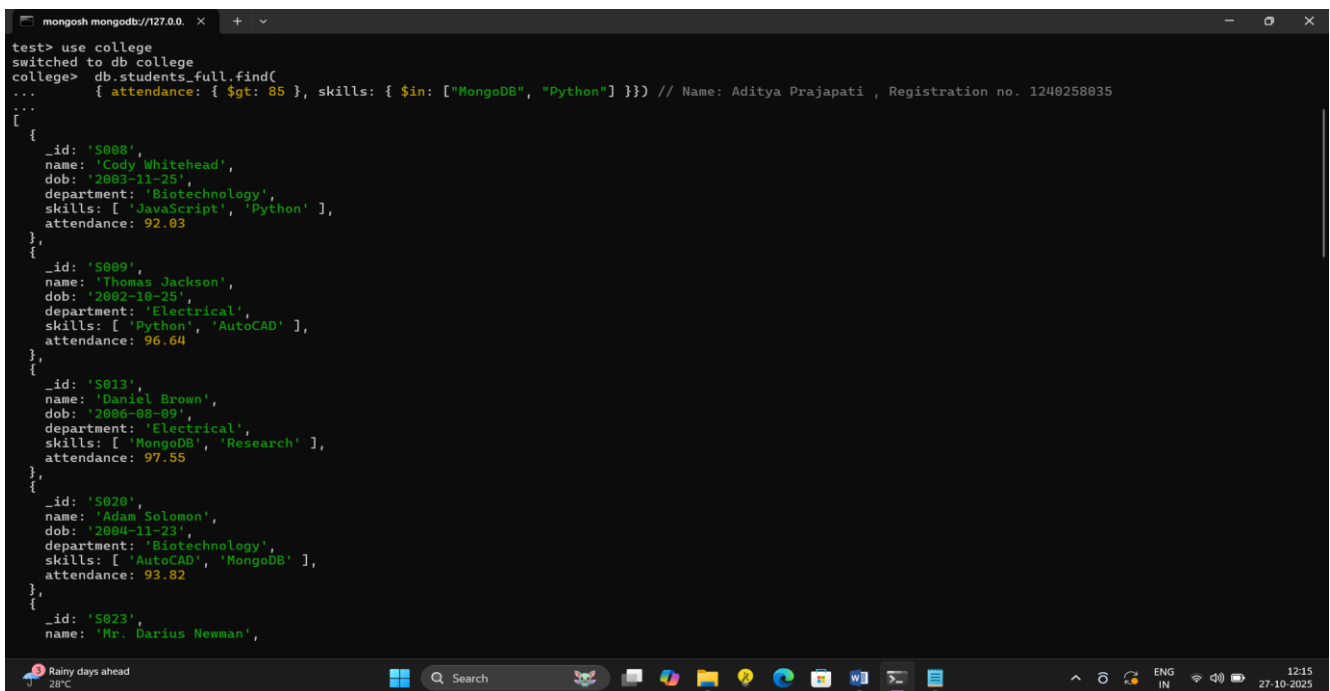

The screenshot shows a MongoDB command prompt window with the following content:

```
test> use college
switched to db college
college> db.students_full.find(
...   { attendance: { $gt: 85 }, skills: { $in: ["MongoDB", "Python"] } }) // Name: Aditya Prajapati , Registration no. 1240258035
...
[
  {
    _id: 'S008',
    name: 'Cody Whitehead',
    dob: '2003-11-25',
    department: 'Biotechnology',
    skills: [ 'JavaScript', 'Python' ],
    attendance: 92.03
  },
  {
    _id: 'S009',
    name: 'Thomas Jackson',
    dob: '2002-10-25',
    department: 'Electrical',
    skills: [ 'Python', 'AutoCAD' ],
    attendance: 96.64
  },
  {
    _id: 'S013',
    name: 'Daniel Brown',
    dob: '2006-08-09',
    department: 'Electrical',
    skills: [ 'MongoDB', 'Research' ],
    attendance: 97.55
  },
  {
    _id: 'S020',
    name: 'Adam Solomon',
    dob: '2004-11-23',
    department: 'Biotechnology',
    skills: [ 'AutoCAD', 'MongoDB' ],
    attendance: 93.82
  },
  {
    _id: 'S023',
    name: 'Mr. Darius Newman',
    attendance: 98.5
  }
]
```

- Nothing will show up because there aren't any students who have both 'MongoDB' and 'Python' skills and more than 85% attendance.
- Use **comparison operators** like \$gt (greater than).
- Apply **array matching** with \$all to ensure multiple elements exist.
- Use **projection** to show only required fields.
- Build **compound filters** using multiple conditions.

Q2: - Show all faculty who are teaching more than 2 courses. Display their names and the total number of courses they teach.

Query: -

```
db.faculty_full.aggregate(  
  [{ $project: { name: 1, totalCourses: { $size: "$courses" }}}],  
  { $match: { totalCourses: { $gt: 2 }}}])
```

Output: -

```
college> db.faculty_full.aggregate(  
...      [{ $project: { name: 1, totalCourses: { $size: "$courses" }}}],  
...      { $match: { totalCourses: { $gt: 2 }}}]) // Name: Aditya Prajapati , Registration no. 1240258035  
...  
[  
  { _id: 'F029', name: 'Charles Newton', totalCourses: 3 },  
  { _id: 'F032', name: 'Julia Cole', totalCourses: 3 },  
  { _id: 'F040', name: 'Darrell Velasquez', totalCourses: 3 },  
  { _id: 'F048', name: 'Michael Poole', totalCourses: 3 },  
  { _id: 'F051', name: 'John Duran', totalCourses: 3 },  
  { _id: 'F061', name: 'Daniel Allen', totalCourses: 3 },  
  { _id: 'F083', name: 'Matthew Hanna', totalCourses: 3 },  
  { _id: 'F084', name: 'Michael Johnson', totalCourses: 3 },  
  { _id: 'F100', name: 'Robert Lara', totalCourses: 3 }  
]  
college>
```

- Use \$project to create computed fields.
- Use \$size to count array elements.
- Combine \$match after projection for conditional filtering.
- Understand aggregation pipelines.


2. Joins (\$lookup) and Aggregations

Q3: - Write a query to show each student's name along with the course titles they are enrolled in (use \$lookup between enrollments, students, and courses).

Query: -

```
db.enrollments_full.aggregate([
  { $lookup: { from: "students_full", localField: "student_id", foreignField: "_id", as: "student_info" } },
  { $unwind: "$student_info" }, { $lookup: { from: "courses_full", localField: "course_id", foreignField: "_id", as: "course_info" } },
  { $unwind: "$course_info" }, { $project: { _id: 0, student_name: "$student_info.name", course_title: "$course_info.title" } }])
```

Output:-

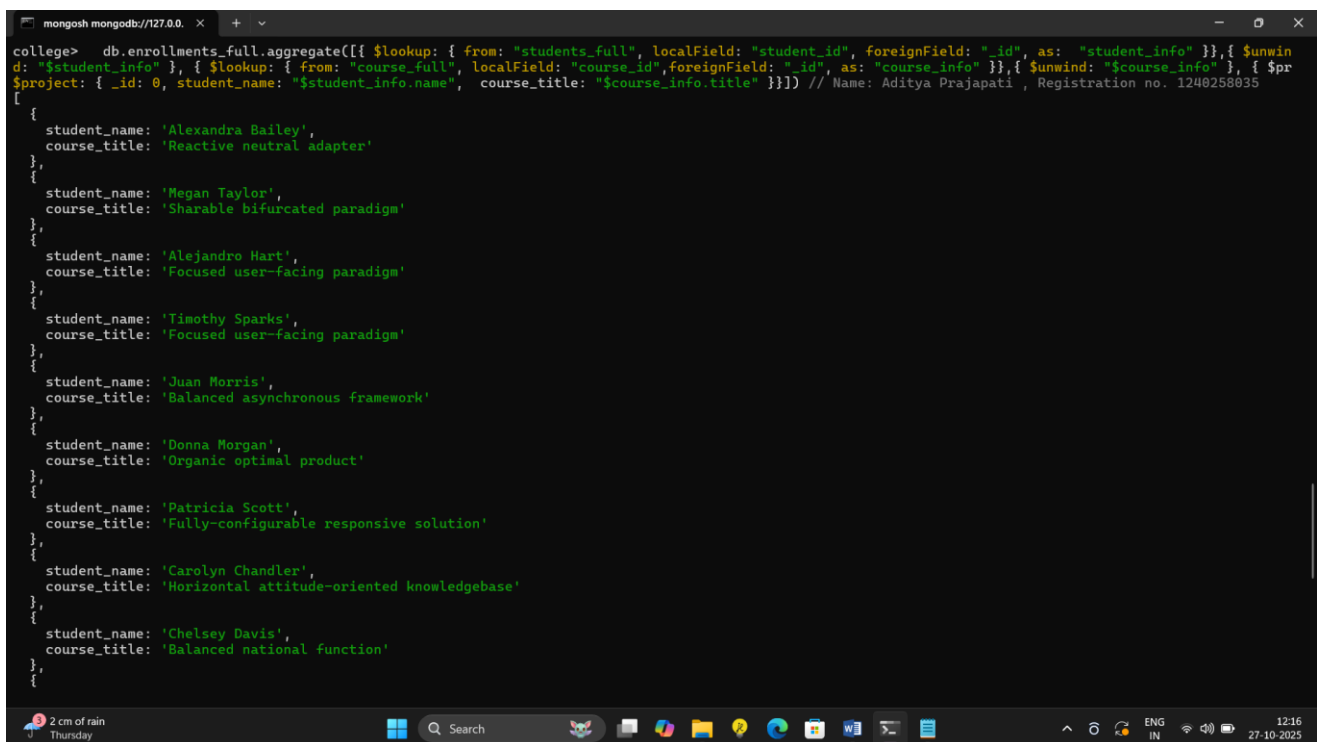

```
college> db.enrollments_full.aggregate([{$lookup: { from: "students_full", localField: "student_id", foreignField: "_id", as: "student_info" }},{ $unwind: "$student_info" }, { $lookup: { from: "courses_full", localField: "course_id", foreignField: "_id", as: "course_info" }},{ $unwind: "$course_info" }, { $project: { _id: 0, student_name: "$student_info.name", course_title: "$course_info.title" } }]) // Name: Aditya Prajapati , Registration no. 1240258035
[
  {
    student_name: 'Alexandra Bailey',
    course_title: 'Reactive neutral adapter'
  },
  {
    student_name: 'Megan Taylor',
    course_title: 'Sharable bifurcated paradigm'
  },
  {
    student_name: 'Alejandro Hart',
    course_title: 'Focused user-facing paradigm'
  },
  {
    student_name: 'Timothy Sparks',
    course_title: 'Focused user-facing paradigm'
  },
  {
    student_name: 'Juan Morris',
    course_title: 'Balanced asynchronous framework'
  },
  {
    student_name: 'Donna Morgan',
    course_title: 'Organic optimal product'
  },
  {
    student_name: 'Patricia Scott',
    course_title: 'Fully-configurable responsive solution'
  },
  {
    student_name: 'Carolyn Chandler',
    course_title: 'Horizontal attitude-oriented knowledgebase'
  },
  {
    student_name: 'Chelsey Davis',
    course_title: 'Balanced national function'
  },
  {
  }
```


- Use \$lookup for joins between collections.
- Combine multiple \$lookups for complex relationships.
- Use \$arrayElemAt to extract single values from arrays.
- Understand MongoDB's relational-like linking.

Q4: - For each course, display the course title, number of students enrolled, and average marks (use \$group).

Query: -

```
db.enrollments_full.aggregate([{$group: { _id: "$course_id", total_students: { $sum: 1 },
avg_marks: { $avg: "$marks" } }},
{$lookup: { from: "courses_full", localField: "_id", foreignField: "_id", as: "course_info" }},
{$unwind: "$course_info" },
{$project: { _id: 0, course_title: "$course_info.title", total_students: 1, avg_marks: { $round:
["$avg_marks", 2] } } }])
```

Output:-

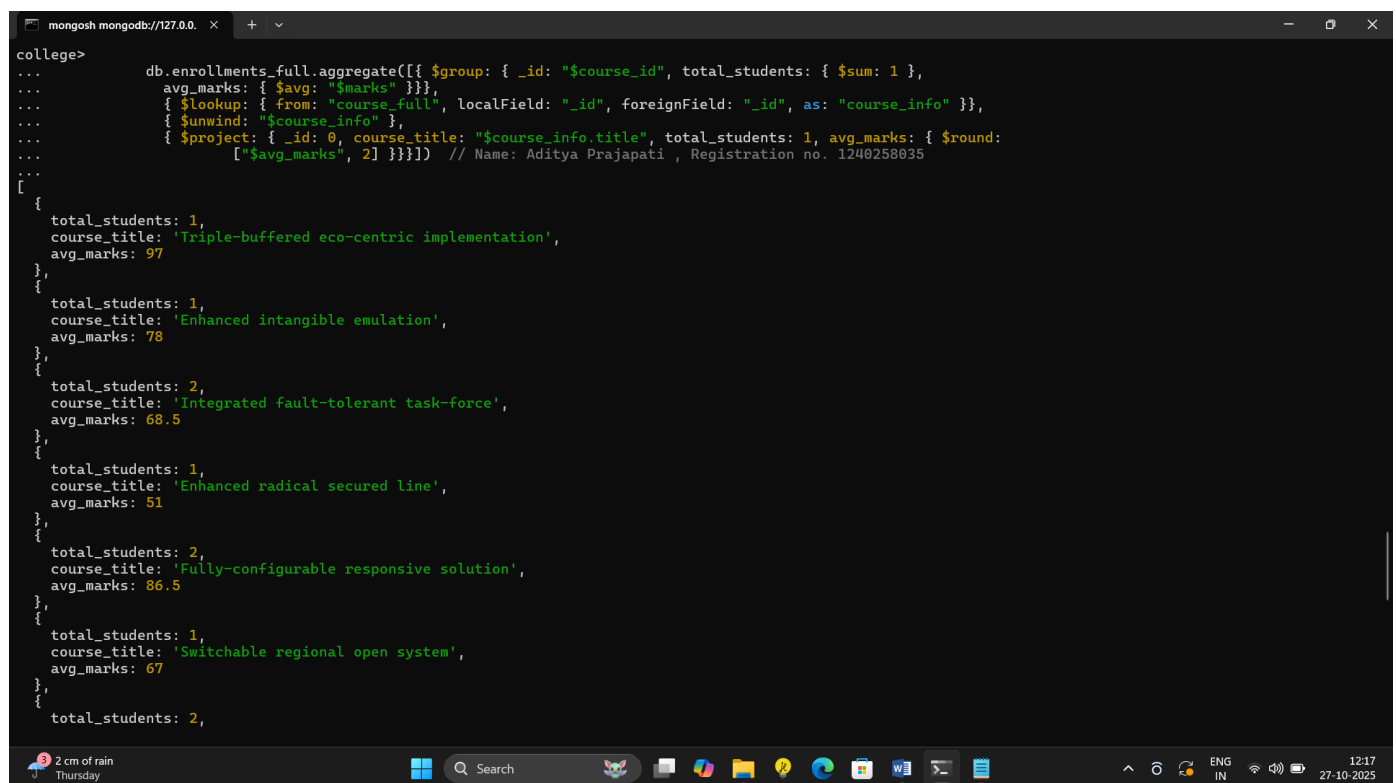

```
college>
... db.enrollments_full.aggregate([{$group: { _id: "$course_id", total_students: { $sum: 1 },
... avg_marks: { $avg: "$marks" } }},
... {$lookup: { from: "courses_full", localField: "_id", foreignField: "_id", as: "course_info" }},
... {$unwind: "$course_info" },
... {$project: { _id: 0, course_title: "$course_info.title", total_students: 1, avg_marks: { $round:
... ["$avg_marks", 2] } } }]) // Name: Aditya Prajapati , Registration no. 1240258035
...
[
  {
    total_students: 1,
    course_title: 'Triple-buffered eco-centric implementation',
    avg_marks: 97
  },
  {
    total_students: 1,
    course_title: 'Enhanced intangible emulation',
    avg_marks: 78
  },
  {
    total_students: 2,
    course_title: 'Integrated fault-tolerant task-force',
    avg_marks: 68.5
  },
  {
    total_students: 1,
    course_title: 'Enhanced radical secured line',
    avg_marks: 51
  },
  {
    total_students: 2,
    course_title: 'Fully-configurable responsive solution',
    avg_marks: 86.5
  },
  {
    total_students: 1,
    course_title: 'Switchable regional open system',
    avg_marks: 67
  },
  {
    total_students: 2,

```

- Use \$group for summarizing data.
- Use \$avg and \$sum to calculate aggregates.
- \$unwind helps to deconstruct arrays.
- \$project to rename and structure output.

3. Grouping, Sorting, and Limiting

Q5: - Find the top 3 students with the highest average marks across all enrolled courses.

Query: -

```
db.enrollments_full.aggregate(
  [{ $group: { _id: "$student_id", avg_marks: { $avg: "$marks" } } },
   { $sort: { avg_marks: -1 } },
   { $limit: 3 },
   { $lookup: { from: "students_full", localField: "_id", foreignField: "_id", as: "student_info" } },
   { $unwind: "$student_info" },
   { $project: { _id: 0, student_name: "$student_info.name", avg_marks: { $round: ["$avg_marks", 2] } } }
])
```

Output:-

```
college> db.enrollments_full.aggregate(
...     [{ $group: { _id: "$student_id", avg_marks: { $avg: "$marks" } } },
...     { $sort: { avg_marks: -1 } },
...     { $limit: 3 },
...     { $lookup: { from: "students_full", localField: "_id", foreignField: "_id", as: "student_info" } },
...     { $unwind: "$student_info" },
...     { $project: { _id: 0, student_name: "$student_info.name", avg_marks: { $round: ["$avg_marks", 2] } } }
...     ]}) // Name: Aditya Prajapati , Registration no. 1240258035
...
[
  { student_name: 'Diane Phillips', avg_marks: 100 },
  { student_name: 'Brandon Rios', avg_marks: 98 },
  { student_name: 'Christopher Benson', avg_marks: 94 }
]
college>
```

- \$sort sorts data in ascending/descending order.
- \$limit restricts results to top records.
- \$group for calculating averages.
- Combining joins with grouping.

Q6: - Count how many students are in each department. Display the department with the highest number of students.

Query: -

```
db.students_full.aggregate(  
  [{ $group: { _id: "$department", totalStudents: { $sum: 1 } }},  
   { $sort: { totalStudents: -1 } },  
   { $limit: 1 },  
   { $project: { _id: 0, department: "$_id", totalStudents: 1 } }])
```

Output:-

```
college> db.students_full.aggregate(  
...      [{ $group: { _id: "$department", totalStudents: { $sum: 1 } }},  
...        { $sort: { totalStudents: -1 } },  
...        { $limit: 1 },  
...        { $project: { _id: 0, department: "$_id", totalStudents: 1 } }]) // Name: Aditya Prajapati , Registration no. 1240258035  
...  
[ { totalStudents: 23, department: 'Electrical' } ]  
college>
```

- Count items per category with \$sum: 1.
- Use \$sort to rank results.
- Identify top-performing or most populated groups.
- Apply \$limit to get top results.

4. Update, Upsert, and Delete

Q7: - Update attendance to 100% for all students who won any "Hackathon".

Query: -

```
db.students_full.updateMany(
  { activities: "Hackathon" },
  { $set: { attendance: 100 } })
```

Output:-

```
college> db.students_full.updateMany(
...   { activities: "Hackathon" },
...   { $set: { attendance: 100 } }) // Name: Aditya Prajapati , Registration no. 1240258035
...
{
  acknowledged: true,
  insertedId: null,
  matchedCount: 0,
  modifiedCount: 0,
  upsertedCount: 0
}
college>
```

- Use updateMany() for bulk updates.
- \$set modifies specific fields.
- Target documents via **nested fields**.
- Understand bulk updates with filters.

Q8: - Delete all student activity records where the activity year is before 2022.

Query: -

```
db.activities_full.deleteMany(
  { year: { $lt: 2022 } })
```

Output:-

```
college> db.activities_full.deleteMany(
...   { year: { $lt: 2022 } }) // Name: Aditya Prajapati , Registration no. 1240258035
...
{ acknowledged: true, deletedCount: 0 }
college> |
```

- Delete records conditionally using deleteMany().
- \$lt filters by less than a value.
- Manage dataset cleanup.
- Apply conditional data management.

Q9: - Upsert a course record for "Data Structures" with ID "C150" and credits 4—if it doesn't exist, insert it; otherwise update its title to "Advanced Data Structures".

Query: -

```
db.courses_full.updateOne(
  { _id: "C150" },
  [{ $set: { title: { $cond: [{ $eq: ["$title", null] }, "Data Structure", "Advanced Data Structures"] },
    credits: { $ifNull: ["$credits", 4] } } }],
  { upsert: true })
```

Output:-

```
college> db.activities_full.deleteMany(
...   { year: { $lt: 2022 } }) // Name: Aditya Prajapati , Registration no. 1240258035
...
{ acknowledged: true, deletedCount: 0 }
college> db.course_full.updateOne(
...   { _id: "C150" },
...   {
...     $set: {
...       title: {
...         $cond: [{ $eq: ["$title", null] }, "Data Structure", "Advanced Data Structures"]
...       },
...       credits: { $ifNull: ["$credits", 4] }
...     }
...   },
...   { upsert: true }
... ) // Name: Aditya Prajapati , Registration no. 1240258035
...
{
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 0,
  upsertedCount: 0
}
college>
```

- upsert: true inserts if no match is found.
- \$setOnInsert applies only when inserting new data.
- \$set updates fields if record exists.
- Handle both **insert** and **update** in one command.


5. Array & Operator Usage

Q10: - Find all students who have "Python" as a skill but not "C++".

Query: -

```
db.students_full.find(
  { $and: [{ skills: "Python" }, { skills: { $ne: "C++" } } ] })
```

Output:-

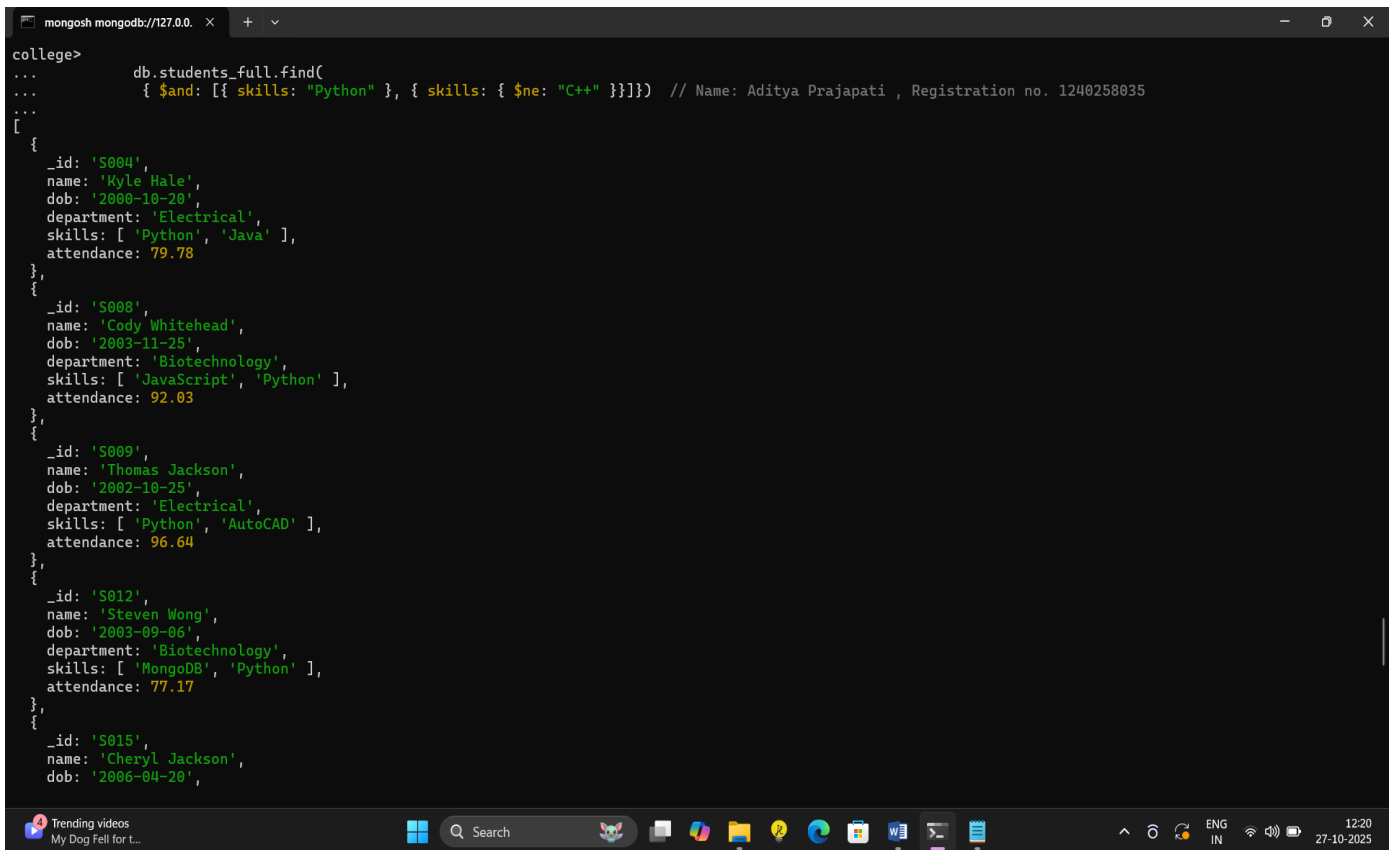

```
college>
...      db.students_full.find(
...      { $and: [{ skills: "Python" }, { skills: { $ne: "C++" } } ] }) // Name: Aditya Prajapati , Registration no. 1240258035
...
[
  {
    _id: 'S004',
    name: 'Kyle Hale',
    dob: '2000-10-20',
    department: 'Electrical',
    skills: [ 'Python', 'Java' ],
    attendance: 79.78
  },
  {
    _id: 'S008',
    name: 'Cody Whitehead',
    dob: '2003-11-25',
    department: 'Biotechnology',
    skills: [ 'JavaScript', 'Python' ],
    attendance: 92.03
  },
  {
    _id: 'S009',
    name: 'Thomas Jackson',
    dob: '2002-10-25',
    department: 'Electrical',
    skills: [ 'Python', 'AutoCAD' ],
    attendance: 96.64
  },
  {
    _id: 'S012',
    name: 'Steven Wong',
    dob: '2003-09-06',
    department: 'Biotechnology',
    skills: [ 'MongoDB', 'Python' ],
    attendance: 77.17
  },
  {
    _id: 'S015',
    name: 'Cheryl Jackson',
    dob: '2006-04-20',
    attendance: 0
  }
]
```

- \$in checks for presence in arrays.
- \$nin checks for absence in arrays.
- Combine both for exclusive conditions.
- Operate effectively on array fields.

Q11: - Return names of students who participated in "Seminar" and "Hackathon" both.

Query: -

```
db.activities_full.aggregate(  
  [{ $group: { _id: "$student_id", activityTypes: { $addToSet: "$type" } }},  
  { $match: { activityTypes: { $all: ["Seminar", "Hackathon"] } }},  
  { $lookup: { from: "students_full", localField: "_id", foreignField: "_id", as: "student_info" }},  
  { $unwind: "$student_info" },  
  { $project: { _id: 0, name: "$student_info.name" } }])
```

Output:-

```
college> db.activities_full.aggregate(  
...   [{ $group: { _id: "$student_id", activityTypes: { $addToSet: "$type" } }},  
...   { $match: { activityTypes: { $all: ["Seminar", "Hackathon"] } }},  
...   { $lookup: { from: "students_full", localField: "_id", foreignField: "_id", as: "student_info" }},  
...   { $unwind: "$student_info" },  
...   { $project: { _id: 0, name: "$student_info.name" } }]) // Name: Aditya Prajapati , Registration no. 1240258035  
[  
  { name: 'Adam Solomon' },  
  { name: 'Patricia Scott' },  
  { name: 'Taylor Webb' },  
  { name: 'Lydia Day' },  
  { name: 'Carlos Bryant' }  
]  
college>
```

- \$all ensures all specified elements exist in an array.
- Simple array querying in MongoDB.
- Combine multiple filters in a single query.
- Efficient participation tracking.

6. Subdocuments and Nested Conditions

Q12: - Find students who scored more than 80 in "Web Development" only if they belong to the "Computer Science" department.

Query: -

```
db.enrollments_full.find(
  { course_title: "Web Development", marks: { $gt: 80 }, department: "Computer Science" })
```

Output:-

```
college> db.enrollments_full.find(
...      { course_title: "Web Development", marks: { $gt: 80 }, department: "Computer Science" }) // Name: Aditya Prajapati , Registration no. 1240
258035
...
college>
```

- Nothing will show up because there are no students in the Computer Science department who scored more than 80 in 'Web Development'.
- Access nested fields using dot notation.
- Combine multiple field conditions.
- Query subdocuments efficiently.
- Focused filtering by department and performance.


7. Advanced Aggregation (Challenge Level)

Q13: - For each faculty member, list the names of all students enrolled in their courses along with average marks per student per faculty.

Query: -

```
db.faculty_full.aggregate([
  { $lookup: { from: "courses_full", localField: "courses", foreignField: "_id", as: "courseInfo" } },
  { $unwind: "$courseInfo" },
  { $lookup: { from: "enrollments_full", localField: "courseInfo._id", foreignField: "course_id", as:
    "enrolledStudents" } },
  { $unwind: "$enrolledStudents" },
  { $lookup: { from: "students_full", localField: "enrolledStudents.student_id", foreignField: "_id",
    as: "studentInfo" } },
  { $project: { _id: 0, facultyName: "$name", studentName: { $arrayElemAt:
    ["$studentInfo.name", 0] }, marks: "$enrolledStudents.marks" } },
  { $group: { _id: { facultyName: "$facultyName", studentName: "$studentName" },
    averageMarks: { $avg: "$marks" } } },
  { $project: { _id: 0, facultyName: "$_id.facultyName", studentName: "$_id.studentName",
    averageMarks: 1 } },
  { $sort: { facultyName: 1, studentName: 1 } }])
```

Output: -

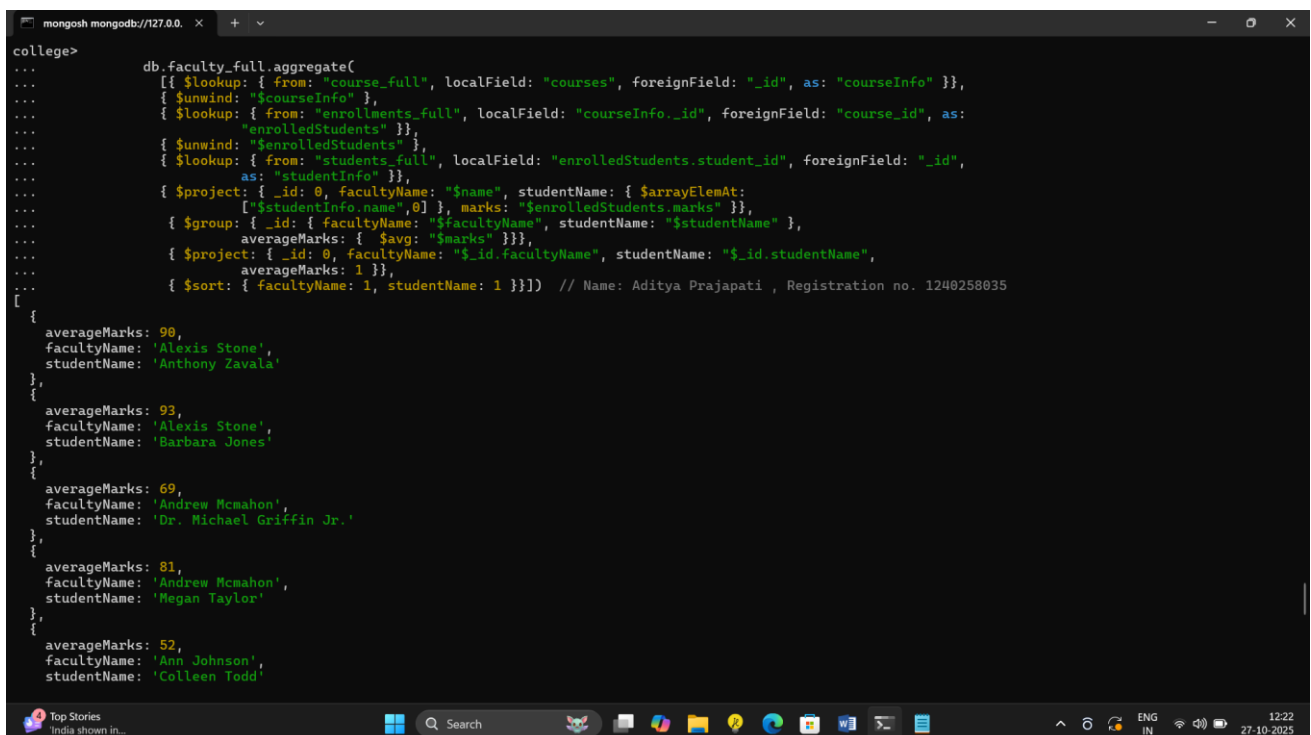

The screenshot shows a MongoDB command prompt window with the following content:

```
college> db.faculty_full.aggregate([
...  [{ $lookup: { from: "courses_full", localField: "courses", foreignField: "_id", as: "courseInfo" } },
...  { $unwind: "$courseInfo" },
...  { $lookup: { from: "enrollments_full", localField: "courseInfo._id", foreignField: "course_id", as:
...    "enrolledStudents" } },
...  { $unwind: "$enrolledStudents" },
...  { $lookup: { from: "students_full", localField: "enrolledStudents.student_id", foreignField: "_id",
...    as: "studentInfo" } },
...  { $project: { _id: 0, facultyName: "$name", studentName: { $arrayElemAt:
...    ["$studentInfo.name", 0] }, marks: "$enrolledStudents.marks" } },
...  { $group: { _id: { facultyName: "$facultyName", studentName: "$studentName" },
...    averageMarks: { $avg: "$marks" } } },
...  { $project: { _id: 0, facultyName: "$_id.facultyName", studentName: "$_id.studentName",
...    averageMarks: 1 } },
...  { $sort: { facultyName: 1, studentName: 1 } }]) // Name: Aditya Prajapati , Registration no. 1240258035
[
  {
    averageMarks: 90,
    facultyName: 'Alexis Stone',
    studentName: 'Anthony Zavala'
  },
  {
    averageMarks: 93,
    facultyName: 'Alexis Stone',
    studentName: 'Barbara Jones'
  },
  {
    averageMarks: 69,
    facultyName: 'Andrew McMahon',
    studentName: 'Dr. Michael Griffin Jr.'
  },
  {
    averageMarks: 81,
    facultyName: 'Andrew McMahon',
    studentName: 'Megan Taylor'
  },
  {
    averageMarks: 52,
    facultyName: 'Ann Johnson',
    studentName: 'Colleen Todd'
  }
]
```

- Multi-level joins using \$lookup.
- \$addToSet to avoid duplicate student names.
- \$avg to compute average marks per faculty.
- Real-world aggregation chaining.

Q14: - Show the most popular activity type (e.g., Hackathon, Seminar, etc.) by number of student participants.

Query: -

```
db.activities_full.aggregate(  
  [{ $group: { _id: "$type", participants: { $sum: 1 } }},  
  { $sort: { participants: -1 } },  
  { $limit: 1 }])
```

Output: -

```
college> db.activities_full.aggregate(  
...      [{ $group: { _id: "$type", participants: { $sum: 1 } }},  
...      { $sort: { participants: -1 } },  
...      { $limit: 1 }]) // Name: Aditya Prajapati , Registration no. 1240258035  
[ { _id: 'Seminar', participants: 35 } ]  
college>
```

- \$unwind to count array elements.
- \$group and \$sum for totals.
- \$sort to rank results.
- Identify “most popular” entities.