

Exercise 1: Mirroring Configuration

Step 1. Create the mirroring configuration on the Primary node (irisa). Specify the arbiter address and port.


1, Enable mirror service

On irisa, go to System Management


Portal(<http://127.0.0.1:8081/csp/sys/Utilhome.csp>) > System

Administration > Configuration > Mirror Settings > Enable Mirror Service

Check “**Service Enabled**” and click Save.

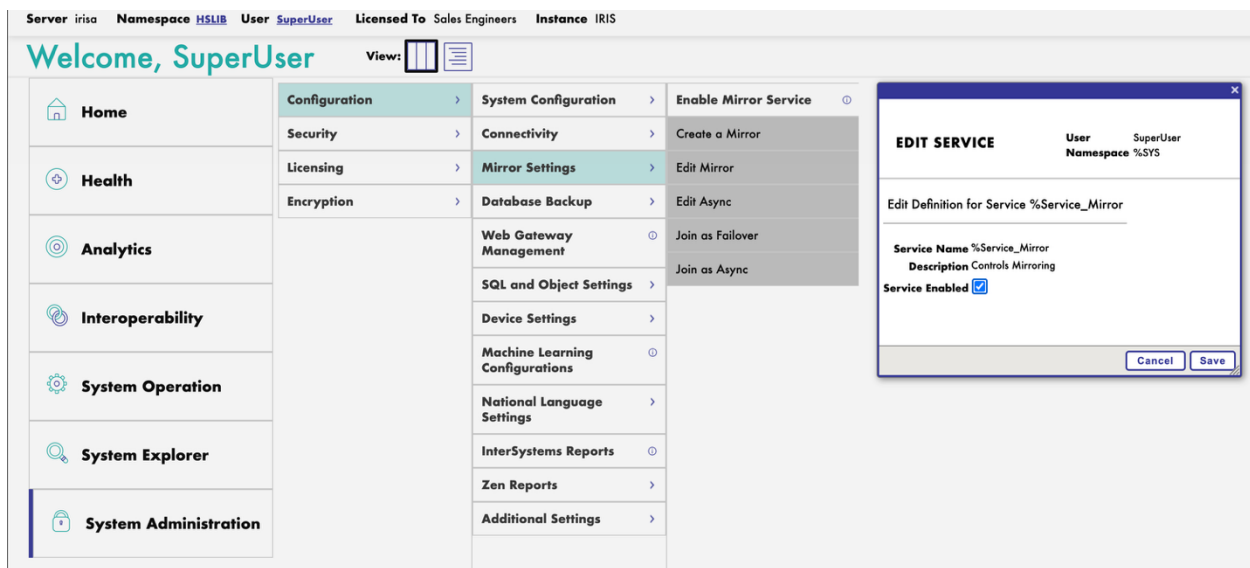

2, Click “**Create a Mirror**”

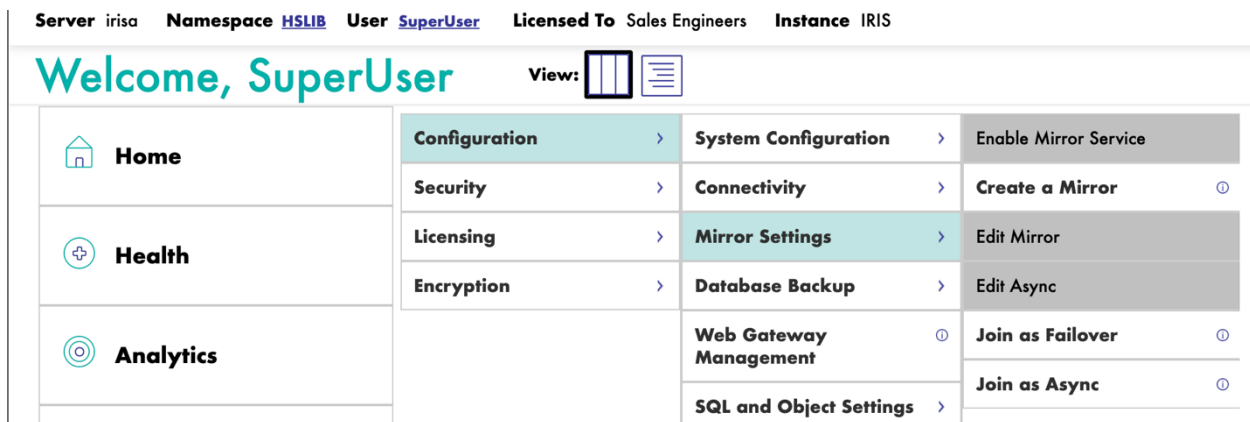

In the page:

Input “**Mirror Name**” a name like IRISMIRROR

Uncheck “**Require SSL/TLS**” since we don’t setup SSL/TLS yet

Check “**Use Arbiter**”, and input “**Address**” as “arbiter”

Keep all others as default value

Click Save to save the mirror setting.

Server irisa Namespace %SYS User SuperUser Licensed To Sales Engineers Instance IRIS

System > Configuration > Create Mirror - (configuration settings)*

Create Mirror

[Save](#) [Cancel](#)

Use the form below to create a Mirror:

Mirror Information

Mirror Name (max 15 characters)
Required.

Require SSL/TLS ☐ [Set up SSL/TLS](#)
Use of SSL/TLS is highly recommended!

Use Arbiter ☒

Address **Port**
Required. Required.

Use Virtual IP ☐

Compression Mode For Failover Members

Compression Mode For Async Members

Allow Parallel Dejournaling

Mirror Failover Member Information

Mirror Member Name
Required.

Superserver Address
Required.

Agent Port
Required.

[Advanced Settings](#)

Mirror Settings

Quality of Service Timeout (msec)

This Failover Member

Mirror Private Address

Agent Address

3, Check mirror status on irisa

Go to System Management Portal > System Operation > Mirror Monitor

Should see status like below:

Only one mirror member in the list, IRISA/IRIS, as **Primary** node;

Aribter connected with address **arbiter|2188**.

Server irisa Namespace %SYS User SuperUser Licensed To Sales Engineers Instance IRIS

System > Mirror Monitor

Mirror Monitor

[View Mirror Journal Files](#)

[Set No Failover](#)

This system is a failover member in mirror IRISMIRROR

Mirror Failover Member Information

	<u>This Failover Member</u>	<u>Other Failover Member</u>
Mirror Member Name	IRISA/IRIS	n/a
Superserver Address	irisa	n/a
Mirror Private Address	irisa	n/a

Arbiter Connection Status

Arbiter Address	arbiter 2188
Failover Mode	Agent Controlled
Connection Status	This member is not connected to the arbiter

Mirror Member Status

Member Name	Member Type	Status	Journal Transfer	Dejournaling	X.509 DN
IRISA/IRIS	Failover	Primary	N/A	N/A	

Mirrored Databases

Filter: Page size: 0 Max rows: 1000 Results: 0 Page: < << 1 >> > of 1

Name	Directory	Status	Next Record To Dejournal (Time, Filename, Offset)
No Results			

Click 'Go' to perform an action on multiple databases

--Select an action--

Step 2. let Backup node (irisb) join the mirror cluster

1, Enable mirror service

On irisb, go to System Management Portal
(http://127.0.0.1:8082/csp/sys/Utilhome.csp)>System
Administration>Configuration>Mirror Settings>Enable Mirror Service

Check “**Service Enabled**” and click **Save**.

2, Join the mirror cluster

Select “**Join as Failover**”

Welcome, SuperUser

View:  

Home Health Analytics	Configuration >	System Configuration >	Enable Mirror Service
	Security >	Connectivity >	Create a Mirror ⓘ
	Licensing >	Mirror Settings >	Edit Mirror
	Encryption >	Database Backup >	Edit Async
		Web Gateway Management ⓘ	Join as Failover ⓘ
		SQL and Object Settings >	Join as Async ⓘ

and enter:

“Mirror Name” as IRISMIRROR

“Agent Address on Other System” as the hostname of primary node, which is **irisa**

“Agent Port” as iscagent port number on the primary node, which is **2188**

“InterSystems IRIS Instance Name” as IRIS instance name on the primary node, which is **IRIS**

Click Next.

System > Configuration > Join Mirror as Failover - (configuration settings)*

Join Mirror as Failover

Next

Cancel

Use the form below to join an existing Mirror as the failover member:

Mirror Information

Mirror Name

Required.

Other Mirror Failover Member's Info

Agent Address on Other System

Required.

Agent Port

Required.

InterSystems IRIS Instance Name

Required.

Provide required information then click [Next] to retrieve data

Confirm and **Save:**

Server irisb **Namespace** %SYS **User** SuperUser **Licensed To** Sales Engineers **Instance** IRIS

[System](#) > [Configuration](#) > [Join Mirror as Failover](#) - (configuration settings)*

Join Mirror as Failover

Save

Clear

Cancel

Use the form below to join an existing Mirror as the failover member:

Mirror Failover Member Information

	<u>This System</u>	<u>Other System</u>
Mirror Member Name	IRISB/IRIS	IRISA/IRIS
Superserver Address	irisb	irisa
Agent Port	2188	2188
SSL/TLS Requirement	The mirror does not require SSL/TLS.	
Mirror Private Address	irisb	irisa
Agent Address	irisb	irisa

[Advanced Settings](#)

Mirror Settings

Quality of Service Timeout (msec) 8000

3, Check mirror status on irisb

Go to System Management Portal > System Operation > Mirror Monitor

Should see status like below:

Now two mirror members in the list: IRISA/IRIS as Primary node; IRISB/IRIS as Backup node.

Server irisb Namespace %SYS User SuperUser Licensed To Sales Engineers Instance IRIS

System > Mirror Monitor

Mirror Monitor

[View Mirror Journal Files](#)

[Stop Mirror On This Member](#)

[Set No Failover](#)

[Demote To DR Member](#)

This system is a failover member in mirror IRISMIRROR

Mirror Failover Member Information

	This Failover Member	Other Failover Member
Mirror Member Name	IRISB/IRIS	IRISA/IRIS
Superserver Address	irisb	irisa
Mirror Private Address	irisb	irisa

Arbiter Connection Status

Arbiter Address	arbiter 2188
Failover Mode	Arbiter Controlled
Connection Status	Both failover members are connected to the arbiter

Mirror Member Status

Member Name	Member Type	Status	Journal Transfer	Dejournaling	X.509 DN
IRISA/IRIS	Failover	Primary	N/A	N/A	
IRISB/IRIS	Failover	Backup	Active	Caught up	

Incoming Journal Transfer Rate for This Member (over refresh interval)
– (will be displayed on refresh)

Mirrored Databases

Filter: Page size: 0 Max rows: 1000 Results: 0 Page: 1 of 1

Name	Directory	Status	Next Record To Dejournal (Time, Filename, Offset)
No Results			

Click 'Go' to perform an action on multiple databases

--Select an action-- Go

Congratulation, your failover mirror cluster is now ready!

Exercise 2: Add Database into Mirror

Notice, “**Mirrored Database**” list is empty. It’s because that we did not assign database to be mirrored yet.

You can create a new database on both nodes and assign it as mirrored database, and also can add a existing database on primary node as mirrored database. We will exercise both cases.

2.1 Create a new mirrored database

Step 1: Add new mirrored database on Primary node

On the Primary node (irisa), create a new database named as “mymirrordb”, and change “**Mirrored database?**” to **Yes**, keep “**Mirror DB Name**” as the auto-populated name unchanged (MYMIRRORDB).

Server irisaNamespace %SYSUser SuperUserLicensed To Sales EngineersInstance IRIS

System > Configuration > Local Databases

Local Databases

Create New DatabaseAdd to Mirror

Last update: 2026-05-14 15:21:18.370

The following is a

Filter:Page size

Name

IRISSYS

IRISSECURITY

IRISLIB

IRISTEMP

IRISLOCALDATA

IRISAUDIT

ENSLIB

IRISMETRICS

HSCUSTOM

HSLIB

HSSYS

HSSYSLOCALTEMP

TRAININGCODE

TRAININGDATA

USER

DATABASE WIZARD

User SuperUserNamespace %SYS

Enter details about the database.

Directory: /iris-shared/durable/mgr/mymirrordb

Initial Size (MB)1

This determines how big the initial database will be.

Block size for this database will be8KB

Block size is the size of the blocks that the databases uses.

New volume threshold size0

☒ TB☐ GB☐ MB

Enter zero to disable automatic creation of new volumes. If non-zero, when the IRIS.DAT would expand past this threshold, a new volume file called IRIS-0001.VOL will be created. When expansion would grow that file past the threshold, IRIS-0002.VOL will be created, and so on. For non-zero values a minimum of 1 terabyte is recommended to avoid an excessive number of files. Each database is limited to 200 volumes.

Journal globals?Yes

Select 'Yes' to journal globals in this database.

Encrypt database?No

You may not create an Encrypted Database because Encryption is not activated.

Mirrored database?Yes

Select 'Yes' to create a Mirrored Database. Globals must be journaled.

Mirror DB NameMYMIRRORDB

Required to create a Mirrored database.

BackNextFinishCancelHelp

Click Finish. Now you can see this database added as mirrored database:

Server irisaNamespace %SYSUser SuperUserLicensed To Sales EngineersInstance IRIS

System > Configuration > Local Databases

Local Databases

Create New DatabaseAdd to Mirror

Last update: 2026-05-14 15:25:33.727

The following is a list of the local databases:

Filter:Page size: 0Max rows: 1000Results: 16Page: 1 of 1

Name	Mirror	Directory	Size (MB)	Status	Resource	Encrypted	Encryption Key ID	Journal		
IRISSYS		/iris-shared/durable/mgr/	70	Mounted/RW	%DB_IRISSYS	No		Yes	-	Globals
IRISSECURITY		/iris-shared/durable/mgr/irissecurity/	11	Mounted/RW	%DB_IRISSECURITY	No		Yes	-	Globals
IRISLIB		/usr/irissys/mgr/irislib/	375	Mounted/R	%DB_IRISLIB	No		No	-	Globals
IRISTEMP		/iris-shared/durable/mgr/iristemp/	11	Mounted/RW	%DB_IRISTEMP	No		No	-	Globals
IRISLOCALDATA		/iris-shared/durable/mgr/irislocaldata/	31	Mounted/RW	%DB_IRISLOCALDATA	No		No	-	Globals
IRISAUDIT		/iris-shared/durable/mgr/irisaudit/	31	Mounted/RW	%DB_IRISAUDIT	No		Yes	-	Globals
ENSLIB		/usr/irissys/mgr/enslib/	213	Mounted/R	%DB_ENSLIB	No		No	-	Globals
IRISMETRICS		/iris-shared/durable/mgr/irismetrics/	1	Mounted/RW	%DB_IRISMETRICS	No		Yes	-	Globals
HSCUSTOM		/iris-shared/durable/mgr/HSCUSTOM/	21	Mounted/RW	%DB_HSCUSTOM	No		Yes	Delete	Globals Volumes
HSLIB		/usr/irissys/mgr/hslib/	1623	Mounted/R	%DB_HSLIB	No		No	Delete	Globals Volumes
HSSYS		/iris-shared/durable/mgr/hssys/	21	Mounted/RW	%DB_HSSYS	No		Yes	Delete	Globals Volumes
HSSYSLOCALTEMP		/iris-shared/durable/mgr/hssyslocaltemp/	1	Mounted/RW	%DB_HSSYSLOCALTEMP	No		No	Delete	Globals Volumes
MYMIRRORDB	IRISMIRROR	/iris-shared/durable/mgr/mymirrordb/	1	Mounted/RW	%DB_%DEFAULT	No		Yes	-	Globals Volumes
TRAININGCODE		/iris-shared/durable/mgr/trainingcode/	1	Mounted/RW	%DB_%DEFAULT	No		Yes	Delete	Globals Volumes
TRAININGDATA		/iris-shared/durable/mgr/trainingdata/	114	Mounted/RW	%DB_%DEFAULT	No		Yes	Delete	Globals Volumes
USER		/iris-shared/durable/mgr/user/	1	Mounted/RW	%DB_USER	No		No	Delete	Globals Volumes

And on **Mirror Monitor** page:

Mirror Monitor

[View Mirror Journal Files](#)

[Set No Failover](#)

This system is a failover member in mirror IRISMIRROR

Mirror Failover Member Information

	This Failover Member	Other Failover Member
Mirror Member Name	IRISA/IRIS	IRISB/IRIS
Superserver Address	irisa	irisb
Mirror Private Address	irisa	irisb

Arbiter Connection Status

Arbiter Address arbiter|2188
Failover Mode Arbiter Controlled
Connection Status Both failover members are connected to the arbiter

Mirror Member Status

Member Name	Member Type	Status	Journal Transfer	Dejournaling	X.509 DN
IRISA/IRIS	Failover	Primary	N/A	N/A	
IRISB/IRIS	Failover	Backup	Active	Caught up	

Mirrored Databases

Filter: Page size: 0 Max rows: 1000 Results: 1 Page: 1 of 1

Name	Directory	Status	Next Record To Dejournal (Time, Filename, Offset)				
MYMIRRORDB	/iris-shared/durable/mgr/mymirrordb/	Normal	N/A	-	-	-	Remove

Click 'Go' to perform an action on multiple databases

--Select an action--

Step 2: Add same named new database on backup node

First, take a look on **Mirror Monitor** page of backup node:

There is a warning “**Missing Mirrored Database Report**”

Server irisb Namespace %SYS User SuperUser Licensed To Sales Engineers Instance IRIS

System > Mirror Monitor

Mirror Monitor

[View Mirror Journal Files](#)

[Stop Mirror On This Member](#)

[Set No Failover](#)

This system is a failover member in mirror IRISMIRROR

Mirror Failover Member Information

	<u>This Failover Member</u>	<u>Other Failover Member</u>
Mirror Member Name	IRISB/IRIS	IRISA/IRIS
Superserver Address	irisb	irisa
Mirror Private Address	irisb	irisa

Arbiter Connection Status

Arbiter Address	arbiter 2188
Failover Mode	Arbiter Controlled
Connection Status	Both failover members are connected to the arbiter

Mirror Member Status

Member Name	Member Type	Status	Journal Transfer	Dejournaling	X.509 DN
IRISA/IRIS	Failover	Primary	N/A	N/A	
IRISB/IRIS	Failover	Backup	Active	Caught up	

Incoming Journal Transfer Rate for This Member (over refresh interval)

– (will be displayed on refresh)

Missing Mirrored Databases Report

Mirrored Database Name

:mirror:IRISMIRROR:MYMIRRORDB

Mirrored Databases

Filter: Page size: 0 Max rows: 1000 Results: 0 Page: 1 of 1

[Name](#) [Directory](#) [Status](#) [Next Record To Dejournal \(Time, Filename, Offset\)](#)

No Results

Click 'Go' to perform an action on multiple databases

--Select an action--

Go

Now, on the Backup node, create a new database with the same name (MYMIRRORDB) and exact same setting of the primary one:

The following is a list of t

Filter: Page size: 0

Name	Mirror	Direct
IRISSYS		/iris-s
IRISSECURITY		/iris-s
IRISLIB		/usr/li
IRISTEMP		/iris-s
IRISLOCALDATA		/iris-s
IRISAUDIT		/iris-s
ENSLIB		/usr/li
IRISMETRICS		/iris-s
HSCUSTOM		/iris-s
HSLIB		/usr/li
HSSYS		/iris-s
HSSYSLOCALTEMP		/iris-s
USER		/iris-s

DATABASE WIZARD

User SuperUser
Namespace %SYS

Enter details about the database.

Directory: /iris-shared/durable/mgr/MYMIRRORDB

Initial Size (MB)

This determines how big the initial database will be.

Block size for this database will be

Block size is the size of the blocks that the databases uses.

New volume threshold size ☒ TB ☐ GB ☐ MB

Enter zero to disable automatic creation of new volumes. If non-zero, when the IRIS.DAT would expand past this threshold, a new volume file called IRIS-0001.VOL will be created. When expansion would grow that file past the threshold, IRIS-0002.VOL will be created, and so on. For non-zero values a minimum of 1 terabyte is recommended to avoid an excessive number of files. Each database is limited to 200 volumes.

Journal globals?

Select 'Yes' to journal globals in this database.

Encrypt database?

You may not create an Encrypted Database because Encryption is not activated.

Mirrored database?

Select 'Yes' to create a Mirrored Database. Globals must be journaled.

Mirror DB Name

Required to create a Mirrored database.

Back

Next

Finish

Cancel

Help

Step 3: Check status

On either node, go to Mirror Monitor, should see status like below:

Backup node should be on status of **Caught up**

Mirrored database should be on status of **Dejournaling** on backup node

Server irisb Namespace %SYS User SuperUser Licensed To Sales Engineers Instance IRIS

System > Mirror Monitor

Mirror Monitor

[View Mirror Journal Files](#)

[Stop Mirror On This Member](#)

[Set No Failover](#)

[Demote To DR Member](#)

This system is a failover member in mirror IRISMIRROR

Mirror Failover Member Information

	This Failover Member	Other Failover Member
Mirror Member Name	IRISB/IRIS	IRISA/IRIS
Superserver Address	irisb	irisa
Mirror Private Address	irisb	irisa

Arbiter Connection Status

Arbiter Address	arbiter 2188
Failover Mode	Arbiter Controlled
Connection Status	Both failover members are connected to the arbiter

Mirror Member Status

Member Name	Member Type	Status	Journal Transfer	Dejournaling	X.509 DN
IRISA/IRIS	Failover	Primary	N/A	N/A	
IRISB/IRIS	Failover	Backup	Active	Caught up	

Incoming Journal Transfer Rate for This Member (over refresh interval)

— (will be displayed on refresh)

Mirrored Databases

Filter:	Page size: 0	Max rows: 1000	Results: 1	Page: 1 of 1
Name	Directory	Status	Next Record To Dejournal (Time, Filename, Offset)	
MYMIRRORDB	/iris-shared/durable/mgr/MYMIRRORDB/	Dejournaling	Current, /iris-shared/durable/mgr/journal/MIRROR-IRISMIRROR-20260514.001, 45326248	Remove

Click 'Go' to perform an action on multiple databases

--Select an action-- Go

Step 4: Verify that it works

Now, write some data in the Primary node, and verify it's sync to the Backup node. On irisa terminal, change to mymirrordb database with command: **zn "^/iris-shared/durable/mgr/mymirrordb/"** which is the folder of the database file.

Run **s ^Test(1)="Hello"**

```
USER>zn "^/iris-shared/durable/mgr/mymirrordb/"

.../durable/mgr/mymirrordb/>s ^Test(1)="Hello"

.../durable/mgr/mymirrordb/>
```

Go to irisb> System Management Portal>System Explorer>Globals, change "Look in:" as **Database/MYMIRRORDB**. Now should see the global ^Test:

Server irisb **Namespace** ^^/iris-shared/durable/mgr/MYMIRRORDB/ **User** Superl

System > Globals

Globals

Export

Import

Find

Replace

Look in:

Database ▾

MYMIRRORDB ▾

Include:

☐ System items

«

Page size: 0

Results: 2

Page: |< << **1** >> >| of 1

☐	Name	Keep	Collation		
☐	ISCMethodWhitelist	No	IRIS standard	View	Edit
☐	Test	No	IRIS standard	View	Edit

2.2 Add existing database as mirrored database

Yesterday, we created a namespace “**training**” and 2 databases, **trainingcode** and **trainingdata** on irisa. Let’s add **trainingdata** as mirrored database.

Step 1: Add existing database as mirrored database on Primary node

On primary node (irisa), goto System Management Portal>System Administration>Configuration>System Configuration>Local Databases, click trainingdata, and then click “**Add to Mirror IRISMIRROR**”, and click “**Add**”.

Database Properties

Save

Cancel

Database Properties

Name	TRAININGDATA		
	Required.		
Directory	/iris-shared/durable/mgr/trainingdata/ 		
Encrypted	No		
Mirrored	No Add to Mirror IRISMIRROR		
Block Size	8192 Bytes		
Size (MB)	Current 114 >=114	Expansion 0 0 for Default	Maximum 0 0 for Unlimited
Resource Name	%DB_%DEFAULT		Create New Resource...
New Global Collation	IRIS standard		
Global Journal State	☒		
Preserve Global Attributes on Delete	☐		
Mount Read-Only	☐		
Mount Required at Startup	☐		
Stream Location			Browse...
New Volume Threshold Size	0 ☐ TB ☐ GB ☒ MB		

Now the database is added as mirrored database, but on backup node, you will see same **“Missing Mirrored Database Report”** warning for this database.

Step 2: Add this database on backup node

On backup node (irisb), there are several ways to do it:

1. If the database is not too big, just create a database with same name and set **“Mirrored database?”** to **Yes**. After save, irisb will automatically download the database file from primary node (irisa).
2. If the database is too big, there are 2 ways to resolve:
 - a. Restore the database on backup node (irisb)
 - b. Dismount the database on primary node, and then copy the database file to target folder on backup node (irisb), and create a same named database from this folder. After that, mount the database on primary node.

You can do the exercise with any way. Let us know your result.

Exercise 3: Failover test

Step 1: Stop IRIS on primary node (irisa)

Goto primary node (irisa) terminal, run: **iris stop iris**

[Containers](#) / irisa

 **irisa**

 779ff72540af   [intersystems/irishealth:latest-cd](#)

[51773:1972](#)  [21881:2188](#)  [Show all ports \(3\)](#)

LogsInspectBind mountsExecFilesStats

```
$ iris stop iris

InterSystems IRIS Shutdown Status:  4:21 pm 14 May 2026

0 interactive jobs (Telnet/Lat)
0 background jobs (from job command)
28 CSP server jobs
0 ODBC server jobs
27 system jobs

Do you want to broadcast a message to anyone? No => No
Do you want to see the InterSystems IRIS status report? No => No
Do you want to run the user defined shutdown routine? Yes => Yes
Are you ready for the system to halt? Yes => Yes
```

Step 2: Observe the failover

Observe the Mirror Monitor on backup node (irisb) and verify it has become the primary node.

Server irisb Namespace %SYS User SuperUser Licensed To Sales Engineers Instance IRIS

System > Mirror Monitor

Mirror Monitor

[View Mirror Journal Files](#)

[Set No Failover](#)

This system is a failover member in mirror IRISMIRROR

Mirror Failover Member Information

	This Failover Member	Other Failover Member
Mirror Member Name	IRISB/IRIS	IRISA/IRIS
Superserver Address	irisb	irisa
Mirror Private Address	irisb	irisa

Arbiter Connection Status

Arbiter Address	arbiter 2188
Failover Mode	Agent Controlled
Connection Status	Only this member is connected to the arbiter

Mirror Member Status

Member Name	Member Type	Status	Journal Transfer	Dejournaling	X.509 DN
IRISB/IRIS	Failover	Primary	N/A	N/A	
IRISA/IRIS	Failover	Down	Disconnected on 05/14/2026 16:21:40.85	Disconnected on 05/14/2026 16:21:40.85	

Mirrored Databases

Filter:

Page size: 0

Max rows: 1000

Results: 2

Page: 1 of 1

Name	Directory	Status	Next Record To Dejournal (Time, Filename, Offset)				
MYMIRRORDB	/iris-shared/durable/mgr/MYMIRRORDB/	Normal	N/A	-	-	-	Remove
TRAININGDATA	/iris-shared/durable/mgr/TRAININGDATA/	Normal	N/A	-	-	-	Remove

Click 'Go' to perform an action on multiple databases

--Select an action--

Go

Access from haproxy port (8080) <http://127.0.0.1:8080/csp/sys/Utilhome.csp>, observe it's the portal of irisb:

← → ↺ 127.0.0.1:8080/csp/sys/Utilhome.csp

InterSystems™
IRIS Data Platform

Management Portal

Hom

Server irisb Namespace %SYS User SuperUser Licensed To Sales Engineers Instance IRIS

Welcome, SuperUser View: [Grid Icon] [List Icon]

Home

Health

Analytics

Interoperability

System Operation

System Dashboard ⓘ

Backup >

Databases ⓘ

Processes ⓘ

SQL Activity ⓘ

Locks >

Journals ⓘ

Transactions ⓘ

Shadow Servers >

Mirror Monitor ⓘ

Step 3: Start iris on irisa

Start iris instance on irisa: **iris start iris**

Observe irisa now added into mirroring cluster as backup node automatically.

Server irisa **Namespace** %SYS **User** SuperUser **Licensed To** Sales Engineers **Instance** IRIS

System > Mirror Monitor

Mirror Monitor

[View Mirror Journal Files](#) [Stop Mirror On This Member](#) [Set No Failover](#) [Demote To DR Member](#)

This system is a failover member in mirror IRISMIRROR

Mirror Failover Member Information

	This Failover Member	Other Failover Member
Mirror Member Name	IRISA/IRIS	IRISB/IRIS
Superserver Address	irisa	irisb
Mirror Private Address	irisa	irisb

Arbiter Connection Status

Arbiter Address arbiter|2188

Failover Mode Arbiter Controlled

Connection Status Both failover members are connected to the arbiter

Mirror Member Status

Member Name	Member Type	Status	Journal Transfer	Dejournaling	X.509 DN
IRISB/IRIS	Failover	Primary	N/A	N/A	
IRISA/IRIS	Failover	Backup	Active	Caught up	

Incoming Journal Transfer Rate for This Member (over refresh interval)
– (will be displayed on refresh)

Mirrored Databases

Filter: Page size: 0 Max rows: 1000 Results: 2 Page: 1 of 1

Name	Directory	Status	Next Record To Dejournal (Time, Filename, Offset)			
MYMIRRORDB	/iris-shared/durable/mgr/mymirrordb/	Dejournaling	Current, /iris-shared/durable/mgr/journal/MIRROR-IRISMIRROR-20260514.002, 45197952	-	-	Remove
TRAININGDATA	/iris-shared/durable/mgr/trainingdata/	Dejournaling	Current, /iris-shared/durable/mgr/journal/MIRROR-IRISMIRROR-20260514.002, 45197952	-	-	Remove

Click 'Go' to perform an action on multiple databases

--Select an action-- [Go](#)