
Δ KV: WEIGHT-DELTA-AWARE MAINTENANCE OF THE KV CACHE

Aditya Raj

Independent Researcher

itsrishabhforyou@gmail.com

ABSTRACT

Large-language-model serving systems reuse key-value (KV) states across requests that share a token prefix, but they treat a *weight* update as a full cache miss. vLLM namespaces prefix blocks by adapter identity, SGLang isolates by weight version, and reinforcement-learning trainers flush KV on every policy step. The result is that the most expensive tensor in the stack is discarded whenever ΔW is nonzero, even when that ΔW is small by construction—a rank- r LoRA, a rank-1 edit, a quantization-grid change, or a KL-bounded RL step. We observe that the KV cache is a materialized view of (weights $\times$ tokens) and that a weight update is therefore an instance of incremental view maintenance. Δ KV is a library that, given a compact ΔW descriptor, produces the corresponding Δ KV without a full prefill. Cache keys are token prefixes only; adapter identity and weight version are edges of a lineage graph, not part of the key. Where input activations are stored, the projection $\Delta K = \text{RoPE}(X \Delta W_K^\top)$, $\Delta V = X \Delta W_V^\top$ is algebraically exact because RoPE is linear. Deeper layers are maintained by a hybrid of the adapter path on cached hidden states, rank- r least-squares onto the LoRA column space, first-order Jacobian propagation of ΔX with snapshot resets, and a spectral-condition-anchored probe budget. A compatibility lattice $\text{strict} \rightarrow \text{patched-}\varepsilon \rightarrow \text{miss}$ guarantees that the system is pointwise never worse than flush-and-recompute. On a Llama-style reference Transformer, a rank-4 LoRA of scale 10^{-2} is patched with next-token KL of 0 nats at reported precision, relative KV ℓ_2 of 2.1×10^{-3} (inside a 4-bit KIVI noise floor), and 8.5% of re-prefill FLOPs. Δ KV does not fork vLLM or SGLang; it implements the connector interfaces those engines already expose.

Keywords KV cache · LoRA · LLM serving · incremental view maintenance · prefix caching

1 Introduction

Prefix caching is the dominant source of reuse in LLM serving. PagedAttention [Kwon et al., 2023] and radix-tree matching [Zheng et al., 2024] share KV tensors across requests with a common token prefix. That reuse has two well-studied axes: the *token* prefix and the *position* encoding [Su et al., 2024]. A third axis is almost always ignored: the *weights*.

Whenever the weights change—loading or swapping a LoRA [Hu et al., 2022, Dettmers et al., 2023], applying a rank-1 edit [Meng et al., 2022, 2023], changing a quantization grid, or taking a policy-gradient step—production engines invalidate the entire KV store. vLLM hashes the adapter name into the prefix-block key and, on a same-name reload, can reuse stale blocks [vLLM Developers, 2025a,b]. SGLang places a weight version in the radix extra key [SGLang Developers, 2025] and flushes persistent cache tiers. Distributed RL stacks reset every KV byte on every policy step. In all of these settings ΔW is *structurally small*: rank $r \ll d$, rank 1, or KL-bounded. Throwing away $O(Lnd_{kv})$ cached state is then an implementation choice, not a mathematical necessity.

We treat KV as a materialized view over (weights $\times$ tokens) and a weight update as incremental view maintenance [Gupta and Mumick, 1993]. Δ KV is the corresponding library. A weight update ships a compact *delta descriptor*. The next lookup of a cached prefix materializes a patched view. If a conservative error estimate exceeds a budget ε , the engine falls back to a full prefill—exactly today’s behavior.

Contributions.

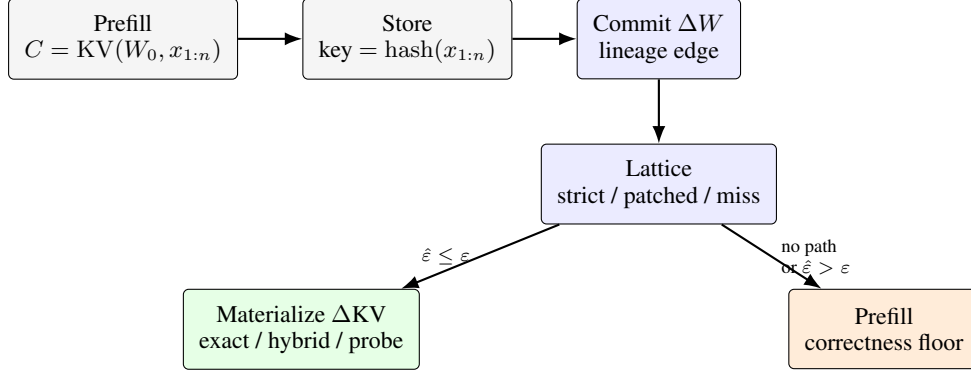


Figure 1: Serving path. Physical cache keys are token prefixes. A weight update is a lineage edge. Lookup returns a strict hit, a patched view, or today’s recompute.

1. A cache contract in which keys are token prefixes only and compatibility is the lattice strict $\rightarrow$ patched- $\varepsilon \rightarrow$ miss (§2, Figure 1).
2. Exact projection patches. Because RoPE is linear, $\text{RoPE}(K + \Delta K) = \text{RoPE}(K) + \text{RoPE}(\Delta K)$. At any layer whose input X is stored, ΔK and ΔV are closed form (§4).
3. A rank- r LoRA-subspace corrector: per-token least-squares onto $\text{col}(B)$, an orthogonal residual shift, and a residual gate [Yao et al., 2025] (§5.1).
4. Spectral-condition hybrid routing—per-layer skip / exact / subspace / probe—together with first-order ΔX propagation and periodic snapshot resets (§5.3–§5.2).
5. Connectors, not forks: vLLM KVConnectorBase_V1, SGLang weight-update hooks, LMCACHE hidden-state snapshots, and PEFT state-dict extraction (§6).
6. A reference validator on a Llama-style stack (RMSNorm, RoPE, GQA, SwiGLU) that reports next-token KL, log-probability L_1 , and a KIVI-4bit floor [Liu et al., 2024], not KV- ℓ_2 alone (§7).

2 Cache contract

A decoder-only Transformer [Touvron et al., 2023] maps a token prefix $x_{1:n}$ and weights W to a KV cache $C = \text{KV}(W, x_{1:n}) \in \mathbb{R}^{L \times n \times n_{\text{kv}} \times d_h}$ and a next-token distribution $\pi(\cdot \mid x_{1:n}; W, C)$. A *weight version* v is a node in a lineage DAG. A *weight delta* $\Delta W_{v \rightarrow v'}$ is a compact descriptor of $W_{v'} - W_v$ (§3). Given C computed under v , the serving problem is to produce a cache that is a valid view under v' without a full prefill.

Entry. A cache row is

$$\text{CacheEntry} = (C_{\text{base}}, (\Delta C_i)_i, \hat{\varepsilon}), \quad (1)$$

the base KV under v_0 , a chain of applied patches, and a conservative error estimate. The physical key is $\text{hash}(x_{1:n})$. Adapter name and weight version label edges of the lineage graph; they are not part of the key.

Lookup.

$$\text{lookup}(x_{1:n}, W_{\text{cur}}) = \begin{cases} \text{STRICT} & \text{if } v(C) = v_{\text{cur}}, \\ \text{PATCHED} & \text{if a } \Delta W \text{ path exists and } \hat{\varepsilon} \leq \varepsilon, \\ \text{MISS} & \text{otherwise.} \end{cases} \quad (2)$$

A miss is flush-and-recompute. A patch whose *measured* residual exceeds ε is promoted to a miss. The engine is therefore pointwise never less correct than today’s invalidation policy (Figure 2).

Acceptance criteria. A patched cache is acceptable when (i) $\text{KL}(\pi_{\text{fresh}} \parallel \pi_{\text{patched}}) \lesssim 10^{-2}$ nats, (ii) max-layer relative KV $\ell_2 \lesssim 0.10$, and (iii) that ℓ_2 lies inside a 4-bit grouped-quantization noise floor [Liu et al., 2024]. Serving samples from π ; off-policy RL depends on $|\log \pi_{\text{fresh}} - \log \pi_{\text{patched}}|$. Relative KV ℓ_2 alone is not a sufficient metric.

Algorithm 1 Prefix lookup under the current weight version.

Input: prefix $x_{1:n}$, current version v_{cur} , budget ε .

1. $e \leftarrow \text{store}[\text{hash}(x_{1:n})]$. If e is nil, prefill and insert.
2. If $e.v = v_{\text{cur}}$, return STRICT: replay $e.\text{base} + \sum e.\text{patches}$.
3. If there is no ΔW path $e.v \rightarrow v_{\text{cur}}$, or $\|\Delta W\|$ is outside the patchable regime, return MISS: prefill.
4. Pick a route whose billed FLOPs are strictly below prefill (default: hybrid).
5. $C' \leftarrow \text{materialize}(e, \Delta W)$. If the residual is measured and $\hat{\varepsilon} > \varepsilon$, return MISS: prefill.
6. Append the full increment $C' - e.\text{base}$; rebase if $\hat{\varepsilon} \geq 0.8\varepsilon$. Return PATCHED: C' .

Figure 2: Prefix lookup. A miss is identical to today’s flush-and-recompute.

Table 1: Compact ΔW payloads. Adapter swap concatenates factors with a sign flip (rank adds). Dense quant and RL deltas are compressed once by economy SVD.

Regime	Rank	Payload
LoRA / adapter swap	$r(r_1 + r_2)$	$A \in \mathbb{R}^{r \times \text{in}}, B \in \mathbb{R}^{\text{out} \times r}, s = \alpha/r$
ROME / MEMIT	1	outer product $uv^\top$
Quantization swap	chosen r	SVD of $W_{\text{new}} - W_{\text{old}}$
RL step	chosen r	SVD of a KL-bounded ΔW

3 Delta descriptors

A weight update ships a compact object, not a checkpoint (Table 1). Throughout we use the PEFT convention [Mangrulkar et al., 2022] $y = xW^\top + s(xA^\top)B^\top$, so per-token Δy lives in $\text{col}(B)$.

The *patchable regime* is the set of ΔW that are small by construction. If a Frobenius proxy exceeds a threshold (default 0.5), Δ KV refuses to patch: full supervised fine-tuning and architecture changes are a miss.

4 Exact projection patches

Let $X \in \mathbb{R}^{n \times d}$ be the RMS-normalized input of a k/v projection. Then

$$\Delta K = \text{RoPE}(X\Delta W_K^\top), \quad \Delta V = X\Delta W_V^\top. \quad (3)$$

RoPE is a block-diagonal linear operator on each adjacent pair of dimensions, so $\text{RoPE}(K + \Delta K) = \text{RoPE}(K) + \text{RoPE}(\Delta K)$. Equation (3) is algebraically exact at any layer whose X is the true input under the new weights: layer 0 when embeddings are frozen, and every layer whose residual-stream snapshot is stored. For LoRA this is the adapter path, $O(n dr)$ against $O(nd^2)$ for the dense map. Storage is $nr + rd$ codes and basis until RoPE mixes the K basis, after which a dense increment of size $n d_{\text{kv}}$ is kept—still one layer, still not a re-prefill.

Above the first modified layer, X_ℓ depends on W , so (3) on a stale X_ℓ is a zeroth-order approximation and the baseline that the routes in §5 correct.

5 Deep-layer routes

5.1 Rank- r subspace correction

A rank-1 probe corrector estimates a chunk offset $\hat{\mu}$ from a few recomputed tokens and adds it to the rest. Production LoRA is rank- r : ΔV lives in $\text{col}(B)$. Let $R = C_{\text{fresh}} - C_{\text{reused}} \in \mathbb{R}^{n \times d_{\text{kv}}}$ be a residual estimate (exact on probes; mixed-forward otherwise) and $B \in \mathbb{R}^{d_{\text{kv}} \times r}$ the LoRA factor of v_{proj} . Per token,

$$c_j = (B^\top B + \lambda I)^{-1} B^\top R_{j,:}, \quad (4)$$

the structured increment is $c_j^\top B^\top$, and only the leftover orthogonal to $\text{col}(B)$ is mean-shifted from the probe set $\mathcal{P}$:

$$\mu_\perp = \frac{1}{|\mathcal{P}|} \sum_{j \in \mathcal{P}} (R_{j,:} - c_j^\top B^\top). \quad (5)$$

Table 2: Per-layer hybrid plan from local ΔW and cumulative $\tilde{\kappa}$.

Condition	Strategy
No local ΔW and no upstream ΔW	skip
No local ΔW , upstream ΔX exists	subspace
Stored X at layer 0 / stride boundary, k/v ΔW	exact, (3)
Normalized $\tilde{\kappa} \geq 0.65$	probe (subspace + residual gate)
Otherwise	subspace

Probes are overwritten with fresh values. Tokens whose residual remains large relative to the probe scale are fully recomputed [Yao et al., 2025].

After RoPE, ΔK is not in $\text{col}(B)$. For keys we take the leading- r right singular vectors of the probe residual as the basis, at the same rank as the adapter.

5.2 First-order analytic propagation

Given stored boundary activations h_{in} and h_{mid} , $\Delta K V$ propagates ΔX with closed-form Jacobians (Appendix A): the RMSNorm map, the softmax Jacobian $a \odot (\delta - \langle a, \delta \rangle)$ inside attention, and the SwiGLU product rule. Two stabilizers limit compounding: ΔX is rank-truncated after every layer, and reset to zero every `hidden_stride` layers (default 4), after which that layer is exact-patched from the snapshot. The engine commits ΔW before propagating, so $dx W'^T$ already contains the second-order $\Delta X \Delta W$ term.

When $\Delta Q, \Delta K, \Delta V$ are rank- r , forming ΔS is $O(n^2 r)$ rather than $O(n^2 d)$ [Dao et al., 2022]. On short sequences a dense softmax Jacobian still dominates, which is why the analytic route can be accurate without being cheaper than prefill (§7).

5.3 Spectral-condition hybrid routing

Let $\kappa_\ell = \kappa(W_K^{(\ell)}) \kappa(W_V^{(\ell)})$ with $\kappa(W) = \sigma_{\max}/\sigma_{\min}$, and

$$\tilde{\kappa}_\ell = \prod_{j=\ell}^{L-1} \kappa_j. \quad (6)$$

Shallow errors are amplified more. A log-normalized $\tilde{\kappa}$ plus a depth prior yields a progressive probe budget: up to 20% of tokens in the first third of the stack and in high- $\tilde{\kappa}$ layers, down to 5% in deep, well-conditioned layers. Table 2 is the per-layer plan. The default route is hybrid. Probe and hybrid patches store the full patched-minus-base increment so a later strict replay does not drop the zeroth-order stage.

5.4 Error accounting and cost

Zeroth-order error is a Lipschitz compound bound $e_\ell = L_{\text{lip}} e_{\ell-1} + \|\Delta W_\ell\|$ ($L_{\text{lip}} = 1.2$ by default) so the lattice never under-reports. Probe and analytic routes may replace the bound with a measured residual. Chains add errors conservatively and rebase when $\hat{\varepsilon} \geq 0.8 \varepsilon$.

Approximate FLOPs are

$$c_{\text{prefill}} \approx L(nd^2 + n^2 d + nd d_{\text{ff}}), \quad (7)$$

$$c_{\text{exact}} \approx (\#\text{LoRA maps}) \cdot ndr, \quad (8)$$

$$c_{\text{probe}} \approx \rho c_{\text{prefill}} + Lnd, \quad (9)$$

$$c_{\text{hybrid}} \approx c_{\text{exact}} + \frac{1}{2} c_{\text{probe}}, \quad (10)$$

$$c_{\text{analytic}} \approx L(ndr + n^2 r). \quad (11)$$

An automatic scheduler does not select a route whose billed FLOPs meet or exceed re-prefill.

Table 3: Reference validator, rank-4 LoRA, scale 0.01, sequence length 64. All four routes lie inside the KIVI-4bit floor (0.066). Hybrid is the default.

Route	max rel. ℓ_2	KL (nats)	log-prob MAE	$\leq$ KIVI-4bit	FLOP ratio
Zeroth-order	0.0035	0	3.8×10^{-4}	yes	0.034
Analytic	0.0000	0	5.2×10^{-7}	yes	0.82
Probe	0.0021	0	1.8×10^{-4}	yes	0.10
Hybrid	0.0021	0	1.7×10^{-4}	yes	0.085

6 Systems integration

Δ KV is a library. The serving engines remain the serving engines. Multi-adapter systems such as S-LoRA [Sheng et al., 2024] and Punica [Chen et al., 2024] already batch heterogeneous LoRAs; they still namespace or rebuild KV when the adapter set changes. Δ KV is complementary: it keeps one physical prefix and patches it.

vLLM. The V1 connector path loads an external module from `kv_connector_module_path`. `DeltaKVConnector` implements `KVConnectorBase_V1`. On adapter load or RL weight broadcast it registers ΔW instead of bumping a generation counter, materializes a patched view, and scatters into allocated paged blocks $[N_{\text{blocks}}, B, n_{\text{kv}}, d_h]$. If ε is exceeded, `get_num_new_matched_tokens` returns 0 and vLLM prefills. The remaining engine-side change is to omit the adapter name from the block hash when this connector is installed.

SGLang. Weight-version isolation stays off. The `update_weights_*` RPCs run with `flush_cache=False`. Weight version is a label on the delta, not a radix key. In-flight requests keep private KV; the shared tree is patched in the background.

LMCache and PEFT. Analytic propagation reads the existing hidden-state store [LMCache Team, 2024]. Chunk keys stay coupled to KV eviction. PEFT state dictionaries [Mangrulkar et al., 2022] of the form `layers.i.self_attn.k_proj.lora_A.weight` are the delta descriptor, with scaling α/r .

7 Experiments

We evaluate on the reference engine shipped with Δ KV: a Llama-style stack (RMSNorm, RoPE, grouped-query attention, SwiGLU) that is small enough to run on CPU and complete enough that every algebraic claim is testable. This is a correctness validator, not a substitute for a 7B/70B serving study (§9). If the algebra is wrong, it fails here.

Protocol. Prefill under W_0 , commit a rank- r LoRA, materialize a patched view, and compare against a fresh prefill under $W_0 + \Delta W$. Metrics: max relative KV ℓ_2 , min cosine, next-token KL, log-prob MAE, and the KIVI-4bit floor of the fresh cache. Default configuration: $L=4$, $d=64$, $n_{\text{heads}}=4$, sequence length 64, rank 4, LoRA scale 10^{-2} . The run is deterministic given a fixed seed.

Table 3 supports four observations. The adapter path on cached X already lies inside 4-bit KV quantization noise at 3.4% of prefill. Subspace/probe correction reduces relative ℓ_2 from 0.0035 to 0.0021 at 8–10% of prefill. Analytic matching is numerically exact on this stack, but the dense softmax Jacobian makes it only a mild FLOP win at $n=64$, as the cost model predicts. Hybrid matches probe quality at lower billed FLOPs because boundary layers stay exact.

Layer-0 exactness. For a k/v -only LoRA on layer 0, (3) matches a fresh prefill to absolute error $< 2 \times 10^{-5}$ and cosine > 0.9999 .

Subspace versus rank-1. On a residual $R = CB^\top + 1\mu_\perp^\top$ with varying codes C , per-token least-squares onto B recovers $\text{col}(B)$ and strictly beats a probe mean-shift.

ROME and the miss path. A rank-1 write into `down_proj` of layer 1 patches without a flush [Meng et al., 2022]. A LoRA of scale 1.0, outside the patchable regime, is a miss. After a hybrid materialize, a second lookup is strict and replays the stored increment to 10^{-5} .

Forty-eight unit tests cover RoPE linearity, the three Jacobians, lattice decisions, PEFT parsing, adapter-swap subtraction, paged scatter, and connector interfaces.

8 Related work

Prefix caches. PagedAttention [Kwon et al., 2023] and SGLang [Zheng et al., 2024] made token-prefix reuse the default. LMCache [LMCache Team, 2024] extends reuse off-device and stores hidden states. These systems still namespace or flush when W moves. Δ KV reuses their storage; it changes the invalidation policy.

Multi-LoRA serving. S-LoRA [Sheng et al., 2024] and Punica [Chen et al., 2024] batch many adapters efficiently. They still treat adapter identity as part of the cache key. Δ KV keeps one physical prefix and patches across adapter swap.

Context-axis KV reuse. CacheBlend [Yao et al., 2025] recomputes tokens whose layer-1 KV residual is large when stitching cached chunks. Streaming and eviction methods (H2O, SnapKV) drop tokens under a *fixed* W . Δ KV reuses probe/gate machinery with a different trigger (weight delta) and a different structure ($\text{col}(B)$).

Low-rank weights and KV compression. LoRA [Hu et al., 2022], QLoRA [Dettmers et al., 2023], and PEFT [Man-grulkar et al., 2022] made $\Delta W = sBA$ the production adapter format; ROME and MEMIT [Meng et al., 2022, 2023] are rank-1 edits. KIVI [Liu et al., 2024] quantizes KV under fixed weights. We use that 4-bit noise as an acceptance floor.

View maintenance. Materialized views are maintained under Δ relation [Gupta and Mumick, 1993]. We maintain KV under ΔW . The lattice is the consistency contract.

9 Limitations

The validator is a 4-layer, $d=64$ model. It can falsify the algebra; it cannot measure tail latency on a 70B deployment, nor error compounding through 32–80 layers. Paged GPU kernels for the adapter path and the one-line vLLM/SGLang hooks remain engineering work. The analytic route still densifies ΔS in PyTorch; a low-rank attention kernel would change the flop ratio, not the Jacobian. Δ KV will not patch full supervised fine-tuning or an architecture swap. Mid-token in-flight decode under a weight update is out of scope: live requests keep private KV; the shared store is patched in the background.

10 Conclusion

Serving engines already reuse KV along the token axis and invalidate it along the weight axis. For the ΔW that occur in production—LoRA swaps, rank-1 edits, quantization-grid changes, KL-bounded RL steps—that invalidation is unnecessary. Δ KV maintains the cache as a materialized view, applies an exact projection where X is known and a spectral-condition hybrid otherwise, and falls back to recompute when it cannot. The acceptance criteria hold on a complete (if small) Transformer. The connectors fit engines that already exist. A large-model serving measurement is the next empirical step; it does not require a different algorithm.

References

- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient Memory Management for Large Language Model Serving with PagedAttention. In *Proceedings of the 29th Symposium on Operating Systems Principles*, 2023.
- Lianmin Zheng, Liangsheng Yin, Zhiqiang Xie, Chuyue Sun, Jeff Huang, Cody Hao Yu, Shiyi Cao, Christos Kozyrakis, Ion Stoica, Joseph E. Gonzalez, Clark Barrett, and Ying Sheng. SGLang: Efficient execution of structured language model programs. In *Advances in Neural Information Processing Systems*, 2024.
- Jianlin Su, Murtadha Ahmed, Yu Lu, Shengfeng Pan, Wen Bo, and Yunfeng Liu. Roformer: Enhanced transformer with rotary position embedding. *Neurocomputing*, 568:127063, 2024.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022.
- Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. QLoRA: Efficient finetuning of quantized language models. In *Advances in Neural Information Processing Systems*, 2023.

- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in GPT. In *Advances in Neural Information Processing Systems*, 2022.
- Kevin Meng, Arnab Sen Sharma, Alex Andonian, Yonatan Belinkov, and David Bau. Mass-editing memory in a transformer. In *International Conference on Learning Representations*, 2023.
- vLLM Developers. Stale KV blocks on same-name LoRA reload. Issue #42125, <https://github.com/vllm-project/vllm/issues/42125>, 2025a.
- vLLM Developers. Weight reload and KV invalidation for RL. RFC #48312, <https://github.com/vllm-project/vllm/issues/48312>, 2025b.
- SGLang Developers. Weight-version KV isolation in SGLang. Pull request #27886, <https://github.com/sgl-project/sglang/pull/27886>, 2025.
- Ashish Gupta and Inderpal Singh Mumick. Maintenance of materialized views: Problems, techniques, and applications. *IEEE Data Engineering Bulletin*, 16(2):3–18, 1993.
- Jiayi Yao, Hanchen Li, Yuhao Liu, Souradip Ray, Yihua Cheng, Qi Zhang, Kaidi Du, Shan Lu, and Junchen Jiang. CacheBlend: Fast large language model serving for RAG with cached knowledge fusion. In *Proceedings of the Twentieth European Conference on Computer Systems*, 2025.
- Zirui Liu, Jiayi Yuan, Hongye Jin, Shaochen Zhong, Zhaozhuo Xu, Vladimir Braverman, Beidi Chen, and Xia Hu. KIVI: A tuning-free asymmetric 2bit quantization for KV cache. In *Proceedings of the 41st International Conference on Machine Learning*, 2024.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. LLaMA: Open and efficient foundation language models. In *arXiv preprint arXiv:2302.13971*, 2023.
- Sourab Mangrulkar, Sylvain Gugger, Lysandre Debut, Younes Belkada, and Sayak Paul. PEFT: State-of-the-art parameter-efficient fine-tuning. <https://github.com/huggingface/peft>, 2022.
- Tri Dao, Daniel Y. Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. FlashAttention: Fast and memory-efficient exact attention with IO-awareness. In *Advances in Neural Information Processing Systems*, 2022.
- Ying Sheng, Shiyi Cao, Dacheng Li, Coleman Hooper, Nicholas Lee, Shuo Yang, Christopher Chou, Banghua Zhu, Lianmin Zheng, Kurt Keutzer, Joseph E. Gonzalez, and Ion Stoica. S-LoRA: Serving thousands of concurrent LoRA adapters. In *Proceedings of Machine Learning and Systems*, 2024.
- Lequn Chen, Zihao Ye, Yongsheng Wu, Danyang Zhuo, Luis Ceze, and Arvind Krishnamurthy. Punica: Multi-tenant LoRA serving. In *Proceedings of Machine Learning and Systems*, 2024.
- LMCache Team. LMCache: An efficient KV cache layer for enterprise-scale LLM inference. <https://docs.lmcache.ai>, 2024.

A Jacobians

RMSNorm. Let $ms = \text{mean}(x^2)$, $rms = \sqrt{ms + \epsilon}$, $y = (x/rms) \odot w$. Then $d(ms) = 2 \text{mean}(x \odot dx)$, $d(rms) = d(ms)/(2 \text{rms})$, and

$$dy = \frac{dx \cdot rms - x \cdot d(rms)}{rms^2} \odot w. \quad (12)$$

Softmax. For a row $a = \text{softmax}(s)$, $J_{\text{softmax}}(a) = \text{diag}(a) - aa^\top$, hence $J_{\text{softmax}}(a)[\delta] = a \odot (\delta - \langle a, \delta \rangle)$.

SwiGLU. $\text{silu}(z) = z \sigma(z)$ and $\text{silu}'(z) = \sigma(z) + z \sigma(z)(1 - \sigma(z))$. The MLP differential is $dy = ((\text{silu}'(g) \odot dg) \odot u + \text{silu}(g) \odot du) W_{\text{down}}^\top$ plus the local adapter path.

B LoRA path after RoPE

PEFT computes $\Delta y = s(xA^\top)B^\top$. Codes $c = sxA^\top \in \mathbb{R}^{n \times r}$ and basis B are the compressed $\Delta K/\Delta V$ before RoPE. After RoPE on K the basis is position-dependent, so ΔK is stored dense. Compression relative to one KV layer is d_{kv}/r before RoPE ($64 \times$ at $d_{kv} = 4096$, $r = 64$). Adapter swap concatenates $(A_B, -A_A)$ and (B_B, B_A) without materializing ΔW .