


Document Pipeline — Step Functions flows (as-built)


classification-service-demo · LocalStack eu-west-1 · verified 2026-06-03. Both stages: **Standard** state machine → `sqs:sendMessage.waitForTaskToken` → worker signals the token back. Execution name = documentId (idempotent). TimeoutSeconds 1800 + Catch replace the convert-watchdog.

P1 — convert (category = convert)

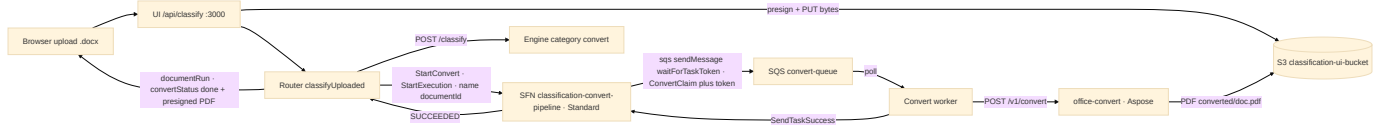

Worker signalling: success → markDone + SendTaskSuccess · terminal (.dwg / 4xx) → markFailed + SendTaskFailure → Catch → FAILED · transient (5xx / network) → no signal → SQS redrive, SFN timeout is the backstop.

P2 — archive / zip-extraction (category = archive)

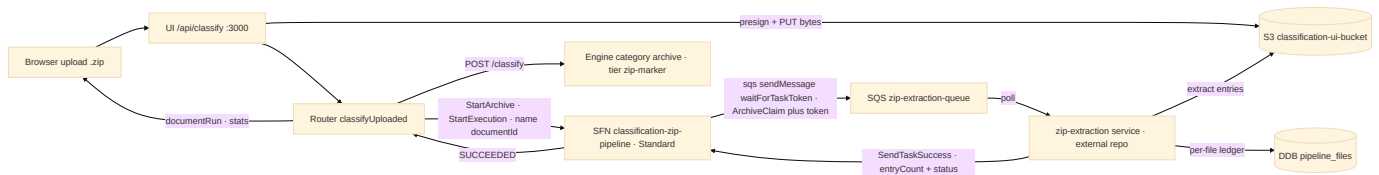

zip-extraction is an external service (no code copied in): it opted into the token protocol via a taskToken field + an SFN signaler. Terminal SUCCESS/PARTIAL → SendTaskSuccess{entryCount,status} · FAILED → SendTaskFailure(ZipExtractionFailed) → Catch → FAILED · transient → no signal → SFN timeout backstop.