


EXPERIMENT – 5

Simple Blog

#Folder structure:

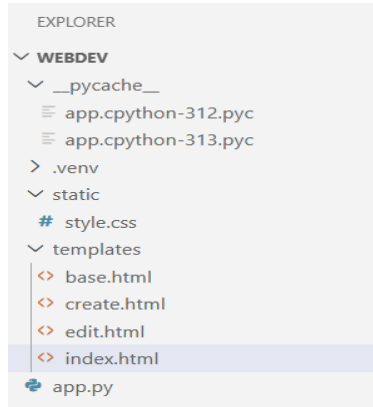

#base.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Aditya Simple Blog</title>
  <link rel="stylesheet" href="{{ url_for('static', filename='style.css')
  }}">
</head>
<body>
  <div class="page-shell">
    <header class="header">
      <div class="brand-copy">
        <span class="eyebrow">Student Flask Project</span>
        <h1>Aditya's Simple Blog</h1>
        <p>Write, edit, and manage posts with a clean classroom-ready
interface.</p>
      </div>
      <nav>
        <a href="{{ url_for('index') }}">Home</a>
        <a href="{{ url_for('create') }}" class="btn-nav">+ New
Post</a>
        <button type="button" onclick="toggleDark()" class="dark-btn"
aria-label="Toggle theme">🌙</button>
      </nav>
    </header>
```

```

<main class="container">
  <div class="toast-container">
    {% with messages = get_flashed_messages() %}
      {% if messages %}
        {% for message in messages %}
          <div class="toast">{{ message }}</div>
        {% endfor %}
      {% endif %}
    {% endwith %}
  </div>

  {% block content %}{% endblock %}
</main>
</div>

<script>
  function toggleDark() {
    document.body.classList.toggle("dark");
  }

  function likePost(button) {
    const counter = button.querySelector("span");
    counter.innerText = parseInt(counter.innerText, 10) + 1;
  }

  function searchPosts() {
    const input =
document.getElementById("search").value.toLowerCase();
    const cards = document.getElementsByClassName("card");

    for (let i = 0; i < cards.length; i += 1) {
      const title =
cards[i].querySelector("h3").innerText.toLowerCase();
      const content = cards[i].querySelector(".card-
text").innerText.toLowerCase();

      if (title.includes(input) || content.includes(input)) {
        cards[i].style.display = "";
      } else {
        cards[i].style.display = "none";
      }
    }
  }
</script>
</body>
</html>

```

#create.html

```
{% extends 'base.html' %}

{% block content %}
<div class="editor-container">
  <div class="editor-info">
    <span class="section-tag">Create</span>
    <h2>✍️ Create New Post</h2>
    <p>Share your thoughts, assignments, and ideas in Aditya's personalized
blog workspace.</p>
    <ul class="feature-list">
      <li>Clean title and content layout</li>
      <li>Quick category selection</li>
      <li>Responsive classroom-friendly design</li>
    </ul>
  </div>

  <form method="POST" class="editor-form">
    <label for="title">Post Title</label>
    <input id="title" type="text" name="title" placeholder="Enter post
title..." required>

    <label for="category">Category</label>
    <input id="category" type="text" name="category" placeholder="General">

    <label for="content">Content</label>
    <textarea id="content" name="content" rows="8" placeholder="Write
something amazing..." required></textarea>

    <button type="submit">🚀 Publish Post</button>
  </form>
</div>
{% endblock %}
```

#edit.html

```
{% extends 'base.html' %}

{% block content %}
<div class="editor-container">
  <div class="editor-info">
    <span class="section-tag">Update</span>
    <h2>✏️ Edit Post</h2>
    <p>Update your existing post without losing the same clean interface
and Aditya branding.</p>
    <ul class="feature-list">
      <li>Revise content in one place</li>
    </ul>
  </div>
  <form method="POST" class="editor-form">
    <label for="title">Post Title</label>
    <input id="title" type="text" name="title" placeholder="Enter post
title..." required>

    <label for="category">Category</label>
    <input id="category" type="text" name="category" placeholder="General">

    <label for="content">Content</label>
    <textarea id="content" name="content" rows="8" placeholder="Write
something amazing..." required></textarea>

    <button type="submit">🚀 Publish Post</button>
  </form>
</div>
{% endblock %}
```

```

        <li>Keep category details organized</li>
        <li>Use the same assignment-ready form layout</li>
    </ul>
</div>

<form method="POST" class="editor-form">
    <label for="title">Post Title</label>
    <input id="title" type="text" name="title" value="{{ post.title }}"
required>

    <label for="category">Category</label>
    <input id="category" type="text" name="category" value="{{
post.category }}" required>

    <label for="content">Content</label>
    <textarea id="content" name="content" rows="8" required>{{ post.content
}}</textarea>

    <button type="submit">🚀 Update Post</button>
</form>
</div>
{% endblock %}

```

#index.html

```

{% extends 'base.html' %}

{% block content %}
<section class="hero-panel">
    <div>
        <span class="section-tag">Dashboard</span>
        <h2>{{ owner_name }}'s Blog Space</h2>
        <p>Manage your latest posts, search instantly, and keep your assignment
looking polished.</p>
    </div>
    <div class="hero-actions">
        <input id="search" type="text" placeholder="Search posts..."
onkeyup="searchPosts()">
        <a href="{{ url_for('create') }}" class="hero-button">Create Post</a>
    </div>
</section>

<section class="card-grid">
    {% if posts %}
        {% for post in posts %}
            <article class="card">

```

```

        <div class="card-top">
            <span class="chip">{{ post.category }}</span>
            <span class="date">{{ post.date }}</span>
        </div>
        <h3>{{ post.title }}</h3>
        <p class="card-text">{{ post.content }}</p>
        <div class="meta">
            <span>By {{ post.author }}</span>
            <span>{{ post.likes }} likes</span>
        </div>
        <div class="card-actions">
            <button type="button" class="like-btn"
onclick="likePost(this)">♥ <span>{{ post.likes }}</span></button>
            <a href="{{ url_for('edit', index=loop.index0) }}"
class="action-link">Edit</a>
            <a href="{{ url_for('delete', index=loop.index0) }}"
class="action-link delete-link">Delete</a>
        </div>
    </article>
    {% endfor %}
{% else %}
    <div class="empty-state">
        <h3>No posts yet</h3>
        <p>Create your first blog post to get started.</p>
        <a href="{{ url_for('create') }}" class="hero-button">Write First
Post</a>
    </div>
{% endif %}
</section>
{% endblock %}

```

#app.py

```

from datetime import datetime

from flask import Flask, flash, redirect, render_template, request, url_for

app = Flask(__name__)
app.secret_key = "aditya-simple-blog"

# In-memory storage for classroom/demo use.
posts = [
    {
        "title": "Welcome to Aditya's Blog",

```

```

        "content": "This starter post shows how your simple blog looks with a
clean layout, quick actions, and a student-friendly design.",
        "date": datetime.now().strftime("%d %b %Y"),
        "category": "General",
        "likes": 8,
        "author": "Aditya",
    },
    {
        "title": "My First Flask Assignment",
        "content": "Building a blog app becomes much easier when templates,
routes, and styling are separated neatly into their own files.",
        "date": datetime.now().strftime("%d %b %Y"),
        "category": "College Work",
        "likes": 3,
        "author": "Aditya",
    },
]

```

```

@app.route("/")
def index():
    return render_template("index.html", posts=posts, owner_name="Aditya")

```

```

@app.route("/create", methods=["GET", "POST"])
def create():
    if request.method == "POST":
        title = (request.form.get("title") or "").strip()
        content = (request.form.get("content") or "").strip()
        category = (request.form.get("category") or "General").strip() or
"General"

```

```

        if title and content:
            posts.insert(
                0,
                {
                    "title": title,
                    "content": content,
                    "date": datetime.now().strftime("%d %b %Y"),
                    "category": category,
                    "likes": 0,
                    "author": "Aditya",
                },
            )
            flash("Post created successfully!")
            return redirect(url_for("index"))

```

```

flash("Please fill in both title and content.")

```

```

        return render_template("create.html", owner_name="Aditya")

@app.route("/edit/<int:index>", methods=["GET", "POST"])
def edit(index):
    if index < 0 or index >= len(posts):
        flash("Post not found.")
        return redirect(url_for("index"))

    post = posts[index]
    if request.method == "POST":
        title = (request.form.get("title") or "").strip()
        content = (request.form.get("content") or "").strip()
        category = (request.form.get("category") or "General").strip() or
"General"

        if title and content:
            post["title"] = title
            post["content"] = content
            post["category"] = category
            flash("Post updated successfully!")
            return redirect(url_for("index"))

        flash("Please fill in both title and content.")

    return render_template("edit.html", post=post, owner_name="Aditya")


@app.route("/delete/<int:index>")
def delete(index):
    if 0 <= index < len(posts):
        posts.pop(index)
        flash("Post deleted successfully!")
    else:
        flash("Post not found.")
    return redirect(url_for("index"))

if __name__ == "__main__":
    app.run(debug=True)


```

#output:

1. Home Page

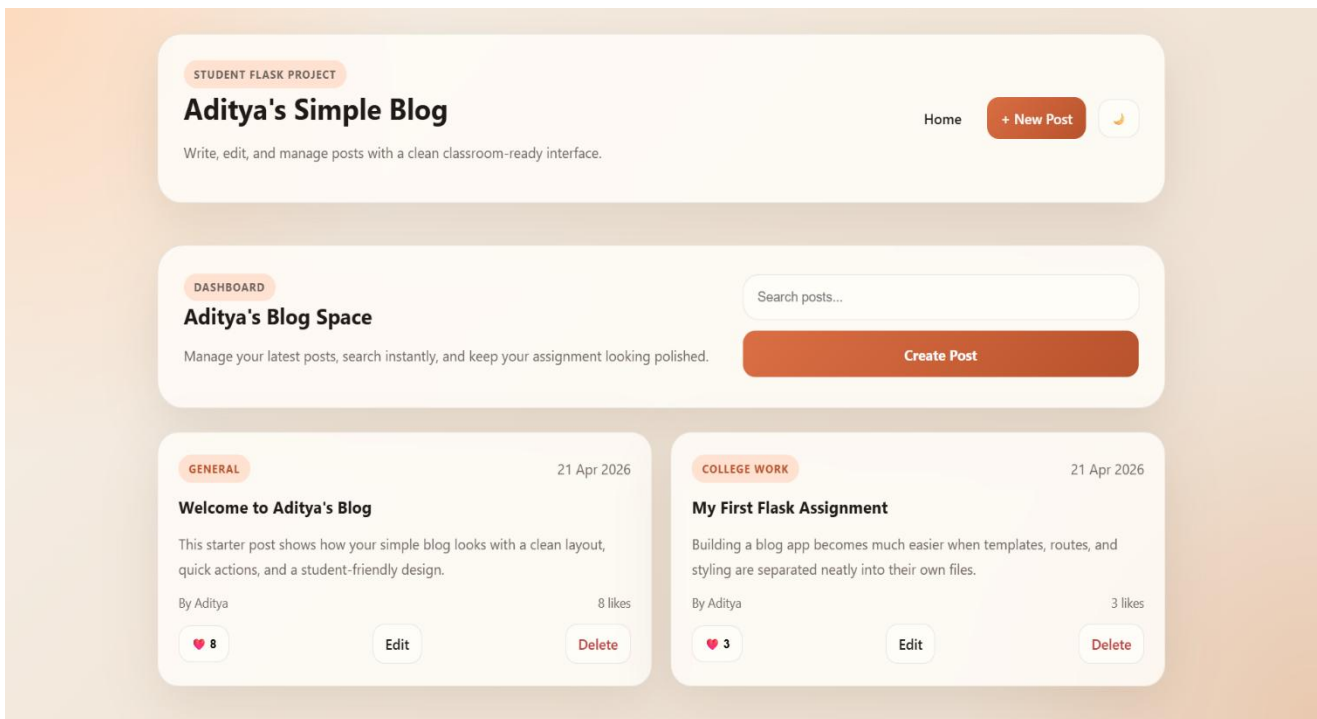

2. Create Blog Page

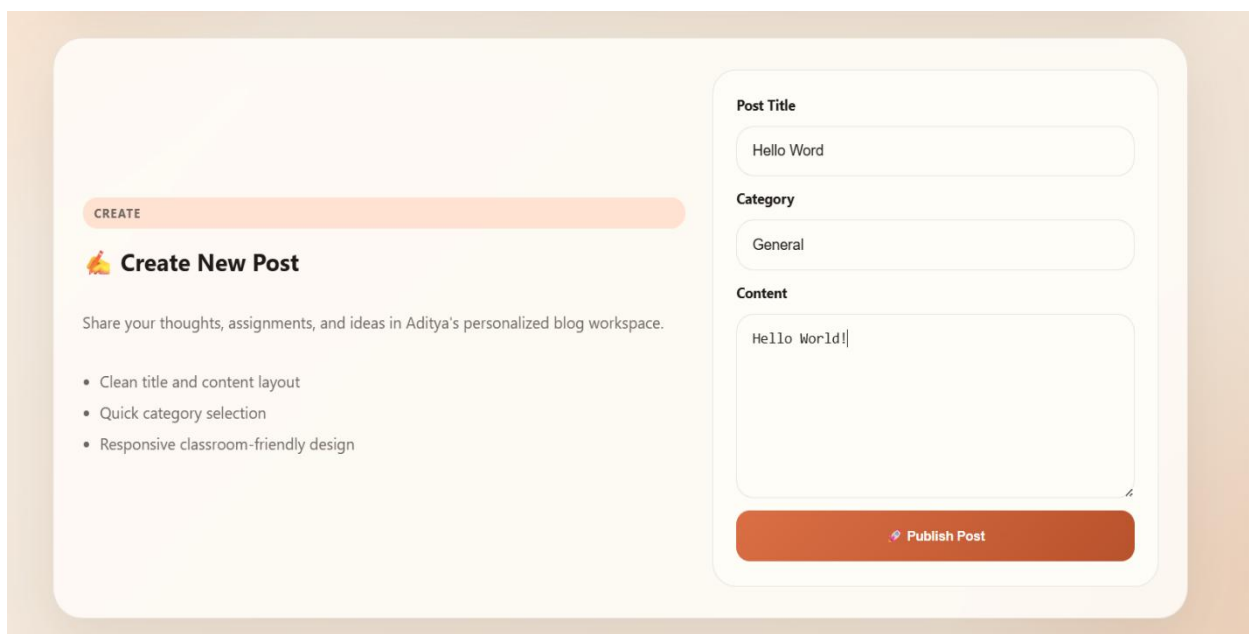

3. Edit Blog Page

UPDATE

Edit Post

Update your existing post without losing the same clean interface and Aditya branding.

- Revise content in one place
- Keep category details organized
- Use the same assignment-ready form layout

Post Title

Hello Word

Category

General

Content

Hello World!
I can be edited!

Update Post