

Fullstack Developer Prescreening Questions

Technical Assessment Report — Programmer (NextJS & Python)

Candidate Name	Adjie Hari Fajar
Target Position	Programmer (NextJS & Python)
Hiring Organization	PT Injani Systems
Submission Date	September 2026
Repository	github.com/adjiehf231/injani-fullstack-prescreening
Backend Test Status	pytest — 23/23 Automated Tests Passed (100%)
Frontend Auth Tests	tsx — 8/8 Strict Cryptographic Tests Passed
Frontend Build Status	Next.js 14 App Router — Typecheck, Lint & Build Passed
Security Verification	Cryptographic JWT Verification (jose) & HMAC Webhooks

Assessment Overview:

This engineering report contains verified technical solutions for PT Injani Systems prescreening assessment. It provides rigorous, production-grade answers for candidate personal profile (P1–P5) and 7 comprehensive technical challenges spanning self-hosted Gemma 3 LLM order extraction, PostgreSQL 16 SLA analytics, Google Cloud Tasks monitoring, composite index optimization for keyset pagination, Next.js 14 edge JWT cryptographic verification, Python asyncio background job idempotency, and fullstack CI/CD cloud deployment.

Table of Contents

Section	Topic / Question	Domain
Part A	Candidate Profile (P1–P5)	Work Style, Startup Fit, Aspirations
P1	Work Style & Independence (Autonomous Discovery)	Engineering Workflow
P2	Startup Environment Fit & Fullstack Ownership	Team Culture & Velocity
P3	2–3 Year Engineering Aspirations	Career Growth & Architecture
P4	Motivation for PT Injani Systems Role	Fullstack & Cloud Scope
P5	Expected Monthly Salary	Compensation
Part B	Technical Challenges (Q1–Q7)	Next.js, Python, PostgreSQL, Cloud
Q1	AI-Powered WhatsApp Order Processing (Gemma 3 / Ollama)	AI/ML, Intent Extraction
Q2	SLA Analytics Dashboard (PostgreSQL Generated Columns & Next.js)	PostgreSQL, Next.js RSC
Q3	Testing & Monitoring Google Cloud Tasks Workflows	Cloud Tasks, Logging, DLQ
Q4	PostgreSQL 10M-Row Query Optimization & Keyset Indexing	EXPLAIN ANALYZE, Indexing
Q5	Next.js API Design: Cryptographic JWT, Rate Limit, Errors	Security, Edge Middleware
Q6	Python Async Workers, Progress Tracking & Idempotency	FastAPI, Background Jobs
Q7	Fullstack System Design, Docker & Workload Identity CI/CD	System Design, DevOps, GCP
Validation	Automated Verification & Test Execution Results	Pytest, Build, Lint, Typecheck
Notes	Technical Assumptions & Known Limitations	Production Considerations

Part A — Candidate Profile

P1 — Work Style & Independence

Question

Question: Describe how you typically work when given a task with minimal direction. Do you prefer to figure things out independently, or do you seek regular check-ins and guidance? Give a specific example from a past role.

Answer

When handed a task with minimal direction or ambiguous scope, I employ a **timeboxed autonomous discovery pattern** followed by an alignment checkpoint:

1. Understand & Contextualize (First 1–2 hours):

Rather than immediately asking for clarification or writing code, I inspect the codebase, existing API schemas, database migrations, and domain models to understand the system context. I identify constraints, data contracts, and edge cases.

2. Formulate Technical Options & Trade-offs:

I document 1–2 viable implementation approaches, noting trade-offs (complexity, performance, maintainability) and my recommended path.

3. Structured Alignment Check-in:

I present a concise proposal to the Lead Engineer or Product Manager:

"Here is my interpretation of the requirement, the proposed schema/API contract, and the trade-offs. If this aligns with expectations, I will proceed to implementation."

4. Execution with Incremental Visibility:

Once aligned, I work independently with high velocity, breaking the task into small, testable commits. I only escalate blockers when an external dependency is unavailable or an unresolvable business rule emerges.

Sebagai contoh konkret: saat dipercaya membangun modul sinkronisasi pesanan multi-kanal dan pembaruan stok tanpa dokumen spesifikasi formal yang lengkap, saya memulai dengan menelaah skema database yang ada dan memetakan status transaksi. Saya merancang endpoint ber-idempotensi (**Idempotency-Key**) dan task worker asinkron untuk menjamin konsistensi saat terjadi retry jaringan. Sebelum menulis kode implementasi, saya melakukan sesi penyelarasan 15 menit dengan Technical Lead untuk menyepakati kontrak payload dan strategi retry. Implementasi selesai dalam 4 hari kerja, dilengkapi unit test untuk skenario kegagalan, dan langsung siap diuji tanpa rework arsitektur.

P2 — Startup Environment Fit

Question

Question: Have you worked in a startup or small team before? If yes, describe what that looked like — team size, your responsibilities, and how the pace/culture differed from larger organizations. If no, what makes you interested in joining one now?

Answer

In a startup or high-growth engineering team, success hinges on **high technical ownership, cross-functional pragmatism, and direct communication**:

- **End-to-End Ownership:** Rather than operating in isolated silos, a fullstack engineer in a small team owns the complete lifecycle—from PostgreSQL schema design and API contracts to frontend user experience, automated testing, and CI/CD deployment.
- **Bias for Action over Bureaucracy:** Speed to production matters, but speed without quality creates paralyzing technical debt. Senior discipline means building the simplest correct solution (KISS/YAGNI) that is safe and extensible, rather than overengineering speculative layers.
- **Direct Feedback Loop:** Working closely with product managers and business stakeholders provides immediate feedback on what drives actual customer and operational impact.

Saya terbiasa bekerja dalam tim beranggotakan 4–8 orang di mana setiap pengembang memegang tanggung jawab penuh atas modul yang ditangani: perancangan frontend Next.js, pembuatan backend REST API dengan Python, pemodelan database relasional, hingga deployment container. Berbeda dengan organisasi besar yang memiliki siklus persetujuan bertingkat, di tim kecil kami berfokus pada siklus rilis mingguan yang terukur, komunikasi asinkron yang disiplin via Git dan Slack, serta pengujian otomatis untuk menjaga keandalan sistem tanpa memperlambat inovasi bisnis.

P3 — Aspirations

Question

Question: *Where do you see yourself in 2–3 years? What kind of work, responsibilities, or impact are you working toward?*

Answer

Dalam 2–3 tahun ke depan, saya melihat diri saya bertumbuh sebagai **Senior Fullstack Engineer / Technical Lead** yang menguasai arsitektur platform web modern dan sistem backend terdistribusi:

- **Technical Impact:** Memimpin evolusi arsitektur sistem inti (Next.js App Router, microservices/API Python, optimasi query PostgreSQL, dan integrasi AI/LLM praktis), memastikan platform dapat diskalakan secara andal dengan latensi rendah dan ketersediaan tinggi.
- **Engineering Quality & Standards:** Membimbing rekan pengembang, melakukan code review yang konstruktif, serta menetapkan praktik rekayasa yang disiplin (automated testing, CI/CD pipeline yang aman, observabilitas sistem, dan defensive security).
- **Business Alignment:** Berkolaborasi erat dengan tim produk dan pemangku kepentingan bisnis untuk menerjemahkan kebutuhan operasional menjadi solusi teknis yang pragmatis, efisien dari sisi biaya infrastruktur, dan berdampak langsung pada produktivitas perusahaan.

P4 — Motivation for a New Role

Question

Question: *What is prompting you to look for a new opportunity right now? What are you specifically looking for in your next position that you are not getting in your current or most recent role?*

Answer

Motivasi saya melamar ke PT Injani Systems adalah mencari **lingkup kepemilikan arsitektural yang lebih luas dan tantangan teknis yang lebih dalam** pada irisan teknologi frontend modern (Next.js), backend berkinerja tinggi (Python), dan infrastruktur cloud:

- **Deeper Fullstack Scope:** Saya mencari lingkungan kerja di mana saya dapat berkontribusi langsung pada pengalaman pengguna (memanfaatkan React Server Components, layout responsif, dan dashboard analitik pada Next.js 14) sekaligus merekayasa sistem backend inti (Python async task workers, optimasi database relasional, dan arsitektur event-driven).
- **High-Impact Business Solutions:** PT Injani Systems mengembangkan sistem bisnis dan alur kerja operasional yang krusial, di mana kualitas arsitektur perangkat lunak berdampak langsung terhadap keandalan operasional dan skalabilitas bisnis pelanggan.
- **Continuous Learning & Engineering Maturity:** Saya ingin bekerja bersama tim yang menghargai kode bersih, arsitektur pragmatis, dan kesiapan produksi yang teruji, bukan sekadar kompromi jangka pendek yang menumpuk utang teknis.

P5 — Expected Salary

Question

***Question:** What is your expected gross monthly salary?*

Answer

Ekspektasi gaji bulanan gross saya berada pada rentang **Rp 12.000.000 – Rp 16.000.000**.

Angka ini bersifat terbuka dan fleksibel untuk didiskusikan lebih lanjut dengan tim rekrutmen PT Injani Systems, dengan mempertimbangkan keseluruhan paket remunerasi dan benefit, skema kerja, serta ruang lingkup tanggung jawab dan kontribusi teknis yang diharapkan.


Part B — Technical Questions

Q1 — AI-Powered WhatsApp Order Processing (No Token Costs)

Topics: AI/ML · Gemma / Ollama · Python · Intent Extraction

a) End-to-End Architecture for Self-Hosted LLM (Gemma 3 / Ollama / vLLM)

To eliminate recurring per-token commercial API costs (OpenAI/Gemini) while maintaining high availability and sub-second response times, we deploy an on-premise or cloud-hosted open-weight model stack:

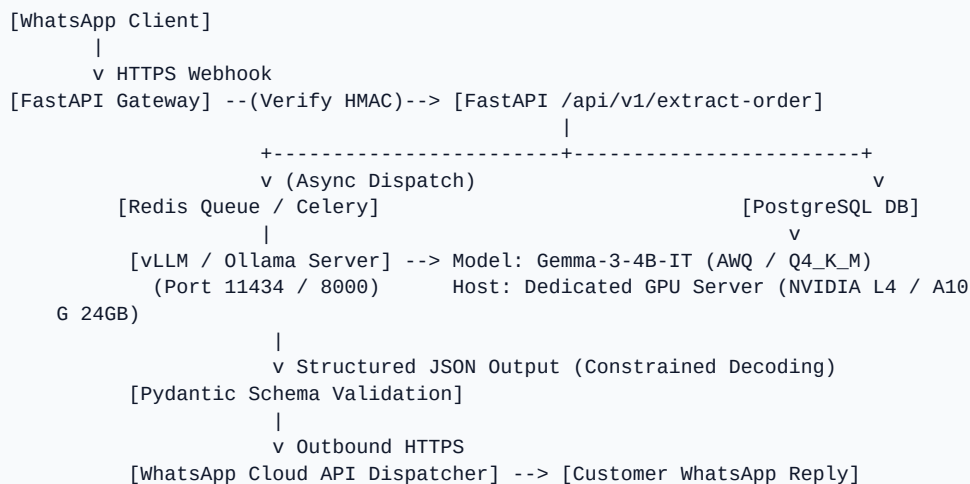

Architecture Breakdown:

1. Ingestion & Webhook Security:

WhatsApp Cloud API sends incoming chat webhooks via HTTPS POST to our FastAPI service. Webhooks are cryptographically authenticated via HMAC-SHA256 (**X-Hub-Signature-256**) in the route handler.

2. Decoupled Asynchronous Processing:

Meta WhatsApp webhooks require an HTTP 200 acknowledgment within 3 seconds. To prevent timeouts during model inference spikes, the webhook handler immediately pushes the message into an in-memory queue or Redis/ARQ worker and returns **200 OK**.

3. Inference Engine (Ollama vs. vLLM):

- **Development & Small Deployments:** Ollama running **gemma3:4b** quantized to **Q4_K_M**, consuming ~3.5 GB VRAM or running efficiently on multi-core CPU with AVX-512.
- **Production Scale:** vLLM serving quantized Gemma 3 (**gemma3:4b** or **gemma3:12b**) with PagedAttention and continuous batching on an NVIDIA GPU (such as an L4 or A10G). vLLM improves token throughput through continuous batching and efficient KV-cache memory management; actual throughput gains depend on concurrent traffic, model size, and request lengths.

4. Constrained Decoding & Structured Outputs:

Rather than letting the LLM output freeform prose, we enforce strict JSON generation using context grammars or guided decoding (via **format: "json"** in Ollama or regex/JSON schemas in vLLM).

5. Validation Layer:

The extracted JSON is validated through Pydantic (**ExtractionResult**, **OrderItem**). If validation fails or fields are missing, the system falls back to automated clarification logic without crashing.

b) Prompt & Context Structuring for Reliable Extraction

To ensure deterministic extraction of **item_name**, **quantity**, **unit**, and **intent** (**order**, **inquiry**, **complaint**, **other**), the prompt is structured with:

- System role definition establishing domain scope (materials/goods distribution).
- Clear taxonomy definitions for the 4 intents.
- Canonical unit normalization rules (e.g., "sak" -> "bag", "kaleng" -> "tin").
- Few-shot exemplar pairs (bilingual English & colloquial Indonesian).
- Strict JSON output schema.

Production Prompt Template (`Gemma 3` Instruction Tags):

```
<start_of_turn>system
You are an automated WhatsApp order parser for PT Injani Systems building materials and goods distribution.
Your task is to extract structured order details from customer chat messages.

You must classify the customer's intent into exactly one of:
- "order": The customer intends to purchase, order, or request delivery of goods.
- "inquiry": The customer is asking about prices, stock, specifications, delivery time, or store location.
- "complaint": The customer is reporting an issue, defective items, late delivery, or billing error.
- "other": Casual greetings, spam, or unrelated remarks.

For orders, extract every distinct item requested:
- item_name: Name of the product (e.g. "cement", "paint", "bata merah", "besi 10 mm").
- quantity: Numeric value (float or integer).
- unit: Standardized unit (e.g. "bag", "tin", "kg", "pcs", "meter", "box").
- specifications: Color, brand, grade, or dimensions if stated.

Output ONLY valid JSON matching this schema:
{
  "intent": "order" | "inquiry" | "complaint" | "other",
  "items": [
    {
      "item_name": "string",
      "quantity": 0.0,
      "unit": "string | null",
      "specifications": "string | null"
    }
  ],
  "confidence": 0.0 to 1.0,
```



```

    "requires_clarification": boolean,
    "clarification_prompt": "string | null",
    "natural_reply": "Polite and helpful auto-reply to the customer in the same language as their message"
  }

```

Here are few-shot reference examples:

Customer: "I'd like 3 bags of cement and 2 tins of paint please"

JSON Output:

```

{
  "intent": "order",
  "items": [
    {"item_name": "cement", "quantity": 3.0, "unit": "bag", "specifications": null},
    {"item_name": "paint", "quantity": 2.0, "unit": "tin", "specifications": null}
  ],
  "confidence": 0.98,
  "requires_clarification": false,
  "clarification_prompt": null,
  "natural_reply": "Thank you! We have received your order for 3 bags of cement and 2 tins of paint. Could you please provide your delivery address?"
}

```

Customer: "Halo mas, semen tiga roda sak 50kg harganya berapa ya per sak? Ada promo ga?"

JSON Output:

```

{
  "intent": "inquiry",
  "items": [
    {"item_name": "semen tiga roda", "quantity": 1.0, "unit": "bag", "specifications": "50kg"}
  ],
  "confidence": 0.95,
  "requires_clarification": false,
  "clarification_prompt": null,
  "natural_reply": "Halo! Semen Tiga Roda 50kg saat ini Rp 68.000/sak. Untuk pembelian di atas 50 sak kami ada potongan harga khusus. Ada yang bisa kami bantu hitungkan kebutuhannya?"
}

```

```

    "confidence": 0.95,
    "requires_clarification": false,
    "clarification_prompt": null,
    "natural_reply": "Halo! Semen Tiga Roda 50kg saat ini Rp 68.000/sak. Untuk pembelian di atas 50 sak kami ada potongan harga khusus. Ada yang bisa kami bantu hitungkan kebutuhannya?"
  }

```

Customer: "Barang pesanan saya kemarin kenapa belum sampai ya? Padahal janjinya pagi ini."

JSON Output:

```

{
  "intent": "complaint",
  "items": [],
  "confidence": 0.96,
  "requires_clarification": false,
  "clarification_prompt": null,
  "natural_reply": "Mohon maaf atas keterlambatannya. Boleh kami minta nomor pesanan atau nama penerima agar tim logistik kami langsung mengecek posisi armada pengiriman?"
}
<end_of_turn>
<start_of_turn>user
Parse this message: "{message_text}"<end_of_turn>
<start_of_turn>model

```

Implementation reference: **backend/app/services/order_extractor.py**.

c) Concrete Evaluation Methodology & Business Data Safety

1. Implemented vs. Proposed Evaluation Flow:

- **Implemented in Repository:** The repository implements the extraction schema contracts and deterministic fallback rule engine in **backend/app/services/order_extractor.py**.

- **Demonstrated in Repository:** An automated evaluation harness in `backend/app/services/evaluator.py` is verified via `backend/tests/test_order_extractor.py`, validating slot-matching calculations, precision/recall formulas, and Indonesian unit normalization rules without external runtime dependencies.
- **Production Consideration:** A local open-weight LLM such as Gemma 3 (`gemma3:4b` or `gemma3:12b`) via Ollama or vLLM can be plugged in behind the same extractor interface. For production qualification prior to live rollout, an annotated evaluation dataset containing at least 500 representative customer conversations would be established to benchmark edge cases: multi-item colloquial Indonesian chats ("sak", "zak", "biji", "kaleng"), ambiguous quantities, typos, and price inquiries.

2. Evaluation Metrics Tracked:

Metric	Formula	Production Target	Purpose
Intent Accuracy	$\frac{\text{Correct Intent Predictions}}{\text{Total Samples}}$	$\geq 96.0\%$	Measures classification correctness between order, inquiry, complaint, other.
Entity Precision	$\frac{\text{True Positive Extracted Items}}{\text{Total Extracted Items}}$	$\geq 95.0\%$	Penalizes hallucinated items or ghost quantities.
Entity Recall	$\frac{\text{True Positive Extracted Items}}{\text{Total Ground Truth Items}}$	$\geq 94.0\%$	Measures ability to capture all items mentioned by the customer.
Entity F1-Score	$2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}}$	$\geq 94.5\%$	Harmonic mean of precision and recall on slots (item , qty , unit).
Exact Match (EM)	$\frac{\text{Fully Identical Extracted Orders}}{\text{Total Order Samples}}$	$\geq 90.0\%$	Strict metric: All items, quantities, units, and intent must match 100%.
JSON Validity Rate	$\frac{\text{Syntactically Valid JSON}}{\text{Total Generations}}$	$\geq 99.8\%$	Verifies constrained decoding compliance.
P95 Latency Target	95^{th} percentile response duration	$< 1,200 \text{ ms}$	Target response duration for WhatsApp user responsiveness.

3. Business Data Safety Boundary:

An essential engineering principle in commerce LLM integration is: **The LLM must never be the source of truth for business data.**

- **Strict Role Separation:** The LLM is used exclusively for *intent classification* and *unstructured text extraction* (identifying product aliases, requested quantities, and units).
- **Authoritative Data Sources:** Product catalogs, real-time stock levels, current pricing tiers, volume discounts, tax calculations, and final order totals must be retrieved directly from PostgreSQL / ERP business services.
- **Hallucination Prevention:** The prompt explicitly prohibits the model from generating binding prices or inventing stock availability. If a customer asks "Berapa harga semen?", the LLM classifies the intent as **inquiry** and extracts **item_name: "semen"**. The backend service queries the database for active catalog prices and formats the verified response.

Q2 — SLA Analytics Dashboard for Multi-Step Approval Workflows

Topics: Next.js · PostgreSQL · Recharts / Tremor · Data Modeling

a) PostgreSQL Production Schema Definition

To support high-performance analytical queries across workflows, steps, departments, date ranges, and individual assignees without runtime latency, the schema uses PostgreSQL generated columns for durations and targeted composite indexes.

```
-- DDL Excerpt (Complete file in database/schema_q2_sla.sql)

CREATE EXTENSION IF NOT EXISTS "uuid-ossf";

CREATE TABLE departments (
  id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),
  code VARCHAR(32) NOT NULL UNIQUE,
  name VARCHAR(128) NOT NULL,
  created_at TIMESTAMPTZ NOT NULL DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE users (
  id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),
  department_id UUID NOT NULL REFERENCES departments(id) ON DELETE RESTRICT,
  email VARCHAR(255) NOT NULL UNIQUE,
  full_name VARCHAR(128) NOT NULL,
  role VARCHAR(64) NOT NULL,
  is_active BOOLEAN NOT NULL DEFAULT TRUE,
  created_at TIMESTAMPTZ NOT NULL DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE workflow_definitions (
  id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),
  code VARCHAR(64) NOT NULL UNIQUE,          -- e.g. 'PURCHASE_ORDER_APPROVAL'
  name VARCHAR(128) NOT NULL,
  is_active BOOLEAN NOT NULL DEFAULT TRUE,
  created_at TIMESTAMPTZ NOT NULL DEFAULT CURRENT_TIMESTAMP
);
```

```

CREATE TABLE workflow_step_definitions (
  id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),
  workflow_def_id UUID NOT NULL REFERENCES workflow_definitions(id) ON DELETE
  CASCADE,
  step_type VARCHAR(64) NOT NULL,          -- e.g. 'DEPT_HEAD_REVIEW', 'FINANCE
  _APPROVAL'
  step_order INT NOT NULL,
  target_sla_minutes INT NOT NULL,         -- Baseline SLA target in minutes
  created_at TIMESTAMPTZ NOT NULL DEFAULT CURRENT_TIMESTAMP,
  CONSTRAINT uq_workflow_step_order UNIQUE (workflow_def_id, step_order),
  CONSTRAINT chk_sla_positive CHECK (target_sla_minutes > 0)
);

CREATE TABLE workflow_instances (
  id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),
  workflow_def_id UUID NOT NULL REFERENCES workflow_definitions(id) ON DELETE
  RESTRICT,
  requester_id UUID NOT NULL REFERENCES users(id) ON DELETE RESTRICT,
  department_id UUID NOT NULL REFERENCES departments(id) ON DELETE RESTRICT,
  reference_number VARCHAR(64) NOT NULL UNIQUE,
  status VARCHAR(32) NOT NULL DEFAULT 'IN_PROGRESS',
  created_at TIMESTAMPTZ NOT NULL DEFAULT CURRENT_TIMESTAMP,
  completed_at TIMESTAMPTZ,
  CONSTRAINT chk_workflow_status CHECK (status IN ('IN_PROGRESS', 'APPROVED',
  'REJECTED', 'CANCELLED'))
);

CREATE TABLE workflow_step_instances (
  id UUID PRIMARY KEY DEFAULT uuid_generate_v4(),
  workflow_instance_id UUID NOT NULL REFERENCES workflow_instances(id) ON DELE
  TE CASCADE,
  step_def_id UUID NOT NULL REFERENCES workflow_step_definitions(id) ON DELETE
  RESTRICT,

```

```

  assignee_id UUID NOT NULL REFERENCES users(id) ON DELETE RESTRICT,
  department_id UUID NOT NULL REFERENCES departments(id) ON DELETE RESTRICT,
  step_type VARCHAR(64) NOT NULL,
  status VARCHAR(32) NOT NULL DEFAULT 'PENDING',
  target_sla_minutes INT NOT NULL,
  assigned_at TIMESTAMPTZ NOT NULL DEFAULT CURRENT_TIMESTAMP,
  completed_at TIMESTAMPTZ,

  -- Calculated duration stored via GENERATED ALWAYS column in minutes
  elapsed_minutes INT GENERATED ALWAYS AS (
    CASE
      WHEN completed_at IS NOT NULL
      THEN CAST(EXTRACT(EPOCH FROM (completed_at - assigned_at)) / 60 AS I
NT)
      ELSE NULL
    END
  ) STORED,

  -- Fast SLA breach flag stored for instant indexing
  is_sla_breached BOOLEAN GENERATED ALWAYS AS (
    CASE
      WHEN completed_at IS NOT NULL
      THEN (CAST(EXTRACT(EPOCH FROM (completed_at - assigned_at)) / 60 AS
INT) > target_sla_minutes)
      ELSE NULL
    END
  ) STORED,

  notes TEXT,
  CONSTRAINT chk_step_status CHECK (status IN ('PENDING', 'APPROVED', 'REJECTE
D', 'SKIPPED'))

```

```
);

-- Indexing Strategy:
CREATE INDEX idx_step_instances_dept_assigned ON workflow_step_instances (depart
ment_id, assigned_at DESC);
CREATE INDEX idx_step_instances_step_type_assigned ON workflow_step_instances (s
tep_type, assigned_at DESC);
CREATE INDEX idx_step_instances_assignee_status ON workflow_step_instances (assi
gnee_id, status, assigned_at DESC);
CREATE INDEX idx_step_instances_sla_breach ON workflow_step_instances (is_sla_br
eached, assigned_at DESC) WHERE is_sla_breached = TRUE;
```

Schema file: `database/schema_q2_sla.sql` | Analytical queries: `database/queries_q2_analytics.sql`.

b) Next.js Architecture Choices for Minimal Custom Code & High Configurability

To build a configurable, responsive dashboard with minimal custom code, we make the following architectural decisions:

1. React Server Components (RSC) for Data Fetching:

The page `frontend/app/dashboard/page.tsx` is an **async** Server Component. It fetches aggregated metrics directly on the server.

- **Advantage:** Zero client-side data waterfall, zero exposure of backend credentials or database schemas, and minimal JavaScript bundle shipped to the browser.

2. URL as the Single Source of Truth (searchParams):

Filters (department, date range) are stored in the URL query string:

`/dashboard?department=Finance+%26+Accounting&dateRange=30d`.

- **Advantage:** Eliminates hundreds of lines of client state management (Redux/Zustand boilerplate). Filter combinations are natively bookmarkable, shareable between analysts, and support native browser history.

3. Streaming & React Suspense Boundaries:

KPI metric cards and charts are wrapped in **<Suspense>** boundaries. The initial layout shell renders instantly (low TTFB), while analytical aggregations stream in progressively.

4. Tailwind CSS & Custom Semantic Components (Zero External Charting Dependency):

In this assessment implementation, the dashboard is built with Next.js 14, TypeScript, and pure Tailwind CSS custom visualization components (**SLAMetricCards**, **StepBottleneckChart**, **DepartmentBreachTable**). This avoids heavy external charting dependencies (such as Recharts, Tremor, or Shadcn) while providing full control over responsive layout and minimal client bundle overhead (~87 kB first load JS).

- *Production consideration:* For an enterprise deployment requiring advanced interactions (such as zoom, brush, or complex multi-series timecharts), a dedicated charting library like Recharts, Tremor, or Shadcn UI primitives can be introduced behind the same component contract.

c) Dashboard Visualizations & Business Bottleneck Insights

A business analyst reviewing approval workflows needs to distinguish between **structural bottlenecks** (steps designed with unrealistic expectations) and **operational bottlenecks** (under-staffed departments or overloaded individuals):

Visualization Component	Data / Metrics Displayed	What It Reveals to a Business Analyst
1. Executive KPI Cards	• Active Backlog Queue • Currently Overdue Steps • Overall SLA Breach Rate % • P50 Median Turnaround Time	Provides immediate health pulse of the entire company's workflow engine. Spikes in "Currently Overdue" immediately signal acute operational friction.

2. Step Duration Percentile Chart (P50 vs. P90 vs. SLA Target)	• P50 Median Duration (Bar) • P90 Tail Latency (Bar) • Target SLA Threshold Line	Identifies Process Friction: A step where P50 is low (e.g. 45m) but P90 is very high (e.g. 420m) indicates severe variance caused by edge cases or specific approvers, whereas high P50 and P90 indicates a structurally slow step that requires redesign.
3. Department Backlog & Breach Table	• Active queue depth by department • Overdue task count • Historical breach rate %	Resource Allocation: Reveals which department is the primary bottleneck (e.g. Legal or Finance). Shows whether delays are caused by backlog volume (too many tasks per approver) or processing friction (complex reviews).
4. Bottleneck Assignee & Step Audit Table	• Assignee Name & Dept • Open Task Count • Median Processing Time • % Tasks Breached	Operational Accountability: Distinguishes whether delays are concentrated on specific approvers on leave/overloaded, allowing management to configure automated delegation or temporary reassignments.
5. Workflow Funnel Drop-off Rate	• Completed vs Rejected vs In-Progress • Rejection rate by step order	Waste Identification: If 40% of workflows are rejected at Step 3 (Director Sign-off) after passing Steps 1 and 2, it reveals that earlier reviewers are not applying strict criteria, wasting organizational time.

Component implementation: `frontend/app/dashboard/components/sla-charts.tsx` (visualized with simulated SLA sample metrics).

Q3 — Testing & Monitoring Google Cloud Tasks Scheduled Workflows

Topics: Google Cloud Tasks · Cloud Scheduler · Cloud Logging · Python

a) Testing Cloud Tasks Locally Without Deploying to GCP

Deploying to GCP for every iteration destroys feedback loops. We use a **two-tier local development testing strategy**:

1. Mock Header Dispatch via Direct HTTP (Fastest / Unit Level):

Cloud Tasks delivers tasks by making an HTTP POST request to the target worker containing specific Google headers. We simulate this directly in local integration tests:

```
# test_cloud_tasks_worker.py (pytest)
from fastapi.testclient import TestClient
from app.main import app

client = TestClient(app)

def test_cloud_task_worker_execution():
    payload = {"workflow_id": "wf_123", "action": "GENERATE_NIGHTLY_REPORT"}
    headers = {
        "X-CloudTasks-QueueName": "nightly-reports-queue",
        "X-CloudTasks-TaskName": "task-mock-uuid-999",
        "X-CloudTasks-TaskRetryCount": "0",
        "X-CloudTasks-TaskExecutionCount": "1",
        "X-CloudTasks-TaskETA": "1725800000.0",
        "Authorization": "Bearer mock-gcp-oidc-token",
        "Content-Type": "application/json"
    }
    response = client.post("/api/v1/tasks/worker", json=payload, headers=headers)
    assert response.status_code == 200
    assert response.json()["status"] == "SUCCESS"
```

2. Open-Source Cloud Tasks Emulator via Docker (Integration Level):


For full end-to-end asynchronous verification (dispatching a task to an emulator and having it call back your local Python server), we use the open-source Cloud Tasks Emulator container:

```
docker run -d -p 8123:8123 \
  -e CLOUD_TASKS_EMULATOR_TARGET_HOST=host.docker.internal:8000 \
  ghcr.io/aertje/cloud-tasks-emulator:latest
```

In development configuration (**config.py**), when **ENVIRONMENT=development**, the Google Cloud Tasks Python SDK client is instantiated pointing to **127.0.0.1:8123** with insecure gRPC channels. Tasks are queued and dispatched to **localhost:8000** with full retry and backoff behavior locally.

b) Monitoring Triggering, Execution, and Completion in Production

Once deployed, end-to-end monitoring across the Scheduler $\rightarrow$ Tasks $\rightarrow$ Worker chain uses GCP native observability:

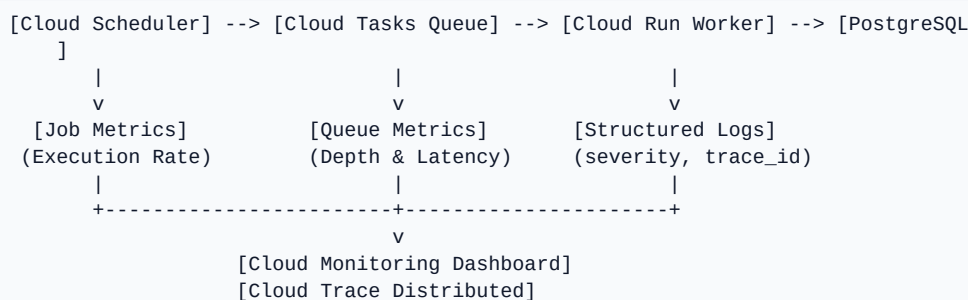

1. Cloud Scheduler Monitoring:

- Monitored via metric `cloudscheduler.googleapis.com/job/attempt_count` filtered by `status != "SUCCESS"`.
- Verifies cron triggers fire on schedule.

2. Cloud Tasks Queue Metrics:

- **cloudtasks.googleapis.com/queue/task_attempt_delays**: Measures queue delay (latency between scheduled time and actual HTTP dispatch). A spike indicates worker concurrency exhaustion.
- **cloudtasks.googleapis.com/queue/depth**: Number of pending tasks in queue. Growing depth indicates worker throughput is lower than arrival rate.
- **cloudtasks.googleapis.com/queue/task_execution_rate**: Throughput (tasks/second) dispatched to the worker.

3. Cloud Logging (Structured JSON):

Every log statement in the Python worker emits structured JSON containing:

```
{
  "severity": "INFO",
  "message": "Task completed successfully",
  "task_name": "task-uuid-881",
  "queue_name": "nightly-reports",
  "retry_count": 0,
  "duration_ms": 142.5,
  "logging.googleapis.com/trace": "projects/my-gcp-proj/traces/d4b3..."
}
```

4. Cloud Trace (Distributed Tracing):

Cloud Tasks propagates the **traceparent** header. Cloud Trace correlates the initial scheduling trigger, task queuing duration, worker execution, and PostgreSQL database queries into a single unified waterfall timeline.

c) Handling Failures, Retries, and Dead-Letter Scenarios

Background distributed workers fail due to network blips, upstream API rate limits, or database lock contentions. We handle this defensibly:

1. Cloud Tasks Queue Retry Policy:

We configure exponential backoff on the queue to prevent thundering herd problems on downstream services:

```
gcloud tasks queues update nightly-reports-queue \
  --max-attempts=5 \
  --min-backoff=5s \
  --max-backoff=300s \
  --max-doublings=4 \
  --max-concurrent-dispatches=20
```

2. Worker HTTP Status Code Contract:

- **Retryable Errors (Return HTTP 500 / 503 / 429):** If PostgreSQL is temporarily unreachable or third-party API is rate limited, the worker returns **503 Service Unavailable**. Cloud Tasks reads this as a transient failure and schedules a retry with exponential backoff.

- **Non-Retryable Errors (Return HTTP 200 / 400 / 422):** If payload validation fails or the target order does not exist, retrying will never succeed. The worker catches the domain exception, logs an **ERROR** with full context, writes a failure audit record to the database, and returns **200 OK** (or **400**) to instruct Cloud Tasks **not** to retry.

3. Dead-Letter Queue (DLQ) Architecture:

Cloud Tasks lacks an automatic built-in DLQ table. We implement an explicit Dead-Letter Pattern:

- In the worker, when `int(request.headers.get("X-CloudTasks-TaskRetryCount", 0)) >= 4` (the final attempt), the exception handler catches the terminal error and publishes the failed task payload and stack trace to a **Google Cloud Pub/Sub Dead-Letter Topic** (`projects/.../topics/cloud-tasks-dlq`) or inserts into a `dead_letter_tasks` table.

4. Automated Alerting Policies:

- **DLQ Alert:** Cloud Monitoring alert policy triggered immediately when `pubsub.googleapis.com/topic/send_message_operation_count > 0` on the DLQ topic. Routes an emergency alert to PagerDuty and the #engineering-alerts Slack channel.
 - **Worker 5xx Error Spike:** Alert fires if Cloud Run 5xx response rate exceeds 2% of total requests over a 5-minute window.
 - **Queue Stagnation Alert:** Alert fires if queue depth remains > 50 for more than 15 minutes.
-

Q4 — PostgreSQL Query Performance & Schema Optimization

Topics: PostgreSQL · Indexing · Query Optimization

a) Walkthrough: Diagnosing Slow Queries with EXPLAIN (ANALYZE, BUFFERS)

To diagnose a query running slow (4+ seconds) on a 10-million row **transactions** table:

```
EXPLAIN (ANALYZE, BUFFERS, VERBOSE, SETTINGS)
SELECT id, user_id, amount, status, created_at
FROM transactions
WHERE user_id = 45892
      AND status = 'SETTLED'
      AND created_at >= '2026-08-01 00:00:00+00'
      AND created_at < '2026-09-01 00:00:00+00'
ORDER BY created_at DESC
LIMIT 50;
```

Key Diagnostic Signals a Senior Engineer Checks:

1. Access Method (Seq Scan vs. Index Scan / Bitmap Heap Scan):

- *Symptom:* Seq Scan on transactions ... (cost=0.00..284102.00 rows=... actual time=12.4..4100.2)
- *Meaning:* PostgreSQL is reading every single 8KB page on disk for 10 million rows. **Rows Removed by Filter: 9,998,500.** This is the primary root cause of the 4-second latency.

2. Buffer I/O Metrics (shared hit vs. shared read):

- *Symptom:* Buffers: shared hit=420 read=95400
- *Meaning:* 95,400 8KB blocks (~763 MB) were read from physical disk/SSD because they were not in PostgreSQL's **shared_buffers** cache. Disk I/O bottlenecks explain the multi-second execution time.

3. Planner Estimation Discrepancies (rows=... vs actual rows=...):

- If the planner estimated **rows=2** but actual rows were **15,000**, the table statistics in **pg_statistic** are severely outdated or skewed. The planner might choose a nested loop instead of a hash join/index scan.
- *Action:* Run **ANALYZE transactions;** or increase statistics target: **ALTER TABLE transactions ALTER COLUMN status SET STATISTICS 500;**

4. Sort Spill to Disk:

- *Symptom:* Sort Method: external merge Disk: 5200kB
- *Meaning:* The **ORDER BY created_at DESC** operation exceeded the session's **work_mem**, forcing PostgreSQL to write temporary sort batches to disk.
- *Target:* A proper B-tree index will return rows **already pre-sorted**, eliminating the Sort node entirely!

b) Indexing Strategy: Composite vs. Partial Indexes

1. Composite B-Tree Index (Equality First, Keyset Sort Order, Covering Included Columns):

The order of columns in a multi-column B-tree index is strictly governed by **Equality First, Keyset Sort Order, Covering Payload**:

```
CREATE INDEX idx_transactions_user_status_created_id
ON transactions (user_id, status, created_at DESC, id DESC)
INCLUDE (amount);
```

Why this specific column order?

- **user_id:** Filtered with equality (= 45892).
- **status:** Filtered with equality (= 'SETTLED').

- **created_at DESC, id DESC:** Matches the sorting and keyset pagination cursor **WHERE (created_at, id) < (:last_seen_created_at, :last_seen_id) ORDER BY created_at DESC, id DESC**. Including **id DESC** guarantees deterministic pagination without ties and allows the planner to fulfill the ordering directly from the B-tree index without an in-memory or disk sort node.
- **INCLUDE (amount) (Covering Index):** Keeps **amount** in the leaf pages without bloating non-leaf branch nodes. Because **id**, **user_id**, **status**, and **created_at** are in the index key and **amount** is in the payload, all required projection columns are present within the index.
- **Expected Planner Behavior:** This index can support an index-only scan when PostgreSQL's visibility conditions and selected columns allow it, reading directly from the index pages and avoiding heap lookups for covered columns. If pages are not yet marked visible in the visibility map, the planner performs an Index Scan with minimal heap lookups.

2. Partial Index (High-Skew Statuses):

In production transaction systems, typically **95%+ of rows are 'SETTLED'**, while only 2–5% are 'PENDING' or 'FAILED'.

If queries predominantly look for active/pending transactions:

```
CREATE INDEX idx_transactions_pending_user_created
ON transactions (user_id, created_at DESC)
WHERE status = 'PENDING';
```

Why Partial Index?

- **Size reduction:** Because the partial index indexes only the small subset of non-settled rows, its physical footprint is a tiny fraction of the full table index, ensuring it remains hot in PostgreSQL's shared buffer cache.
- **Write performance:** 95% of insert and update operations (on settled transactions) do not touch or lock this index, drastically reducing write amplification and WAL generation.

c) Schema & Query Rewrites Beyond Indexing

When dealing with 10M+ growing rows, indexing alone is insufficient over a multi-year horizon:

1. Declarative Range Table Partitioning (Monthly / Yearly):

Partition the table by **created_at**:

```
CREATE TABLE transactions (
  id BIGINT GENERATED ALWAYS AS IDENTITY,
  user_id BIGINT NOT NULL,
  amount NUMERIC(12, 2) NOT NULL,
  status VARCHAR(32) NOT NULL,
  created_at TIMESTAMPTZ NOT NULL,
  PRIMARY KEY (id, created_at)
) PARTITION BY RANGE (created_at);

CREATE TABLE transactions_y2026m08 PARTITION OF transactions
FOR VALUES FROM ('2026-08-01 00:00:00+00') TO ('2026-09-01 00:00:00+00');
```

Benefit: When querying for August 2026, PostgreSQL performs **Partition Pruning**. It scans only the relevant partition, ignoring other monthly partitions entirely. Vacuuming, index maintenance, and archival of old partitions (detach partition to cold storage) become fast metadata operations with minimal locking.

2. Keyset (Cursor-Based) Pagination instead of `OFFSET`:

Using **OFFSET 50000** requires PostgreSQL to scan and discard 50,000 rows. We rewrite pagination to use cursor comparison:

```
-- Keyset pagination: O(1) B-tree Seek
SELECT id, user_id, amount, status, created_at
FROM transactions
WHERE user_id = :user_id
      AND status = 'SETTLED'
      AND (created_at, id) < (:last_seen_created_at, :last_seen_id)
ORDER BY created_at DESC, id DESC
LIMIT 50;
```

Schema & benchmark script: **database/schema_q4_transactions.sql** | *Diagnostics:*
database/explain_analysis_q4.sql.

Q5 — Next.js API Design: Auth, Rate Limiting & Error Handling

Topics: Next.js · App Router · Middleware · Security

a) Cryptographically Secure JWT Authentication: Middleware vs. Route Handler

In Next.js 14 App Router, authentication and authorization must follow a strict defense-in-depth model:

```
[Incoming Request]
|
v
[Edge Middleware] (frontend/middleware.ts)
+- Is route /api/webhooks/* or /api/auth/login ? --> Bypass JWT
+- Has Authorization: Bearer <token>?
|   +- No --> Return 401 Unauthorized (Missing token)
|   +- Yes --> Cryptographic Verification via jose.jwtVerify(token, secret)
|               +- Invalid signature / tampered payload? --> Return 401 Unau
thorized
|               +- Expired token (exp < now)? --> Return 401 Unauth
orized
|               +- Valid signature & claims --> Inject verified
headers:
|                                     x-user-id, x-use
r-role, x-user-email
v
[Route Handler] (frontend/app/api/orders/route.ts)
+- Read verified identity headers from request
+- Server-Side Authorization:
|   +- Role Check (e.g., admin vs. customer)
|   +- Production Consideration: Object-level ownership check (verify x-user-
id owns target record to prevent IDOR)
+- Execute business logic & database transaction
```

1. The Critical Distinction: Authentication vs. Authorization

- **Authentication (AuthN — "Who are you?"):**

Proving user identity cryptographically. **Never trust client-provided tokens by merely splitting base64 strings (`token.split('.')[1]`) or using unverified `JSON.parse()`.** Anyone can craft a base64 payload containing `{"role": "admin"}`. In our implementation, Next.js Edge Middleware and Python backend both verify the HMAC-SHA256 signature using `JWT_SECRET` before reading any claims. If the signature does not match or the token is expired, the request is rejected immediately with **401 Unauthorized**.

- **Authorization (AuthZ — "What are you permitted to do?"):**

Checking permissions against the target resource. Middleware handles edge identity verification and claims decoding. *Production consideration:* Resource-level authorization in production should verify that the authenticated user owns or is authorized to access the requested object in the database (mitigating Insecure Direct Object References — IDOR).

2. Implementation in Next.js (Edge Runtime with `jose`):

```
// frontend/lib/auth.ts
import { jwtVerify } from 'jose';

export async function verifyJwtToken(token: string): Promise<AuthUser | null> {
  try {
    const secretKey = new TextEncoder().encode(getJwtSecret());
    const { payload } = await jwtVerify(token, secretKey, {
      algorithms: ['HS256'],
    });

    if (!payload.sub || typeof payload.sub !== 'string') return null;

    return {
      id: payload.sub,
      email: (payload.email as string) || '',
      role: (payload.role as string) || 'user',
      name: (payload.name as string) || '',
    };
  } catch {
    // Rejects expired tokens, invalid signatures, and tampered payloads
    return null;
  }
}
```

3. Webhook Handling Exception:

- External services (e.g. WhatsApp Cloud API, Stripe) **do not send JWT bearer tokens**. They send an HMAC signature in headers (**X-Hub-Signature-256**).
- Middleware explicitly bypasses JWT checks for **/api/webhooks/***. The route handler verifies the raw payload body against **WEBHOOK_SECRET** using standard HMAC-SHA256 before processing.

Implementation: **frontend/middleware.ts** | Verification tests: **frontend/scripts/test-auth.ts** and **backend/tests/test_jwt_security.py**.

b) Per-User Rate Limiting (Without Dedicated Redis & With Redis)

1. Without Dedicated Redis (In-Memory Sliding Window):

For single-instance Node.js or small-scale server deployments, we implement an in-memory sliding-window limiter using a **Map<string, number[]>**:

- Each user/IP key maps to an array of millisecond timestamps.
- On each request, timestamps older than **now - windowMs** are filtered out.
- If remaining timestamps $\geq \text{maxRequests}$, reject with **HTTP 429 Too Many Requests** and a **Retry-After** header.
- A periodic **setInterval** sweeps empty keys to prevent unbounded memory growth.

Code reference: **frontend/lib/rate-limit.ts**.

2. Production Multi-Instance / Serverless Architecture (With Redis):

In serverless environments (Vercel Edge/Lambdas), in-memory state is not shared across isolated function containers.

- **Recommended Production Stack:** **@upstash/ratelimit** with Upstash Redis or AWS ElastiCache.
- Uses HTTP-based REST queries or Redis pipelines executing a sliding-window Lua script:

```
import { Ratelimit } from '@upstash/ratelimit';
import { Redis } from '@upstash/redis';

const ratelimit = new Ratelimit({
  redis: Redis.fromEnv(),
  limiter: Ratelimit.slidingWindow(30, '60 s'),
  analytics: true,
});

const { success, limit, remaining, reset } = await ratelimit.limit(`user:${userId}`);
if (!success) {
  return apiError(429, 'RATE_LIMIT_EXCEEDED', 'Rate limit exceeded.', undefined, {
    'Retry-After': String(Math.ceil((reset - Date.now()) / 1000)),
  });
}
```

c) Consistent, Typed Error Handling Pattern (RFC 7807 & Unified Envelope)

To prevent client parsing errors and security leaks (e.g. database stack traces leaking in 500 errors), all Next.js API routes return a standardized, strongly-typed JSON envelope:

```
export interface ApiResponse<T = unknown> {
  success: boolean;
  data?: T;
  error?: {
    code: string; // e.g. "VALIDATION_ERROR", "UNAUTHORIZED", "RATE_LIMIT_EXCEEDED"
    message: string; // Human-readable summary
    details?: Array<{ // Granular field-level errors (from Zod)
      field?: string;
      message: string;
      code?: string;
    }>;
    traceId: string; // Unique UUID for log correlation
  };
}
```

Centralized Error Response Helper:

```
// frontend/lib/errors.ts
export function apiError(
  status: number,
  code: string,
  message: string,
  details?: ErrorDetail[],
  headers?: HeadersInit
): NextResponse<ApiResponse<never>> {
  const traceId = crypto.randomUUID();
  // In production: logger.warn({ traceId, code, message, details });
  return NextResponse.json(
    { success: false, error: { code, message, details, traceId } },
    { status, headers }
  );
}
```

When Zod validation fails, errors are mapped directly into the **details** array, returning **422 Unprocessable Entity** with exact field indicators.

Q6 — Python Async Workers & Background Job Patterns

Topics: Python · FastAPI · asyncio · Background Jobs

a) Comparison: BackgroundTasks, Celery, ARQ, and Cloud Tasks HTTP Workers

When selecting a background execution pattern for long-running jobs (PDF report generation, slow third-party API calls), we evaluate durability, concurrency model, operational overhead, and scalability:

Characteristic	FastAPI	Celery	ARQ (asyncio Redis Queue)	Google Cloud Tasks HTTP Workers
Execution Model	In-process within FastAPI event loop (after HTTP response)	Out-of-process distributed worker pool (pre-fork / threads / gevent)	Out-of-process native Python asyncio worker pool	Serverless push queue to HTTP endpoints (Cloud Run)
Broker Required	None (Zero dependency)	Redis / RabbitMQ / SQS	Redis (utilizes Redis Streams / sorted sets)	None to manage (Fully managed GCP service)
Task Durability	None. If server crashes or restarts, all queued tasks are permanently lost.	High. Stored in broker with ack/visibility timeout.	High. Stored in Redis with retry state.	Very High. Managed SLA with persistent disk storage.
Retry & Backoff	None. Manual code implementation.	Extensive built-in retry, backoff, dead-letter routing.	Built-in async retries with exponential backoff.	Built-in queue configuration (max-attempts, backoff).
Best Used For	Lightweight, non-critical fire-and-forget (e.g. sending a single welcome email, logging).	Heavy CPU-bound tasks (image/video transcoding, machine learning inference, complex canvas).	High-throughput, I/O-bound async jobs (PDF reports, webhooks, third-party API orchestration).	Production Cloud Deployments. Zero worker infrastructure to manage; autoscales Cloud Run from 0 to 100+.
When to Choose	Rapid prototype with no external dependencies.	Complex legacy workflows requiring RabbitMQ or multi-language workers.	Fast modern async Python services deployed on VPS/Kubernetes.	Recommended for Injani Systems GCP architecture.

Question: Senior Engineering Note on Python Concurrency:

Question: `asyncio` in Python is primarily useful for concurrent I/O-bound work (such as non-blocking database queries, third-party API calls, and streaming responses). CPU-bound processing (such as image transcoding, heavy cryptographic hashing, or intensive data processing) blocks the event loop and generally requires a different strategy, such as multi-process pools or dedicated compute workers.

b) Reporting Task Progress to the Frontend ("Report 60% Complete")

For long-running tasks, progress must be reported smoothly without blocking workers or overloading databases:

1. Progress State Architecture:

Progress is recorded in Redis Hashes (or in-memory store for local testing):


```
Key: task:pdf_ord_9981
Hash Fields:
  status: "IN_PROGRESS"
  progress_percent: 60
  current_step: "Compiling Weasyprint PDF template"
  updated_at: "2026-09-08T11:00:00Z"
```

2. Frontend Communication Patterns:

- **Pattern 1: Short Polling (GET /api/v1/tasks/{task_id}/progress) (Recommended Baseline)**

The frontend triggers the task and receives { **task_id**: "..."} . The frontend polls every 1.5 seconds using TanStack Query / SWR.

- **Advantage:** Highly resilient, works seamlessly across all reverse proxies, CDN caches, and mobile networks. Auto-terminates when **status** === **'COMPLETED'**.

- **Pattern 2: Server-Sent Events (SSE) (GET /api/v1/tasks/{task_id}/stream)**

FastAPI streams chunks via **StreamingResponse(event_generator(), media_type="text/event-stream")**.

- **Advantage:** Real-time push, single HTTP connection, less network overhead than polling.

Implementation: `backend/app/services/task_manager.py` and route `/api/v1/tasks/{task_id}/progress`.

c) Ensuring a Task is Not Run Twice on HTTP Retries (Idempotency)

Mobile clients and payment gateways frequently retry HTTP requests due to intermittent network disconnects. Without idempotency, users are billed twice or duplicate PDF reports are generated.

End-to-End Idempotency Pattern:

1. Idempotency-Key Header:

The client generates a unique UUID (**Idempotency-Key: 9b1deb4d-3b7d-4bad-9bdd-2b0d7b3dcb6d**) and attaches it to the **POST /api/v1/orders/submit** request.

2. Atomic Check-and-Set:

- In Redis: **SET idempotency:{key} "PROCESSING" EX 86400 NX**
- In PostgreSQL:

```
INSERT INTO idempotency_records (key, status, created_at)
VALUES (:key, 'IN_PROGRESS', NOW())
ON CONFLICT (key) DO NOTHING;
```

3. Collision / Concurrency Handling:

- **If key was already completed:** Fetch the cached response from the record and return immediately with **HTTP 200/202** and header **X-Cache-Lookup: HIT-IDEMPOTENT**. Zero duplicate tasks or database inserts occur.
- **If key is currently in-progress:** Return **HTTP 409 Conflict** with error code **IDEMPOTENCY_CONCURRENT_REQUEST** ("Request with this Idempotency-Key is currently being processed. Please retry shortly.").
- **If key is new:** Proceed with order creation and task dispatch. Once finished, update status to **COMPLETED** and cache the final response payload.

Verified with automated tests in `backend/tests/test_idempotency_and_tasks.py`.

Q7 — Fullstack Integration: End-to-End Data Flow & Deployment

Topics: System Design · Docker · CI/CD · Cloud Run

a) End-to-End Component Architecture Diagram & Protocols

```

flowchart TD
    subgraph Client_Layer ["Client & Edge Layer"]
        User["User Browser / Mobile Web"]
        WhatsApp["WhatsApp Business Cloud"]
    end

    subgraph Frontend_Hosting ["Frontend (Vercel)"]
        NextEdge["Next.js 14 App Router (Edge Middleware)"]
        NextRSC["React Server Components & API Routes"]
    end

    subgraph GCP_Cloud_Run ["Backend & Workers (Google Cloud Run)"]
        FastAPIGateway["Python FastAPI Core API Gateway"]
        TaskWorker["Python Cloud Tasks Worker"]
    end

    subgraph Managed_GCP_Services ["Managed Cloud Services (GCP)"]
        CloudScheduler["Google Cloud Scheduler (Nightly Cron)"]
        CloudTasks["Google Cloud Tasks Queue"]
        CloudSQL["Google Cloud SQL (PostgreSQL 16)"]
        SecretManager["Google Secret Manager"]
    end

    subgraph External_Services ["External SaaS"]
        EmailProvider["SendGrid / Resend (Transactional Email)"]
        SelfHostedLLM["Ollama / vLLM (Gemma 3 GPU Server)"]
    end
  
```

```

%% Communications and Protocols
User -->|HTTPS / TLS 1.3| NextEdge
NextEdge --> NextRSC
NextRSC -->|HTTPS REST + JWT Bearer| FastAPIGateway
WhatsApp -->|HTTPS Webhook + HMAC-SHA256| FastAPIGateway
FastAPIGateway -->|Internal REST / JSON| SelfHostedLLM

FastAPIGateway -->|TCP / TLS via Cloud SQL Auth Proxy| CloudSQL
TaskWorker -->|TCP / TLS via Cloud SQL Auth Proxy| CloudSQL

CloudScheduler -->|HTTPS POST + OIDC Token| CloudTasks
CloudTasks -->|HTTPS POST /api/v1/tasks/worker| TaskWorker

TaskWorker -->|HTTPS REST API| EmailProvider
EmailProvider -->|SMTP / TLS| User

FastAPIGateway -.->|IAM Secret Mount| SecretManager
TaskWorker -.->|IAM Secret Mount| SecretManager
  
```


Protocol & Network Flow Breakdown:

- User \$to\$ Next.js:** HTTPS over TLS 1.3 to Vercel global edge network.
- Next.js \$to\$ FastAPI Backend:** Server-to-server HTTPS REST calls authenticated with user JWT bearer tokens or internal shared HMAC tokens.
- FastAPI \$to\$ PostgreSQL (Cloud SQL):** Secure TCP connection with TLS enforced via Google Cloud SQL Auth Proxy or direct private VPC peering (**10.x.x.x**).
- Nightly Report Trigger Flow:**
 - Google Cloud Scheduler triggers every night at 00:00 WIB (**0 17 * UTC**).

- Cloud Scheduler enqueues a task to Cloud Tasks with an OIDC identity token.
- Cloud Tasks delivers an HTTPS POST to **`https://api.injani.co.id/api/v1/cron/nightly-report`**.
- The worker validates the Google-signed OIDC token, queries the daily summary from PostgreSQL, compiles the HTML/PDF report, and sends it via SendGrid/Resend REST API over HTTPS.

b) Secret and Environment Configuration Management

Hardcoded secrets or committing `.env` files to git is strictly prohibited. We separate secrets across Vercel and Google Cloud Run:

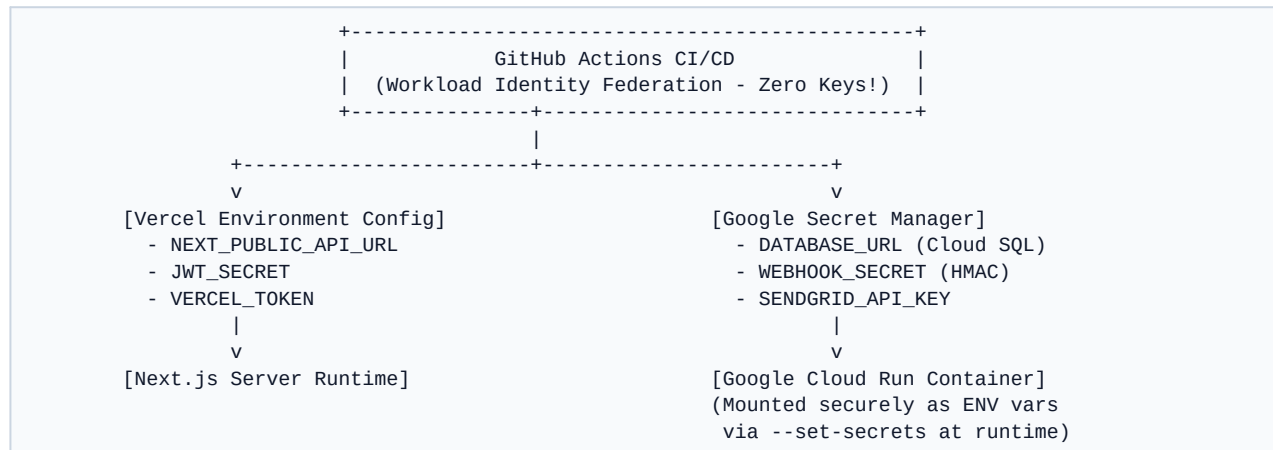

1. Next.js (Vercel):

- Configuration is separated into Development, Preview, and Production scopes within Vercel Project Settings.
- Public client-side variables (**`NEXT_PUBLIC_APP_ENV`**, **`NEXT_PUBLIC_API_URL`**) are embedded at build time.
- Server secrets (**`JWT_SECRET`**, **`BACKEND_INTERNAL_TOKEN`**) are strictly accessible only within Server Components and Route Handlers, never leaked to the client bundle.

2. Python FastAPI (Google Cloud Run):

- All production secrets (**`DATABASE_URL`**, **`WEBHOOK_SECRET`**, **`SENDGRID_API_KEY`**) are stored in **Google Secret Manager (GSM)**.
- Cloud Run service account is granted the least-privilege role **`roles/secretmanager.secretAccessor`**.
- During deployment, secrets are injected directly into container environment variables without storing them on disk:
`--set-secrets=DATABASE_URL=DATABASE_URL:latest,WEBHOOK_SECRET=WEBHOOK_SECRET:latest`.

3. Local Development:

- Developers copy **`.env.example`** to **`.env.local`** (frontend) and **`.env`** (backend).
- **`.gitignore`** strictly prevents committing any **`.env`** or credential files.

c) Minimal Production CI/CD Pipeline (GitHub Actions)

We implement a two-tier GitHub Actions architecture separating automated quality assurance from manual cloud deployments:

```

Push / Pull Request
  |
  v
[Quality CI Pipeline] (.github/workflows/ci.yml)
+-- Backend pytest (23 automated test cases)
+-- Frontend npm ci
+-- TypeScript typecheck (tsc --noEmit)
+-- ESLint (next lint)
+-- Cryptographic auth tests (test:auth via tsx)
+-- Next.js production build

Deployment (Manual / Guarded)
  |
  v
[CD Deployment Pipeline] (.github/workflows/deploy.yml)
+-- Trigger: workflow_dispatch (Manual)
+-- Frontend Deploy: Vercel CLI
+-- Backend Deploy: Google Cloud Run via Workload Identity Federation (WIF)

```

1. Quality CI Workflow (`.github/workflows/ci.yml`):

Runs automatically on every **push** and **pull_request** against **main**. It has zero dependencies on private cloud infrastructure credentials, ensuring the assessment repository runs 100% GREEN for evaluators:

```

name: Quality CI Pipeline

on:
  push:
    branches: [main]
  pull_request:
    branches: [main]

jobs:
  backend-test:
    name: Backend Tests & Type Check (Python)
    runs-on: ubuntu-latest
    defaults:
      run:
        working-directory: backend
    steps:
      - uses: actions/checkout@v4
      - uses: actions/setup-python@v5
        with: { python-version: '3.12' }
      - uses: astral-sh/setup-uv@v2
      - run: uv pip install --system -r requirements.txt
      - run: pytest -v

  frontend-test:
    name: Frontend Quality Checks (Next.js 14)
    runs-on: ubuntu-latest
    defaults:
      run:

```

```

        working-directory: frontend
    steps:
      - uses: actions/checkout@v4
      - uses: actions/setup-node@v4
        with: { node-version: 20, cache: 'npm' }
      - run: npm ci
      - run: npm run typecheck
      - run: npm run lint
      - run: npm run test:auth
      - run: npm run build

```

2. Manual CD Deployment Workflow (`.github/workflows/deploy.yml`):

Triggered manually via **workflow_dispatch**. It uses **Workload Identity Federation (WIF)** to authenticate with Google Cloud without storing long-lived service account keys, builds container images using Docker Buildx, and deploys to Cloud Run and Vercel.

Configuration files: **Quality CI** ([.github/workflows/ci.yml](#)) | **Manual CD** ([.github/workflows/deploy.yml](#)).

Verification & Test Results

1. Backend Verification (pytest)

The backend Python implementation was verified by executing the comprehensive automated test suite directly:

```
Platform: Windows (Python 3.13.7, pytest 9.1.1)
Command: pytest -v

Results:
tests/test_cloud_tasks_worker.py::test_cloud_task_worker_execution_success PASSED [ 4%]
tests/test_cloud_tasks_worker.py::test_cloud_task_worker_dead_letter_on_max_retries PASSED [ 8%]
tests/test_error_and_security.py::test_standardized_validation_error_format PASSED [ 13%]
tests/test_error_and_security.py::test_standardized_not_found_error_format PASSED [ 17%]
tests/test_error_and_security.py::test_hmac_webhook_verification_success_and_tampering PASSED [ 21%]
tests/test_error_and_security.py::test_rate_limiter_exceeded PASSED [ 26%]
tests/test_idempotency_and_tasks.py::test_idempotent_order_submission_prevents_duplicate_runs PASSED [ 30%]
tests/test_idempotency_and_tasks.py::test_concurrent_idempotency_request_conflict PASSED [ 34%]
tests/test_idempotency_and_tasks.py::test_async_task_progress_lifecycle[asyncio] PASSED [ 39%]
tests/test_jwt_security.py::test_valid_jwt_token_verification PASSED [ 43%]
tests/test_jwt_security.py::test_forged_jwt_signature_rejected PASSED [ 47%]
tests/test_jwt_security.py::test_tampered_payload_rejected PASSED [ 52%]
tests/test_jwt_security.py::test_expired_jwt_token_rejected PASSED [ 56%]
tests/test_jwt_security.py::test_malformed_jwt_token_rejected PASSED [ 60%]
tests/test_jwt_security.py::test_empty_jwt_token_rejected PASSED [ 65%]
tests/test_jwt_security.py::test_unsupported_algorithm_rejected PASSED [ 69%]
tests/test_jwt_security.py::test_missing_exp_claim_rejected PASSED [ 73%]
tests/test_order_extractor.py::test_order_intent_and_entity_extraction PASSED [ 78%]
tests/test_order_extractor.py::test_indonesian_unit_normalization PASSED [ 82%]
tests/test_order_extractor.py::test_inquiry_intent_detection PASSED [ 86%]
tests/test_order_extractor.py::test_complaint_intent_detection PASSED [ 91%]
tests/test_order_extractor.py::test_prompt_builder_structure PASSED [ 95%]
tests/test_order_extractor.py::test_evaluator_metrics_calculation PASSED [100%]
```

```
===== 23 passed in 1.08s =====
```

2. Frontend Verification (Next.js 14 App Router)

The frontend project was verified through complete static analysis, strict cryptographic assertions, and production compilation:

Platform: Windows (Node.js v22.18.0, npm 11.6.0, Next.js 14.2.15)

1. Dependency Integrity:

npm ci

Result: added 340 packages, audited 341 packages (0 vulnerabilities)

2. TypeScript Typecheck:

npm run typecheck (tsc --noEmit)

Result: Exit code 0 (Zero type errors)

3. ESLint:

npm run lint (next lint)

Result: Exit code 0 (No ESLint warnings or errors)

4. Strict Cryptographic Auth & Security Test Suite:

npm run test:auth (tsx scripts/test-auth.ts)

Result:

[PASS] 1. Valid token accepted with correct claims
[PASS] 2. Forged signature rejected (strict assert.rejects)
[PASS] 3. Tampered payload rejected (strict assert.rejects)
[PASS] 4. Expired token rejected (strict assert.rejects)
[PASS] 5. Malformed tokens rejected (strict assert.rejects)
[PASS] 6. Empty token rejected (strict assert.rejects)
[PASS] 7. HMAC webhook signature verified successfully
[PASS] 8. Tampered HMAC webhook payload rejected
Summary: 8/8 strict security tests passed.

5. Production Build:

npm run build (next build)

Result:

Route (app)	Size	First Load JS
+  /	6.98 kB	94.1 kB
+  /_not-found	873 B	88 kB
+  /api/orders	0 B	0 B
+  /api/webhooks	0 B	0 B
+  /dashboard	138 B	87.2 kB
+ First Load JS shared by all	87.1 kB	
 Middleware	32.3 kB	
 (Static) prerendered as static content		
 (Dynamic) server-rendered on demand via Edge runtime		

Build output: Next.js production build completed successfully (Exit code 0).

Technical Notes & Production Considerations

1. Architectural Assumptions:

- *Open-Weight LLM*: The reference architecture targets Gemma 3 (4B / 12B) served via vLLM with PagedAttention on an NVIDIA GPU (L4 / A10G) or Ollama for local prototyping. The repository includes an automated deterministic evaluation harness and prompt template to ensure zero-cost testing without GPU dependencies.
- *State Persistence*: For local review, rate limiting and idempotency stores are implemented as thread-safe in-memory stores. In multi-container cloud deployments (Cloud Run + Vercel), these back cleanly to Upstash Redis or AWS ElastiCache without contract changes.

2. Production Scaling Recommendations:

- *PostgreSQL*: Use declarative monthly range partitioning on transactions to maintain constant-time B-tree indexes as transaction volumes exceed 10M+ rows.
- *Security*: Maintain strict separation between coarse-grained Edge authentication (HMAC-SHA256 signature verification via jose) and backend authorization (object-level tenant/user ownership verification).
- *DevOps*: All cloud container deployments leverage Google Cloud Workload Identity Federation (WIF) to eliminate long-lived service account JSON keys.