

AdminFaces

Version 1.0.0-RC19-SNAPSHOT



1. Introduction	2
2. Admin Theme	3
2.1. Prerequisites	3
2.2. Usage	3
2.3. Architecture	5
2.4. Theme classifiers	6
2.5. Avoiding theme caching	8
2.6. Development	9
2.7. Snapshots	9
3. Admin Template	10
3.1. Features	10
3.2. Usage	11
3.3. Application template	14
3.4. Configuration	17
3.5. Admin Session	19
3.6. Error Pages	21
3.7. Internationalization	25
3.8. Control Sidebar	26
3.9. BreadCrumbs	28
3.10. Snapshots	30
4. Admin Starters	31
4.1. Demo	31
5. Admin Designer	32
5.1. What is it?	32
5.2. Objectives	32
5.3. How it works	32
6. Admin Persistence	34
6.1. Prerequisites	34
6.2. Usage	34
6.3. Pagination	38
6.4. Pagination filtering	39
6.5. Sample application	41
7. Admin Mobile	42

 Read this documentation [in HTML5 here](#).



[AdminFaces](#) is an open source project which brings [Bootstrap](#) and [AdminLTE](#) to your application via a [PrimeFaces](#) theme and a [JSF responsive](#) template.

AdminFaces ecosystem is composed by the following projects:

- [Admin Theme](#): A PrimeFaces theme based on [Bootstrap](#) and [Admin LTE](#) where Primefaces components are customized to look like mentioned frameworks.
- [Admin Template](#): A [Java Server Faces admin](#) template which is also based on [Bootstrap](#) and [AdminLTE](#).
- [Admin Showcase](#): A showcase web application, [deployed on openshift](#), which demonstrates AdminFaces main features and components.
- [Admin Designer](#): The same showcase application with Admin Theme and Admin Template bundled (instead of being library dependencies) in order to make it easier to customize the theme and the template.
- [Admin Starter](#): A simple starter project to get you started with AdminFaces.
- [Admin Persistence](#): CRUD operations like a breeze for AdminFaces applications based on [Apache DeltaSpike Data](#) module.
- [Admin Starter Tomcat](#): Admin Starter application for Tomcat.
- [Admin Starter SpringBoot](#): Admin Starter application using [SpringBoot](#) and [JoinFaces](#).
- [Admin Starter Shiro](#): Admin Starter application using [Apache Shiro](#) for authentication.
- [Admin Starter Security](#): Admin Starter application using [JavaEE 8 security API](#) for authentication and authorization.
- [Admin Mobile](#): A simple [Android Studio](#) project which uses [Webview](#) to create an [hybrid web app](#) based on Admin Showcase.

In subsequent chapters we will drive through each project in detail.

 AdminLTE is a [PrimeFaces theme](#) where components are styled to look like AdminLTE ones (which theming are based on Bootstrap).

The only pre-requisite is [PrimeFaces](#) and [Font Awesome](#).

Since PrimeFaces 5.1.1 font awesome comes embedded, you just need to activate it in [web.xml](#):

```
<context-param>
    <param-name>primefaces.FONT_AWESOME</param-name>
    <param-value>true</param-value>
</context-param>
```

For  or if you need to upgrade FA version you may include it in your pages by using webjars:



```
<h:outputStylesheet library="webjars" name="font-
awesome/4.7.0/css/font-awesome-jsf.css" />
```

and add fontawesome webjar in your classpath:

```
<dependency>
    <groupId>org.webjars</groupId>
    <artifactId>font-awesome</artifactId>
    <version>4.7.0</version>
</dependency>
```

To start using the theme you need the following:

1. Add admin theme to your classpath:

```
<dependency>
    <groupId>com.github.adminfaces</groupId>
    <artifactId>admin-theme</artifactId>
    <version>1.0.0-RC19-SNAPSHOT</version>
</dependency>
```

2. Activate the theme in [web.xml](#)

```
<context-param>
    <param-name>primefaces.THEME</param-name>
    <param-value>admin</param-value>
</context-param>
```



If you use [Admin Template](#) the theme already comes activated.

Now PrimeFaces components are styled like Bootstrap and AdminLTE.

The screenshot shows a Java application window titled "Admin Grouper". A prominent red warning bar at the top displays the message: "Warning! Faces pages now render faces messages are rendered." Below this, the application interface is visible, featuring a sidebar with various menu items like Home, Documents, Analytics, General, Exceptions, Forms, Material Inputs, UI Elements, Accordion, AutoComplete, Buttons, Chips, DataTable, Dialog, Messages, Panels, Schedule, and PartialView. The "Messages" section is currently selected. A sub-menu for "Material Inputs" is open, showing options like Select and Auto Complete. A validation error message is displayed next to the "Select" option: "Value is required." Another validation message is shown for "Auto Complete": "Value is required." At the bottom of the window, there is a footer with links to "Checklist Validation", "Text Validation", and "Form Validation".

See [showcase forms page](#) to get an idea.



The theme uses [less](#) as css pre-processor. Each PrimeFaces component has its own less file:




① Bootstrap variables and [mixins](#) are used as reference in AdminLTE and admin theme less files

② Built in skins

③ PrimeFaces components

④ Components and Admin-LTE less files are included in theme.less

After compilation it will generate the theme.css with Admin-LTE, Bootstrap and Primefaces components.

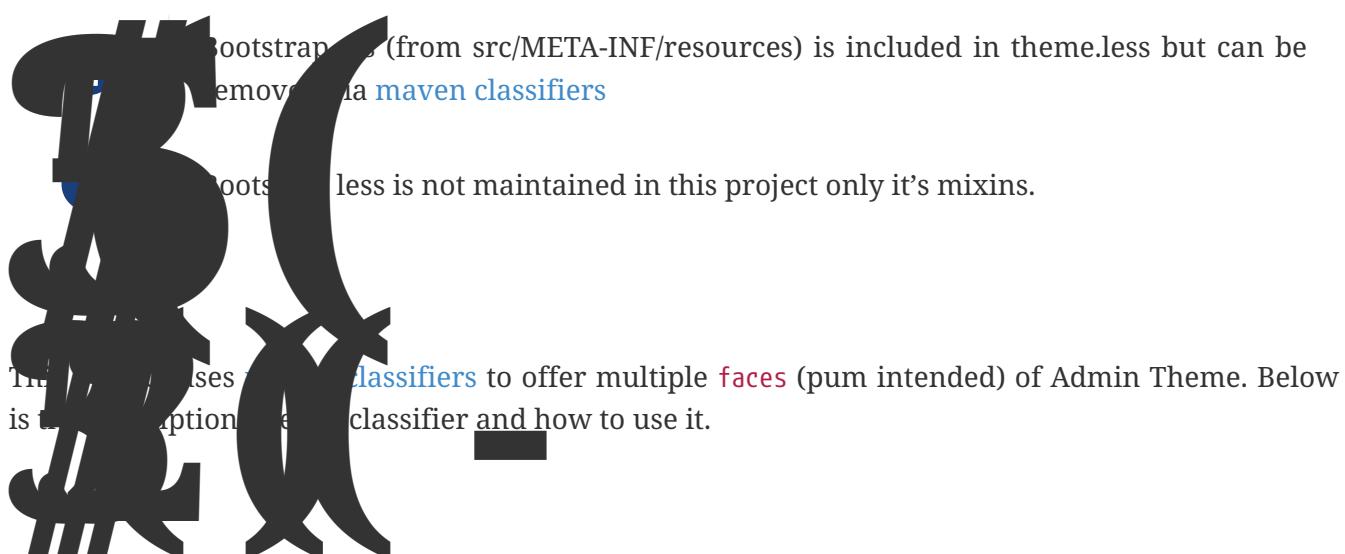

The default theme comes [compressed](#), with [Bootstrap \(3.3.7\)](#) embedded and uses [JSF resource handling](#) for loading images and web fonts.

Maven usage

```
<dependency>
  <groupId>com.github.adminfaces</groupId>
  <artifactId>admin-theme</artifactId>
  <version>1.0.0-RC19-SNAPSHOT</version>
</dependency>
```



The **dev** classifier will bring a theme.css

Maven usage

```
<dependency>
  <groupId>com.github.adminfaces</groupId>
  <artifactId>admin-theme</artifactId>
  <version>1.0.0-RC19-SNAPSHOT</version>
  <classifier>dev</classifier>
</dependency>
```





The **without-bootstrap** classifier will bring a theme.css
the developer to provide Bootstrap within the application.

so it's up to

Maven usage

```
<dependency>
  <groupId>com.github.adminfaces</groupId>
  <artifactId>admin-theme</artifactId>
  <version>1.0.0-RC19-SNAPSHOT</version>
  <classifier>without-bootstrap</classifier>
</dependency>
```



The **without-jsf** classifier will bring a theme.css

be used on projects (derived from PrimeFaces) without JSF like Prime React, PrimeUI or PrimeNG.

so the theme can

Maven usage

```
<dependency>
  <groupId>com.github.adminfaces</groupId>
  <artifactId>admin-theme</artifactId>
  <version>1.0.0-RC19-SNAPSHOT</version>
  <classifier>without-jsf</classifier>
</dependency>
```



Since v1.0.0-RC16 web fonts such as `glyphicon` and `Source Sans Pro` are embedded inside the theme instead of being queried from a [CDN](#).

This makes the theme work offline or in environments with limited access to the internet but on the other hand results in a larger jar file, ~1MB against ~200kb when fonts are not in the theme.

So if you want a thinner theme you can use the  classifier:

```
<dependency>
    <groupId>com.github.adminfaces</groupId>
    <artifactId>admin-theme</artifactId>
    <version>1.0.0-RC16</version>
    <classifier>no-fonts</classifier>
</dependency>
```

Whenever the theme is updated to a new version in the project users may have to clear their browser caches to get the changes of the new theme.

Sometimes a theme update even introduces conflicts and only clearing browser cache fixes them.

To solve this issues you can use a theme classifier called  :

pom.xml

```
<dependency>
    <groupId>com.github.adminfaces</groupId>
    <artifactId>admin-theme</artifactId>
    <version>1.0.0-RC19-SNAPSHOT</version>
    <classifier>no-cache</classifier>
</dependency>
```

This classifier
name in web.xml:

 to the name of theme so you need to change the theme

web.xml

```
<context-param>
    <param-name>primefaces.THEME</param-name>
    <param-value>admin-1.0.0-RC19-SNAPSHOT</param-value>
</context-param>
```




There is also a `no-cache-no-fonts` classifier combining both approaches.



To get your hands dirty with admin theme it is recommended to use [Admin Designer](#) in combination with [Brackets](#) or any tool that **compile less** files to css on save.

Using designer, which is backed by wildfly swarm, plus brackets will let you change the components less files and see the results instantly. see [this video](#) to see Brackets and Designer in action.

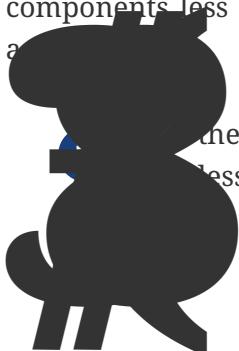

The theme.less is already brackets aware so you just need to change any component less file, save it and see the results in Admin Designer.

Theme [Snapshots](#) are published to [maven central](#) on each commit, to use it just declare the repository below on your [pom.xml](#):

```
<repositories>
  <repository>
    <snapshots/>
    <id>snapshots</id>
    <name>libs-snapshot</name>
    <url>https://oss.sonatype.org/content/repositories/snapshots</url>
  </repository>
</repositories>
```



Administrator is a
Administrator

Java Server Faces admin template based on Bootstrap and

Below is a non exhaustive list of notable features brought out of the box by this template:

- Fully
 - Its based on Bootstrap and AdminLTE two well tested and solid frameworks
 - Enhanced mobile experience
 - Material design load bar
 - Material design flat buttons
 - Ripple effect based on [materialize css](#)
[27104868 d9bfb33e 5063 11e7 83be 2201a3f8cda5]
 - Touch enabled menu to slide in/out
[dd37121e 2296 11e7 855c 8f20b59dcf5f]
 - Auto show and hide navbar based on page scroll
 - Scroll to top
 - Automatically activates (highlight) menu based on current page

The screenshot shows the Admin Showcase application interface. The top navigation bar includes a search bar, a menu icon, and user notifications for 4 messages and 2 alerts. The user is Rafael Pestano. The main content area has a title 'Forms Example of form controls'. On the left, there's a sidebar with links like Home, Documentation, General, Exceptions, Forms, Material Inputs, Messages, UI Elements, and Custom Pages. The 'Forms' section is currently selected. The main content area displays various form control examples: AutoComplete, Password, OneMenu, SelectOne, Slider, Radio, and Checkbox, each with a preview image.

- Custom [error pages](#)
 - Two menu modes, `left` and `horizontal` based menu
 - Configurable, see [Configuration](#)
 - [Breadcrumb](#) based navigation

- Layout customization via [Control Sidebar](#)
- High resolution and responsible icons based on Glyphicons and FontAwesome
- Menu items search

The screenshot shows the Admin Showcase application's interface. On the left is a sidebar with a search bar at the top. Below the search bar is a list of menu items: Home, Documentation, GENERAL, Exceptions, Forms, and Material Inputs. The 'Material Inputs' item has a sub-menu with 'Material Inputs' and '(NEW)'. The main content area displays the 'ControlSidebar' documentation. It includes a title 'ControlSidebar', a sub-section 'Usage', and a warning message: 'Warning: admin-renderControlSidebar=true is deprecated since version 1.0.0-RC19-SNAPSHOT'.

- Built-in **dark** and **light** skins
- Returns previous screen when logging in again after session expiration (or accessing a page via direct URL while not being logged in)



Most of the above features can be disabled via [configuration](#) mechanism.

Add the following dependency to your classpath:

```
<dependency>
  <groupId>com.github.adminfaces</groupId>
  <artifactId>admin-template</artifactId>
  <version>1.0.0-RC19-SNAPSHOT</version>
</dependency>
```

Admin template will bring the following transitive dependencies:

```
<dependency>
    <groupId>com.github.adminfaces</groupId>
    <artifactId>admin-theme</artifactId>
    <version>1.0.0-RC19-SNAPSHOT</version>
</dependency>

<dependency>
    <groupId>org.primefaces</groupId>
    <artifactId>primefaces</artifactId>
    <version>6.2</version>
</dependency>

<dependency>
    <groupId>org.omnifaces</groupId>
    <artifactId>omnifaces</artifactId>
    <version>2.1</version>
</dependency>
```



Which you can override in your pom.xml as needed.



With this template dependency in classpath now you can use **admin** facelets template into your JSF page.

Consider the following sample page:

```
<?xml version="1.0" encoding="UTF-8"?>
<ui:composition xmlns="http://www.w3.org/1999/xhtml"
                 xmlns:ui="http://java.sun.com/jsf/facelets"
                 xmlns:p="http://primefaces.org/ui"
                 template="/admin.xhtml"> ①

    <ui:define name="head">
        <title>Admin Starter</title>
    </ui:define>

    <ui:define name="logo-lg">
        Admin Starter
    </ui:define>

    <ui:define name="logo-mini">
        Admin
    </ui:define>

    <ui:define name="menu">
        <ul class="sidebar-menu">
```

```

<li>
    <p:link href="/index.xhtml" onclick="clearBreadCrumbs()">
        <i class="fa fa-home"></i>
        <span>Home</span>
    </p:link>
</li>
<li class="header">
    General
</li>
<li>
    <p:link href="/car-list.xhtml">
        <i class="fa fa-car"></i>
        <span>Cars</span>
    </p:link>
</li>
</ul>
</ui:define>

<ui:define name="top-menu">
    <ui:include src="/includes/top-bar.xhtml"/>
</ui:define>

<ui:define name="title">
    <h2 class="align-center">
        Welcome to the <span class="text-aqua"> <i><a href=
        "https://github.com/adminfaces/admin-starter" target="_blank"
        style="text-transform: none
        ;text-decoration: none"> AdminFaces Starter</a></i></span> Project!
        <br/>
        <small>Integrating <p:link value="Primefaces" href="http://primefaces.org
        "/>, <p:link value="Bootstrap"
        href="http://getbootstrap.com/"> and
        <p:link value="Admin LTE" href=
        "https://almsaeedstudio.com/themes/AdminLTE/index2.html/"> into your
        <p:link value="JSF" href="https://javaserverfaces.java.net/">
application.
        </small>
    </h2>
</ui:define>

<ui:define name="description">
    A page description
</ui:define>

<ui:define name="body">
    <h2>Page body</h2>
</ui:define>

<ui:define name="footer">

```

```

<a target="_blank"
    href="https://github.com/adminfaces/">
    Copyright (C) 2017 - AdminFaces
</a>


<div class="pull-right hidden-xs" style="color: gray">
    <i>1.0.0</i>
</div>
</ui:define>

</ui:composition>

```

① /admin.xhtml is the location of the template

The above page definition renders as follows:

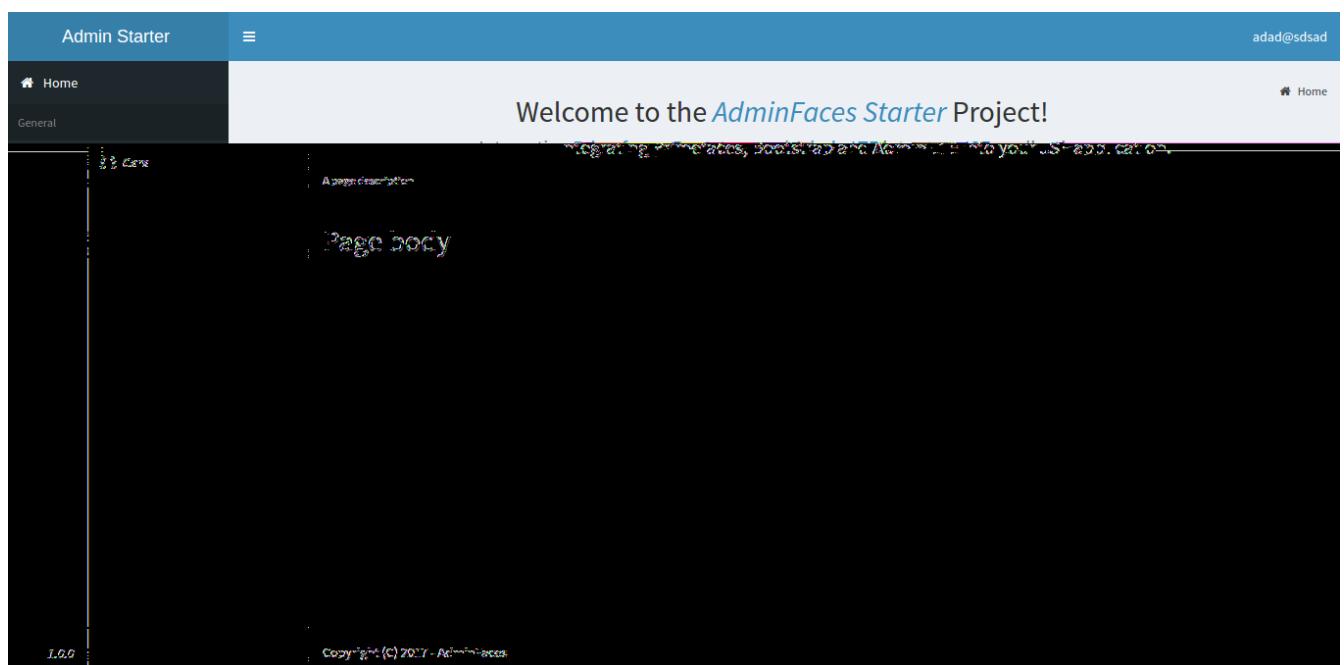

There are also other regions defined in admin.xhtml template, [see here](#).



A good practice is to define a template on your application which extends the Admin template. See [admin-starter application template here](#).

So in your pages you use your template instead of admin.

Instead of repeating sections like , , and on every page we can create a template inside our application which uses `admin.xhtml` as template:

`/WEB-INF/templates/template.xhtml`

```

<?xml version="1.0" encoding="UTF-8"?>
<ui:composition xmlns="http://www.w3.org/1999/xhtml">

```

```

        xmlns:ui="http://java.sun.com/jsf/facelets"
        xmlns:p="http://primefaces.org/ui"
        template="/admin.xhtml">

<ui:define name="head">
    <title>Admin Starter</title>
    <h:outputStylesheet library="css" name="starter.css"/>
</ui:define>

<ui:define name="logo-lg">
    Admin Starter
</ui:define>

<ui:define name="logo-mini">
    Admin
</ui:define>

<ui:define name="menu">
    <ul class="sidebar-menu">
        <li>
            <p:link href="/index.xhtml" onclick="clearBreadCrumbs()">
                <i class="fa fa-home"></i>
                <span>Home</span>
            </p:link>
        </li>
        <li class="header">
            General
        </li>
        <li>
            <p:link href="/car-list.xhtml">
                <i class="fa fa-car"></i>
                <span>Cars</span>
            </p:link>
        </li>
    </ul>
</ui:define>

<ui:define name="top-menu">
    <ui:include src="/includes/top-bar.xhtml"/>
</ui:define>

<ui:define name="footer">
    <a target="_blank"
       href="https://github.com/adminfaces/">
        Copyright (C) 2017 - AdminFaces
    </a>

    <div class="pull-right hidden-xs" style="color: gray">
        <i>1.0.0</i>
    </div>
</ui:define>
```

```
</ui:composition>
```

And now the page can just define its content and title:

```
/webapp/mypage.xhtml
```

```
<?xml version="1.0" encoding="UTF-8"?>
<ui:composition xmlns="http://www.w3.org/1999/xhtml"
                 xmlns:ui="http://java.sun.com/jsf/facelets"
                 xmlns:p="http://primefaces.org/ui"
                 template="/WEB-INF/templates/template.xhtml">

    <ui:define name="title">
        A page title
    </ui:define>

    <ui:define name="description">
        A page description
    </ui:define>

    <ui:define name="body">
        <h2>Page body</h2>
    </ui:define>
</ui:composition>
```

AdminFaces supports two layout modes, one is

and the other is

The user can change layout modes via `control sidebar` but to make it work you have to use to define page template:

```
/webapp/mypage.xhtml
```

```
<?xml version="1.0" encoding="UTF-8"?>
<ui:composition xmlns="http://www.w3.org/1999/xhtml"
                 xmlns:ui="http://java.sun.com/jsf/facelets"
                 xmlns:p="http://primefaces.org/ui"
                 template="#{layoutMB.template}">

    <!-- page content -->
</ui:composition>
```

As a



LayoutMB will load templates from the following locations:

- `webapp/WEB-INF/templates/template.xhtml` for the `left menu` based template



- We can use /WEB-INF/templates/template-top.xhtml for horizontal menu layout.

See Admin Starter templates for a reference: <https://github.com/adminfaces/admin-starter/tree/master/src/main/webapp/WEB-INF/templates>

Template configuration is made through `admin-config.properties` file present in `src/main/resources` folder.

Here are the default values as well as its description:

```
admin.loginPage=login.xhtml ①
admin.indexPage=index.xhtml ②
admin.dateFormat= ③
admin.breadcrumbSize=5 ④
admin.renderMessages=true ⑤
admin.renderAjaxStatus=true ⑥
admin.disableFilter=false ⑦
admin.renderBreadCrumb=true ⑧
admin.enableSlideMenu=true ⑨
admin.enableRipple=true ⑩
admin.rippleElements=.ripplelink,button.ui-button,.ui-selectlistbox-item,.ui-multiselectlistbox-item,.ui-selectonemenu-label,.ui-selectcheckboxmenu,\.ui-autocomplete-dropdown,.ui-autocomplete-item ... (the list goes on) ⑪
admin.skin=skin-blue ⑫
admin.autoShowNavbar=true ⑬
admin.ignoredResources= ⑭
admin.loadingImage=ajaxloadingbar.gif ⑮
admin.extensionLessUrls=false ⑯
admin.renderControlSidebar=false ⑰
admin.controlSidebar.showOnMobile=false ⑱
admin.controlSidebar.leftMenuTemplate=true ⑲
admin.controlSidebar.fixedLayout=false ⑳
admin.controlSidebar.boxedLayout=false
admin.controlSidebar.sidebarCollapsed=false
admin.controlSidebar.expandOnHover=false
admin.controlSidebar.fixed=false
admin.controlSidebar.darkSkin=true
admin.rippleMobileOnly=true
admin.renderMenuSearch=true
admin.autoHideMessages=true
admin.messagesHideTimeout=2500
```

① login page location (relative to webapp). It will only be used if you configure [Admin Session](#).

② index page location. User will be redirected to it when it access app root (contextPath/).

③ Date format used in error page ([500.xhtml](#)), by default it is JVM default format.

④ Number of breadcrumbs to queue before removing the older ones.

- ⑤ When false, p:messages defined in admin template will not be rendered.
- ⑥ When false ajaxStatus, which triggers the loading bar on every ajax request, will not be rendered.
- ⑦ Disables AdminFilter, responsible for redirecting user after session timeout, sending user to logon page when it is not logged in among other things.
- ⑧ When false, the breadCrumb component, declared in admin template, will not be rendered.
- ⑨ If true will make left menu touch enable (can be closed or opened via touch). Can be enable/disabled per page with <ui:param name="enableSlideMenu" value="false".
- ⑩ When true it will create a [wave/ripple effect](#) on elements specified by `rippleElements`.
- ⑪ A list of comma separated list of (jquery) selector which elements will be affected by ripple effect.
- ⑫ Default template skin.
- ⑬ Automatic shows navbar when users scrolls page up ~~on small screens~~. Can be enable/disabled per page with <ui:param name="autoShowNavbar" value="false".
- ⑭ Comma separated resources (pages or urls) to be skiped by AdminFilter. Ex: /rest, /pages/car-list. Note that by default the filter skips pages under ~~admin~~ folder.
- ⑮ image used for the loading popup. It must be under `webapp/resources/images` folder.
- ⑯ Removes extension suffix from breadCrumb links.
- ⑰ When true it will activate `control sidebar` component.
- ⑱ When true control sidebar will be also rendered on mobile devices.
- ⑲ Switches layout between left (default) and top menu.
- ⑳ Toggles fixed layout where navbar is fixed on the page.

Toggles boxed layout which is helpful when working on large screens because it prevents the site from stretching very wide.

When true left sidebar will be collapsed.

When true left sidebar will expand on mouse hover.

When true control sidebar will be fixed on the page.

Changes control sidebar skin between `dark` and `light`.

When true the ripple effect will be enabled only on mobile (small) screens.

Enables or disables menu search.

If true PrimeFaces ~~info~~ messages will be hidden after a certain timeout.


Timeout to hide info messages. Note that the timeout is composed by `configured timeout + number of words` in message.



You don't need to declare all values in your `admin-config.properties`, you can specify only the ones you need in order to change.



Since vRC16 config properties can be passed as Java `system properties`.

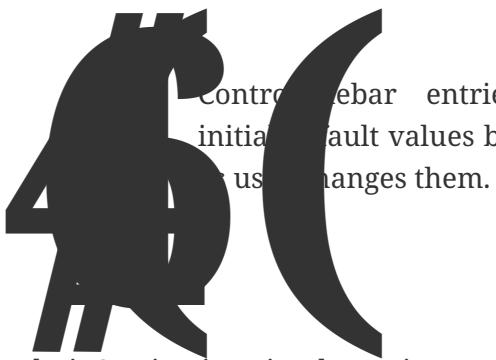

Control sidebar entries (admin.controlSidebar.xxx) will be used only for initial default values because they will be stored on browser local storage as soon as user changes them.


AdminSession is a simple session scoped bean which controls whether user is logged in or not.

```
public boolean isLoggedIn(){  
    return isLoggedIn; // always true by default  
}
```

By default the user is **true** and you need to override it (by using [bean specialization](#) or via injection and calling [setisLoggedIn\(\)](#) method) to change its value, see [Overriding AdminSession](#).

When isLoggedIn is **false** you got the following mechanisms activated:

1. Access to any page, besides the login, redirects user to login;
2. When session is expired user is redirected to logon and current page (before expiration) is saved, user is redirected back to where it was before session expiration.

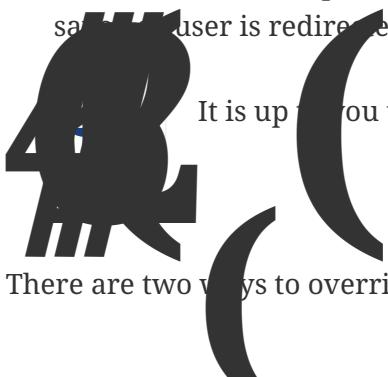

It is up to you to decide whether the user is logged in or not.

There are two ways to override AdminSession default value which is [specialization](#) and [injection](#).

A simple way to change AdminSession logged in value is by extending it:

```
import javax.enterprise.context.SessionScoped;
import javax.enterprise.inject.Specializes;
import com.github.adminfaces.template.session.AdminSession;
import org.omnifaces.util.Faces;
import java.io.Serializable;

@SessionScoped
@Specializes
public class LogonMB extends AdminSession implements Serializable {

    private String currentUser;
    private String email;
    private String password;
    private boolean remember;

    public void login() throws IOException {
        currentUser = email;
        addDetailMessage("Logged in successfully as <b>" + email + "</b>");
        Faces.getExternalContext().getFlash().setKeepMessages(true);
        Faces.redirect("index.xhtml");
    }

    @Override
    public boolean isLoggedIn() {

        return currentUser != null;
    }
}
```



Another way is to inject it into your security authentication logic:

```

import com.github.adminfaces.template.session.AdminSession;
import org.omnifaces.util.Messages;
import org.omnifaces.util.Faces;

@SessionScoped
@Named("authorizer")
public class CustomAuthorizer implements Serializable {

    private String currentUser;

    @Inject
    AdminSession adminSession;

    public void login(String username) {
        currentUser = username;
        adminSession.setIsLoggedIn(true);
        Messages.addInfo(null, "Logged in sucessfully as <b>" + username + "</b>");
        Faces.redirect("index.xhtml");
    }

}

```



As `setIsLoggedIn` is `true by default` you need to set it to false on application startup so user is redirected to login page. This step is not needed when using [AdminSession Specialization](#).

The template comes with custom error pages like `403`, `404`, `500`, `ViewExpired` and `OptimisticLock`.

`500`

User is going to be redirected to whenever a `500` response code is returned in a request.

The page will also be triggered when a `Throwable` is raised (and not catch).

Here is how `500` page look like:



 Oops! Something went wrong

 Home > Exceptions

500


Unexpected error

- Date/time: 03/19/2017 23:20:06
 - User agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/54.0.2840.100 Safari/537.36
 - User IP: 127.0.0.1
 - Request URI: <http://localhost:8080/showcase/pages/exception/exception.xhtml>
 - Ajax request: Yes
 - Status code: 500
 - Exception type: java.lang.RuntimeException
 - Message: this is a runtime exception...

Details

403

User is redirected to  whenever a `403` response code is returned in a request. The page will also be triggered when a `com.github.adminfaces.template.exception.AccessDeniedException` is raised.

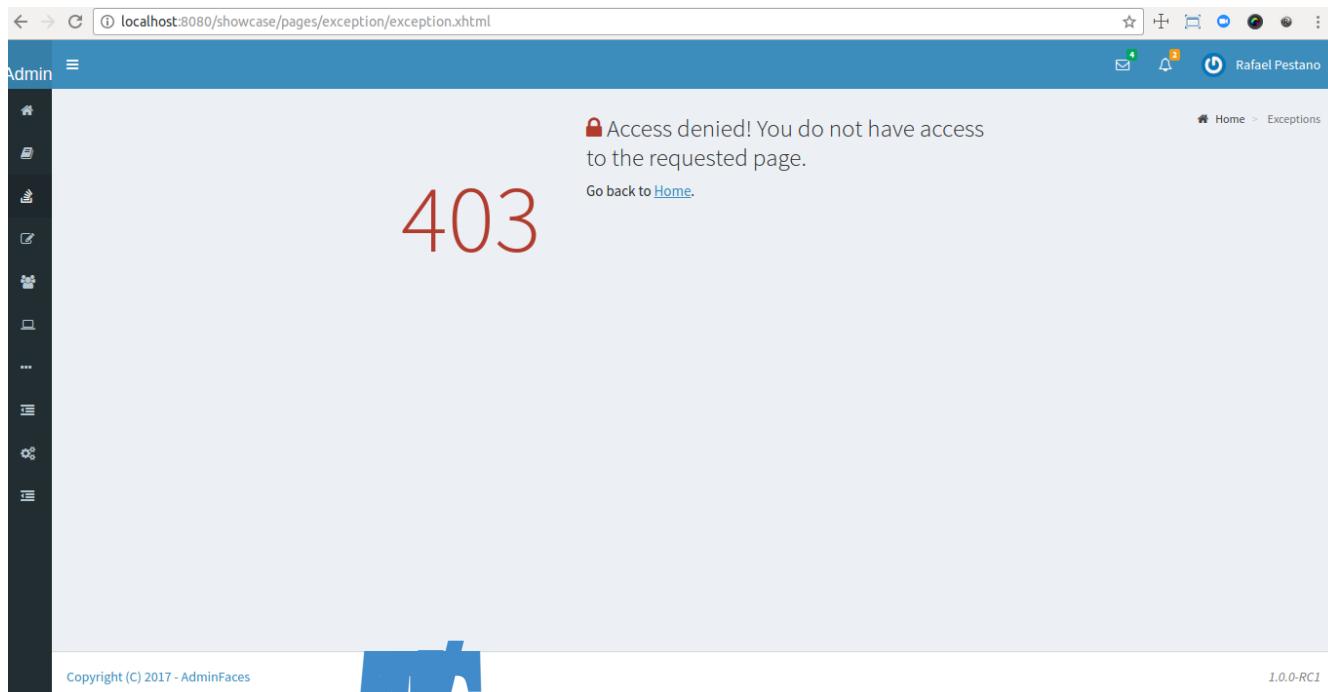

localhost:8080/showcase/pages/exception/exception.xhtml

Admin


Access denied! You do not have access to the requested page.
Go back to [Home](#).

403

Copyright (C) 2017 - AdminFaces 1.0.0-RC1

404

User will be redirected to  whenever a `404` response code is returned from a request.

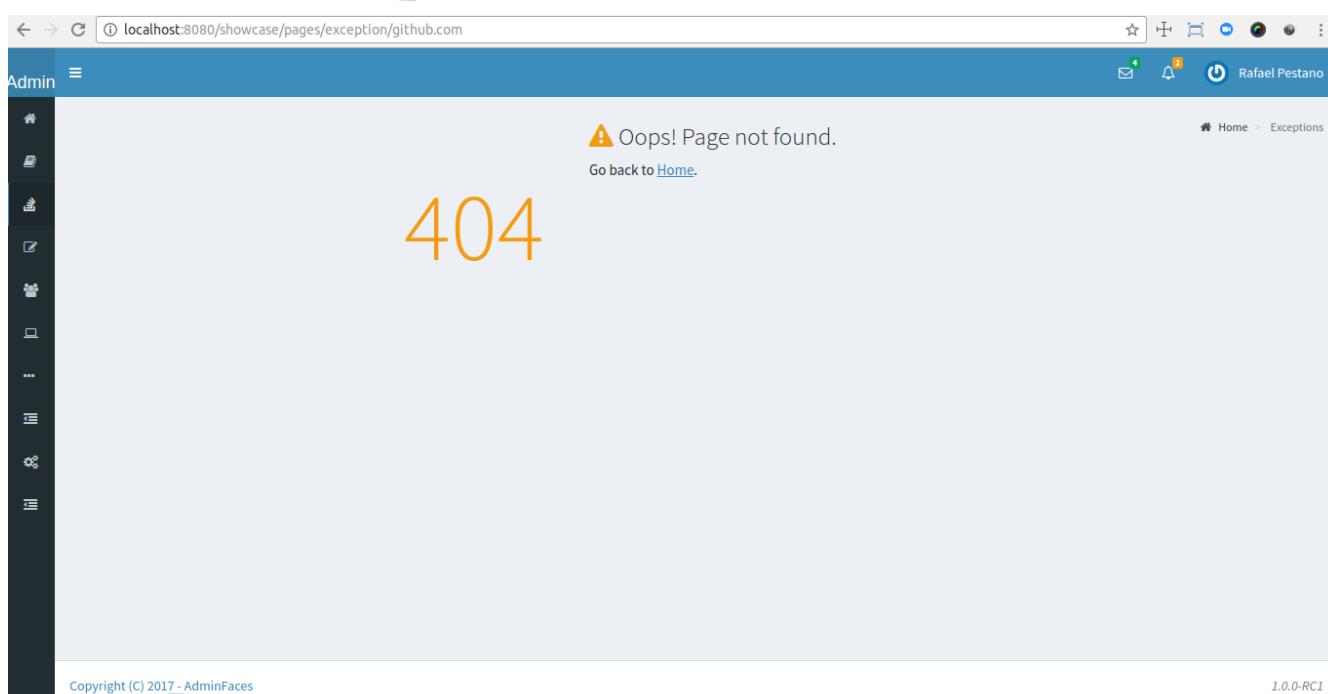

localhost:8080/showcase/pages/exception/github.com

Admin

Oops! Page not found.
Go back to [Home](#).

404

Copyright (C) 2017 - AdminFaces 1.0.0-RC1

ViewExpire

When a JSF `javax.faces.application.ViewExpiredException` is raised user will be redirected to

The requested page could not be recovered.. [Click here to reload the page.](#)

Copyright (C) 2017 - AdminFaces 1.0.0-RC1

OptimisticLockException

When a JPQL query returns a `javax.persistence.OptimisticLockException` is thrown user will be redirected to

The requested record has been already updated by another user. [Click here to reload the updated record from database.](#)

Copyright (C) 2017 - AdminFaces 1.0.0-RC1

You can provide your own custom pages (and other status codes) by configuring them in web.xml, example:

```
<error-page>
    <error-code>404</error-code>
    <location>/404.xhtml</location>
</error-page>
<error-page>
    <error-code>500</error-code>
    <location>/500.xhtml</location>
</error-page>
<error-page>
    <exception-type>javax.lang.Throwable</exception-type>
    <location>/500.xhtml</location>
</error-page>
```



You can also override error pages by placing the pages (with same name) described in [Error Pages](#) section in root of your application ([webapp/](#)).



Labels in [error pages](#) and [control sidebar](#) are provided via [JSF resource bundle](#) mechanism.

Following are the default labels in admin resource bundle:

src/main/resources/admin.properties

```
#general
admin.version=${project.version}
label.go-back=Go back to

#403
label.403.header=403
label.403.message=Access denied! You do not have access to the requested page.

#404
label.404.header=404
label.404.message=Oops! Page not found

#500
label.500.header=500
label.500.message=Oops! Something went wrong
label.500.title=Unexpected error
label.500.detail=Details

#expired
label.expired.title=View expired
label.expired.message= The requested page could not be recovered.
label.expired.click-here= Click here to reload the page.
```

```

#optimistic
label.optimistic.title=Record already updated
label.optimistic.message= The requested record has been already updated by another user.
label.optimistic.click-here= Click here to reload the updated record from database.

#controlsidebar
controlsidebar.header=Layout Options
controlsidebar.label.restore-defaults=Restore defaults
controlsidebar.label.menu-hororientation=Left menu layout
controlsidebar.txt.menu-hororientation=Toggle menu orientation between <b class\="sidebar-bold">left</b> and <b class\="sidebar-bold">top</b> menu.
controlsidebar.label.fixed-layout=Fixed Layout
controlsidebar.txt.fixed-layout=Activate the fixed layout, if checked the top bar will be fixed on the page.
controlsidebar.label.boxed-layout=Boxed Layout
controlsidebar.txt.boxed-layout=Activate the boxed layout.
controlsidebar.label.sidebar-collapsed=Collapsed Sidebar
controlsidebar.txt.sidebar-collapsed=If checked the sidebar menu will be collapsed.
controlsidebar.label.sidebar-expand-hover=Sidebar Expand on Hover
controlsidebar.txt.sidebar-expand-hover=If checked the left sidebar will expand on hover.
controlsidebar.label.sidebar-slide=Control Sidebar fixed
controlsidebar.txt.sidebar-slide=If checked control sidebar will be fixed on the page.
controlsidebar.label.sidebar-skin=Dark Sidebar Skin
controlsidebar.txt.sidebar-skin=If checked <b class\="sidebar-bold">dark</b> skin will be used for control sidebar, otherwise <b class\="sidebar-bold">light</b> skin will be used.
controlsidebar.header.skins=Skins

```

You can provide your own language bundle adding a file named `admin_YOUR_LANGUAGE.properties` in your application `resources` folder.



Don't forget to add it as `supported locale` in




, see [example here](#).

You can contribute your language locale to AdminFaces, [check here](#) the current supported locales.



ControlSidebar is a component which provides a panel so user can `customize` the template layout:

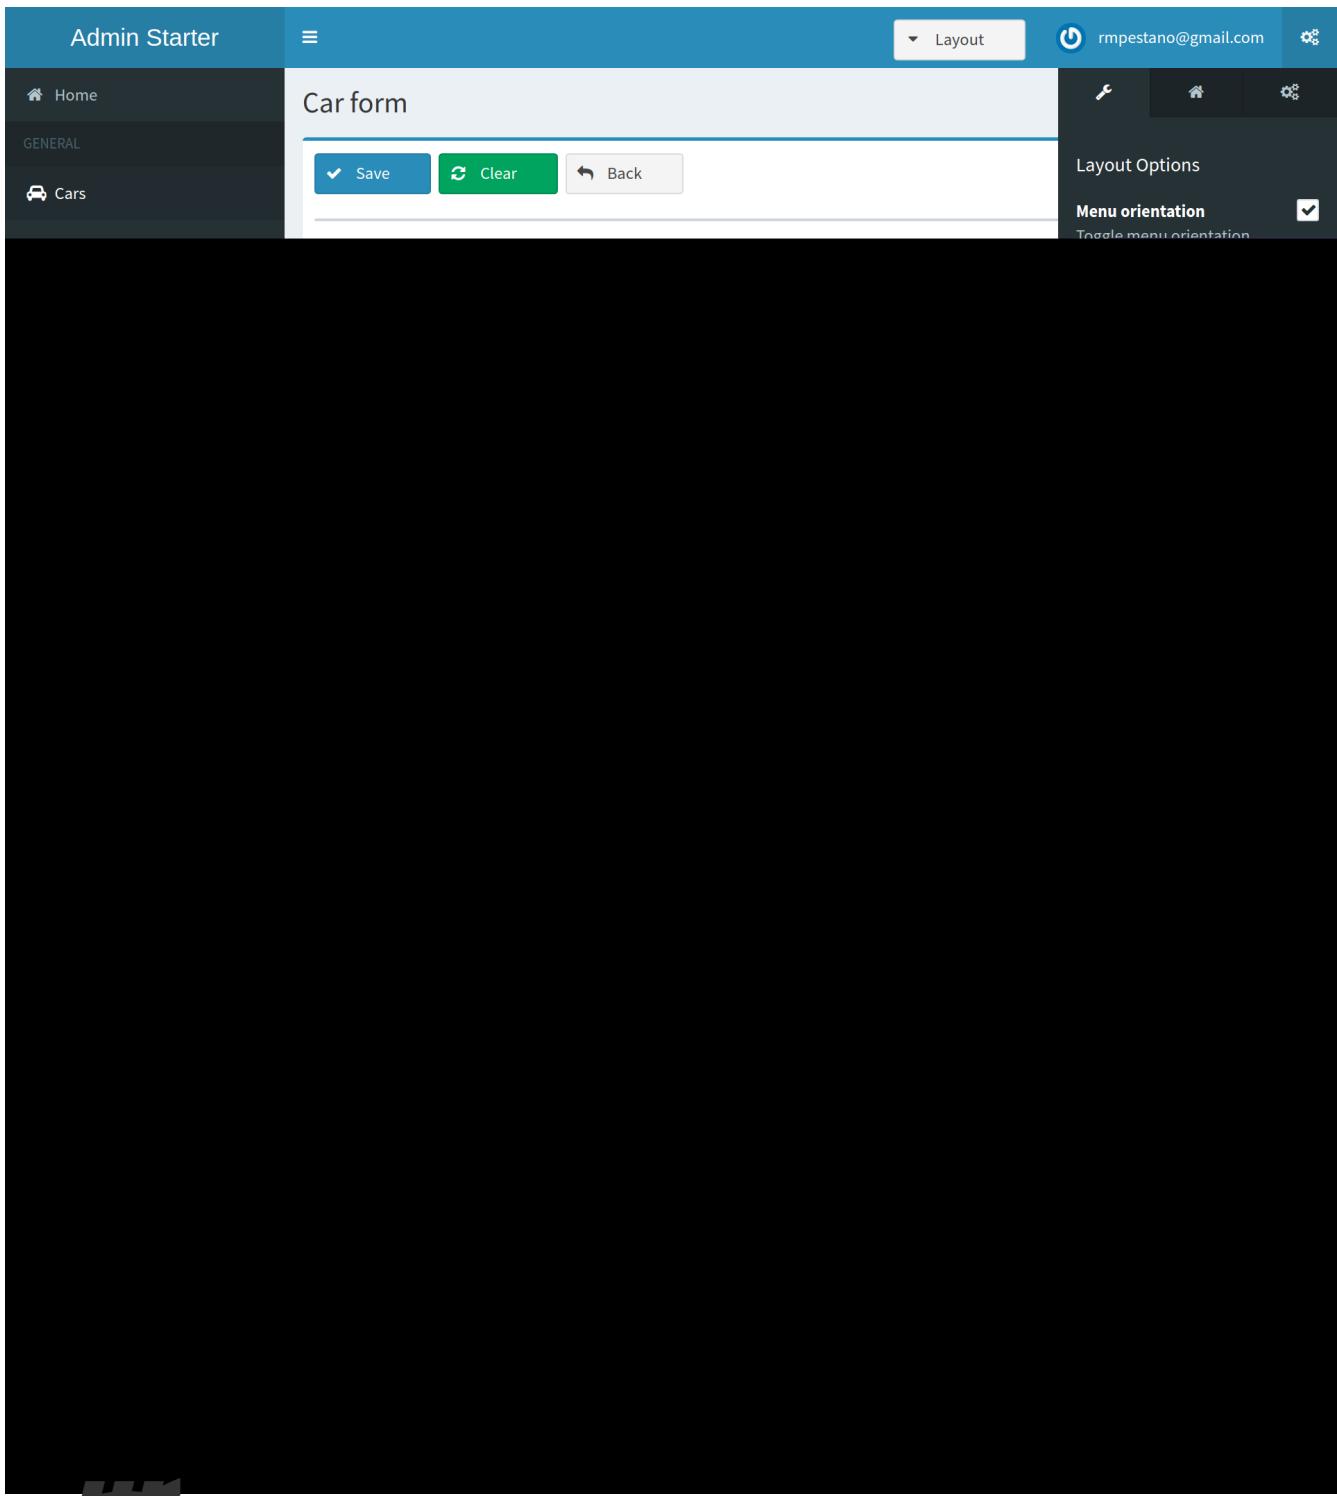

Options selected by user are stored on browser local storage so they are remembered no matter the user logs off the application.



To enable the control sidebar you need to add the following entry in `src/main/resources/admin-config.properties`:

```
admin.renderControlSidebar=true
```

And then add a link or button on your page which opens the sidebar. The link or button must use

data-toggle attribute:

```
<a href="#" id="layout-setup" data-toggle="control-sidebar" class="hidden-sm hidden-xs"><i class="fa fa-gears"></i></a>
```

On admin-starter the link is located on [top-bar.xhtml](#).

[Click here](#) to see controlsidebar in action on admin showcase.

By default the control sidebar comes only with the configuration tab but you can define additional tabs by defining **controlsidebar-tabs** and **controlsidebar-content** on your template. An example can be found on [admin-starter template](#).

ControlSidebar is hidden on mobile devices by default. You can change this on [admin-config.properties](#):

```
admin.controlSidebar.showOnMobile=true
```



Also don't forget to remove the **hidden-sm hidden-xs** classes from the button/link that opens the sidebar:

```
<a href="#" class="ui-link ui-widget" data-toggle="control-sidebar"><i class="fa fa-gears"></i></a>
```

Breadcrumbs based navigation indicates the location of the user within the site's hierarch.

AdminFaces provides a composite component which will manage breadCrumbs as user navigates through the pages.

The screenshot shows the AdminFaces application interface. At the top, there is a blue header bar with the title "Admin". Below the header, a sidebar on the left contains icons for Home, ControlSidebar, Breadcrumbs, Exceptions, Forms, and Material inputs. The main content area has a title "Material inputs" and a sub-section "Material inputs". A blue banner at the top of the content area states: "Material design inputs must be surrounded by a `div` with class `ui-material` and its label must be placed **after** the input." Below the banner, there is a form with a label "Required label" and a text input field. The URL in the browser's address bar is "Home > ControlSidebar > Breadcrumbs > Exceptions > Forms > Material inputs".

There are three ways to use the component, via `adm:breadcrumb composite component`, by using a `ui:param` or **programmatically**.

1. Using via **composite component**

To use the composite component just declare the `admin namespace` and provide a title and the link, following is `car-form` breadCrumb declaration in `admin starter`:

`car-form.xhtml`

```
<ui:composition xmlns="http://www.w3.org/1999/xhtml"
    xmlns:adm="http://github.com/adminfaces">

    <ui:define name="body">
        <adm:breadcrumb title="#{empty carFormMB.id ? 'New Car' : 'Car'
            '.concat(carFormMB.id)}" link="car-form.jsf?id=#{carFormMB.id}"/>
        //other page components
    </ui:define>
</ui:composition>
```

So when user enters the `car-form` page a breadCrumb will be created based on currently edited car or 'New Car' label will be used when adding a Car:



The _____ is the page where user will be redirected when clicking the breadCrumb link.



If the _____ is not provided then user will be redirected to the page where the breadCrumb is declared.

2. Usage via `title ui:param`

An easy way, but not so flexible as above, of creating breadCrumbs is to use the `ui:param name="title"` on the page, following is `admin-starter car-list page`:

```
<ui:composition xmlns="http://www.w3.org/1999/xhtml"
    xmlns:adm="http://github.com/adminfaces">

    <ui:param name="title" value="Car listing"/>

</ui:composition>
```

When the _____ param is present on the page, a breadCrumb with title as `ui:param value` will be added. The breadCrumb link will redirect user to the page where the `ui:param` is declared.



Declare the param as direct child of `ui:composition` otherwise it will not work in MyFaces JSF implementation if you e.g declare it inside `body` section.


3. Adding breadCrumb `programmatically`

To use breadcrumb in Java you need to `@Inject` the _____ component:

```
@Inject  
private BreadCrumbMB breadCrumbMB;  
  
public void add(){  
    breadCrumbMB.add(new BreadCrumb(link,title));
```



You can disable breadCrumbs

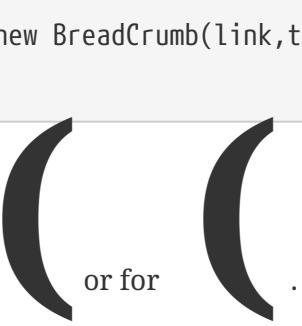

or for .

1. Disable per page

To disable breadCrumbs in a page just declare: `<ui:param name="renderBreadCrumbs" value="false"/>`. For an example see admin starter [index page](#).

2. Disable all pages

Just add `admin.renderBreadCrumb=false` entry in [src/main/resources/](#) folder. For details see [configuration section](#).



Template [Snapshots](#) are published to [maven central](#) on each commit, to use it just declare the repository below on your [pom.xml](#):


```
<repositories>  
    <repository>  
        <snapshots/>  
        <id>snapshots</id>  
        <name>libs-snapshot</name>  
        <url>https://oss.sonatype.org/content/repositories/snapshots</url>  
    </repository>  
</repositories>
```

Admin Starters are sample projects to get you started with AdminFaces. Following are current starters, access their github [README](#) for running instructions:

- [Admin Starter](#): The default starter is a simple JavaEE 6(+) application without any persistence layer. You can run it on a JavaEE 6 or newer server and also in [wildfly-swarm](#).
- [Admin Starter Persistence](#): Admin Starter application with persistence layer based on Apache DeltaSpike Data module via [Admin Persistence](#);
- [Admin Starter Tomcat](#): Admin Starter application for Tomcat;
- [Admin Starter SpringBoot](#): Admin Starter application using [SpringBoot](#) and [JoinFaces](#).
- [Admin Starter Shiro](#): Admin Starter application using [Apache Shiro](#) for authentication.



All starters have images published on docker hub so you can easily run them via docker.

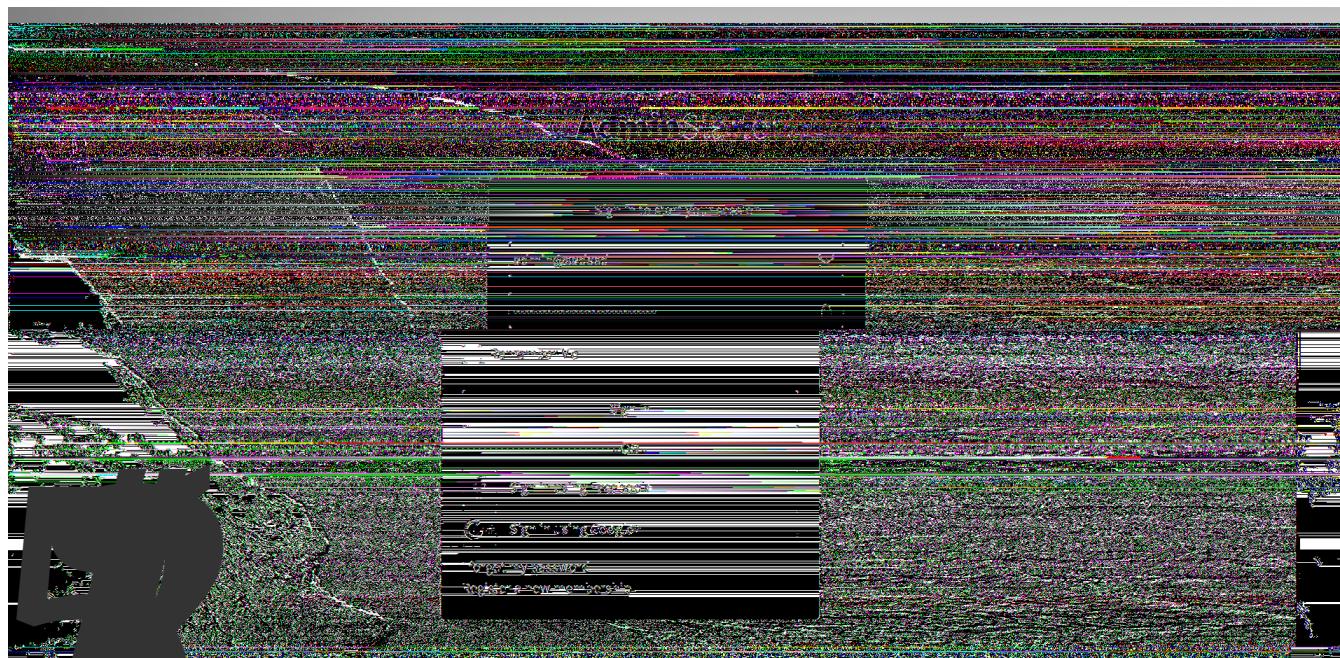

A live demo is available on Openshift here: <http://admin-starter-admin-starter.1d35.starter-us-east-1.openshiftapps.com/admin-starter/>



and [Admin Designer](#) is to make it easier to customize Admin theme and Admin Template.

This is the simple [Admin Showcase](#) application with `admin template` and `admin theme` bundled inside in the project dependencies.

You can use [Wildfly Swarm](#) to run the [exploded](#) application so one can change the theme or template and the application reloads without needing to restart the application.

The initial idea was to speed AdminFaces development but it turns out that it can easily contribute from non Java developers (like designers and frontend developers) as the project is about front end components and layout.

Also another great feature of Admin Designer is the possibility to add Admin theme and Admin template as a maven project.

The downloaded project is the [Admin Starter](#) with modified admin theme and template embedded in the project.



This is the most flexible approach but at the same time you lose the updates on Admin Theme and template projects because you don't depend on them anymore.

In application root directory:

1. First start the application by running the command:

```
./mvnw wildfly-swarm:run (or mvnw.cmd wildfly-swarm:run)
```

2. Second edit any less file in directory `src/main/resources/less`.


3. Now to compile the application using:

```
./mvnw compile (or mvnw.cmd compile)
```



If you don't want to compile every time you change a less file, use the flag `-Dlesscss.watch=true`. Or use a tool like brackets with [less extension](#) installed.

4. Finally when you're done you can download the customized **theme** and **template** as a or as separated jar files;

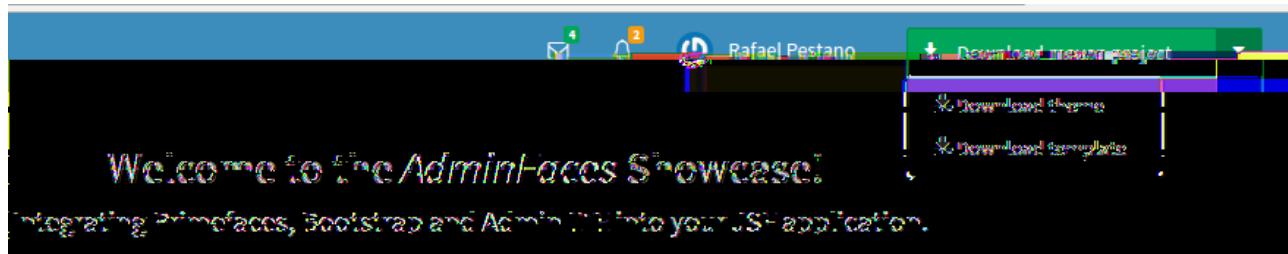

The changes made to less files should be visible in running application <http://localhost:8080/showcase>



There is no need to stop and run the application again.

You can see this workflow in the following video: <https://youtu.be/X1UEpN942s0>

The [Admin Persistence](#) module aims to simplify CRUD operations on AdminFaces applications.

It actually works without AdminFaces.

This module depends on [JSF](#), [CDI](#) and [JPA](#) and was tested with respective implementations and versions:

JSF	CDI	JPA
Mojarri 2.3	Weld 2.3	Hibernate 5.0
Mojarri 2.2	Weld 2.2	Hibernate 4.3
MyFaces 2.3	OpenWebBeans 1.7.4	Eclipselink 2.6

Following are the steps you need to follow in order to use [Admin Persistence](#):

1.

First include it in your classpath:

```
<dependency>
    <groupId>com.github.adminfaces</groupId>
    <artifactId>admin-persistence</artifactId>
    <version>1.0.0</version>
</dependency>
```

Admin persistence will bring the following transitive dependencies:

```
<dependency>
    <groupId>org.primefaces</groupId>
    <artifactId>primefaces</artifactId>
    <version>6.2</version>
</dependency>

<dependency>
    <groupId>org.apache.deltaspike.core</groupId>
    <artifactId>deltaspike-core-impl</artifactId>
    <version>1.8.0</version>
</dependency>

<dependency>
    <groupId>org.apache.deltaspike.core</groupId>
    <artifactId>deltaspike-core-api</artifactId>
    <version>1.8.0</version>
</dependency>

<dependency>
    <groupId>org.apache.deltaspike.modules</groupId>
    <artifactId>deltaspike-data-module-api</artifactId>
    <version>1.8.0</version>
    <scope>compile</scope>
</dependency>

<dependency>
    <groupId>org.apache.deltaspike.modules</groupId>
    <artifactId>deltaspike-data-module-impl</artifactId>
    <version>1.8.0</version>
    <scope>compile</scope>
</dependency>
```



Of course you can override them in your pom.xml as needed.

2.

As Admin Persistence uses **DeltaSpike typesafe criteria** you'll need to generate JPA metamodel. There are various ways to do that, here is a maven plugin example:

```

<plugin>
    <groupId>com.mysema.maven</groupId>
    <artifactId>apt-maven-plugin</artifactId>
    <version>1.1.3</version>
    <executions>
        <execution>
            <id>metamodel</id>
            <goals>
                <goal>process</goal>
            </goals>
            <configuration>
                <outputDirectory>target/generated-
sources/metamodel</outputDirectory>
                <processor>
                    org.hibernate.jpamodelgen.JPAMetaModelEntityProcessor</processor>
                </configuration>
            </execution>
        </executions>
        <dependencies>
            <dependency>
                <groupId>org.hibernate</groupId>
                <artifactId>hibernate-jpamodelgen</artifactId>
                <version>4.3.8.Final</version>
            </dependency>
        </dependencies>
    </plugin>

```



See [this tutorial](#) for configuring it on your IDE.

3.

Admin persistence needs an exposed **entity manager** as CDI Bean, you can do that by using a CDI producer:

```

@ApplicationScoped
public class EntityManagerProducer {

    @PersistenceContext
    EntityManager em;

    @Produces
    public EntityManager produce() {
        return em;
    }
}

```



4.

Every JPA entity must be typed as a , it is an interface with only a method, `getId()`:

```
import com.github.adminfaces.persistence.model.PersistenceEntity;

@Entity
@Table(name = "car")
public class Car implements PersistenceEntity {

    @Override
    public Integer getId() {
        return id;
    }

}
```



You can extend to gain `equals()`,`hashCode()` and `toString()`.

5.

Now to create a service which will hold your business logic you need to extend :

```
@Stateless
public class CarService extends CrudService<Car, Integer> {
```



Full source code for CarService can be [found here](#).



For some examples of CrudService usage [see integration tests here](#).

6.

Finally on the controller layer (JSF managed beans) you need to extend which will enable CRUD support for your JSF pages:

```

@Named
@ViewScoped
public class CarListMB extends CrudMB<Car> implements Serializable {

    @Inject
    CarService carService;

    @Inject
    @Service
    CrudService<Car, Integer> crudService; //generic injection

    @Inject
    public void initService() {
        setCrudService(carService); ①
    }

}

```

① Needed by CrudMB otherwise it will throw an exception asking for CrudService initialization.

You can use annotation (since 1.0.0-RC9) to provide CrudService:



```

@Named
@ViewScoped
@BeanService(CarService.class)//use annotation instead of setter
injection
public class CarListMB extends CrudMB<Car> implements Serializable {

}

```

Full source code for CarListMB can be [found here](#).



Real pagination involves lots of boilerplate code, in admin-persistence it is a matter of using a Primefaces lazy datatable and bind it to the CrudMB `list` variable:

xhtml page

```

<p:datatable widgetVar="carsTable" var="c" value="#{carListMB.list}"
    rows="5" rowKey="#{c.id}"
    lazy="true" paginator="true"
    <!-- other attributes -->

```



The full source code for this XHTML page can be [found here](#).

For filtering on the lazy datatable you just need to override `configRestrictions` method in the managed bean's service (the service we set with `service` in CarListMB) and add your restrictions based on a filter:

CarService

```
protected Criteria<Car, Car> configRestrictions(Filter<Car> filter) {  
  
    Criteria<Car, Car> criteria = criteria();  
  
    //create restrictions based on parameters map  
    if (filter.hasParam("id")) {  
        criteria.eq(Car_.id, filter.getIntParam("id"));  
    }  
  
    if (filter.hasParam("minPrice") && filter.hasParam("maxPrice")) {  
        criteria.between(Car_.price, filter.getDoubleParam("minPrice"), filter  
.getDoubleParam("maxPrice"));  
    } else if (filter.hasParam("minPrice")) {  
        criteria.gte(Car_.price, filter.getDoubleParam("minPrice"));  
    } else if (filter.hasParam("maxPrice")) {  
        criteria.lte(Car_.price, filter.getDoubleParam("maxPrice"));  
    }  
  
    //create restrictions based on filter entity  
    if (has(filter.getEntity())) {  
        Car filterEntity = filter.getEntity();  
        if (has(filterEntity.getModel())) {  
            criteria.likeIgnoreCase(Car_.model, "%" + filterEntity.getModel());  
        }  
  
        if (has(filterEntity.getPrice())) {  
            criteria.eq(Car_.price, filterEntity.getPrice());  
        }  
  
        if (has(filterEntity.getName())) {  
            criteria.likeIgnoreCase(Car_.name, "%" + filterEntity.getName());  
        }  
    }  
    return criteria;  
}
```

`filter.params` is a hashmap used to add arbitrary parameters and `filter.entity` is for entity specific ones, see [search dialog](#) which populates those attributes:

```
<div class="ui-g-12">
    <p:outputLabel for="model" value="#{msg['label.model']}
```



Any datatable update (ajax or not) will trigger the configRestrictions.





Besides filtering the `filter` helper class also holds information.

and

By default filters are saved on `Session` so when user goes to another page (e.g a detail) and comes back to list the tables keeps it's previous filters.

You can change this behavior by overriding `keepFiltersInSession` method on your Bean:




CarListMB

```
@Override  
public boolean keepFiltersInSession() {  
    return false;
```

For an example project using Admin Persistence see [admin-starter-persistence](#).



[Admin Mobile](#) is a simple [Android Studio](#) project which uses [Webview](#) to create an hybrid web app based on Admin Showcase.

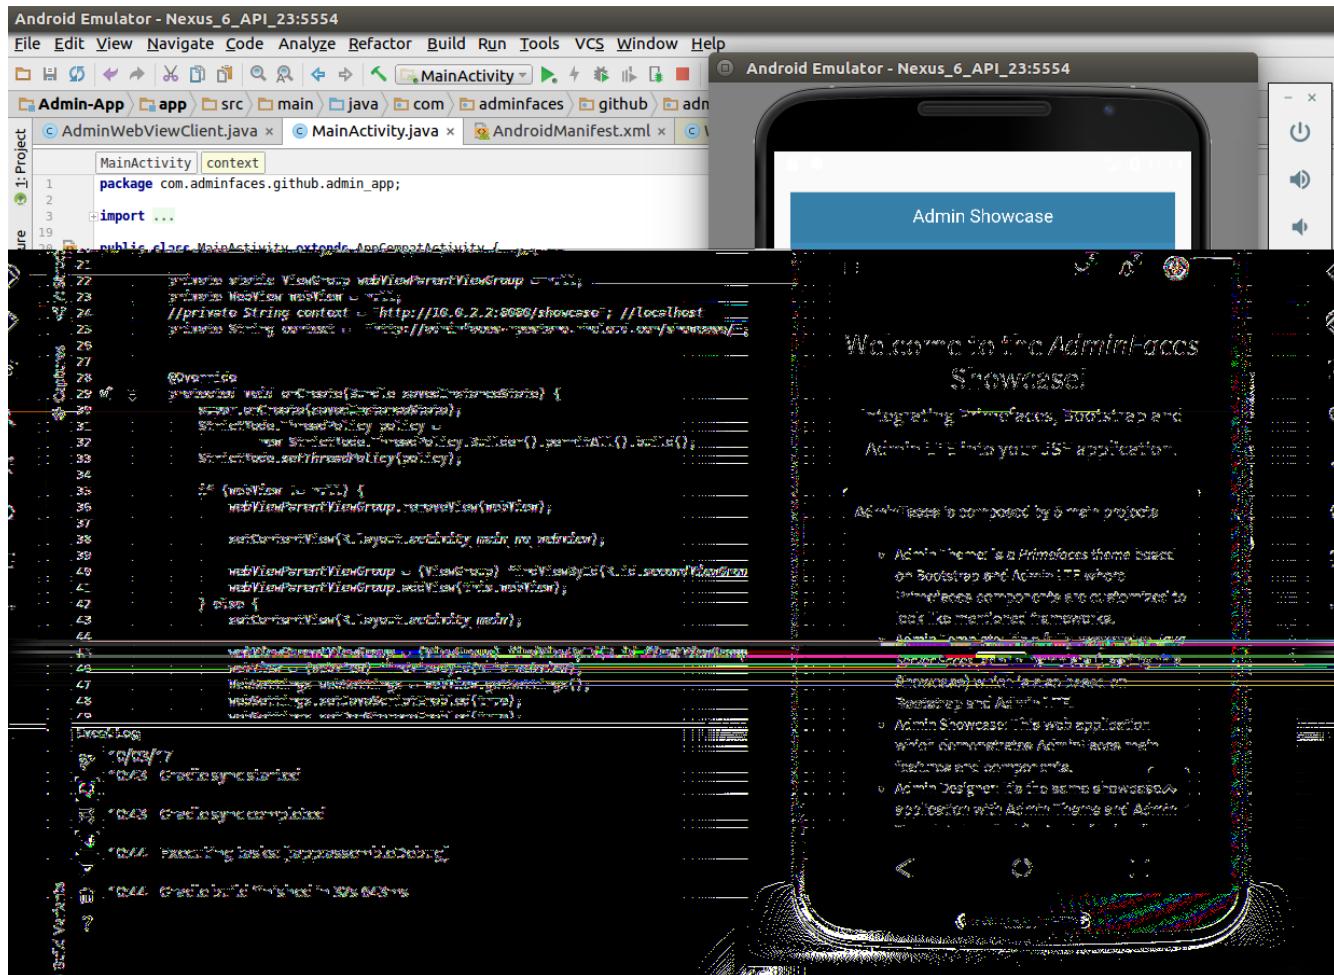

The app is a proof of concept to check AdminFaces user experience in mobile apps. The following behaviours will be enabled only on this kind of devices:

- Loading bar based on google material design;
 - Go to top link at the bottom right corner of the page;
 - Larger icons on panel, dialog and messages;
 - Some components like growl, tabview and datatable are optimized for mobile devices;
 - Ripple/waves effect based on [materialize](#);
 - Slideout menu