



I have my XML file and through the XSL file I have been able to add a button to certain elements of the XML as seen in the image.

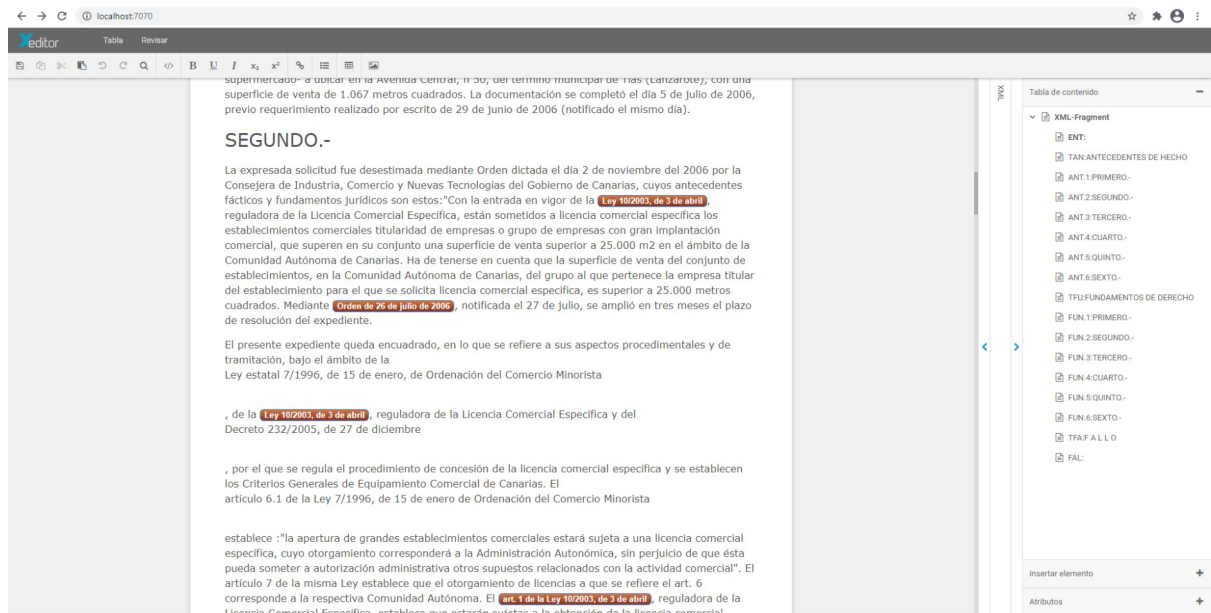

What I need to do is that clicking on the buttons opens a window, but I can't find a way to do it.

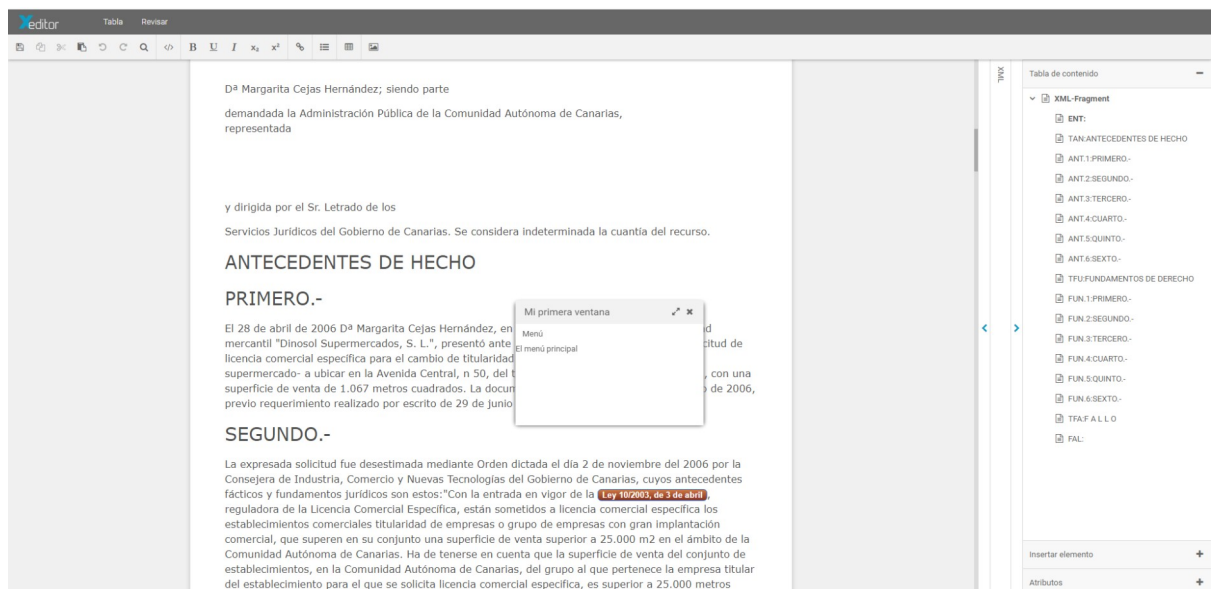


In the XSL definition I have the following code that paints the button for me.

```
xsl > contenttoeditor.xsl
<xsl:template match="cita[@posibles]">
  <xsl:choose>
    <xsl:when test="'false' = 'true'"> <!-- $soloLectura-->
      <span class="marcoXopusRojo" title="Relación con varios destinos posibles"><xsl:apply-templates/></span>
    </xsl:when>
    <xsl:otherwise>
      <input type="button" class="{name()} botonXopus rojo" onclick="msg('Mi Ventana')" title="Relación con varios destinos posibles">
      <xsl:attribute name="value"><xsl:apply-templates/></xsl:attribute>
    </input>
    </xsl:otherwise>
  </xsl:choose>
</xsl:template>
```

The file that the sale creates for me is the following, for now it is a simple test, because this window will carry a lot of business logic.



```
src > js > js > JS Log.js > ...
1  module.exports = function (msg) {
2    console.log(msg);
3    alert(msg);
4
5    var win = Ext.create("Ext.window.Window",{
6      title: "Mi primera ventana",
7      width: 300,
8      height: 200,
9      maximizable: true,
10     layout: "card", //Step 1
11     defaults:{ xtype: "panel", height: 60, border: false },
12     items: [{
13       title: "Menú",
14       html: "El menú principal"
15     },{
16       title: "Contenido",
17       html: "¡El contenido principal!"
18     }]
19   });
20   win.show();
21 };
```

But the problem is that when I press the button, the msg () function does not recognize me.

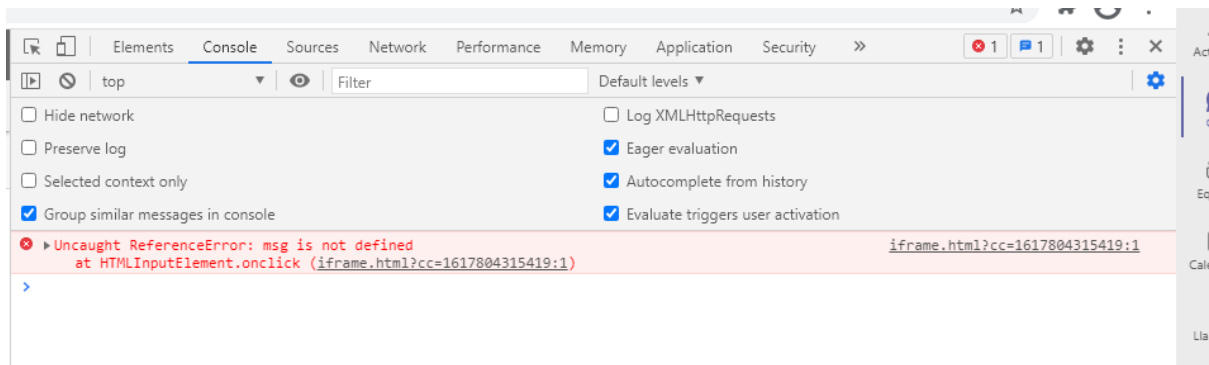

I don't know how to bind the button event with the class that renders the window.

The only thing that I have managed to invoke when loading the page from the index.js file,

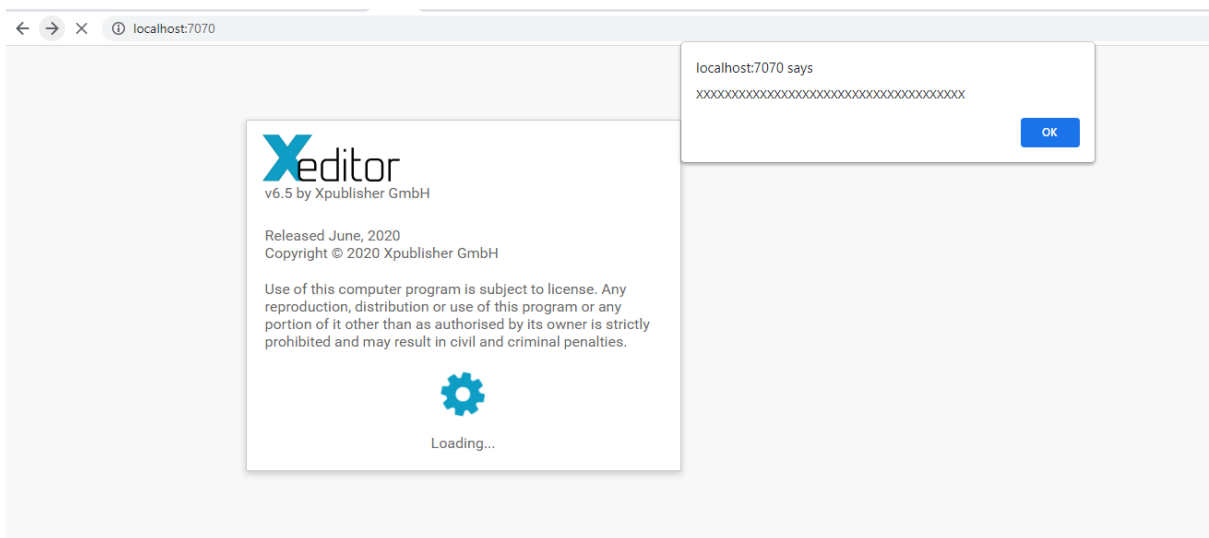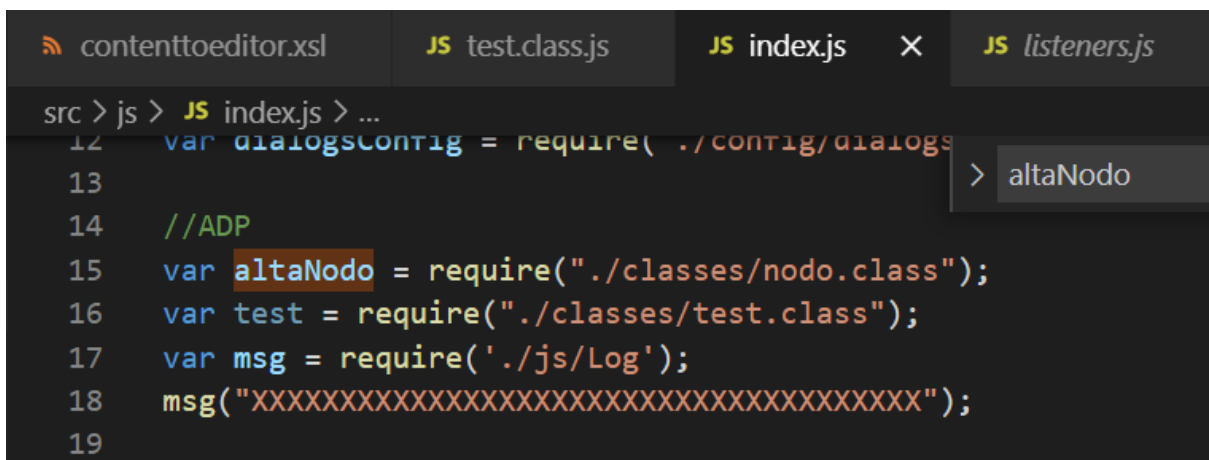

Xeditor Tabla Revisar

RECURSO

CONTENCIOSO-
ADMINISTRATIVO

núm.
473/2.007

SENTENCIA núm. 343

Ilmos. Srs.:
Decreto 232/2005, de 27 de diciembre

Presidente:

D. Francisco José Gómez Cáceres

Magistrados: ley 2000/1

D. Jaime Borrás Moya

XML

Tabla de contenido

XML-Fragment

- ENT:
- TAN:ANTECEDENTES DE HECHO
- ANT.1:PRIMERO.-
- ANT.2:SEGUNDO.-
- ANT.3:TERCERO.-
- ANT.4:CUARTO.-
- ANT.5:QUINTO.-
- ANT.6:SEXTO.-
- TFU:FUNDAMENTOS DE DERECHO
- FUN.1:PRIMERO.-
- FUN.2:SEGUNDO.-
- FUN.3:TERCERO.-
- FUN.4:CUARTO.-
- FUN.5:QUINTO.-
- FUN.6:SEXTO.-
- TFA:F A L L O
- FAL:

Insertar elemento +

Atributos +

Mi primera ventana

Menú

El menú principal

but when trying with the button it no longer recognizes msg ().

You can tell me how I can relate the events defined in the XSL with the classes that I can define within the project and be able to access them according to the event that it invokes.