


Good morning

Through "types_override.js" I have been able to change the XML format to place a button and invoke a dialog.



When the button is clicked, the dialog opens:

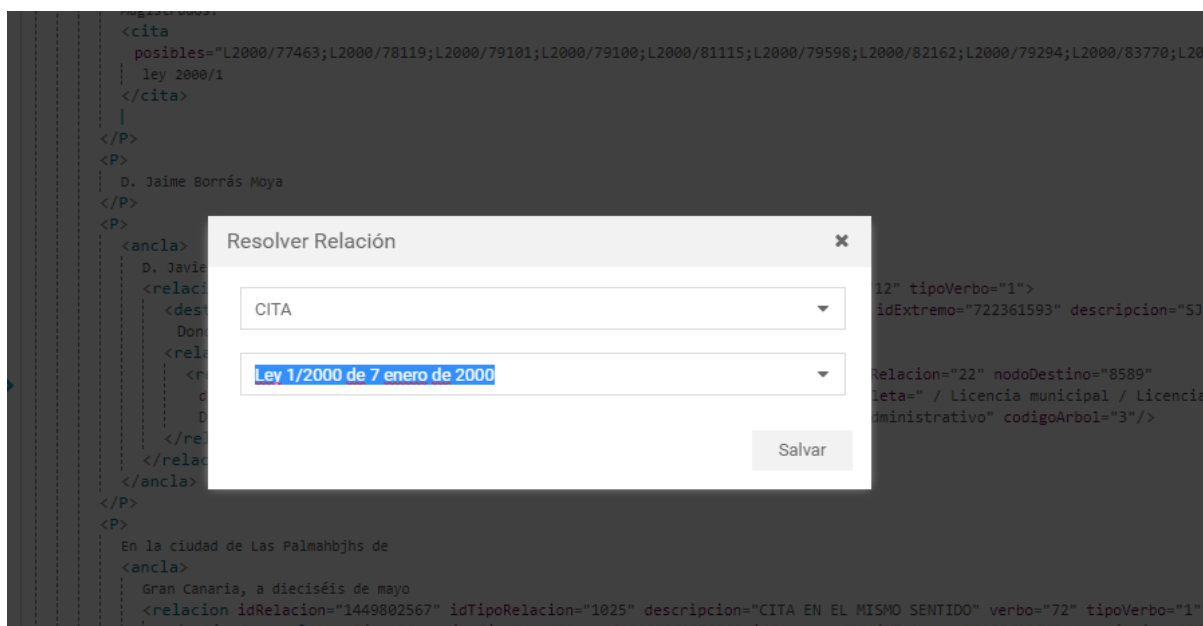

Pressing the "Salvar" button through code creates and deletes some nodes to transform the XML according to our needs according to the selected options:

```

processSelection: function () {
    // check if form is valid
    if (formPanel.getForm().isValid()) {

        //Recupera Datos del Formulario
        var cbxTipoRelacion = dialog.queryById("cbxTipoRelacion");

        //Recupera Datos del Formulario
        var cbxPosibles = dialog.queryById("cbxPosibles");

        if(cbxPosibles.getValue() != null){
            dialog.crearCita(element, element.getDom().innerText, cbxTipoRelacion, cbxPosibles);
        }
    }
},

```

```

crearCita(element, nrefCompleto, cbxTipoRelacion, cbxPosibles){

    // reference to insert the cloned element
    var reference = element.dom;

    //Creamos el elemento ANCLA
    var textNode = editor.document.createTextNode(nrefCompleto);
    var valorElement = editor.document.createElement('text', [textNode]);
    var ancla = editor.document.createElement('ancla', [valorElement]);

    element.getParent().insertBefore(ancla, reference);

    //Creamos el elemento RELACION
    var textRelacion = "";
    var nodeRelacion = editor.document.createTextNode(textRelacion);
    var valorElementRelacion = editor.document.createElement('text', [nodeRelacion]);
    var relacion = editor.document.createElement('Ancla_relacion', [valorElementRelacion]);
    //Atributos fijos del Tag Relación
    relacion.setAttribute('idTipoRelacion', cbxTipoRelacion.getValue());
    relacion.setAttribute('descripcion', cbxTipoRelacion.getRawValue());
    relacion.setAttribute('modificado', 'true');

    //Creamos el elemento DESTINOINCOMPLETO
    var textDestinoIncompleto = "";
    var nodeDestinoIncompleto = editor.document.createTextNode(textDestinoIncompleto);
    var valorElementDestinoIncompleto = editor.document.createElement('text', [nodeDestinoIncompleto]);
    var destinoIncompleto = editor.document.createElement('Relacion_destinoIncompleto', [valorElementDestinoIncompleto]);

    var partesNref = nrefCompleto.split("@");
    var nref = partesNref[0].substring(1);
    var codigoTipoDoc = partesNref[0].charAt(0);

```

```

    var codigoTipoDoc = partesNref[0].charAt(0);

    destinoIncompleto.setAttribute("codigoTipoDoc", codigoTipoDoc);
    destinoIncompleto.setAttribute("idEmpresa", "1");

    destinoIncompleto.setAttribute("nref", nref);

    if (partesNref[1]) {
        destinoIncompleto.setAttribute("alias", partesNref[1]);
    }

    ancla.appendChild(relacion);
    relacion.appendChild(destinoIncompleto);

    reference.remove();

    var actualizar = editor.updateState(true);
    console.table(actualizar);
    editor.selectionManager.sync();

    // close dialog
    dialog.cancelOnClose = false;
    dialog.close();
},

```

Once the code is run in Editor you see some of the changes made. THE PROBLEM IS THAT THE CHANGES ARE NOT REFLECTED IN THE XML.

Presidente:		<P>
		Presidente:
		</P>
		<P>
D. Francisco José Gómez Cáceres		D. Francisco José Gómez Cáceres
		</P>
		<P>
Magistrados:		Magistrados:
		<cita
		posibles="L2000/77463;L2000/78119;L2000/79101;L2000/79100;L2000/81115;L2000/79590;L2000/82162;L2000/79294;L2000/83770;L2000/82425;L2000/83769;
		ley 2000/1
		</cita>
		</P>
D. Jaime Borrás Moya		<P>
		D. Jaime Borrás Moya
		</P>
		<P>
D. Javier Varona Gómez Acedo		D. Javier Varona Gómez Acedo
		</P>
		</P>

An "ancla" node should have been included with all its nodes and the "cita" node should have been removed, the change is seen in the Editor but not in the XML.

What must be done to reflect the changes in the XML?