




register update

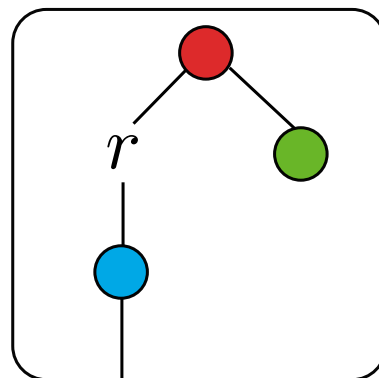

$\circ$

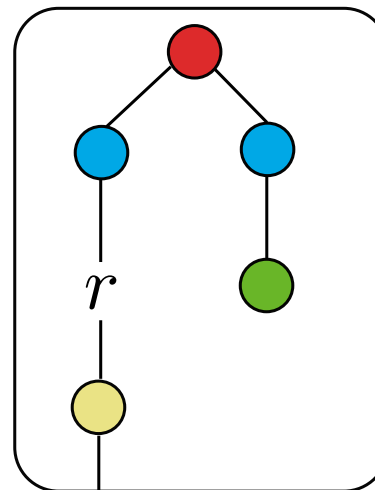

$=$


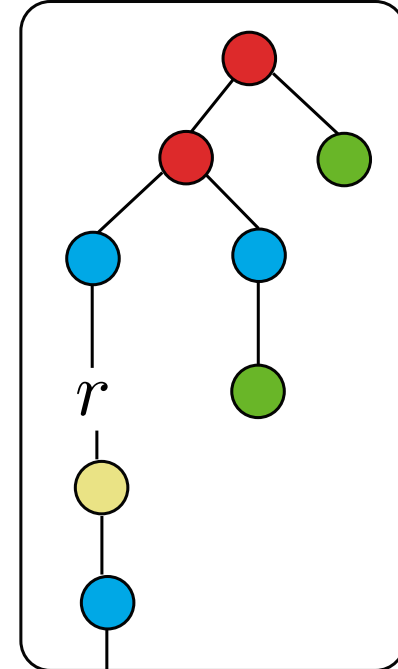


its encoding

$\lambda x$  is added as a root

$r$  is replaced by an @ node,  
its left child becomes the port

port becomes the variable  $x$

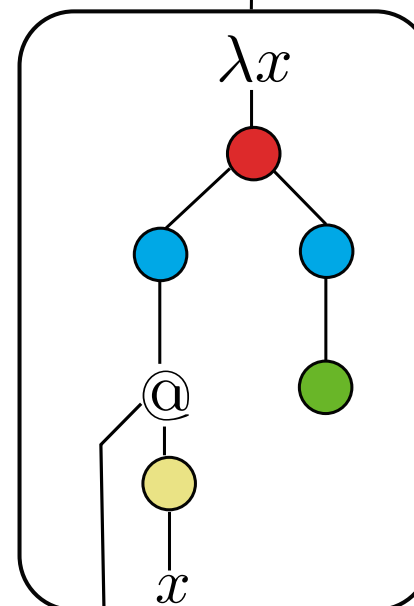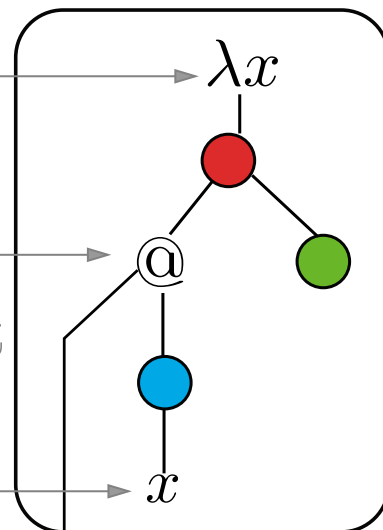

normalises to

