Report Mods Framework

INSTALLATION INSTRUCTIONS

Prerequisites:

- IBM i 7.1 or higher. Latest cumulative PTF's always recommended.
- 5770-TS1 (Transform Services for i) *BASE and option 1.
- 5770-WDS (IBM Rational Development Studio for i) option 31 (ILE RPG).

Download the installation save file RPTMODINS.SAVF to your hard drive in an easy to reach directory, preferably one at the root level of C. For example: C:\mydir
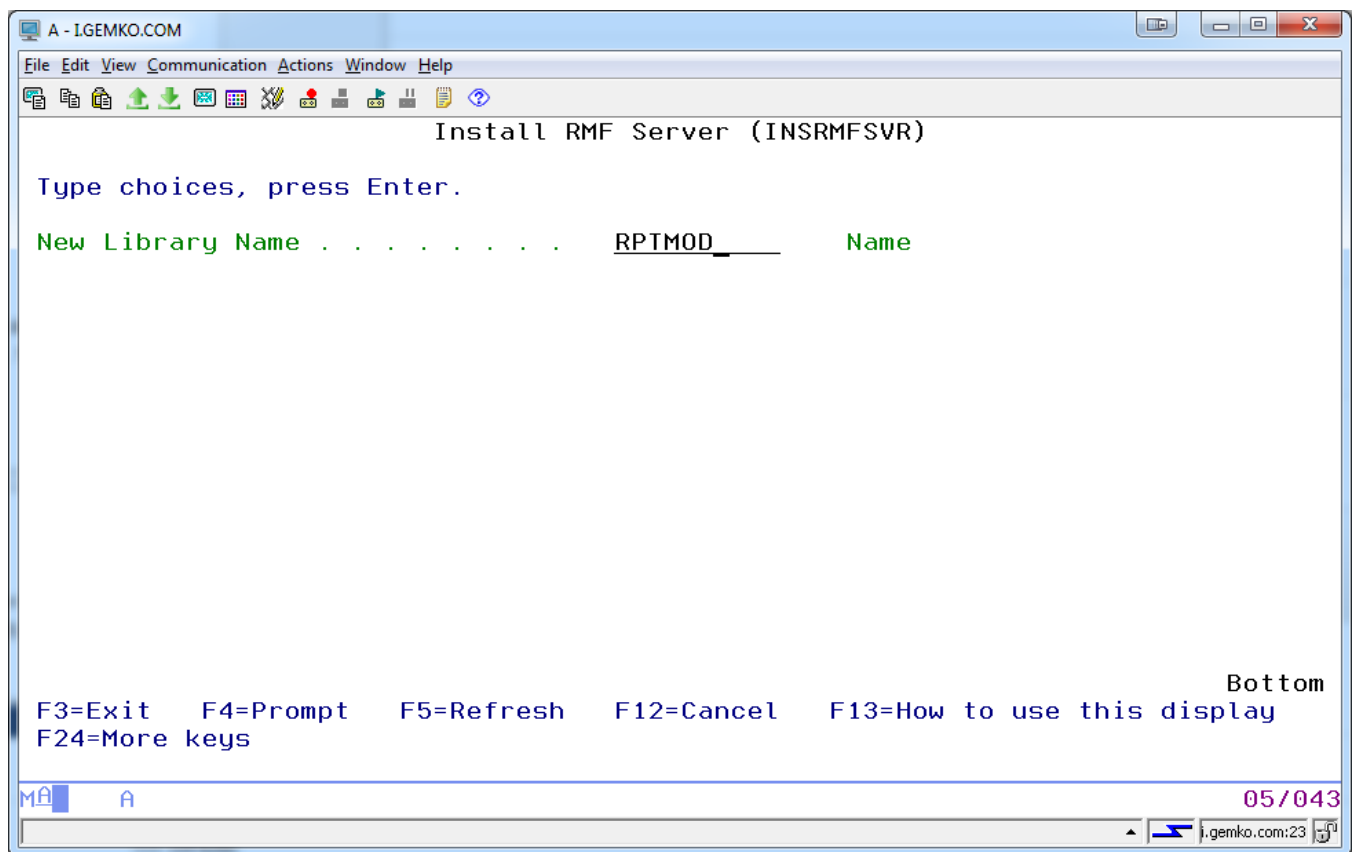
On your IBM i:

- Create a save file on your IBM i: CRTSAVF FILE(MYLIB/RPTMODINS)

From your desktop PC:

- Open the DOS command prompt
- FTP a.b.c.d <enter> (where a.b.c.d is the IP address of your IBM i)
- Enter user and password as prompted
- BIN <enter>
- PUT C:\MYDIR\RPTMODINS.SAVF MYLIB/RPTMODINS.SAVF <enter>
- QUIT <enter>

Back to your IBM i:

- Sign on as a user with *SECOFR authority
- Restore the installation objects to QTEMP:
    - RSTOBJ OBJ(*ALL) SAVLIB(RPTMODINS) DEV(*SAVF) SAVF(MYLIB/RPTMODINS) MBROPT(*ALL) ALWOBJDIF(*ALL) RSTLIB(QTEMP)
- Ensure that QTEMP is in your library list: ADDLIBLE LIB(QTEMP)
- Enter the command INSRMFSVR and prompt with F4.

```
A - I.GEMKO.COM
File  Edit  View  Communication  Actions  Window  Help
                    Install RMF Server (INSRMFSVR)

 Type choices, press Enter.

 New Library Name . . . . . . . . .    RPTMOD_____      Name












                                                            Bottom
 F3=Exit    F4=Prompt    F5=Refresh    F12=Cancel    F13=How to use this display
 F24=More keys

MA      A                                                   05/043
                                                    i.gemko.com:23
```

Enter the name of a new library which will contain the following objects upon completion:

- Subsystem description RPTMOD.
- Job description RPTMOD, to describe the auto start server job.
- Job queue RPTMOD, automatically associated with subsystem RPTMOD.
- Data queue RPTMOD, to receiving notifications from selected output queues.
- Server program RPTMOD, to process notifications from the data queue.
- SQL table RPTMOD and index RPTMODL1, to contain the rules for processing the notifications.
- SQL table SPLFGRID, used in the transfer of spooled file content to memory.
- Dummy physical file PCASCII, used in the creation of an ASCII stream file shell.
- Source physical files QCLSRC, QCMDSRC, QFTPSRC, QRPGLESRC and QTXTSRC.

To start the engine, simply start subsystem RPTMOD in the library name you specified. You might want to consider adding a STRSBS command to your QSTRUP job so that the subsystem starts at IPL.

See the User Guide for instructions on how to leverage this engine.