How to compile: gcc –o sim voting_sim.c

How to run: ./sim
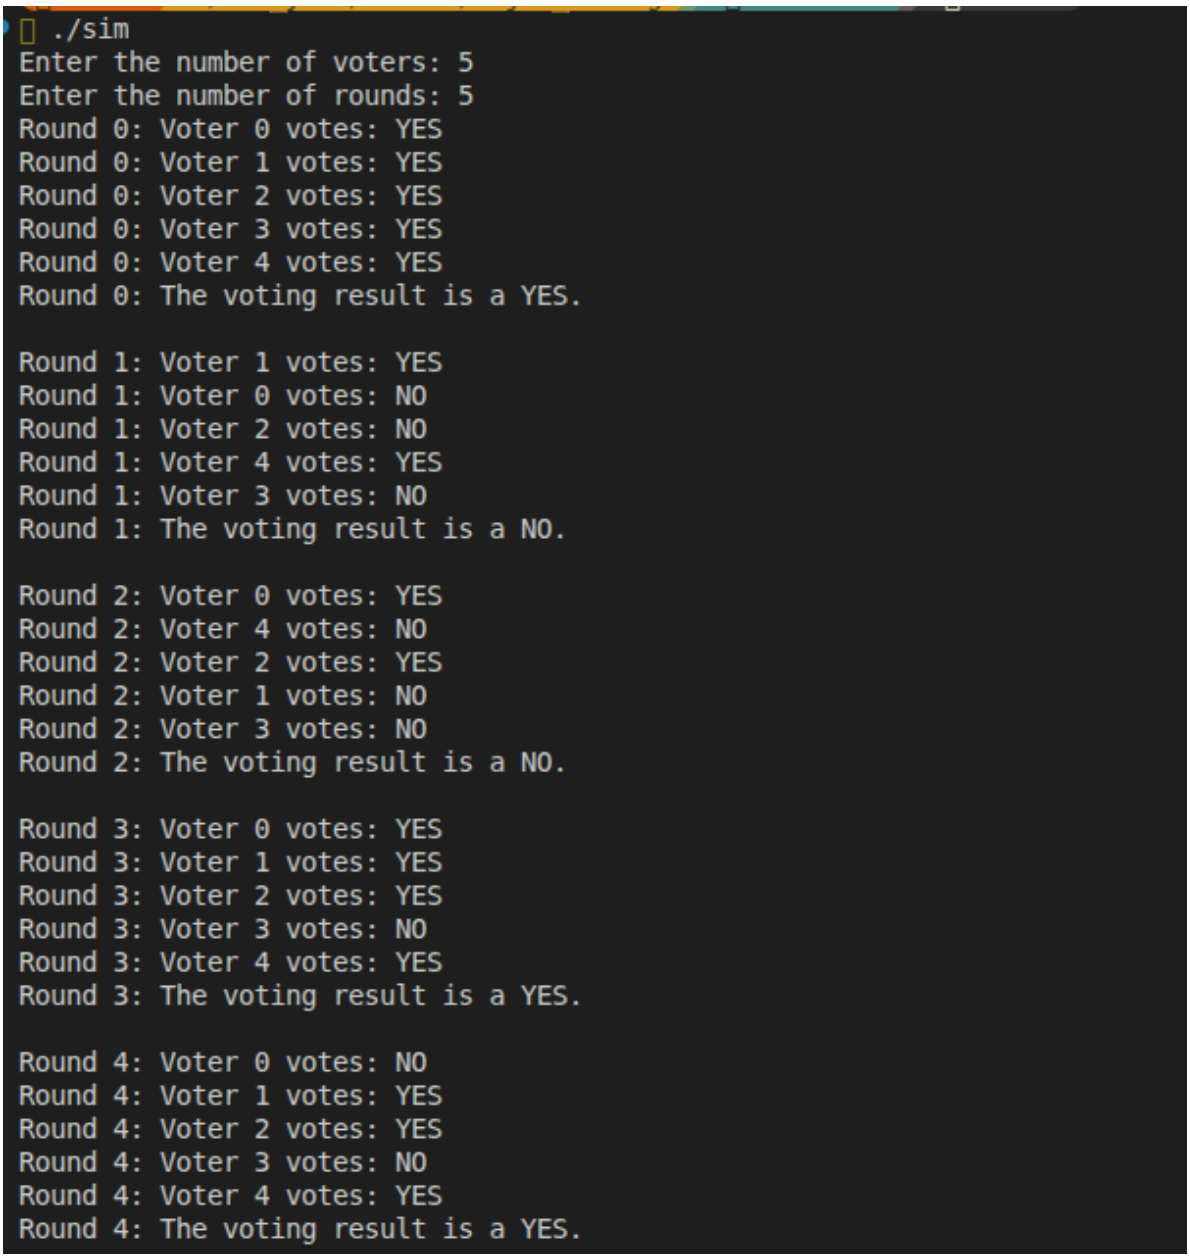
Children write a randomly generated vote to the parent process that reads in those votes to tally and returns the majority result. This goes on for however many rounds the user specifies.