

Assignment No.01

1.What is the command to initialize a new git repository

Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)

\$ mkdir FirstAssignment


Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)

\$ cd FirstAssignment

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)

\$ git init

Initialized empty Git repository in C:/Users/Ravi/FirstAssignment/.git/

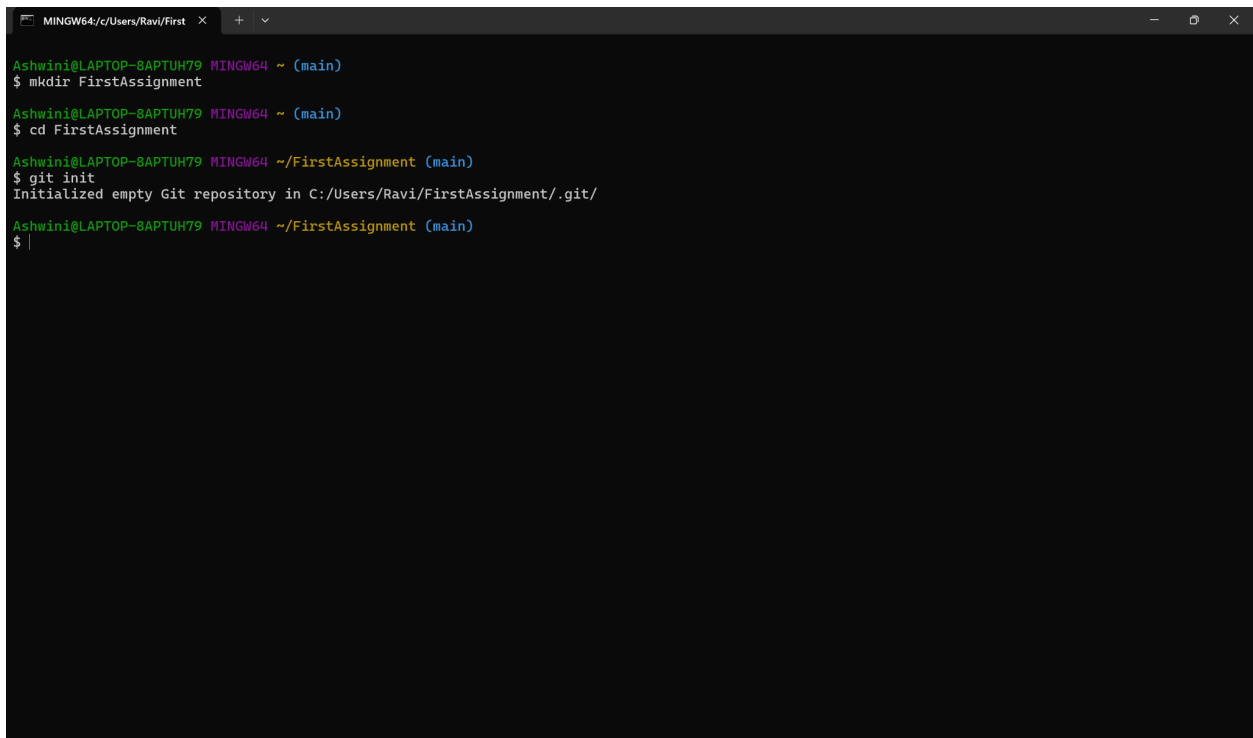

```
MINGW64/c/Users/Ravi/First x + v
Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)
$ mkdir FirstAssignment
Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)
$ cd FirstAssignment
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git init
Initialized empty Git repository in C:/Users/Ravi/FirstAssignment/.git/
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ |
```

2.What is the command to add files to the staging area

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)

```
$ echo "Hello World" > file.txt
```


Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)

```
$ git add file.txt
```

warning: in the working copy of 'file.txt', LF will be replaced by CRLF the next time Git touches it

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)

```
$ git add .
```

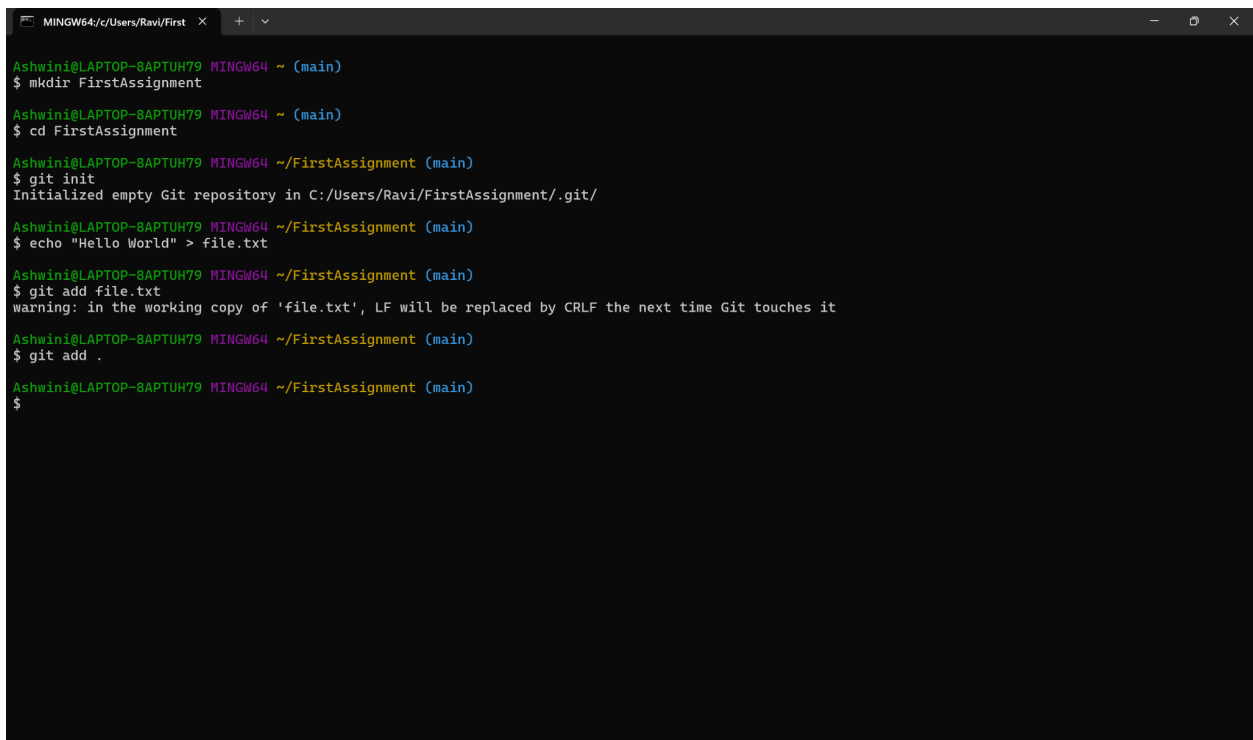

```
MINGW64/c/Users/Ravi/First x + v
Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)
$ mkdir FirstAssignment
Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)
$ cd FirstAssignment
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git init
Initialized empty Git repository in C:/Users/Ravi/FirstAssignment/.git/
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ echo "Hello World" > file.txt
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add file.txt
warning: in the working copy of 'file.txt', LF will be replaced by CRLF the next time Git touches it
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add .
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$
```

3.What is the command to commit changes with a message


Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)

```
$ git commit -m "your message"
```

```
[main (root-commit) fa7c75a] your message
```

```
1 file changed, 1 insertion(+)
```

```
create mode 100644 file.txt
```

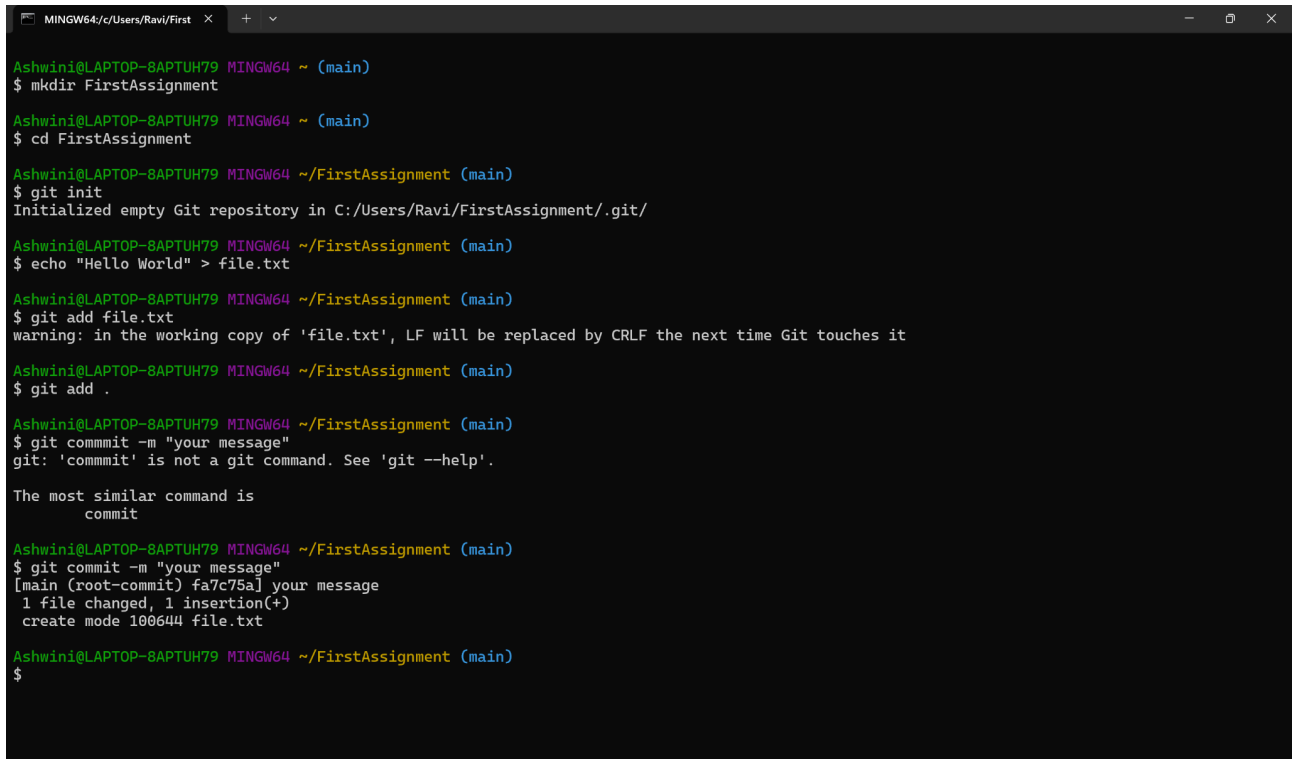

```
MINGW64/c/Users/Ravi/First x + v

Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)
$ mkdir FirstAssignment

Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)
$ cd FirstAssignment

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git init
Initialized empty Git repository in C:/Users/Ravi/FirstAssignment/.git/

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ echo "Hello World" > file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add file.txt
warning: in the working copy of 'file.txt', LF will be replaced by CRLF the next time Git touches it

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add .

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git commit -m "your message"
git: 'commit' is not a git command. See 'git --help'.

The most similar command is
commit

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git commit -m "your message"
[main (root-commit) fa7c75a] your message
1 file changed, 1 insertion(+)
create mode 100644 file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$
```

4. What is the command to check the status of the repository

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)

\$ git status

On branch main

nothing to commit, working tree clean

```
MINGW64/c/Users/Ravi/First x + v
Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)
$ mkdir FirstAssignment
Ashwini@LAPTOP-8APTUH79 MINGW64 ~ (main)
$ cd FirstAssignment
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git init
Initialized empty Git repository in C:/Users/Ravi/FirstAssignment/.git/
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ echo "Hello World" > file.txt
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add file.txt
warning: in the working copy of 'file.txt', LF will be replaced by CRLF the next time Git touches it
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add .
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git commit -m "your message"
git: 'commit' is not a git command. See 'git --help'.

The most similar command is
    commit
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git commit -m "your message"
[main (root-commit) fa7c75a] your message
1 file changed, 1 insertion(+)
create mode 100644 file.txt
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git status
On branch main
nothing to commit, working tree clean
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$
```

5.What is the command to create a new branch and switch to it

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)

```
$ git checkout -b AI-03_AshwiniMore
```

Switched to a new branch 'AI-03_AshwiniMore'

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_AshwiniMore)

```
$ git switch -c AI-03_Ashwini
```

Switched to a new branch 'AI-03_Ashwini'

```
MINGW64/c/Users/Ravi/First x + v
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add file.txt
warning: in the working copy of 'file.txt', LF will be replaced by CRLF the next time Git touches it
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add .
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git commit -m "your message"
git: 'commit' is not a git command. See 'git --help'.

The most similar command is
    commit
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git commit -m "your message"
[main (root-commit) fa7c75a] your message
1 file changed, 1 insertion(+)
create mode 100644 file.txt
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git status
On branch main
nothing to commit, working tree clean
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git checkout -b AI-03_AshwiniMore
Switched to a new branch 'AI-03_AshwiniMore'
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_AshwiniMore)
$ git switch -c AI-03_AshwiniMore
fatal: a branch named 'AI-03_AshwiniMore' already exists
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_AshwiniMore)
$ git switch -c AI-03_Ashwini
Switched to a new branch 'AI-03_Ashwini'
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ |
```

6.What is the command to merge a branch into the current branch?

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)

\$ git merge AI-03_AshwiniMore

Already up to date.

```
MINGW64/c/Users/Ravi/First x + v
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git add .

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git commit -m "your message"
git: 'commit' is not a git command. See 'git --help'.

The most similar command is
    commit

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git commit -m "your message"
[main (root-commit) fa7c75a] your message
1 file changed, 1 insertion(+)
create mode 100644 file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git status
On branch main
nothing to commit, working tree clean

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (main)
$ git checkout -b AI-03_AshwiniMore
Switched to a new branch 'AI-03_AshwiniMore'

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_AshwiniMore)
$ git switch -c AI-03_AshwiniMore
fatal: a branch named 'AI-03_AshwiniMore' already exists

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_AshwiniMore)
$ git switch -c AI-03_Ashwini
Switched to a new branch 'AI-03_Ashwini'


Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git merge AI-03_AshwiniMore
Already up to date.

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$
```

7.What is the command to view the difference between two branches or commits?

```
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git diff main AI-03_AshwiniMore
```

```
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git diff 75e0421 fa7c75a
diff --git a/file2.txt b/file2.txt
deleted file mode 100644
index ee50d67..0000000
--- a/file2.txt
+++ /dev/null
@@ -1 +0,0 @@
-Second file Added
```

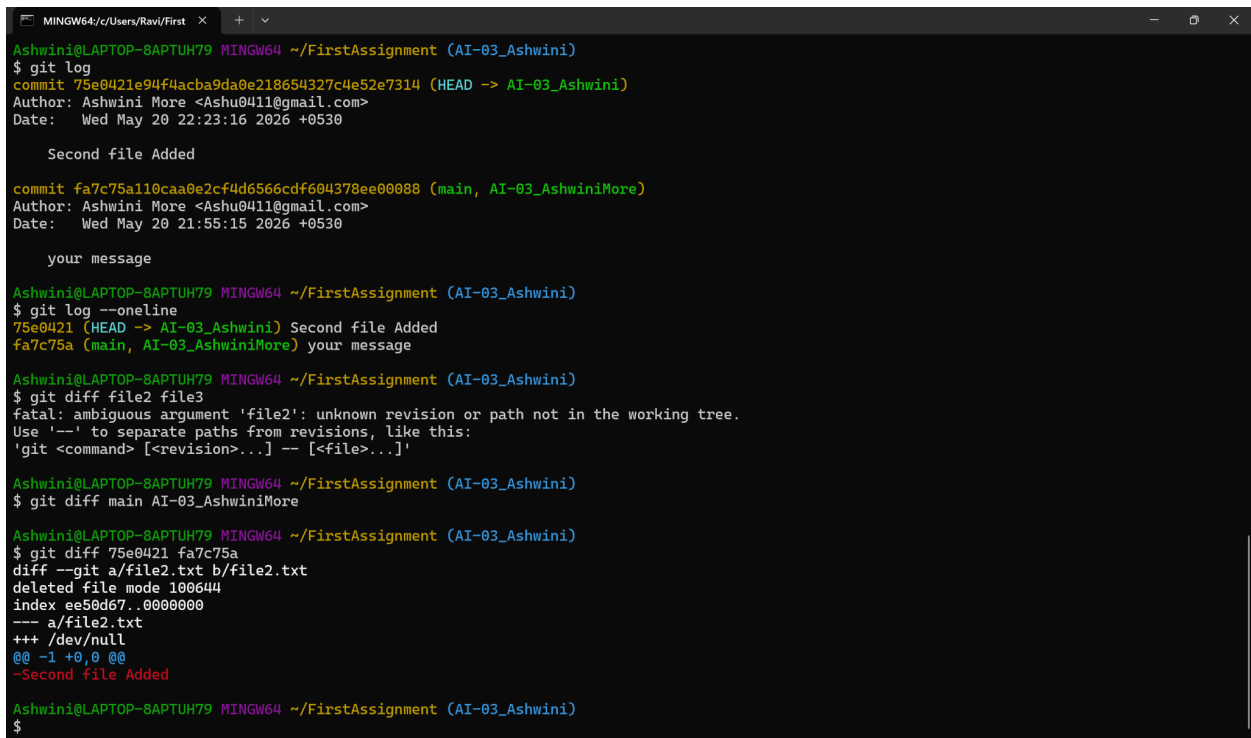

```
MINGW64/c/Users/Ravi/First x + -
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git log
commit 75e0421e94f4acba9da0e218654327c4e52e7314 (HEAD -> AI-03_Ashwini)
Author: Ashwini More <Ashu0411@gmail.com>
Date: Wed May 20 22:23:16 2026 +0530

    Second file Added

commit fa7c75a110caa0e2cf4d6566cdf604378ee00088 (main, AI-03_AshwiniMore)
Author: Ashwini More <Ashu0411@gmail.com>
Date: Wed May 20 21:55:15 2026 +0530

    your message

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git log --oneline
75e0421 (HEAD -> AI-03_Ashwini) Second file Added
fa7c75a (main, AI-03_AshwiniMore) your message

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git diff file2 file3
fatal: ambiguous argument 'file2': unknown revision or path not in the working tree.
Use '-' to separate paths from revisions, like this:
'git <command> [<revision>...] -- [<file>...]'

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git diff main AI-03_AshwiniMore

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git diff 75e0421 fa7c75a
diff --git a/file2.txt b/file2.txt
deleted file mode 100644
index ee50d67..0000000
--- a/file2.txt
+++ /dev/null
@@ -1 +0,0 @@
-Second file Added

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$
```

8.What is the command to revert changes to specific file?

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)


```
$ git restore file.txt
```

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)

```
$ git checkout -- file.txt
```

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)

```
$ git restore --staged file.txt
```

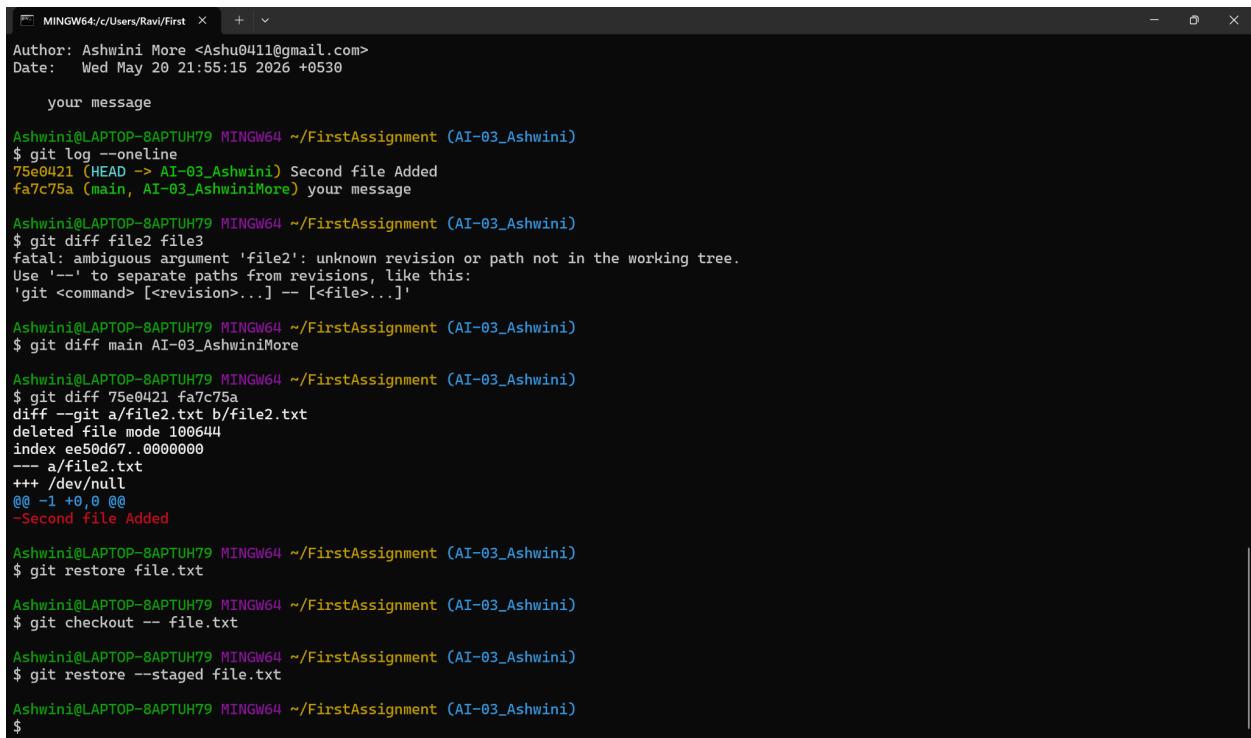

```
Author: Ashwini More <Ashu0411@gmail.com>
Date:   Wed May 20 21:55:15 2026 +0530

your message

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git log --oneline
75e0421 (HEAD -> AI-03_Ashwini) Second file Added
fa7c75a (main, AI-03_AshwiniMore) your message

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git diff file2 file3
fatal: ambiguous argument 'file2': unknown revision or path not in the working tree.
Use '--' to separate paths from revisions, like this:
'git <command> [<revision>...] -- [<file>...]'

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git diff main AI-03_AshwiniMore

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git diff 75e0421 fa7c75a
diff --git a/file2.txt b/file2.txt
deleted file mode 100644
index ee50d67..0000000
--- a/file2.txt
+++ /dev/null
@@ -1,0,0 @@
-Second file Added

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git restore file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git checkout -- file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git restore --staged file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$
```



9.What is the command to undo the last commit?

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)

\$ git restore --staged file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)

\$ git reset HEAD

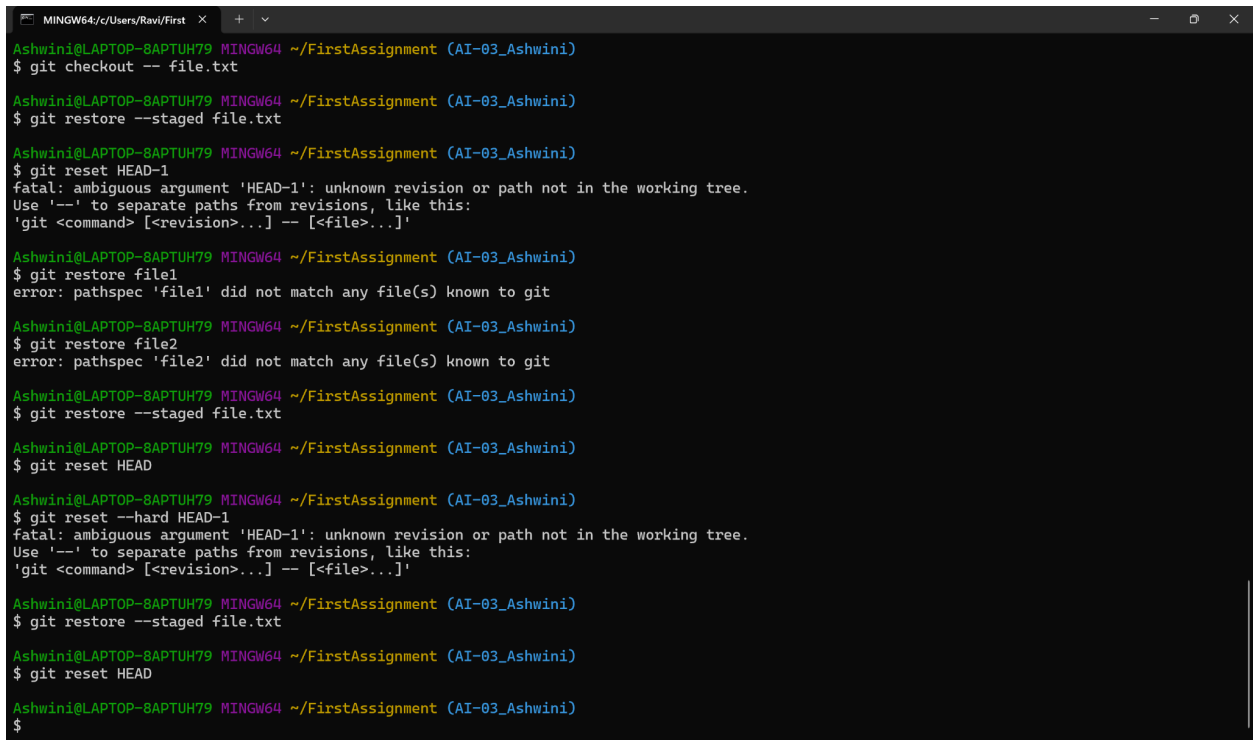

```
MINGW64/c/Users/Ravi/First x + v
Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git checkout -- file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git restore --staged file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git reset HEAD-1
fatal: ambiguous argument 'HEAD-1': unknown revision or path not in the working tree.
Use '--' to separate paths from revisions, like this:
'git <command> [<revision>...] -- [<file>...]'

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git restore file1
error: pathspec 'file1' did not match any file(s) known to git

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git restore file2
error: pathspec 'file2' did not match any file(s) known to git

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git restore --staged file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git reset HEAD

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git reset --hard HEAD-1
fatal: ambiguous argument 'HEAD-1': unknown revision or path not in the working tree.
Use '--' to separate paths from revisions, like this:
'git <command> [<revision>...] -- [<file>...]'

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git restore --staged file.txt

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$ git reset HEAD

Ashwini@LAPTOP-8APTUH79 MINGW64 ~/FirstAssignment (AI-03_Ashwini)
$
```

10. What is the command to push changes to a remote repository?

```
Windows PowerShell
and the repository exists.
PS C:\Users\Ravi\Desktop\GitDay\ass1> git pull remote-repo AI-03_Ashwini-More
fatal: 'remote-repo' does not appear to be a git repository
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.
PS C:\Users\Ravi\Desktop\GitDay\ass1> git init
Reinitialized existing Git repository in C:/Users/Ravi/Desktop/GitDay/ass1/.git/
PS C:\Users\Ravi\Desktop\GitDay\ass1> git remote add AI-03_Ashwini-More https://github.com/adreshschauhan/remote-repo
error: remote AI-03_Ashwini-More already exists.
PS C:\Users\Ravi\Desktop\GitDay\ass1> git add .
PS C:\Users\Ravi\Desktop\GitDay\ass1> git commit -m "Initial commit in ass1"
On branch AI-03_Ashwini-More
nothing to commit, working tree clean
PS C:\Users\Ravi\Desktop\GitDay\ass1> git pull AI-03_Ashwini-More main --allow-unrelated-histories
remote: Enumerating objects: 36, done.
remote: Counting objects: 100% (36/36), done.
remote: Compressing objects: 100% (23/23), done.
remote: Total 36 (delta 5), reused 24 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (36/36), 71.85 KiB | 265.00 KiB/s, done.
From https://github.com/adreshschauhan/remote-repo
 * branch          main       -> FETCH_HEAD
 * [new branch]    main       -> AI-03_Ashwini-More/main
Merge made by the 'ort' strategy.
 FBD_02_Aryan-Gedam Git assignment 1.pdf | Bin 0 -> 79134 bytes
assessment/file.txt                      | 1 +
file1.txt                               | 1 +
file2.txt                               | 1 +
file3.txt                               | 1 +
```