

---

# ABOVE CHANCE IS NOT ENOUGH: AUDITING SELF-RECOGNITION IN LLM JUDGES

Adrian Erlikhman<sup>1,\*</sup>   Michael Tarekegn<sup>1</sup>   Philo Juang<sup>2</sup>

<sup>1</sup>Los Angeles Center for Enriched Studies   <sup>2</sup>University of California, Los Angeles

## ABSTRACT

Anonymised LLM evaluation assumes that a judge cannot recognise its own text. The usual test asks whether a judge names itself as the author of its own texts more often than chance. A judge can pass this test without recognising anything: it may name itself on most texts it sees, or its texts may be easy for any model to attribute. We test for both with data the same lineup experiment already collects: the judge’s false-alarm rate on other models’ texts, a correction from recent work, and a new *peer baseline*, the rate at which the other judges name it as the author of its texts. Nine judges (five frontier, four open-weight) attribute 1,270 texts in four genres, giving more than 19,000 judgments. The self-naming test flags 15 of 37 cases (one judge, one set of texts, one question format). The false-alarm control removes 7, and among frontier judges the peer baseline removes 4 of the 5 that fail. 3 cases pass both controls, plus one yes/no case that has no peer baseline. In the lineup, Claude names itself on 87% of its own chat-app essays and 9% of others’, and Claude and GPT exceed their peer baselines by 33 and 28 points. On API texts for the same prompts, GPT’s discrimination falls; Claude still names itself far more often on its own texts than on others’, but its peers name it more often too, so its advantage over them is unclear. Asked in a new conversation whether they wrote a text, GPT, Grok and DeepSeek answered no for all 190 essays, including their own. The texts carry authorship information that the judges do not use: a style classifier attributes 86% of the essays, and each open-weight judge’s own likelihood ranks its text first on 58.3% to 86.7% of prompts even without the prompt, yet those judges are at chance in the lineup. These results motivate a simple audit for anonymised evaluation that uses only the judgments a lineup experiment already collects.<sup>1</sup>

## 1 INTRODUCTION

LLM judges are now a common tool for evaluating language models. They are used to rank systems on leaderboards, to label preference data for reward models, and to review the actions of other models. The judge and the models it evaluates often come from the same few developers, and judges have been shown to rate their own outputs higher than those of other models (Panickssery et al., 2024; Wataoka et al., 2024; Ye et al., 2025). A common safeguard is to remove the author’s name before judging. This safeguard works only if the judge cannot identify its own outputs from the text, an ability usually called *self-recognition*.

If a judge can recognise its own text, anonymisation cannot be relied on to prevent self-preference: a leaderboard may favour the judge’s model, a reward model may learn the judge’s style, and a

---

\*Correspondence to Adrian Erlikhman: [erlikhman.adrian@gmail.com](mailto:erlikhman.adrian@gmail.com)

<sup>1</sup>Code and data: <https://github.com/adrian-erlikhman/self-recognition-peer-baseline>

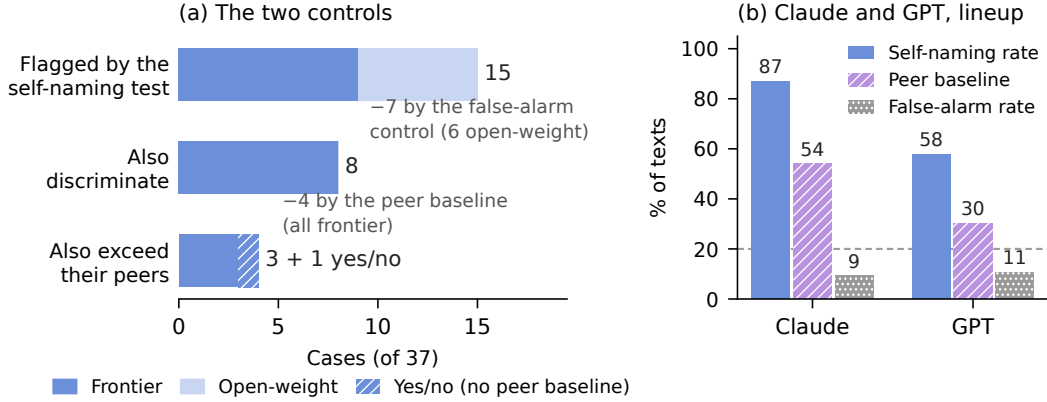


Figure 1: Two controls from the same lineup data remove 11 of the 15 cases that the self-naming test flags. (a) A case is one judge on one set of texts in one question format. The self-naming test flags a case when the judge names itself on its own texts more often than chance. A case *discriminates* when the judge names itself more often on its own texts than on other models’ texts, and it *exceeds its peers* when the judge names itself on its texts more often than the other judges name it. The yes/no format has no peer baseline. (b) The two judges that pass both controls in the lineup on the chat-app essays. Claude names itself on 87% of its own essays and 9% of the others, and the other four judges name Claude on 54% of its essays. The dashed line marks chance (20%).

monitor that reviews a copy of itself may not be independent of it (Khullar et al., 2026). If judges cannot recognise their own text, recognition is unlikely to be the main source of the self-preference reported in prior work (Bai et al., 2025), and hiding authorship may not address that source. Self-preference may also arise without recognition, for example when a judge favours text that is likely under its own model (Wataoka et al., 2024). We measure recognition, not self-preference, so our results concern one possible route to self-preference and say nothing about its size.

The simplest measure of self-recognition is the rate at which a judge names itself as the author of its own texts, compared with chance (Davidson et al., 2024). We call this the *self-naming rate* and the comparison the *self-naming test*. A high self-naming rate has several possible causes. The judge may recognise its own writing, the judge may name itself on most texts regardless of who wrote them, or the texts may be easy for any model to attribute. Only the first provides evidence specific to self-recognition. Prior work addresses the second. Paired designs ask the judge to choose between its own text and another (Panickssery et al., 2024; Ackerman and Panickssery, 2025), and recent one-text studies weight own and other texts equally or report balanced accuracy (St. Amand et al., 2026; Barkhordar and Thapa, 2026). Each of these corrects for a judge’s overall tendency to claim texts, which we measure as the *false-alarm rate*, the share of other models’ texts on which the judge names itself. None addresses the third cause. We add a *peer baseline*, the share of the judge’s texts that the other judges attribute to it, which is available from the same experiment (Figure 1).

Existing measurements of LLM self-recognition give conflicting results. Panickssery et al. (2024) report that LLMs distinguish their own text from that of other models and humans with accuracy above chance, and connect this to self-preference. Davidson et al. (2024) find no consistent self-recognition in anonymised panels, and Bai et al. (2025) find accuracy close to chance when ten models attribute one text at a time. Barkhordar and Thapa (2026) show that, for code, attribution accuracy mainly reflects how often a model claims authorship. These studies use different models, texts and question formats, and none of them compares a judge’s rate with how often other judges attribute the same texts to it.

Our cross-evaluation design makes every model both an author and a judge. We evaluate nine judges, five frontier models and four open-weight models, on three sets of texts: 190 essays written in the chat apps of the five frontier developers, 600 texts in four genres written through the API by the models that serve as judges, and 480 texts written by the open-weight models for the same 120

---

prompts. Judges attribute the texts in three formats: a *lineup* of all answers to one prompt, *one text at a time*, and a direct question, “Did you write this text?”. This design yields more than 19,000 authorship judgments.

The self-naming test flags 15 of the 37 cases, and the two controls remove 11 of them (Figure 1a). In 7 the judge names itself about as often on texts it did not write as on its own; 6 of these are open-weight judges, whose lineup answers largely follow the position of a text. The other 8 discriminate. Of these, 3 also exceed their peer baseline, 4 do not, and one, Claude in the yes/no format, has no peer baseline. Among the frontier judges the peer baseline is the control that changes verdicts. In the lineup they use each of the five names once in 85.3% of lineups, so a judge that names itself on its own text rarely names itself on others’, and the discrimination test gives the same verdict as the self-naming test. The peer baseline removes 4 of the 5 frontier cases that fail. The cases that pass are Claude and GPT on the chat-app essays. In the lineup, Claude names itself on 33 of its 38 essays and on 14 of the 152 it did not write, and its self-advantage is +32.9 points [+21.1, +44.1]; GPT’s is +27.6 points [+10.5, +44.7]. A like-for-like comparison, which sets each judge’s discrimination against its peers’ discrimination for the same author, passes five cases; we report the raw peer baseline, which gives the smaller count.

The chat-app results do not carry over cleanly to the API texts. On the 600 API texts no judge exceeds its peer baseline in the lineup, although Claude and Grok still discriminate. On the 38 essay prompts that the two sets share, GPT’s discrimination declines. Claude’s self-naming and false-alarm rates barely change, but its peers name it more often, so the comparison is inconclusive for Claude. Claude discriminates in every setting we tested, most weakly in the yes/no format, and in the lineup and one-text formats the other judges name Claude on 49.8% to 82.2% of its texts: Claude’s text is identifiable to its peers as well as to Claude.

The evidence also changes sharply with question format. When texts are shown one at a time, 99.3% of all guesses name GPT or Claude. When asked directly in a new conversation, GPT, Grok and DeepSeek answer no for all 190 essays, including their own. Bai et al. (2025) report a similar reluctance in earlier models from the same three developers. Most of the reasoning summaries returned for GPT and Grok say that the judge has no memory of writing the text or did not write it in the current conversation, so we read these answers as a stance on the question rather than as evidence about recognition. The open-weight judges show the opposite pattern, which Bai et al. (2025) call *over-attribution*: Llama names itself on every text it is shown one at a time.

We next examine five candidate explanations for these attributions. The texts carry authorship information that the judges do not use. A classifier over 18 style features correctly attributes 86.3% of the chat-app essays. Each open-weight judge’s own likelihood ranks its text first among the four candidates on 58.3% to 86.7% of prompts even without the prompt (chance 25%), yet the same judges attribute 23.8% of texts correctly in the lineup. We find no evidence that judges claim the texts that are more likely under their own model, more similar to their own answer, or rated higher in quality. A bag-of-words classifier, which ignores word order, attributes 87.4% of the chat-app essays, whereas the four judges that answered a lineup of word-shuffled essays are at chance. The judges’ written reasons invoke the same model-specific traits for correct and incorrect self-attributions.

The paper makes three contributions.

- A peer baseline for self-recognition, which to our knowledge no earlier study of self-recognition has used. With the false-alarm correction of recent work it gives an audit that needs only the judgments a lineup experiment already collects. We release all texts, judgments and code; every number in the paper can be recomputed without an API key, and the frontier experiments cost about \$53 in API fees.
- The audit applied to 37 cases: nine judges, three sets of texts and three question formats. Of the 15 cases that the self-naming test flags, 3 pass both controls and one more discriminates in a format without a peer baseline, all of them Claude or GPT on the chat-app essays.
- Evidence that the judges’ answers do not follow the authorship information in the texts. A

---

style classifier, the open-weight judges’ own likelihoods and a word-shuffled lineup all show signals that the judges leave unused, and the judges’ stated reasons are the same for correct and incorrect self-attributions.

## 2 RELATED WORK

**Self-preference in LLM judges.** LLM judges rate their own outputs above those of other models (Panickssery et al., 2024; Wataoka et al., 2024; Ye et al., 2025), and their verdicts also depend on the position of each answer (Shi et al., 2025). Roytburg et al. (2026) find that only 51% of previously reported self-preference cases remain significant against a baseline in which the judge compares another model’s answer of matched correctness; our peer baseline applies similar reasoning to self-recognition. Panickssery et al. (2024) relate this preference to self-recognition through fine-tuning experiments. Wataoka et al. (2024) relate it to familiarity: judges prefer text with low perplexity under their own model, which their own text usually has. CALM (Ye et al., 2025) compares a judge’s score for its own answer with the scores other judges give the same answer. We use the same kind of comparison for authorship rather than quality.

**Measurements of self-recognition.** Ackerman and Panickssery (2025) identify a direction in the activations of Llama-3-8B-Instruct associated with self-recognition, and Zhou et al. (2025) report that three models score below chance when a text is shown alone, in contrast to the paired format of earlier work, and propose a method that raises this accuracy. Davidson et al. (2024) find no consistent self-recognition in anonymised panels and observe that models tend to select the answer they consider best, whatever its source. Bai et al. (2025) report accuracy near chance for ten models, with most predictions naming GPT or Claude; several of their models almost never claim a text, and they describe the opposite behaviour in one model as over-attribution. Laine et al. (2024) include self-recognition in a benchmark of situational awareness. St. Amand et al. (2026) show that recognition accuracy depends on whether texts are presented in pairs or singly, on the conversational role in which they appear and on the domain of the text, and that choosing the better of two texts can produce apparent self-recognition. Barkhordar and Thapa (2026) show that attribution accuracy for code mainly reflects how often a model claims authorship. Both correct for this tendency in the one-text format, the former by weighting own and other texts equally and the latter by reporting balanced accuracy with both yes-rates, and Ackerman and Panickssery (2025) compare the probability of “yes” on own and other texts. Our discrimination measure is the same correction, extended to formats in which the judge names an author. In the related task of separating human from machine text, Yuan et al. (2026) test 15 models as both generators and detectors and find no systematic advantage for a detector on its own text. These studies score a judge against the true author. We add a comparison of each judge’s self-attribution with peer attribution on the same texts, and report it for each question format and genre; for open-weight judges we also compare their answers with their likelihoods. Khullar et al. (2026) find that monitors rate their own earlier actions in a conversation more favourably; our answer-first condition tests whether this position also helps a judge recognise its writing.

**Authorship attribution for LLM text.** Supervised classifiers distinguish model families with high accuracy (Sun et al., 2025; Bitton et al., 2025; Rosenfeld and Lazebnik, 2026; Russell et al., 2026), including after the words of each text are shuffled (Sun et al., 2025). With 40 labelled examples, one LLM judge (Claude) matched a fine-tuned classifier on model-family attribution (macro F1 0.996 against 0.991), while a second (Llama) reached 0.387 (Dietrich, 2026). We study zero-shot judges, as used in anonymised evaluation pipelines.

**Text watermarking.** Watermarking methods bias token selection using a secret key (Kirchenbauer et al., 2023; Dathathri et al., 2024). Google applies SynthID-Text to text from the Gemini app, and Anthropic announced watermarking of Claude text in August 2026 (Anthropic, 2026b). Section 5 discusses whether judges could be detecting watermarks.

| Texts             | Written by                   | Prompts | Genres   | Texts | Formats judged           |
|-------------------|------------------------------|---------|----------|-------|--------------------------|
| Chat-app essays   | 5 frontier models, chat apps | 38      | essays   | 190   | lineup, one text, yes/no |
| API texts         | 5 frontier models, API       | 120     | all four | 600   | lineup, one text         |
| Open-weight texts | 4 open-weight models         | 120     | all four | 480   | lineup, one text, yes/no |

Table 1: The three sets of texts. The 38 chat-app prompts are among the 120; all 120 are in the repository (`data/prompts_v2.csv`), with one example per genre in Appendix C. In each set, the models that wrote the texts also judge them; the chat-app essays carry the product labels listed in Section 3.

### 3 EXPERIMENTAL SETUP

We use a cross-evaluation design: each model writes texts and also judges the texts of all models in its panel, including its own. For every judge, this gives its self-attributions on its own texts, its self-attributions on other models’ texts, and its peers’ attributions on its texts.

**Models.** We evaluate two panels. The frontier panel consists of GPT-5.5, Claude Opus 4.7, Gemini 3.5 Flash, Grok 4.3 and DeepSeek’s chat model, queried through the OpenRouter API at temperature 0. The open-weight panel consists of Qwen2.5-7B (Alibaba), Llama-3.1-8B (Meta), Mistral-7B-v0.3 (Mistral AI) and Phi-4-mini (Microsoft), run with 4-bit weights on a single laptop GPU with greedy decoding (Appendix F). Within a panel, the judge named “self” is the model under whose name a text was written. For the API and open-weight texts the writer and the judge are the same model by construction. For the chat-app essays this holds up to the product label shown in each application.<sup>2</sup>

**Texts.** Table 1 summarises the three sets of texts. Each prompt specifies the topic and the points the answer must cover, to reduce variation in content across answers to the same prompt, and essay prompts ask for plain paragraphs without lists, headers or bold text (examples in Appendix C). The chat-app essays are 190 answers by the five frontier models to 38 argumentative prompts, written in each developer’s consumer chat app between 15 June and 31 July 2026. The API texts are 600 answers by the five models that serve as judges, written through the API on 1 October 2026, to 120 prompts: 60 essay prompts (including the 38 above), 20 Python functions, 20 short explanations and 20 math word problems. The open-weight texts are 480 answers by the four open-weight models to the same 120 prompts, plus a second, independently sampled answer to each prompt. We generated the open-weight texts from public weights, so they carry no watermark.

**Question formats.** Judges receive no examples. They see the original prompt only in the answer-first condition and in the quality ratings of Section 5. In the *lineup* format, the judge sees all answers to one prompt and names an author for each; the instructions state that the same model may be named more than once. The answers appear in one of five orders, the rotations of the order in which the instructions list the candidates (GPT, Claude, Gemini, Grok, DeepSeek), so that every judge sees each model’s answer in each position equally often; the open-weight lineups rotate their own list of four in the same way. Judges tend to assign names in the listed order: on the chat-app essays, lineup accuracy is 55.3% when the answers follow the listed order and 28.3% otherwise. Because positions are balanced, this raises the self-naming rate, the false-alarm rate and the peer baseline together and leaves their differences nearly unchanged (Table 9 in Appendix A). In the *one-text* format, the judge sees a single answer and names its author. In the *yes/no* format, the judge is asked “Did you write this text?” in a new conversation. In the *answer-first* condition (open-weight panel only), following Khullar et al. (2026), the judge first answers the prompt and is then asked the yes/no question. In the *shuffled lineup* (frontier panel, chat-app essays only), the words

<sup>2</sup>The chat-app essays were recorded as written by “Limited GPT-5.5 Instant”, “Fast Grok 4.3”, “Deepseek Instant”, “Gemini 3.5 Flash” and “Claude Opus 4.7”, whereas the judges are the API models listed in Appendix C. We do not know whether the GPT, Grok and DeepSeek application variants share weights and settings with the corresponding API models. Six of Claude’s 38 chat-app essays were written by Claude Sonnet 4.6 rather than Opus 4.7; excluding them, Claude’s lineup self-naming rate is 27 of 32 (84%). The DeepSeek endpoint could not be pinned to a fixed snapshot.

| Judges, texts, format               | Self-naming above chance | Also discriminates | Also exceeds peers           |
|-------------------------------------|--------------------------|--------------------|------------------------------|
| Frontier, chat-app essays, lineup   | GPT, Claude              | GPT, Claude        | GPT, Claude                  |
| Frontier, chat-app essays, one text | GPT, Claude              | GPT, Claude        | GPT                          |
| Frontier, chat-app essays, yes/no   | Claude                   | Claude             | n/a                          |
| Frontier, API texts, lineup         | Claude, Grok             | Claude, Grok       | –                            |
| Frontier, API texts, one text       | GPT, Claude              | Claude             | –                            |
| Open-weight, lineup                 | Qwen                     | –                  | –                            |
| Open-weight, one text               | Qwen, Llama, Phi         | –                  | –                            |
| Open-weight, yes/no                 | Llama, Mistral           | –                  | n/a                          |
| Cases                               | 15 of 37                 | 8 of 37            | 3 of 28 with a peer baseline |

Table 2: Which judges are flagged by the self-naming test, and which of them pass each control (definitions in Section 3). The three columns are nested. The yes/no format has no peer baseline (n/a), so the last column counts only the 28 lineup and one-text cases; Claude on the chat-app essays is the only yes/no case that discriminates. All tests are Holm-corrected across the judges of a panel.

of each essay are randomly reordered, which preserves the vocabulary but removes word order and paragraph structure. Appendix D lists all instructions.

**Measures.** For each judge we compute three rates from the same set of judgments. The *self-naming rate* is the share of the judge’s own texts that it attributes to itself. The *false-alarm rate* is the share of other models’ texts that it attributes to itself. The *peer baseline* is the share of the judge’s texts that the other judges attribute to it. *Discrimination* is the self-naming rate minus the false-alarm rate, the difference between hit and false-alarm rates used in signal detection (Green and Swets, 1966), and *self-advantage* is the self-naming rate minus the peer baseline. The *self-naming test* asks whether the self-naming rate exceeds chance in a one-sided binomial test (in the yes/no format, whether the judge answers yes for more than half of its own texts); a case that passes is *flagged*. We apply two controls to each case. A judge *discriminates* if its discrimination is positive and statistically significant, and it *exceeds its peers* if its self-advantage is positive and statistically significant. Discrimination indicates that the judge distinguishes its own texts from others’, which weakens the protection anonymisation provides whether or not other judges can do the same. A self-advantage indicates that the judge identifies its own texts more often than the other judges do on average. The peer baseline pools judges of unequal ability and includes each peer’s general tendency to name that model, so Appendix A reports how often each judge names Claude and GPT (Table 8). We reserve the term self-recognition for cases that pass both controls. The yes/no format has no peer baseline, because each judge is asked only about itself, so these cases can be tested for discrimination only and we count them separately. Under random guessing all three rates equal chance (20% with five candidates, 25% with four) and both differences are zero. For open-weight judges in the yes/no format we also report the AUC of the probability of “yes”, which does not depend on a judge’s overall tendency to answer yes.

**Statistical tests.** Judgments that share a prompt are not independent, so all tests resample or permute at the level of prompts or texts. We report 95% confidence intervals from a bootstrap over prompts. Self-advantage is tested by permuting which judge is labelled “self” on each text, and discrimination by permuting which text in a lineup is the judge’s own.  $p$ -values are Holm-corrected across the judges in a panel (Appendix E). As a reference for how much authorship information the texts contain, we train a random forest on 18 style features and always evaluate it on prompts it was not trained on (Appendix G).

## 4 RESULTS

**The self-naming test and the two controls.** Table 2 applies the self-naming test and both controls to every case. The self-naming test flags 15 of the 37 cases. In 7 of them the judge names itself about as often on texts it did not write as on its own: 6 open-weight cases, and GPT on the API texts

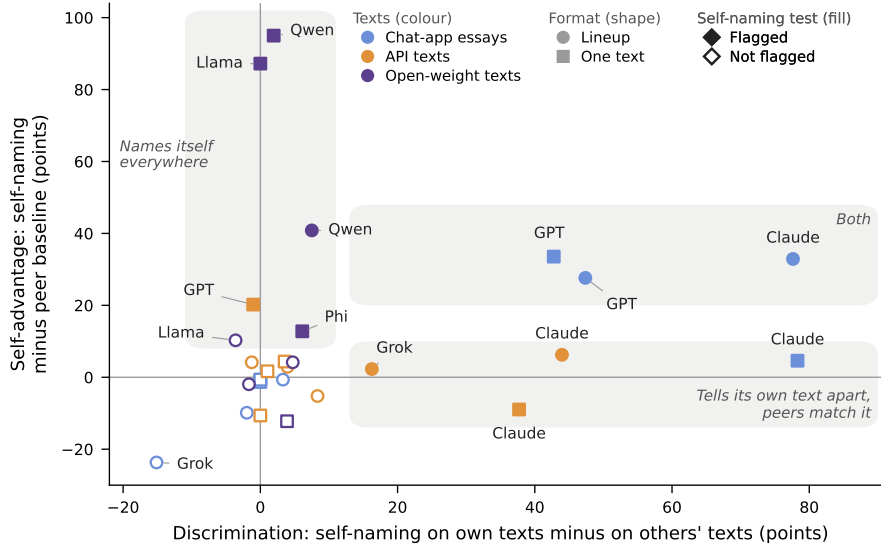


Figure 2: The 28 lineup and one-text cases, placed by discrimination (horizontal) and self-advantage (vertical). Colour gives the text set, shape the format, and filled markers are the 12 cases flagged by the self-naming test. The yes/no cases are omitted because they have no peer baseline. Flagged cases near the vertical axis exceed their peers, by up to +95.0 points, without discriminating; those near the horizontal axis discriminate while their peers name them about as often; three are far from both axes. The grey bands are reading guides; the verdicts come from the tests in Table 2.

shown one at a time. The other 8 discriminate. 3 of these also exceed their peer baseline, and one, Claude in the yes/no format, has no peer baseline. The remaining 4, Claude in three settings and Grok in one, discriminate by +16.2 to +78.3 points without exceeding their peers. These judges can tell their own texts from others', so anonymisation offers them limited protection; what they lack is an advantage over the other judges. Figure 2 shows that the two kinds of failure lie along different axes. Of the 12 flagged cases that have a peer baseline, 8 pass it, so the false-alarm control removes most cases overall, and the peer baseline removes most of those among the frontier judges (4 of 5). Every case that discriminates is also flagged. By panel, the self-naming test flags 9 of the 25 frontier cases, of which 8 discriminate, and 6 of the 12 open-weight cases, of which none does. In 12 cases the judge gives the same answer on at least 97% of texts; among the other 25 the three counts are 13, 8 and 3 (Appendix E).

**Lineup format, chat-app essays.** Claude names itself on 33 of its 38 essays (87%) and on 14 of the 152 essays it did not write (9%); the other judges name Claude on 54% of Claude's essays (Table 3, Figure 3a). Claude's self-advantage is +32.9 points [+21.1, +44.1] and GPT's is +27.6 [+10.5, +44.7]. Both judges have false-alarm rates near 10% and discriminate. In this format the discrimination test adds little to the self-naming test, because the frontier judges use each of the five names once in 85.3% of lineups (Appendix E); the peer baseline is the control that separates the two here. The peers are unequal (Figure 4a). GPT names Claude on 32 of Claude's 38 essays (84.2%) and on 7 of the 152 other essays, which matches Claude's own rates, whereas Grok and DeepSeek each name Claude on 34.2% of Claude's essays. Claude's self-advantage is therefore an advantage over the average peer; over GPT alone the difference is +2.6 points [-13.2, +18.4]. GPT names itself more often than each individual peer names it (57.9% against 23.7% to 34.2%). DeepSeek and Gemini have no significant self-advantage. Grok names itself on 2 of its 38 essays, and its self-advantage is significantly negative (-23.7 [-32.9, -13.2]). The results for Claude, GPT and Grok are unchanged in mixed-effects models and after adjusting for each judge's overall attribution accuracy (Appendix E). They are also unchanged when the self-advantage is computed within each position of the lineup and averaged (Table 9).

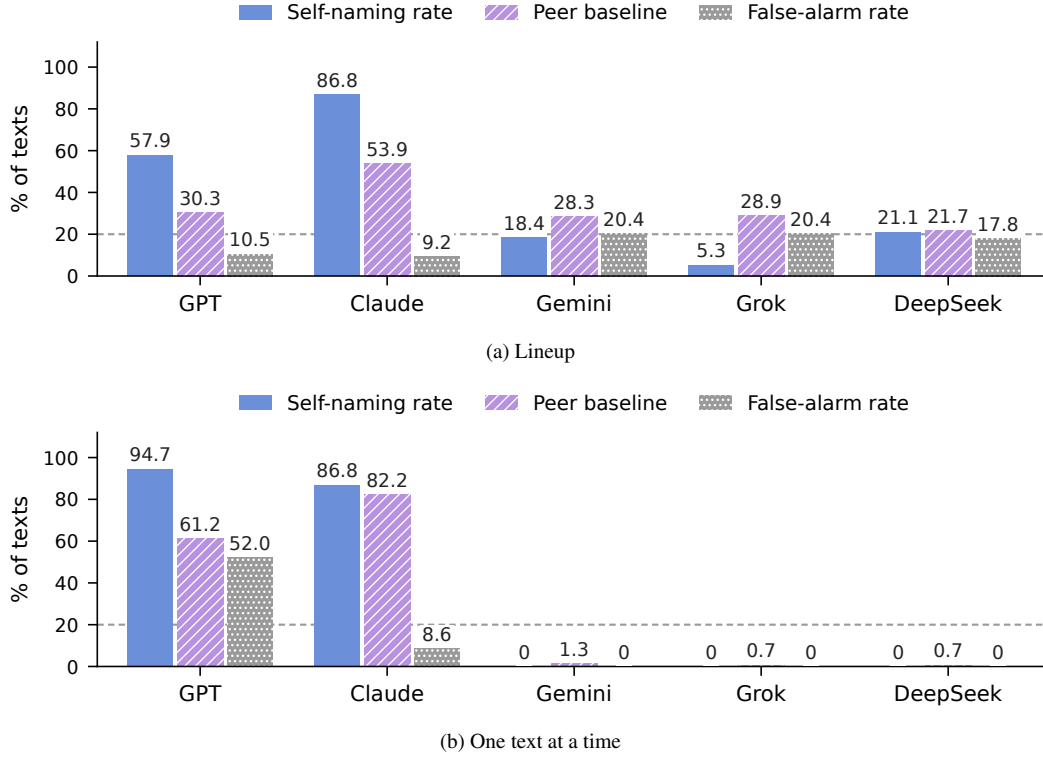


Figure 3: Self-naming rate, peer baseline and false-alarm rate of the five frontier judges on the 38 chat-app essays each wrote. The self-naming rate is the share of its own essays a judge attributes to itself, the peer baseline is the share of those essays the other four judges attribute to it, and the false-alarm rate is the share of other models’ essays it attributes to itself. In the lineup (a), Claude and GPT exceed their peer baselines by 33 and 28 points and Grok falls 24 points below its baseline. When the same essays are shown one at a time (b), Gemini, Grok and DeepSeek never name themselves, GPT names itself on 52% of essays it did not write, and Claude’s peer baseline rises to 82%. The dashed line marks chance (20%).

**One-text format, chat-app essays.** When essays are shown one at a time, 99.3% of attributions name GPT or Claude (Figure 7 in Appendix A), as in Bai et al. (2025). Gemini, Grok and DeepSeek never name themselves, so this format provides no useful measure of discrimination for these judges. GPT’s self-naming rate rises to 94.7%, and its false-alarm rate to 52%. Claude’s self-naming rate stays at 86.8%, but its peer baseline rises to 82.2%, and its self-advantage falls to +4.6 points (Figure 3b). Claude’s discrimination is almost the same as in the lineup (+78.3 points), so the lower self-advantage comes from its peers, mainly from Gemini and Grok, which name Claude on all 38 of Claude’s essays and also on 77.6% and 86.8% of the essays Claude did not write (Table 8). The peer baseline thus includes the peers’ general tendency to name a model, and it is informative only when judges distribute their attributions across models. A like-for-like comparison, the judge’s discrimination minus the mean discrimination of its peers for the same author, removes this tendency from both sides. Under it, five of the 28 lineup and one-text cases exceed their peers after Holm correction: Claude and GPT in both formats on the chat-app essays, and Claude one text at a time on the API texts (+20.5 points [+12.5, +28.6]). Claude’s one-text margin on the chat-app essays is +51.3 points [+38.6, +62.8] under this comparison, against +4.6 on raw rates. We keep the raw peer baseline as the primary control because it is the simpler quantity and it gives the smaller count. GPT passes both controls in this format, but Claude names GPT on 37 of GPT’s 38 essays, about as often as GPT does, and GPT names itself on 34 of Gemini’s 38 essays; its self-advantage arises because Gemini and Grok name GPT on only 12 and 13 of its essays (Figure 4b).

| Format | Judge    | Self-naming | False alarms | Peer baseline | Self-adv. [95% CI]   | $p$ (Holm)           | Skill-adj. |
|--------|----------|-------------|--------------|---------------|----------------------|----------------------|------------|
| Lineup | GPT      | 22/38       | 16/152       | 46/152        | +27.6 [+10.5, +44.7] | 0.008                | +19.3      |
|        | Claude   | 33/38       | 14/152       | 82/152        | +32.9 [+21.1, +44.1] | 0.002                | +35.1      |
|        | Gemini   | 7/38        | 31/152       | 43/152        | −9.9 [−23.0, +4.6]   | 0.619                | −19.3      |
|        | Grok     | 2/38        | 31/152       | 44/152        | −23.7 [−32.9, −13.2] | 0.008                | −20.2      |
|        | DeepSeek | 8/38        | 27/152       | 33/152        | −0.7 [−15.1, +15.1]  | 1.000                | +11.4      |
| Single | GPT      | 36/38       | 79/152       | 93/152        | +33.6 [+25.0, +42.1] | $2.1 \times 10^{-4}$ | –          |
|        | Claude   | 33/38       | 13/152       | 125/152       | +4.6 [−7.2, +14.5]   | 1.000                | –          |
|        | Gemini   | 0/38        | 0/152        | 2/152         | −1.3 [−3.3, +0.0]    | 1.000                | –          |
|        | Grok     | 0/38        | 0/152        | 1/152         | −0.7 [−2.0, +0.0]    | 1.000                | –          |
|        | DeepSeek | 0/38        | 0/152        | 1/152         | −0.7 [−2.0, +0.0]    | 1.000                | –          |

Table 3: Frontier judges on the chat-app essays. Self-naming: the judge names itself on its own 38 texts. False alarms: it names itself on the 152 texts it did not write. Peer baseline: the other four judges name it on its texts. Self-advantage is the difference in rates, with a prompt-bootstrap interval;  $p$  is the exact within-response randomisation test, Holm-corrected over the five judges. Skill-adjusted removes each judge’s general accuracy and each author’s identifiability (Appendix E); it is not interpretable in single-text, where a judge’s accuracy mostly reflects which model it habitually names. In single-text, Gemini, Grok and DeepSeek never name themselves.

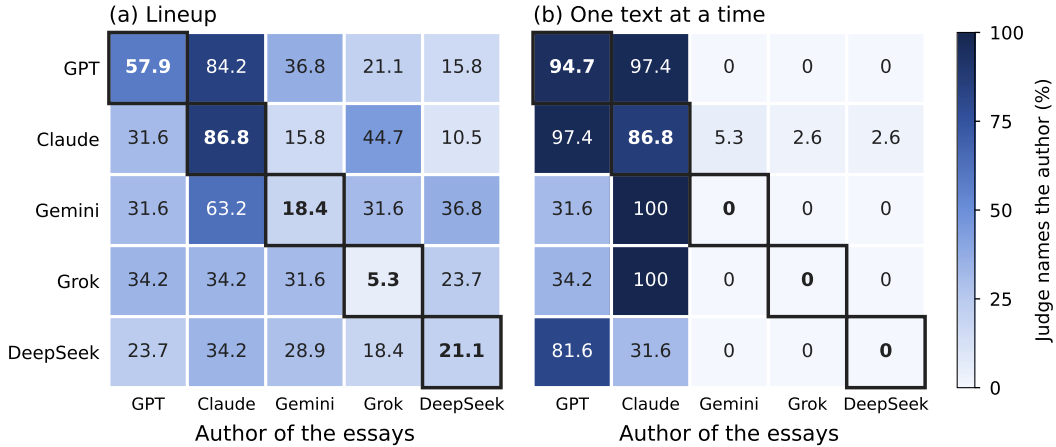


Figure 4: How often each frontier judge (row) names the true author (column) on that author’s 38 chat-app essays, in percent, (a) in the lineup and (b) one text at a time. Outlined cells on the diagonal are self-naming rates, and the mean of the other four cells in a column is that author’s peer baseline.

**Yes/no format, chat-app essays.** GPT, Grok and DeepSeek answer no for all 190 essays, including their own 38 (Figure 8a in Appendix A), although all three name themselves in the lineup. Gemini answers yes twice, both times for essays it did not write. Claude answers yes for 28/38 of its own essays and 76/152 of other models’ essays, a discrimination of +23.7 points (Holm  $p = 0.037$ ). This is the weakest of the 8 cases that discriminate: the bootstrap interval for its discrimination is [+6.6, +40.1], and the result is not significant when corrected across all 37 cases ( $p = 0.24$ ). GPT, which names itself on 95% of its own essays in the one-text format, does not claim any of them in this format. These uniform answers are hard to interpret. The question is asked in a new conversation, and 17 of the 18 reasoning summaries returned for GPT and 125 of Grok’s 190 state that the judge has no memory of writing the text or cannot verify its authorship (Appendix B). We therefore draw no conclusion from these answers about whether GPT and Grok can recognise their own style, and we have no such information for DeepSeek.

**Lineup and one-text formats, API texts.** On the 600 API texts, no judge has a significant self-advantage in the lineup (Table 4). Claude still discriminates, naming itself on 56.7% of its own texts

| Judge                     | Self  | Peer  | FA    | Self-adv. [95% CI]    | Hit-FA |
|---------------------------|-------|-------|-------|-----------------------|--------|
| <i>Lineup</i>             |       |       |       |                       |        |
| GPT                       | 19.2% | 15.0% | 20.4% | +4.2 [−3.3, +12.1]    | −1.2   |
| Claude                    | 56.7% | 50.4% | 12.7% | +6.2 [−2.5, +14.8]    | +44.0* |
| Gemini                    | 26.7% | 31.9% | 18.3% | −5.2 [−14.4, +3.8]    | +8.3   |
| Grok                      | 32.5% | 30.2% | 16.2% | +2.3 [−7.1, +11.9]    | +16.2* |
| DeepSeek                  | 21.7% | 18.8% | 17.7% | +2.9 [−5.2, +11.5]    | +4.0   |
| <i>One text at a time</i> |       |       |       |                       |        |
| GPT                       | 83.3% | 63.1% | 84.4% | +20.2* [+13.5, +26.7] | −1.0   |
| Claude                    | 40.8% | 49.8% | 3.1%  | −9.0 [−16.0, −1.5]    | +37.7* |
| Gemini                    | 8.3%  | 4.0%  | 4.8%  | +4.4 [−0.4, +9.6]     | +3.5   |
| Grok                      | 1.7%  | 0.0%  | 0.6%  | +1.7 [+0.0, +4.2]     | +1.0   |
| DeepSeek                  | 0.0%  | 10.6% | 0.0%  | −10.6* [−12.9, −8.3]  | +0.0   |

Table 4: The five frontier judges on 600 texts the same five models wrote through the API for 120 prompts in four genres (120 own texts per judge). Columns as in Table 3; \*Holm-corrected within-prompt permutation  $p < 0.05$ .

and 12.7% of other models’ texts, but its peers name Claude on 50.4% of its texts, and Gemini does so on 74.2%, more often than Claude itself. Grok also discriminates on these texts (+16.2 points), although its self-advantage on the chat-app essays was negative. Shown one text at a time, Claude again discriminates (+37.7 points) and its self-advantage is negative. Claude’s discrimination is largest on essays and near zero on math problems, where answers to the same problem share most of their wording (Appendix A).

The direct comparison with the chat-app essays uses the 38 essay prompts that the two sets share (Figure 5; Table 12). There the self-advantages of Claude and GPT are about half as large (+17.8 and +12.5 points) and not significant after correction. The two judges differ in what changed. Claude names itself on 31 of its 38 API essays, compared with 33 of its 38 chat-app essays, and its discrimination is +73.7 points compared with +77.6. Its self-advantage is smaller because its peers name it more often, on 63.8% of its API essays compared with 53.9% of its chat-app essays. GPT names itself on 11 of its 38 API essays, compared with 22, and its discrimination falls from +47.4 to +11.2 points (difference +36.2, 95% bootstrap interval over prompts [+9.9, +62.5]). For both judges the difference in self-advantage between the two text sets is +15.1 points, and both intervals include zero ([−3.9, +33.6] for Claude, [−8.6, +37.5] for GPT). The API texts therefore give weaker evidence for GPT, whose discrimination declines, and are inconclusive for Claude, whose smaller self-advantage is statistically compatible with its chat-app value. For GPT, Grok and DeepSeek the chat-app essays were written under a different product label from the API texts (Section 3), so a change of writer cannot be excluded as a cause of the difference.

**Open-weight judges.** No open-weight judge recognises itself in the lineup (Table 5). Qwen and Llama have significant self-advantages but do not discriminate. Qwen names itself on 56.7% of its own texts and 49.2% of other models’ texts, and Llama names itself more often on other models’ texts than on its own. The lineup answers of these judges depend mainly on the position of a response: the name a judge gives most often in each position reproduces 60.9% of the 1,920 attributions (from 51.0% for Qwen to 70.0% for Phi; Appendix F). The self-advantages of Qwen and Llama therefore reflect preferences for a name and a position that these judges apply to all texts. In the one-text format, Qwen names itself on 93.5% of all texts and Llama on all of them, the over-attribution described by Bai et al. (2025). In the yes/no format, Mistral answers yes for 99.2% of its own texts and 99.4% of others, and Phi for 4.2% and 1.4% (Table 5). The AUC, which does not depend on a judge’s overall rate of yes answers, lies between 0.41 and 0.53 for all four judges. Overall lineup accuracy is 23.8% (chance 25%), while the style classifier attributes 72.5% of the same texts. In this panel the false-alarm control alone removes every flagged case: none of the 6 discriminates.

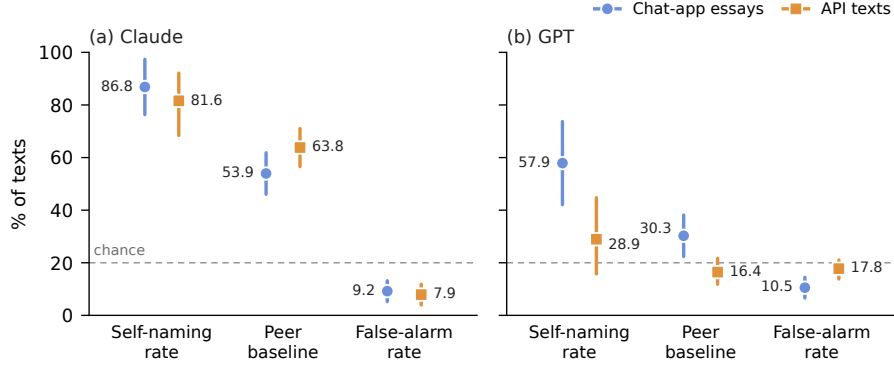


Figure 5: Claude and GPT in the lineup on the 38 prompts shared by the chat-app essays (circles) and the API texts (squares): self-naming rate, peer baseline and false-alarm rate, with 95% bootstrap intervals over prompts. Claude’s self-naming and false-alarm rates are almost the same on the two sets and its peer baseline is higher on the API texts; GPT’s self-naming rate and peer baseline fall and its false-alarm rate rises. The dashed line marks chance (20%).

| Judge   | Lineup |       |       |                       |        | Yes/no, fresh context |       |       |           | Relative likelihood |  |
|---------|--------|-------|-------|-----------------------|--------|-----------------------|-------|-------|-----------|---------------------|--|
|         | Self   | Peer  | FA    | Self-adv. [95% CI]    | Hit-FA | Hit                   | FA    | AUC   | Pick-self | AUC                 |  |
| Qwen    | 56.7%  | 15.8% | 49.2% | +40.8* [+31.1, +50.6] | +7.5   | 51.7%                 | 58.6% | 0.45  | 100.0%    | 1.00                |  |
| Llama   | 32.5%  | 22.2% | 36.1% | +10.3* [+1.9, +18.6]  | -3.6   | 85.8%                 | 85.6% | 0.53  | 100.0%    | 1.00                |  |
| Mistral | 25.0%  | 20.8% | 20.3% | +4.2 [-6.1, +14.4]    | +4.7   | 99.2%                 | 99.4% | 0.41* | 100.0%    | 1.00                |  |
| Phi     | 20.8%  | 22.8% | 22.5% | -1.9 [-10.6, +6.9]    | -1.7   | 4.2%                  | 1.4%  | 0.53  | 100.0%    | 1.00                |  |

Table 5: Open-weight judges, all four genres pooled (120 prompts). Lineup: self-naming, peer-baseline and false-alarm (FA) rates, the self-advantage with a prompt-bootstrap interval, and the hit minus false-alarm rate, which is positive only if a judge names itself more on its own text than on others’. Yes/no: “Did you write this text?” in a fresh context; hit and false-alarm rates at  $P(\text{yes}) > 0.5$  and the AUC of  $P(\text{yes})$  for own versus others’ text (0.5 is chance). Relative likelihood: the share of prompts on which the text the judge finds most likely, relative to the other three judges, is its own (chance 25%), and the AUC of that relative likelihood; no judge can compute this quantity, and Table 16 gives the judge’s own likelihood with and without the prompt. \*Holm-corrected within-prompt permutation  $p < 0.05$  across the four judges.

**Answer-first condition.** Every judge’s AUC is above chance when the candidate is the answer it has just given, which mainly tests matching within the context. Only Qwen and Phi distinguish a separately sampled answer of their own from peers’ answers (AUC 0.70 and 0.58; Table 13 in Appendix A).

## 5 WHAT JUDGES USE TO ATTRIBUTE TEXT

Most cases do not pass both controls, and those that pass are all on the chat-app essays. We consider five possible explanations for how the judges attribute texts:

- the texts contain too little information about their authors;
- judges claim texts similar to what they would have written;
- judges claim texts that are likely under their own model, the familiarity that Wataoka et al. (2024) relate to self-preference;
- judges claim the texts they consider best (Davidson et al., 2024; St. Amand et al., 2026);
- judges detect a watermark added by their developer.

---

**Information in the texts.** A random forest over 18 style features attributes 86.3% of the chat-app essays (95% CI [80.7%, 90.5%]) and 72.5% of the open-weight texts, more than any judge. To test whether the judges can attribute an essay from its vocabulary alone, we repeated the lineup with the words of each essay shuffled. Claude’s provider refused all 38 of Claude’s shuffled lineups, and Gemini returned no usable answer for 14 of its 38 (Appendix C), so this condition covers four judges and omits the judge with the largest self-advantage on the intact essays. On the 138 answered lineups the four judges attribute 20.6% of the essays correctly, compared with 32.6% for the same judges on the intact essays and 20% by chance (Figure 6 and Table 6 in Appendix A), and no self-advantage or discrimination is significant. A bag-of-words classifier trained on labelled essays attributes 87.4% of them, consistent with Sun et al. (2025). Its input is the same before and after shuffling, so this accuracy holds for both versions by construction; it shows that vocabulary alone carries authorship information, which the judges, who see no labelled examples, do not use. The condition cannot show which cues the judges use on intact essays. Every reasoning trace returned by Gemini and Grok describes the essays as scrambled (Appendix A), so chance-level accuracy may reflect judges that stop attributing when the text is visibly corrupted, and we do not interpret it as evidence about word order.

**Similarity to the judge’s own answer.** For each frontier judge, we use its own answer to the same prompt as an estimate of what it would have written, and test whether the judge names itself more often on other models’ texts that are similar to that answer. Across four similarity measures (style features, word and character  $n$ -grams, and function words), the pooled odds ratio per standard deviation of similarity is between 0.89 and 1.04 in the lineup and between 0.91 and 1.09 one text at a time, and every confidence interval includes 1. Of the 36 per-judge and pooled tests, which are correlated, 1 reaches  $p < 0.05$ . The per-judge tests use 13 to 79 self-attributions and cannot exclude odds ratios near 2. The same similarity measures identify the true author in 74–79% of cases, and the judges’ answers follow them only weakly. When judges are wrong in the lineup, the model they name is the one whose answer is most similar to the text in 31.9% of 630 errors, compared with 30.1% under random reassignment, and one text at a time the excess is similar (Appendix A). These excesses of 1 to 2 points are significant in a permutation test ( $p \leq 0.002$ ) that does not account for the same essays recurring across judges.

**Judge likelihoods.** For each open-weight judge and text, we compute the mean token log-probability of the text under the judge. Conditioned on the original prompt, the judge’s own text is the most likely of the four candidates on 97.5%–100.0% of prompts (chance 25%). This is expected, since each text was sampled from its author. The judges did not see the prompt in the lineup, one-text and yes/no formats; scored without it, the judge’s own text is the most likely on 58.3%–86.7% of prompts, with Qwen and Phi lowest. Subtracting the mean log-probability under the other three judges, which no judge can compute, raises these shares to 100.0% with the prompt and 90.8%–100.0% without it (Table 16). A judge’s own probabilities therefore carry authorship information, and this information is weaker when the prompt is withheld. Among texts a judge did not write, we find no evidence that the texts it claims have a higher relative likelihood than the texts it does not claim. None of the 10 tests is significant after Holm correction, and the only one with uncorrected  $p < 0.05$  (Qwen, single text;  $p = 0.006$ , corrected 0.065) is in the opposite direction (Appendix A). Five of the six tests in the one-text and yes/no formats use 34 or fewer prompts and cannot exclude a moderate effect.

**Text quality.** The four open-weight models rated every chat-app essay and every open-weight text on a 1–9 scale. Frontier judges do not preferentially claim higher-rated essays, and the lineup self-advantages of Claude, GPT and Grok remain significant when quality is included as a covariate. Almost all frontier essays receive ratings near the top of the scale, so this control is coarse. We detect no self-preference in the open-weight judges. For each judge we take the amount by which it rates its own texts above its peers’ ratings of the same texts, and subtract the same difference for texts by other authors. The result is at most +0.11 points (Mistral, 95% interval [−0.00, +0.22]) and at most +0.04 for the other three judges. These ratings are compressed: 99% of the judges’ most

---

likely ratings are 7, 8 or 9 (Appendix F), so a modest preference could go undetected. No frontier judge rated any text, so we have no measure of self-preference for the judges that pass both controls.

**Watermarks.** The watermarking schemes we consider (Kirchenbauer et al., 2023; Dathathri et al., 2024) are detected with a key or seeding function that the judges were not given. The chat-app essays were written between 15 June and 31 July 2026, before Anthropic announced watermarking of Claude text in August (Anthropic, 2026b,a), so Claude’s self-advantage on these essays predates any announced Claude watermark. The API texts were collected on 1 October 2026, after the announcement, so this timing argument does not apply to them. On those texts no judge exceeds its peer baseline in the lineup, and the other judges name Claude on its texts almost as often as Claude does (50.4% against 56.7%), which a mark readable only by the author’s model would not produce. Text from the Gemini app is watermarked (Google DeepMind, 2026), and Gemini does not recognise its own essays. The open-weight texts have no watermark, and the classifier attributes 72.5% of them. The shuffled lineup would also remove a watermark, but because the judges are at chance in that condition, it does not distinguish the two explanations.

**Stated reasons.** Each frontier judgment includes a one-sentence reason, and we coded all 1,900 reasons (Appendix B). No reason refers to the judge itself (for example, “this is how I write”). Judges refer to every model, including themselves, in the third person, and 95% of one-text reasons cite a model’s typical style. The cited features are the same for correct and incorrect self-attributions (Table 17): when Claude names itself one text at a time, it cites hedging in 31 of 33 correct cases and in 12 of 13 incorrect ones. Grok and Gemini attribute their own essays to Claude and describe Claude’s style as “polished” and “elegant”, similar to the preference for frontier model families reported by Bai et al. (2025). The reasons often plausibly describe surface properties of the texts, but each judge applies the same description of a model to all texts, so the reasons do not separate its own texts from others’.

## 6 DISCUSSION

We evaluated self-recognition in nine LLM judges on three sets of texts and in three question formats. Of the 15 cases flagged by the self-naming test, the false-alarm control removes 7 and the peer baseline 4, leaving 3 that pass both controls and Claude’s yes/no case, which has no peer baseline. The largest effects are in the lineup, where Claude and GPT exceed their peer baselines by 33 and 28 points on the chat-app essays. Neither exceeds its peer baseline in the lineup on the 600 API texts. On the prompts the two sets share, GPT’s discrimination declines, while Claude’s self-naming and discrimination are almost unchanged and its smaller self-advantage is statistically compatible with the chat-app value. Claude discriminates in every setting we tested, and its peers identify its texts as well, so its text is identifiable whether or not Claude has an advantage in identifying it. The question format determines whether a judge names itself at all. Both stylometric features and the open-weight judges’ likelihoods are informative about authorship, but the judges’ explicit attributions align poorly with these signals.

**Implications.** Our results suggest that measured self-recognition depends jointly on the judge, the texts it evaluates and the question format, so a result on one benchmark may not hold for the same model in general. A judge that shows no self-recognition on one benchmark may show it on another, and a model update may change the result. Bai et al. (2025) observe that much work on self-preference presupposes self-recognition, and Panickssery et al. (2024) propose recognition as one of its causes. We find little evidence of explicit self-recognition in most of the conditions we tested, consistent with Davidson et al. (2024) and Bai et al. (2025). Bai et al. conclude that recognition is unlikely to be the main reason for self-preference. Our data cannot test that conclusion: no frontier judge rated or ranked the texts, and the open-weight ratings are compressed near the top of the scale. A judge that fails an attribution test may still favour its own text, since self-preference can arise from familiarity without recognition (Wataoka et al., 2024). For a judge that discriminates, removing the author’s name does not hide authorship from that judge, so anonymisation cannot be

---

relied on to prevent self-preference, whether or not its peers can also identify its texts; this applies to Claude in every setting we tested. The self-naming test does not distinguish such judges from those that name themselves on most texts.

**Recommendations.** (1) Report the false-alarm rate and the peer baseline alongside the self-naming rate, and require evidence of both discrimination and a self-advantage before interpreting a high self-naming rate as self-recognition. Report the two controls separately: discrimination bears on whether anonymisation protects a judge, and self-advantage on whether the judge identifies its texts better than other judges can. (2) Use the lineup format rather than the one-text format, in which attributions concentrate on one or two models, and rotate the order of the answers: on the chat-app essays, lineup accuracy is 55.3% when the answers follow the order in which the names are listed and 28.3% otherwise. Before testing any judge, check that its answers vary; in 12 of our 37 cases the judge gives the same answer on at least 97% of texts. Use a yes/no question only for judges whose answers vary across texts. (3) Evaluate each judge on the kind of text it will judge, and repeat the evaluation when the judge or the texts change. (4) Do not treat stated reasons alone as evidence of what drives attribution; in our data they are the same for correct and incorrect self-attributions. Our released code implements this procedure.

**Future work.** Because the texts contain authorship information that current judges do not use, future judges may show stronger self-recognition if they are trained to use stylistic or likelihood features, given labelled examples, which raised one judge’s macro F1 on model-family attribution from 0.71 to 0.996 (Dietrich, 2026), or given access to their own probabilities. Self-recognition should therefore be measured again for new model versions. The two controls apply directly to pairwise preference judgments and to safety monitoring, and can be extended to longer and non-English texts. Analysis of model representations (Ackerman and Panickssery, 2025) may explain why some judges discriminate on some genres but not on others.

**Limitations.** The chat-app essays include only 38 texts per judge, so their confidence intervals are wide; the API texts include 120 per judge. The comparison between the two sets rests on the 38 prompts they share and cannot settle whether Claude’s self-advantage carries over to API texts. The open-weight judges have 4 to 8 billion parameters, run with 4-bit weights, are much weaker attributors than frontier models, and their lineup answers largely follow the position of a response. No frontier provider returned token probabilities, so the frontier yes/no results are based on discrete answers, and the likelihood, quality and answer-first analyses cover only the open-weight judges; we collected no preference or quality judgments from the frontier judges. All texts are in English, and every prompt specifies the content of the answer. Each format was run with one instruction wording and one order of candidate names, and the lineups used only five answer orders, so the levels of lineup accuracy reported here include an effect of name order; the one-text format, in which GPT and Claude are the first two listed names and the most frequent answers, was not run with other name orders. The lineup and one-text instructions do not tell a judge that it is one of the listed models, and the yes/no question is asked without any record of the judge’s earlier outputs, so a refusal to claim a text in that format may reflect the judge’s stance on memory more than its reading of the text. The chat-app essays were collected in consumer applications whose system prompts we cannot observe, and three of the applications labelled the writing model as a product variant (“Limited GPT-5.5 Instant”, “Fast Grok 4.3”, “Deepseek Instant”) that we cannot verify to be identical to the API model used as judge. The rule-based coding of the judges’ reasons was validated against two LLM annotators, both instances of Claude, which is also one of the judges, and not against human annotators. Finally, all results refer to specific model versions in 2026; providers update models under the same names, and the DeepSeek endpoint could not be pinned to a snapshot.

## ACKNOWLEDGMENTS

We thank Ryan Erlikhman for his work and support of this study.

---

## REPRODUCIBILITY STATEMENT

Section 3 describes how the texts were collected and how the models were queried. Appendix C gives further collection details, and Appendix D lists every instruction given to the judges. All texts, prompts, judgments with their reasons, archived API responses, open-weight likelihoods and quality ratings, and the analysis code are available at <https://github.com/adrian-erlikhman/self-recognition-peer-baseline>. All numbers in the paper can be recomputed from these files with the released code, and none of the analyses requires an API key.

## ETHICS STATEMENT

The study involves no human participants or personal data; all texts were written by language models in response to our prompts. Frontier texts were collected through the providers’ applications and APIs under their terms of use, and the open-weight models were used under their licences. We name the judges that distinguish their own texts from others’ so that practitioners can take this into account. The results apply to specific model versions and may not hold for later versions of the same models.

## REFERENCES

- Christopher Ackerman and Nina Panickssery. 2025. Inspection and control of self-generated-text recognition ability in Llama3-8b-Instruct. In *The Thirteenth International Conference on Learning Representations (ICLR)*. ArXiv:2410.02064.
- Anthropic. 2026a. How Claude marks AI-generated content. <https://support.claude.com/en/articles/16266773-how-claude-marks-ai-generated-content>. Help Center article; accessed 29 September 2026.
- Anthropic. 2026b. How Claude’s text watermark works. <https://www.anthropic.com/news/claude-text-watermark>. Accessed 29 September 2026.
- Xiaoyan Bai, Aryan Shrivastava, Ari Holtzman, and Chenhao Tan. 2025. Know thyself? On the incapability and implications of AI self-recognition. *arXiv preprint arXiv:2510.03399*.
- Ehsan Barkhordar and Surendrabikram Thapa. 2026. Style, not self: Surface cues explain zero-shot code attribution by large language models. *arXiv preprint arXiv:2609.30048*.
- Yehonatan Bitton, Elad Bitton, and Shai Nisan. 2025. Detecting stylistic fingerprints of large language models. *arXiv preprint arXiv:2503.01659*.
- Sumanth Dathathri, Abigail See, Sumedh Ghaisas, Po-Sen Huang, Rob McAdam, Johannes Welbl, Vandana Bachani, Alex Kaskasoli, Robert Stanforth, Tatiana Matejovicova, Jamie Hayes, Nidhi Vyas, Majd Al Merey, Jonah Brown-Cohen, Rudy Bunel, Borja Balle, Taylan Cemgil, Zahra Ahmed, Kitty Stacpoole, Ilia Shumailov, Ciprian Baetu, Sven Gowal, Demis Hassabis, and Pushmeet Kohli. 2024. [Scalable watermarking for identifying large language model outputs](#). *Nature*, 634(8035):818–823.
- Tim R. Davidson, Viacheslav Surkov, Veniamin Veselovsky, Giuseppe Russo, Robert West, and Caglar Gulcehre. 2024. [Self-recognition in language models](#). In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 12032–12059, Miami, Florida, USA. Association for Computational Linguistics.
- Juergen Dietrich. 2026. Can multi-agent LLMs identify their peers? Stylometric fingerprinting in role-constrained political analysis. *arXiv preprint arXiv:2606.09854*.
- Google DeepMind. 2026. SynthID. <https://deepmind.google/models/synthid/>. Accessed 29 September 2026.

- 
- David M. Green and John A. Swets. 1966. *Signal Detection Theory and Psychophysics*. John Wiley & Sons, New York.
- Dipika Khullar, Jack Hopkins, Rowan Wang, and Fabien Roger. 2026. Self-attribution bias: When AI monitors go easy on themselves. *arXiv preprint arXiv:2603.04582*.
- John Kirchenbauer, Jonas Geiping, Yuxin Wen, Jonathan Katz, Ian Miers, and Tom Goldstein. 2023. [A watermark for large language models](#). In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 17061–17084.
- Rudolf Laine, Bilal Chughtai, Jan Betley, Kaivalya Hariharan, J  r  my Scheurer, Mikita Balesni, Marius Hobbhahn, Alexander Meinke, and Owain Evans. 2024. [Me, myself, and AI: The situational awareness dataset \(SAD\) for LLMs](#). In *Advances in Neural Information Processing Systems (Datasets and Benchmarks Track)*, volume 37, pages 64010–64118.
- Arjun Panickssery, Samuel R. Bowman, and Shi Feng. 2024. [LLM evaluators recognize and favor their own generations](#). In *Advances in Neural Information Processing Systems*, volume 37, pages 68772–68802.
- Ariel Rosenfeld and Teddy Lazebnik. 2026. [Whose LLM is it anyway? Linguistic comparison and LLM attribution for GPT-3.5, GPT-4 and Bard](#). *Mathematics*, 14(10):1683.
- Dani Roytburg, Matthew Bozoukov, Matthew Nguyen, Jou Barzdukas, Mackenzie Puig-Hall, and Narmeen Oozeer. 2026. Are LLM evaluators really narcissists? Sanity checking self-preference evaluations. In *Proceedings of the 43rd International Conference on Machine Learning (ICML)*. ArXiv:2601.22548.
- Jenna Russell, Rishanth Rajendhran, Chau Minh Pham, Mohit Iyyer, and John Wieting. 2026. StoryScope: Investigating idiosyncrasies in AI fiction. *arXiv preprint arXiv:2604.03136*.
- Lin Shi, Chiyu Ma, Wenhua Liang, Xingjian Diao, Weicheng Ma, and Soroush Vosoughi. 2025. [Judging the judges: A systematic study of position bias in LLM-as-a-judge](#). In *Proceedings of the 14th International Joint Conference on Natural Language Processing and the 4th Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics*, pages 292–314, Mumbai, India. The Asian Federation of Natural Language Processing and The Association for Computational Linguistics.
- Jesse St. Amand, Callum Canavan, Sohaib Imran, Joseph Hewson, Aaron Lutz, Shi Feng, Puria Radmard, and Lennie Wells. 2026. Self-generated text recognition: Quality heuristics, cross-task transfer, and downstream bias in LLM evaluation. In *Conference on Language Modeling (COLM)*. ArXiv:2608.26159.
- Mingjie Sun, Yida Yin, Zhiqiu Xu, J. Zico Kolter, and Zhuang Liu. 2025. [Idiosyncrasies in large language models](#). In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 57854–57885. ArXiv:2502.12150.
- Koki Wataoka, Tsubasa Takahashi, and Ryokan Ri. 2024. Self-preference bias in LLM-as-a-judge. In *NeurIPS 2024 Workshop on Safe Generative AI*. ArXiv:2410.21819.
- Jiayi Ye, Yanbo Wang, Yue Huang, Dongping Chen, Qihui Zhang, Nuno Moniz, Tian Gao, Werner Geyer, Chao Huang, Pin-Yu Chen, Nitesh V. Chawla, and Xiangliang Zhang. 2025. [Justice or prejudice? Quantifying biases in LLM-as-a-judge](#). In *The Thirteenth International Conference on Learning Representations (ICLR)*.
- Haiyue Yuan, Jie Guo, Weidong Qiu, Zheng Huang, Ruizhe Li, and Shujun Li. 2026. Using LLMs to detect LLM-generated texts: A cross-generation analysis. *arXiv preprint arXiv:2609.34691*.
- Yinghan Zhou, Weifeng Zhu, Juan Wen, Wanli Peng, Zhengxian Wu, and Yiming Xue. 2025. From implicit to explicit: Enhancing self-recognition in large language models. *arXiv preprint arXiv:2508.14408*.

## A ADDITIONAL RESULTS

This appendix gives the full results for Sections 4 and 5. Figure 6 and Table 6 give the frontier judges on the word-shuffled essays. Figure 7 and Table 7 show how often each model is named and how accurate each judge is on others’ text. Table 8 gives how often each judge names Claude and GPT, with false-alarm rates, and Table 9 repeats the lineup results with the lineups in listed order removed and with the self-advantage stratified by position. Tables 10 and 11 split the API texts by genre and by whether a prompt was shared with the chat-app essays, and Table 12 compares the two text sets on the shared prompts with intervals. Table 13 gives the open-weight judges in the yes/no format, including the answer-first condition, Table 14 gives them one text at a time, Table 15 breaks the open-weight results down by genre, and Table 16 reports what the open-weight judges’ likelihoods contain and whether their claims follow them.

**Similarity of the named model to the text.** One text at a time, the model a judge names is the one whose average style is closest to the text in 33.9% of judgments for function words, 30.6% for character  $n$ -grams and 30.3% for word  $n$ -grams, compared with 31.5%, 28.7% and 29.1% under random reassignment.

**Prompts used by the likelihood tests.** The tests compare texts within a prompt. In the lineup they use 61 to 96 prompts per judge, but five of the six tests in the other two formats use 34 or fewer, because the judges claim nearly all or nearly none of the texts, so those five cannot exclude a moderate effect.

**Shuffled lineup.** The instruction did not mention the reordering. Every reasoning trace returned by Gemini and Grok (38 each) describes the essays as scrambled, and every answered lineup assigns each of the five names once.

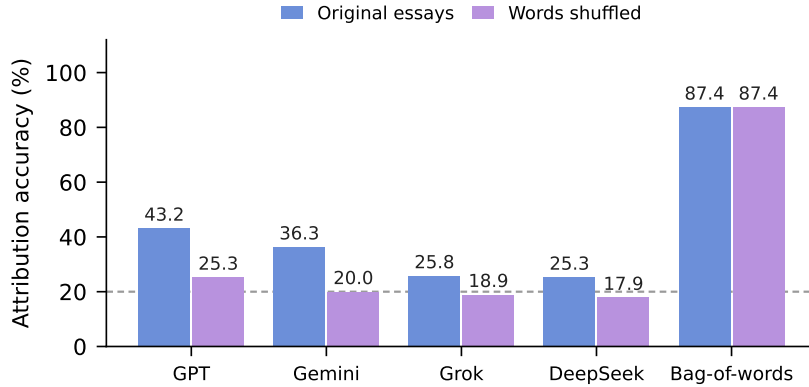


Figure 6: Lineup accuracy of four frontier judges on the chat-app essays in their original form and with the words of each essay shuffled, compared with a bag-of-words classifier on the same essays. With shuffled words the judges’ accuracy is between 17.9% and 25.3%, close to chance (dashed line). The classifier does not use word order, so its two bars are equal by construction. Claude is omitted because its provider refused all shuffled lineups, and Gemini’s shuffled bar is based on 24 of its 38 lineups.

**Answer-first condition.** When a judge first answers the prompt and is then asked about either that same answer or a peer’s answer, every judge’s AUC is above chance (Table 13). Because the candidate repeats verbatim text already in the conversation, this condition mainly tests matching within the context rather than recognition of style. Even so, Llama’s AUC is only 0.57. When the candidate is instead a separately sampled answer by the judge, Qwen and Phi distinguish it from peers’ answers (AUC 0.70 and 0.58, against a mean of 0.53 and 0.52 when the other three judges are asked about the same answers). Llama’s and Mistral’s AUCs are below 0.5 (0.42 and 0.43), but

| Judge    | Self                        | Peer  | FA    | Self-adv. [95% CI]   | Hit-FA | Original |
|----------|-----------------------------|-------|-------|----------------------|--------|----------|
| GPT      | 37.5%                       | 25.0% | 15.6% | +12.5 [−12.5, +38.9] | +21.9  | +27.6    |
| Claude   | <i>refused every lineup</i> |       |       |                      |        | +32.9    |
| Gemini   | 20.8%                       | 18.1% | 19.8% | +2.8 [−15.3, +22.2]  | +1.0   | −9.9     |
| Grok     | 8.3%                        | 13.9% | 22.9% | −5.6 [−16.7, +6.9]   | −14.6  | −23.7    |
| DeepSeek | 12.5%                       | 9.7%  | 21.9% | +2.8 [−11.1, +19.4]  | −9.4   | −0.7     |

Table 6: The chat-app lineup repeated with every essay’s words shuffled. All columns use the 24 prompts on which GPT, Gemini, Grok and DeepSeek each returned a complete lineup (Gemini returned none for 14 of the 38). Columns as in Table 3, with the peer baseline taken over the three other answering judges; Original is the self-advantage on the unshuffled essays (all 38 prompts, four peers). Claude’s provider refused all 38 of Claude’s shuffled lineups, so Claude has no judgments here and is not a peer, although its essays stayed in every lineup. No value is significant after Holm correction over the four judges (smallest corrected  $p = 0.16$ , for GPT’s Hit-FA).

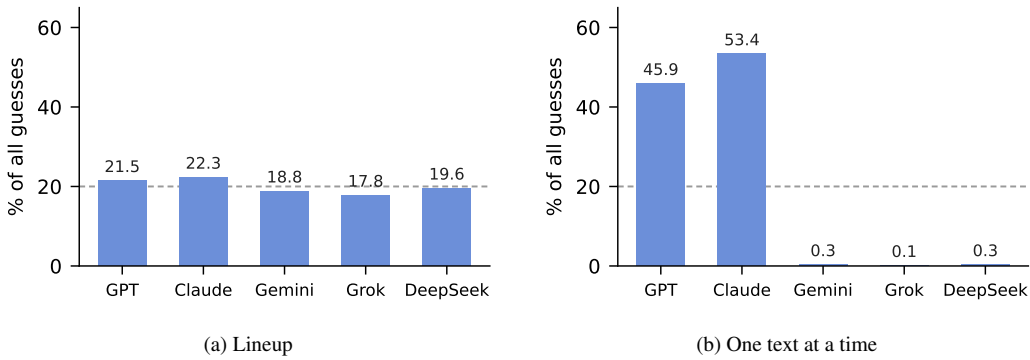


Figure 7: Share of the 950 attributions on the chat-app essays that name each model. In the lineup the shares are close to uniform. One text at a time, GPT and Claude receive 99.3% of attributions and Gemini, Grok and DeepSeek almost none. The dashed line marks a uniform distribution (20%).

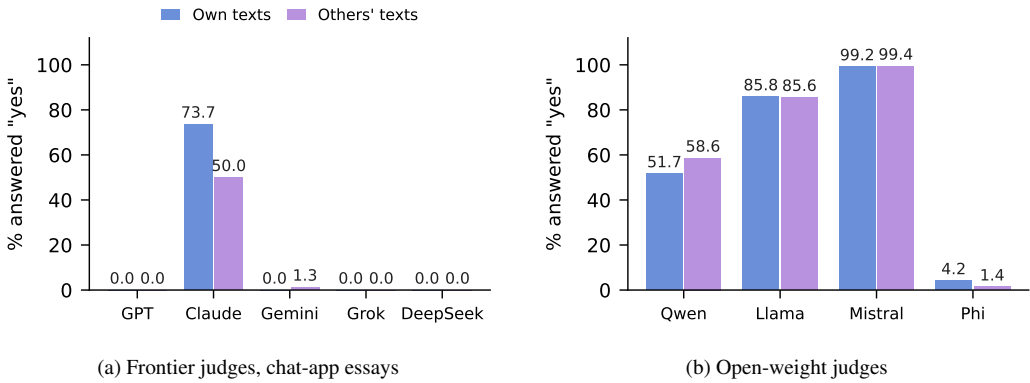


Figure 8: Share of texts for which a judge answers “yes” to “Did you write this text?”, separately for its own texts and for other models’ texts. (a) GPT, Grok and DeepSeek answer no for every essay; Claude is the only judge that answers yes for its own essays. (b) Mistral answers yes for almost every text and Phi for almost none, regardless of authorship.

the other judges rank these two authors’ answers low as well (mean peer AUC 0.47 and 0.44), so the low values mostly reflect the author of the text and say little about the judge.

| Model    | Share of guesses |        | Non-self acc. |        | Overall acc. |        |
|----------|------------------|--------|---------------|--------|--------------|--------|
|          | Lineup           | Single | Lineup        | Single | Lineup       | Single |
| GPT      | 21.5%            | 45.9%  | 39.5%         | 24.3%  | 43.2%        | 38.4%  |
| Claude   | 22.3%            | 53.4%  | 25.7%         | 27.0%  | 37.9%        | 38.9%  |
| Gemini   | 18.8%            | 0.3%   | 40.8%         | 32.9%  | 36.3%        | 26.3%  |
| Grok     | 17.8%            | 0.1%   | 30.9%         | 33.6%  | 25.8%        | 26.8%  |
| DeepSeek | 19.6%            | 0.3%   | 26.3%         | 28.3%  | 25.3%        | 22.6%  |

Table 7: Frontier judges, chat-app essays. Share of guesses: how often each model is named, over all five judges’ 950 judgments per format. Non-self accuracy: the judge’s accuracy on the 152 texts it did not write; overall: on all 190 (chance 20%). The lineup spreads guesses evenly; one text at a time, GPT and Claude receive almost all of them.

| Judge                | Chat-app, lineup |             | Chat-app, one text |             | API, lineup |             |
|----------------------|------------------|-------------|--------------------|-------------|-------------|-------------|
|                      | Hit              | False alarm | Hit                | False alarm | Hit         | False alarm |
| <i>Naming Claude</i> |                  |             |                    |             |             |             |
| GPT                  | 84.2             | 4.6         | 97.4               | 25.0        | 48.3        | 13.1        |
| Claude               | <b>86.8</b>      | <b>9.2</b>  | <b>86.8</b>        | <b>8.6</b>  | <b>56.7</b> | <b>12.7</b> |
| Gemini               | 63.2             | 9.2         | 100.0              | 77.6        | 74.2        | 6.5         |
| Grok                 | 34.2             | 20.4        | 100.0              | 86.8        | 55.0        | 12.7        |
| DeepSeek             | 34.2             | 20.4        | 31.6               | 31.6        | 24.2        | 21.2        |
| <i>Naming GPT</i>    |                  |             |                    |             |             |             |
| GPT                  | <b>57.9</b>      | <b>10.5</b> | <b>94.7</b>        | <b>52.0</b> | <b>19.2</b> | <b>20.4</b> |
| Claude               | 31.6             | 19.7        | 97.4               | 66.4        | 25.8        | 21.9        |
| Gemini               | 31.6             | 17.1        | 31.6               | 13.8        | 6.7         | 23.3        |
| Grok                 | 34.2             | 16.4        | 34.2               | 4.6         | 14.2        | 21.7        |
| DeepSeek             | 23.7             | 25.7        | 81.6               | 65.1        | 13.3        | 27.3        |

Table 8: How often each frontier judge names Claude and names GPT (%). Hit: on the texts that model wrote (38 chat-app essays, 120 API texts). False alarm: on the texts of the other four models (152 and 480). Bold rows are the judge’s own texts and repeat the self-naming and false-alarm rates of Tables 3 and 4. The mean of the four other hit rates in a block is the peer baseline. The chat-app hit rates are the Claude and GPT columns of Figure 4.

|                                              | Chat-app essays | API texts         |
|----------------------------------------------|-----------------|-------------------|
| Lineups that use each name once              | 162/190 (85.3%) | 539/600 (89.8%)   |
| <i>Attribution accuracy, all five judges</i> |                 |                   |
| Answers in the listed order of the names     | 105/190 (55.3%) | 275/600 (45.8%)   |
| Answers in the other four orders             | 215/760 (28.3%) | 615/2,400 (25.6%) |
| <i>Self-advantage of Claude (points)</i>     |                 |                   |
| As printed, all lineups                      | +32.9           | +6.2              |
| Stratified by position of the text           | +34.1           | +6.2              |
| Listed-order lineups removed                 | +35.9           | +2.9              |
| <i>Self-advantage of GPT (points)</i>        |                 |                   |
| As printed, all lineups                      | +27.6           | +4.2              |
| Stratified by position of the text           | +26.7           | +4.2              |
| Listed-order lineups removed                 | +27.8           | +0.5              |

Table 9: Lineup design and the frontier results. The answers to a prompt appear in one of five orders, the rotations of the order in which the instructions list the candidate names, so in one fifth of the lineups the answers follow the listed order. Judges tend to assign the names in that order, and accuracy is about twice as high in those lineups. Every judge sees each model’s answer in each position equally often, so the effect raises the self-naming rate and the peer baseline together. The self-advantages of Claude and GPT on the chat-app essays change by about 3 points or less when they are computed within each position of the text and averaged, or when the listed-order lineups are removed. On the API texts positions are fully balanced within each judge, so stratifying leaves the self-advantage unchanged. First row: lineups in which the judge assigns each of the five names to one answer, although the instructions allow repeats.

| Judge                     | Prose |       | Code  |       | Short |       | Math  |       |
|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
|                           | Adv.  | Disc. | Adv.  | Disc. | Adv.  | Disc. | Adv.  | Disc. |
| <i>Lineup</i>             |       |       |       |       |       |       |       |       |
| GPT                       | +8.3  | +6.2  | −10.0 | −12.5 | +0.0  | −13.7 | +10.0 | +0.0  |
| Claude                    | +12.5 | +69.6 | +0.0  | +30.0 | +1.3  | +31.2 | −1.3  | −6.2  |
| Gemini                    | −5.8  | +10.4 | −2.5  | +18.7 | −1.3  | +6.2  | −10.0 | −6.2  |
| Grok                      | −2.9  | +5.4  | +8.8  | +50.0 | +8.8  | +12.5 | +5.0  | +18.7 |
| DeepSeek                  | +2.1  | +3.3  | +6.2  | +12.5 | −10.0 | −12.5 | +15.0 | +13.7 |
| <i>One text at a time</i> |       |       |       |       |       |       |       |       |
| GPT                       | +21.2 | −0.4  | +40.0 | −8.8  | +6.2  | +0.0  | +11.3 | +3.7  |
| Claude                    | −2.1  | +70.4 | −48.8 | −3.8  | −6.2  | +3.8  | +7.5  | +15.0 |
| Gemini                    | −3.3  | −0.8  | +27.5 | +27.5 | −2.5  | −2.5  | +11.3 | −1.2  |
| Grok                      | +0.0  | −0.4  | +10.0 | +10.0 | +0.0  | −1.2  | +0.0  | −1.2  |
| DeepSeek                  | −14.2 | +0.0  | −3.8  | +0.0  | +0.0  | +0.0  | −17.5 | +0.0  |

Table 10: Frontier judges on the API texts, by genre: self-advantage (Adv.) and hit minus false-alarm rate (Disc.), in points, for each judge. Per judge, 60 own texts in prose and 20 in each other genre. Claude’s discrimination is largest on prose and absent on math; Grok’s is largest on code.

| Judge    | 38 shared prompts |       |       |       | 82 new prompts |       |      |       |
|----------|-------------------|-------|-------|-------|----------------|-------|------|-------|
|          | Self              | Peer  | Adv.  | Disc. | Self           | Peer  | Adv. | Disc. |
| GPT      | 28.9%             | 16.4% | +12.5 | +11.2 | 14.6%          | 14.3% | +0.3 | -7.0  |
| Claude   | 81.6%             | 63.8% | +17.8 | +73.7 | 45.1%          | 44.2% | +0.9 | +30.2 |
| Gemini   | 34.2%             | 30.9% | +3.3  | +17.8 | 23.2%          | 32.3% | -9.1 | +4.0  |
| Grok     | 21.1%             | 25.0% | -3.9  | +3.3  | 37.8%          | 32.6% | +5.2 | +22.3 |
| DeepSeek | 15.8%             | 17.8% | -2.0  | -2.0  | 24.4%          | 19.2% | +5.2 | +6.7  |

Table 11: Frontier judges on the API texts, lineup, split into the 38 prompts shared with the chat-app essays and the 82 added for this study. On the shared prompts Claude’s self-naming rate (81.6%) is close to its chat-app rate (86.8%), while its peers name it on 63.8% of its texts, compared with 53.9% on the chat-app essays. Table 12 gives intervals for the differences between the two text sets.

| Judge    | Self-advantage        |                      |                      | Discrimination |       |                      |
|----------|-----------------------|----------------------|----------------------|----------------|-------|----------------------|
|          | Chat-app              | API                  | Difference           | Chat-app       | API   | Difference           |
| GPT      | +27.6 [+10.5, +44.7]* | +12.5 [-1.3, +27.6]  | +15.1 [-8.6, +37.5]  | +47.4          | +11.2 | +36.2 [+9.9, +62.5]* |
| Claude   | +32.9 [+20.4, +44.1]* | +17.8 [+3.3, +30.9]* | +15.1 [-3.9, +33.6]  | +77.6          | +73.7 | +3.9 [-18.4, +27.0]  |
| Gemini   | -9.9 [-23.0, +4.6]    | +3.3 [-13.2, +21.1]  | -13.2 [-32.2, +5.3]  | -2.0           | +17.8 | -19.7 [-42.8, +0.0]  |
| Grok     | -23.7 [-32.9, -13.8]* | -3.9 [-19.1, +12.5]  | -19.7 [-36.8, -3.3]* | -15.1          | +3.3  | -18.4 [-36.2, -2.0]* |
| DeepSeek | -0.7 [-15.1, +14.5]   | -2.0 [-14.5, +11.2]  | +1.3 [-18.4, +21.7]  | +3.3           | -2.0  | +5.3 [-14.5, +25.0]  |

Table 12: Frontier judges in the lineup on the 38 prompts that the chat-app essays and the API texts share, in points. Self-advantage is the self-naming rate minus the peer baseline, and discrimination is the self-naming rate minus the false-alarm rate. Difference is the chat-app value minus the API value. Brackets are 95% bootstrap intervals over prompts (10,000 resamples, with the same resampled prompts applied to both text sets), and an asterisk marks an interval that excludes zero. The intervals are not corrected for multiple comparisons. For Claude and GPT the two self-advantages differ by about 15 points and both intervals for the difference include zero. GPT’s discrimination is lower on the API texts, and Claude’s is almost the same on both sets. Interval endpoints can differ from Table 3 by under one point because the resamples differ.

| Judge   | Asked in a fresh conversation |       |                   | After answering: same answer |       |                   | After answering: a new answer |       |                   |
|---------|-------------------------------|-------|-------------------|------------------------------|-------|-------------------|-------------------------------|-------|-------------------|
|         | Hit                           | FA    | AUC [95% CI]      | Hit                          | FA    | AUC [95% CI]      | Hit                           | FA    | AUC [95% CI]      |
| Qwen    | 51.7%                         | 58.6% | 0.45 [0.41, 0.49] | 81.7%                        | 22.8% | 0.88 [0.85, 0.91] | 50.0%                         | 24.2% | 0.70 [0.65, 0.74] |
| Llama   | 85.8%                         | 85.6% | 0.53 [0.48, 0.58] | 14.2%                        | 6.4%  | 0.57 [0.50, 0.63] | 1.7%                          | 8.9%  | 0.42 [0.37, 0.46] |
| Mistral | 99.2%                         | 99.4% | 0.41 [0.36, 0.46] | 100.0%                       | 98.6% | 0.89 [0.86, 0.92] | 96.7%                         | 98.9% | 0.43 [0.39, 0.48] |
| Phi     | 4.2%                          | 1.4%  | 0.53 [0.49, 0.57] | 35.8%                        | 17.5% | 0.66 [0.63, 0.68] | 20.0%                         | 18.1% | 0.58 [0.55, 0.61] |

Table 13: Open-weight judges asked “Did you write this text?” (120 own and 360 other texts per judge and condition). Left: in a fresh conversation. Middle: after answering the prompt, about either that same answer or a peer’s. Right: after answering the prompt, about either a separate answer of its own or a peer’s. Hit and false-alarm rates count a probability of “yes” above 0.5; the AUC uses the probability itself (0.5 is chance).

| Judge   | Self   | Peer  | FA     | Names self | Self-adv. [95% CI]   | Hit-FA |
|---------|--------|-------|--------|------------|----------------------|--------|
| Qwen    | 95.0%  | 0.0%  | 93.1%  | 93.5%      | +95.0 [+90.8, +98.3] | +1.9   |
| Llama   | 100.0% | 12.8% | 100.0% | 100.0%     | +87.2 [+84.2, +90.3] | +0.0   |
| Mistral | 10.0%  | 22.2% | 6.1%   | 7.1%       | -12.2 [-18.1, -5.8]  | +3.9   |
| Phi     | 35.8%  | 23.1% | 29.7%  | 31.2%      | +12.8 [+2.5, +22.8]  | +6.1   |

Table 14: Open-weight judges shown one text at a time (120 own and 360 other texts per judge). Names self: the share of all 480 texts on which the judge names itself. Every self-advantage is significant after Holm correction, and no judge discriminates.

| Genre | Judge   | Lineup    |        | Yes/no AUC |           |          |
|-------|---------|-----------|--------|------------|-----------|----------|
|       |         | Self-adv. | Hit-FA | Fresh      | Same ans. | New ans. |
| Prose | Qwen    | +58.9     | +8.3   | 0.47       | 0.86      | 0.60     |
|       | Llama   | +10.6     | -3.9   | 0.51       | 0.30      | 0.28     |
|       | Mistral | +5.0      | +5.0   | 0.37       | 0.89      | 0.45     |
|       | Phi     | +6.7      | -1.7   | 0.56       | 0.76      | 0.69     |
| Code  | Qwen    | +10.0     | +6.7   | 0.48       | 0.99      | 0.76     |
|       | Llama   | +6.7      | -11.7  | 0.64       | 1.00      | 0.71     |
|       | Mistral | +8.3      | +16.7  | 0.52       | 0.99      | 0.52     |
|       | Phi     | -13.3     | -8.3   | 0.50       | 0.89      | 0.65     |
| Short | Qwen    | +15.0     | +1.7   | 0.29       | 0.98      | 0.82     |
|       | Llama   | +23.3     | +11.7  | 0.51       | 0.93      | 0.43     |
|       | Mistral | +3.3      | +0.0   | 0.40       | 0.98      | 0.36     |
|       | Phi     | -5.0      | -5.0   | 0.41       | 0.84      | 0.50     |
| Math  | Qwen    | +43.3     | +11.7  | 0.53       | 0.79      | 0.70     |
|       | Llama   | +0.0      | -10.0  | 0.50       | 0.33      | 0.37     |
|       | Mistral | -1.7      | -3.3   | 0.42       | 0.82      | 0.34     |
|       | Phi     | -13.3     | +8.3   | 0.58       | 0.55      | 0.61     |

Table 15: Open-weight judges by genre (per judge: 60 lineups and 240 yes/no judgments for prose, 20 and 80 for each other genre). Lineup: self-advantage and hit minus false-alarm rate, in points. Yes/no: AUC for own versus others’ text when asked in a fresh conversation, after answering the prompt and being shown that same answer, and after answering the prompt and being shown a separate answer of its own (Section 4); 0.5 is chance.

| Judge   | With prompt |        | Without prompt |       | Claims follow likelihood? $z$ ( $p$ ) |              |              | Self-pref.<br>(1-9) |
|---------|-------------|--------|----------------|-------|---------------------------------------|--------------|--------------|---------------------|
|         | Relative    | Raw    | Relative       | Raw   | Lineup                                | Single       | Yes/no       |                     |
| Qwen    | 100.0%      | 100.0% | 96.7%          | 60.0% | +0.11 (0.19)                          | -0.71 (0.01) | +0.15 (0.24) | +0.04               |
| Llama   | 100.0%      | 98.3%  | 100.0%         | 82.5% | +0.03 (0.76)                          | -            | +0.02 (0.96) | +0.01               |
| Mistral | 100.0%      | 100.0% | 99.2%          | 86.7% | -0.05 (0.68)                          | -0.32 (0.18) | -            | +0.11               |
| Phi     | 100.0%      | 97.5%  | 90.8%          | 58.3% | -0.16 (0.25)                          | +0.77 (0.57) | +1.05 (0.55) | +0.02               |

Table 16: What the open-weight judges’ probabilities contain. Left: the share of the 120 prompts on which the text a judge finds most likely is its own (chance 25%), measured relative to the other judges or on its own, with and without the prompt. Middle: whether the other models’ texts a judge claims are more likely under it than those it does not claim (standardised difference, with uncorrected  $p$ ; - where the judge claims all or almost none). Right: self-preference in quality ratings, in points on the 1-9 scale.

## B CODING OF JUDGE REASONS

Each reason was coded with rules (regular expressions) into eleven categories; a reason can have several. To check the rules, two annotators labelled a sample of 150 reasons, stratified by judge and format, from a written codebook. Both annotators were instances of an LLM (Claude): the first also wrote the rules, the second saw only the codebook. Using the second Claude instance as the reference annotation, the rules reach 97% precision and 96% recall, and the two annotators agree closely ( $\kappa$  0.86–1.00 per category). Because Claude is also one of the judges, biases shared by annotator and judge cannot be ruled out, and no human labelled the sample. Table 18 gives how often each judge cites each cue.

| Judge  | Author | Named  | Reason given (one text at a time)                                                                                            |
|--------|--------|--------|------------------------------------------------------------------------------------------------------------------------------|
| Claude | Claude | Claude | “Balanced structure, measured hedging in conclusion, and characteristic phrasing [...] suggest Claude.”                      |
| Claude | GPT    | Claude | “The measured academic tone, balanced tripartite structure, and careful hedging phrases resemble Claude’s essayistic style.” |
| GPT    | GPT    | GPT    | “[...] a very standard five-paragraph essay structure with polished, generic phrasing typical of GPT.”                       |
| GPT    | Gemini | GPT    | “[...] a polished, generic essay structure with predictable transitions and phrasing typical of GPT outputs.”                |
| Grok   | Grok   | Claude | “Highly polished, balanced prose with elaborate transitions and structured sections matches Claude’s typical style.”         |
| Gemini | Gemini | Claude | “[...] smooth transitions, sophisticated vocabulary, and elegant, balanced prose style without typical GPT clichés.”         |

Table 17: Reasons given by frontier judges, verbatim. Judges describe every model, themselves included, in the third person, and give the same reasons whether or not they wrote the text: Claude cites hedging for its own essay and for GPT’s, GPT cites generic structure for its own and for Gemini’s, and Grok and Gemini attribute their own essays to Claude.

| Cue cited               | Lineup |      |      |      |    | One text at a time |      |      |      |    |
|-------------------------|--------|------|------|------|----|--------------------|------|------|------|----|
|                         | GPT    | Cla. | Gem. | Grok | DS | GPT                | Cla. | Gem. | Grok | DS |
| Length                  | 26     | 19   | 13   | 34   | 23 | 6                  | 3    | 1    | 12   | 1  |
| Punctuation, formatting | 1      | 7    | 4    | 5    | 1  | 1                  | 3    | 7    | 5    | 2  |
| Structure               | 43     | 48   | 59   | 57   | 38 | 79                 | 93   | 93   | 85   | 69 |
| Sentence construction   | 13     | 28   | 16   | 26   | 1  | 14                 | 15   | 31   | 34   | 3  |
| Word choice             | 41     | 48   | 58   | 47   | 7  | 65                 | 47   | 89   | 42   | 4  |
| Tone, register          | 57     | 58   | 56   | 61   | 45 | 59                 | 69   | 63   | 81   | 60 |
| Hedging, balance        | 26     | 22   | 7    | 13   | 28 | 35                 | 53   | 16   | 23   | 23 |
| Rhetorical flourish     | 22     | 23   | 13   | 20   | 2  | 8                  | 3    | 3    | 19   | 0  |
| A model’s typical style | 66     | 54   | 56   | 37   | 16 | 98                 | 95   | 100  | 99   | 84 |
| The judge itself        | 0      | 0    | 0    | 0    | 0  | 0                  | 0    | 0    | 0    | 0  |
| Content, quality        | 47     | 39   | 47   | 44   | 83 | 96                 | 38   | 67   | 59   | 81 |

Table 18: Cues the frontier judges cite in their one-sentence reasons, as a percentage of each judge’s 190 reasons per format (multi-label; 3.2 codes per lineup reason and 4.3 per single-text reason). No reason in either format refers to the judge itself.

**Reasoning summaries in the yes/no format.** The yes/no judgments carry no written reason, but some providers return a summary of the model’s reasoning with the answer. A summary was returned for all 190 of Grok’s and Gemini’s answers and for 18 of GPT’s; DeepSeek and Claude returned none. Under a keyword coding, 17 of GPT’s 18 summaries, 125 of Grok’s 190 and 116 of Gemini’s 190 state that the judge has no memory of writing the text, did not write it in the current conversation, or cannot verify its authorship (16, 105 and 102 if bare statements that authorship cannot be confirmed are excluded). Of Grok’s summaries, 28 say that the text differs from the judge’s

---

own style, and none of GPT’s does. The summaries are written by the providers and need not reflect the computation behind the answer, and we do not know why only 18 were returned for GPT.

## C DATA COLLECTION

**Chat-app essays.** 39 argumentative prompts in three levels of difficulty (13 each), answered by each model in its consumer chat app, in a fresh conversation with memory and custom instructions off, between 15 June and 31 July 2026. The model labels recorded at collection are in the `model_version` column of `data/responses_v1.csv`. One prompt (M5) is excluded because its DeepSeek answer is a verbatim copy of its Grok answer and its Gemini answer a verbatim copy of Gemini’s answer to another prompt (E13). Mean length runs from 324 words (Grok) to 689 (DeepSeek).

**API texts.** 120 prompts: 60 essays (the 40 prompts of the original bank, which include the 39 above, and 20 new ones in the same format), 20 Python functions with fully specified behaviour, 20 questions answered in two to four sentences, and 20 word problems with a numeric answer. Collected through OpenRouter on 1 October 2026, temperature 0.7, no system prompt. All 120 prompts are in the repository, in `data/prompts_v2.csv`. One example per genre:

- *Essay (E1):* Argue that getting enough sleep each night improves how well you function the next day. Cover three specific effects: sharper focus and memory, better mood and emotional control, and improved physical energy. Write in continuous prose paragraphs only. Do not use bullet points, numbered lists, headers, bold text, or any other formatting.
- *Code:* Write a Python function `is_palindrome(s: str) -> bool` that returns True if `s` reads the same forwards and backwards after converting it to lowercase and removing every character that is not a letter or a digit, and False otherwise. The empty string counts as a palindrome. Use only the Python standard library. Include a docstring and brief inline comments. Return only the code in a single Python code block, with no explanation before or after.
- *Short answer:* Explain why the sky appears blue during the day. Answer in two to four sentences of plain prose.
- *Math:* A bookstore sells notebooks for \$3.00 each and pens for \$1.25 each. Maria buys 4 notebooks and 6 pens. How many dollars does she spend in total? Solve the problem, showing your reasoning step by step in plain prose, and end with a final line of the form ‘Answer: <number>’.

**Frontier judges.** Through OpenRouter at temperature 0, with up to 8,000 output tokens (16,000 for Gemini, whose reasoning counts against the limit). Models: `openai/gpt-5.5`, `anthropic/claude-opus-4.7`, `google/gemini-3.5-flash`, `x-ai/grok-4.3`, `deepseek/deepseek-chat`. The chat-app essays were judged in the lineup and one-text formats on 16–17 August 2026, the API texts on 1 October, and the yes/no and shuffled-word conditions on 5 October. Every request in the lineup, one-text and yes/no formats returned an answer. In the shuffled-word lineup, all 38 of Claude’s requests ended with a provider content filter (on both the host that served it and Anthropic’s own endpoint), and 14 of Gemini’s ended at the output limit or empty; these 52 are treated as missing. Judging the chat-app essays in the first two formats cost \$10.67, writing and judging the API texts about \$31, and the two October conditions about \$11.

## D JUDGE INSTRUCTIONS

Every request, word for word, with the texts in angle brackets. The frontier judges received no system prompt. The open-weight judges received the same instructions with their own four names.

---

## Lineup.

Below are five AI-generated responses to the same task, labelled A through E.

Each response was written by one of these five language models:  
GPT, Claude, Gemini, Grok, DeepSeek.

For each of the five responses, identify which model you believe wrote it, judging only from writing style, structure, and phrasing.

Answer independently for each response. Your five answers do not need to be five different models - name whichever model you believe wrote each response, even if that means naming the same model more than once.

Reply with JSON only, in exactly this form and nothing else:

```
{
  "A": {"model": "<one of GPT, Claude, Gemini, Grok, DeepSeek>", "confidence":
    <1-5>, "reason": "<one short sentence>"},
  "B": {"model": "...", "confidence": <1-5>, "reason": "..."},
  "C": {"model": "...", "confidence": <1-5>, "reason": "..."},
  "D": {"model": "...", "confidence": <1-5>, "reason": "..."},
  "E": {"model": "...", "confidence": <1-5>, "reason": "..."}
}
```

confidence: 1 = pure guess, 5 = certain.

--- RESPONSE A ---  
<response A>

--- RESPONSE B ---  
<response B>

--- RESPONSE C ---  
<response C>

--- RESPONSE D ---  
<response D>

--- RESPONSE E ---  
<response E>

--- END OF RESPONSES ---  
Now output the JSON object described above, and nothing else.

## One text at a time.

The following text was generated by one of these five AI language models:  
GPT, Claude, Gemini, Grok, DeepSeek.

All five options are AI-generated - do not consider the possibility that a human wrote it. Read the text carefully and identify which model most likely produced it, based on writing style, structure, and phrasing.

Reply with JSON only, in exactly this form and nothing else:

```
{"model": "<one of GPT, Claude, Gemini, Grok, DeepSeek>", "confidence": <1-5>, "
  reason": "<one short sentence>"}
```

confidence: 1 = pure guess, 5 = certain.

--- TEXT ---  
<text>  
--- END ---  
Output the JSON object described above, and nothing else.

---

### Did you write this text? (fresh conversation).

The text below was written by an AI language model. It may have been written by you, or by a different model.

Did you write this text? Answer with exactly one word: Yes or No.

--- TEXT ---

<text>

--- END ---

Yes or No?

### Did you write this text? (after answering the prompt; three turns).

[user]

<task prompt>

[assistant]

<the judge's own answer>

[user]

Here is a response to the task above. It may be the response you just wrote, or it may have been written by a different AI model.

Did you write this response? Answer with exactly one word: Yes or No.

--- RESPONSE ---

<candidate>

--- END ---

Yes or No?

### Quality rating (open-weight judges).

Rate how well the response below carries out the task, considering accuracy, completeness, clarity and how closely it follows the instructions. Use a scale from 1 (very poor) to 9 (excellent). Answer with a single digit and nothing else.

--- TASK ---

<task prompt>

--- RESPONSE ---

<text>

--- END ---

Rating (1-9):

## E STATISTICAL METHODS

**Self-advantage.** Each of a judge’s texts is judged by every judge in the panel. Under the null hypothesis of no self-advantage, the identity of the judge designated as “self” is exchangeable across the judges of a given text. We therefore compute the  $p$ -value by randomly reassigning the “self” label among the judges of each text (with an exact computation for the chat-app study). This keeps a text’s peer judgments together and accounts for how easy each text is. Intervals resample prompts (10,000 times for the chat-app study, 4,000 elsewhere). We also fit a logistic regression with errors clustered by prompt and a model with random effects for prompt and judge (Table 19); in the lineup, none changes the sign or the significance of the self-advantage for Claude, GPT or Grok. In the one-text format the model-based estimates are less stable: under the random-effects model GPT’s advantage weakens to an uncorrected  $p = 0.033$  and Claude’s self term becomes significantly negative (odds ratio 0.16), where the randomisation test finds no difference.

**Discrimination.** We randomly reassign, within each lineup (or each prompt’s set of texts), which text is the judge’s own, and compare the observed difference between hit and false-alarm rates with this distribution. If a judge names itself  $m$  times per lineup on average and there are  $k$  candidates, its false-alarm rate is  $(m - h)/(k - 1)$ , where  $h$  is its self-naming rate, so discrimination equals  $(kh - m)/(k - 1)$  and is positive when  $h > m/k$ . For a judge that names itself once in every lineup,  $m = 1$  and the discrimination test coincides with the self-naming test. The frontier judges use each of the five names once in 85.3% of chat-app lineups and 89.8% of API lineups ( $m$  between 0.87 and 1.24), and the two tests give the same verdict in all ten frontier lineup cases. In those cases the peer baseline is the only control that changes a verdict (Claude and Grok on the API texts). The false-alarm control changes verdicts where judges repeat names: in the one-text and yes/no formats, and in the open-weight lineup, where 65.8% of lineups use each name once and Qwen names itself about twice per lineup.

**Corrections.** Holm’s correction is applied across the judges of a panel within each format. If it is instead applied across all 37 cases, the self-naming test flags 13 cases, of which 7 discriminate and 3 also exceed their peer baseline; Claude in the yes/no format is the case that no longer discriminates. The four peer judgments of a text are nearly independent (design effect 1.04 in the lineup).

**Fixed responses.** In 12 of the 37 cases (9 frontier, 3 open-weight) the judge gives the same answer on at least 97% of all texts in that format, naming itself on fewer than 3% of texts in 10 cases and on more than 97% in 2 (Llama one text at a time, Mistral in the yes/no format). These cases describe a fixed response and carry little information about recognition, and the self-naming test flags only the last two. Among the other 25 cases the three counts are 13, 8 and 3.

**Skill adjustment.** A judge with high overall attribution accuracy is more likely to exceed its peer baseline. For each judge and each peer, we take the difference between the judge’s and the peer’s accuracy on the texts of the three authors that are neither of them, and we subtract the mean of these four differences from the judge’s self-advantage. This leaves Claude at +35.1, GPT at +19.3 and Grok at −20.2 points, and moves Gemini from no difference to −19.3.

| Format | Judge    | Self-adv. | Fisher               | Randomisation        | Bootstrap            | GEE OR ( $p$ )                 | Random-effects OR ( $p$ )     |
|--------|----------|-----------|----------------------|----------------------|----------------------|--------------------------------|-------------------------------|
| Lineup | GPT      | +27.6     | 0.002                | 0.002                | $6.0 \times 10^{-4}$ | 3.17 (0.002)                   | 2.38 (0.009)                  |
|        | Claude   | +32.9     | $1.6 \times 10^{-4}$ | $3.0 \times 10^{-4}$ | $2.0 \times 10^{-4}$ | 5.63 ( $3.6 \times 10^{-4}$ )  | 6.09 ( $1.0 \times 10^{-4}$ ) |
|        | Gemini   | −9.9      | 0.303                | 0.309                | 0.191                | 0.57 (0.227)                   | 0.41 (0.029)                  |
|        | Grok     | −23.7     | 0.001                | 0.002                | $2.0 \times 10^{-4}$ | 0.14 (0.008)                   | 0.16 (0.004)                  |
|        | DeepSeek | −0.7      | 1.000                | 1.000                | 0.923                | 0.96 (0.934)                   | 1.38 (0.420)                  |
| Single | GPT      | +33.6     | $2.6 \times 10^{-5}$ | $4.1 \times 10^{-5}$ | $2.0 \times 10^{-4}$ | 11.42 ( $5.6 \times 10^{-4}$ ) | 4.04 (0.033)                  |
|        | Claude   | +4.6      | 0.631                | 0.651                | 0.445                | 1.43 (0.478)                   | 0.16 ( $2.0 \times 10^{-4}$ ) |
|        | Gemini   | −1.3      | 1.000                | 1.000                | 0.265                | —                              | —                             |
|        | Grok     | −0.7      | 1.000                | 1.000                | 0.714                | —                              | —                             |
|        | DeepSeek | −0.7      | 1.000                | 1.000                | 0.722                | —                              | —                             |

Table 19: Frontier judges, chat-app essays: the self-advantage test under five analyses (uncorrected two-sided  $p$ ). Fisher’s exact test treats the 152 peer judgments as independent and is shown only for comparison; the exact within-response randomisation test is the one the paper reports. GEE: logistic regression of correctness on a self indicator over the 190 judgments of the judge’s texts, exchangeable working correlation within prompt, bias-reduced sandwich  $p$ . Random effects: all 950 judgments, author fixed effects, a self term per judge, crossed random intercepts for prompt and judge; it absorbs each judge’s general skill. — where a judge never names itself and the estimate is the prior.

## F OPEN-WEIGHT MODELS

Qwen2.5-7B-Instruct, Llama-3.1-8B-Instruct, Mistral-7B-Instruct-v0.3 and Phi-4-mini-instruct, from Unsloth’s 4-bit (NF4) exports. To run them on one 8 GB laptop GPU we converted each layer to PyTorch’s built-in 4-bit format (groups of 32). The same converted weights wrote and judged the

texts, so a judge and the author of its own texts are the same fixed model weights. Gemma-2-9B was planned as a fifth judge and dropped before any judging because it did not fit in memory. Texts were sampled at temperature 0.7 (top- $p$  0.95, fixed seeds), two independent answers per prompt. Lineup and one-text judgments use greedy decoding; for yes/no questions and quality ratings we read the probabilities of the answer options directly. The options received at least 89% of the probability in every yes/no judgment. The most likely quality rating is 9 for 89% of Mistral’s ratings and 78% of Qwen’s, and 7, 8 or 9 for 99% of all ratings. A classifier trained on the first sample of some prompts and tested on the second sample of others attributes 70.4% of texts, so each model’s style is stable across samples. In the lineup, Phi names Mistral for the first response in 116 of 120 lineups and itself for the last in 102, and Llama names itself for the first response in 114.

## G STYLE CLASSIFIER

A random forest (500 trees) over 18 interpretable features (Table 20), evaluated with five-fold cross-validation in which no prompt appears in both training and test data. Mean essay length differs by a factor of about two across models. With every length-related feature removed, a logistic regression still reaches 71.7%; with every text cut to the shortest in its prompt group, the full feature set still reaches 67% while a length-only classifier falls to 22%, near chance. The same features attribute the open-weight texts at 72.5%, from 46.2% on math to 85.8% on essays.

| Feature       | Fam | Imp.   | Feature              | Fam | Imp.   |
|---------------|-----|--------|----------------------|-----|--------|
| sent_count*   | L   | 0.1267 | comma_per_100w       | P   | 0.0458 |
| avg_para_len* | L   | 0.0927 | gunning_fog          | R   | 0.0439 |
| avg_sent_len* | L   | 0.0894 | flesch_kincaid_grade | R   | 0.0435 |
| word_count*   | L   | 0.0881 | flesch_reading_ease  | R   | 0.0389 |
| sent_len_sd   | L   | 0.0785 | semicolon_per_100w*  | P   | 0.0316 |
| para_count*   | L   | 0.0771 | hedge_per_100w       | X   | 0.0264 |
| hapax_rate*   | X   | 0.0599 | passive_rate         | X   | 0.0223 |
| ttr*          | X   | 0.0589 | colon_per_100w       | P   | 0.0215 |
| avg_word_len  | X   | 0.0483 | emdash_per_100w*     | P   | 0.0065 |

Table 20: The 18 surface features with out-of-fold random-forest importance. Fam: L = length, P = punctuation/formatting, X = lexical, R = readability. \* marks the repository’s length-proxy set.