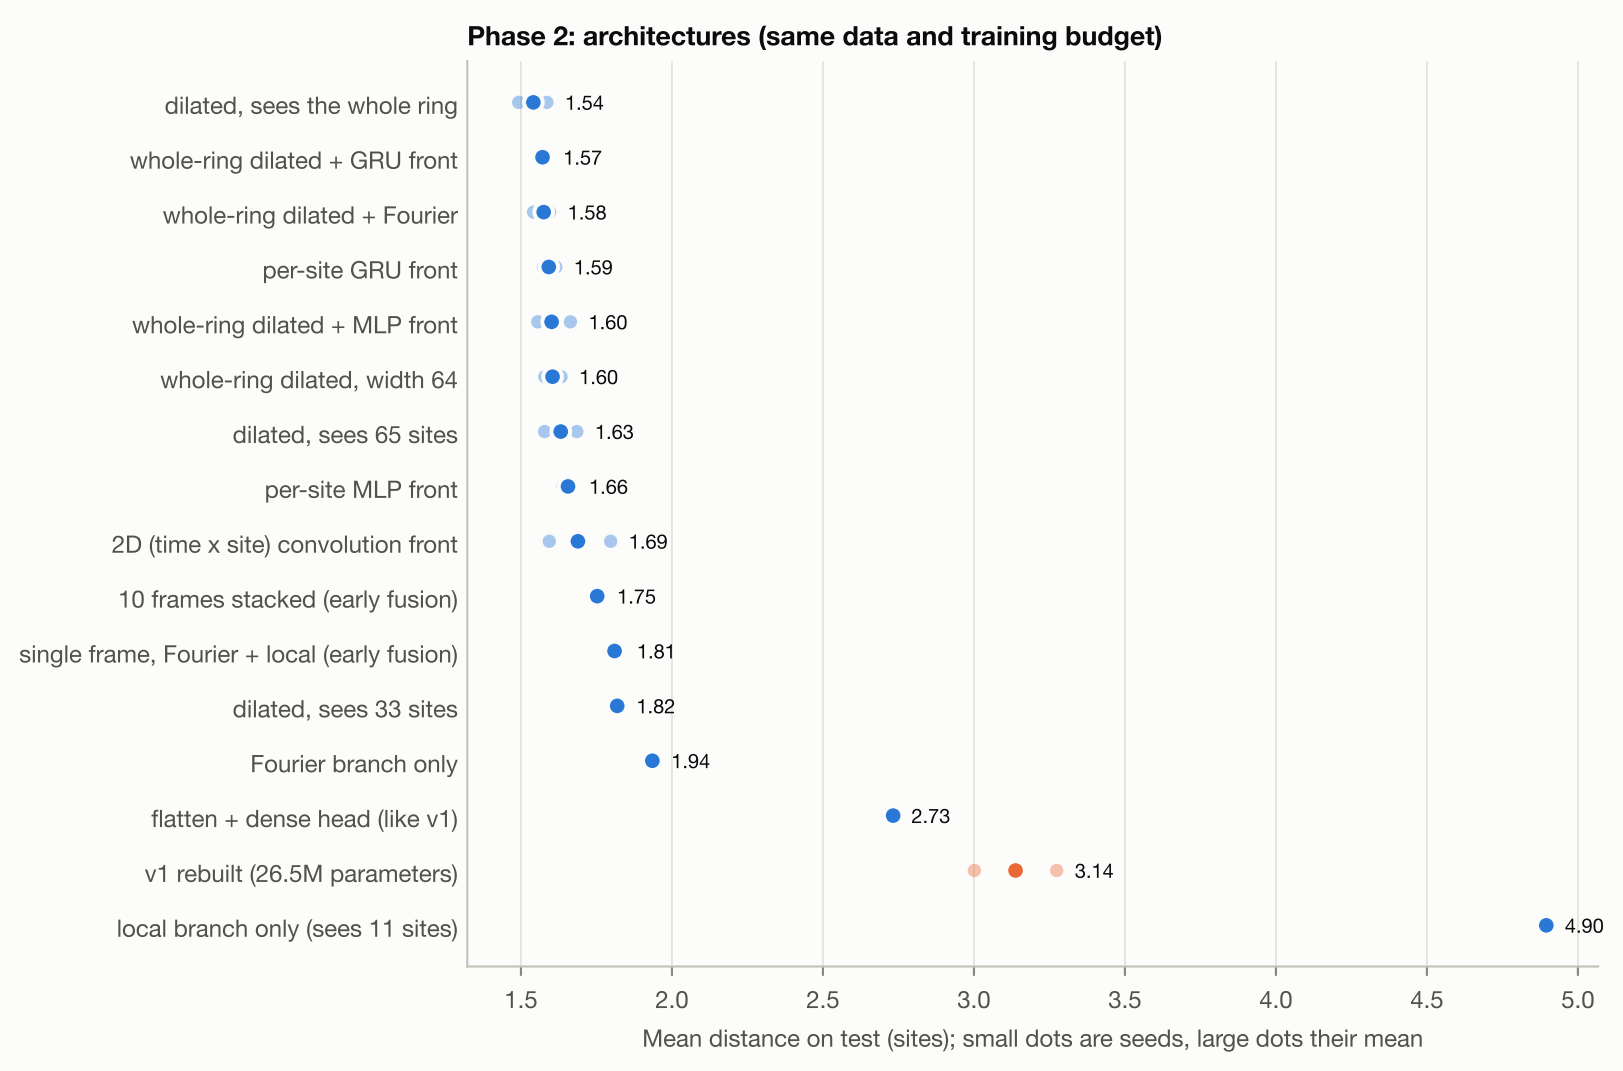
Phase 2: architectures (same data and training budget)
dilated, sees the whole ring
whole-ring dilated + GRU front
whole-ring dilated + Fourier
per-site GRU front
whole-ring dilated + MLP front
whole-ring dilated, width 64
dilated, sees 65 sites
per-site MLP front
2D (time x site) convolution front
10 frames stacked (early fusion)
single frame, Fourier + local (early fusion)
dilated, sees 33 sites
Fourier branch only
flatten + dense head (like v1)
v1 rebuilt (26.5M parameters)
local branch only (sees 11 sites)
1.54
1.57
1.58
1.59
1.60
1.60
1.63
1.66
1.69
1.75
1.81
1.82
1.94
2.73
3.14
4.90
1.5
2.0
2.5
3.0
3.5
4.0
4.5
5.0
Mean distance on test (sites); small dots are seeds, large dots their mean