



Grado en ingeniería en tecnologías de telecomunicación

Curso Académico 2015/2016

Trabajo Fin de Grado

Panel 3D de seguimiento de desarrollo de software

Autor : Adrián Alonso Barriuso

Tutor : Dr. Jesús M. González Barahona



# Proyecto Fin de Carrera

FIXME: Título

**Autor :** Adrián Alonso Barriuso **Tutor :** Dr. Jesús M. González Barahona

La defensa del presente Proyecto Fin de Grado se realizó el día            de  
de 2016, siendo calificada por el siguiente tribunal:

**Presidente:**

**Secretario:**

**Vocal:**

y habiendo obtenido la siguiente calificación:

**Calificación:**

Fuenlabrada, a            de            de 20XX



*Dedicado a  
mi familia / mi abuelo / mi abuela*



# Agradecimientos

Aquí vienen los agradecimientos... Aunque está bien acordarse de la pareja, no hay que olvidarse de dar las gracias a tu madre, que aunque a veces no lo parezca disfrutará tanto de tus logros como tú... Además, la pareja quizás no sea para siempre, pero tu madre sí.





# Resumen

El presente proyecto tiene como objetivo facilitar la visualización de datos y estadísticas de desarrollo de software y hacerlo en 3D dentro de cualquier navegador web sin la necesidad de instalar ningún controlador, plugin o software adicional.

Para realizarlo se ha utilizado principalmente el lenguaje de programación JavaScript, y HTML5 como base para poder servirse de WebGL, una librería que nos permite renderizar gráficos en 3D con aceleración gráfica de forma nativa en casi cualquier navegador. No obstante, dado que WebGL es de relativo bajo nivel y sería muy complicado realizar aplicaciones directamente sobre su API, se ha utilizado una librería que proporciona un mayor nivel de abstracción que WebGL, esta librería es Three.js.

- ¿De qué va este proyecto? ¿Cuál es su objetivo principal?
- ¿Cómo se ha realizado? ¿Qué tecnologías están involucradas?
- ¿En qué contexto se ha realizado el proyecto? ¿Es un proyecto dentro de un marco general?

Lo mejor es escribir el resumen al final.



# Summary

This project aims to facilitate the visualization of data and statistics from software development in 3D, inside any web browser without the need to install any drivers , plugin or additional software.

To do this, it has been mainly used the JavaScript programming language , and HTML5 as the basis to use WebGL, a library that allow us to render 3D graphics with hardware acceleration natively in almost any browser. However , since webGL is relatively low level and would be very difficult to make applications directly on its API , it has been used a library that provides a higher level of abstraction than WebGL, this library is Three.js.



# Índice general

<b>1. Introduction</b>	<b>1</b>
1.1. Objectives . . . . .	1
1.1.1. Problem description . . . . .	1
1.1.2. Main Objective . . . . .	1
1.1.3. Requeriments . . . . .	1
1.2. Demos . . . . .	1
<b>2. Project context</b>	<b>3</b>
2.1. Free software . . . . .	3
2.2. Objetivos específicos . . . . .	3
2.3. Planificación temporal . . . . .	3
<b>3. Objetivos</b>	<b>5</b>
3.1. Objetivo general . . . . .	5
3.2. Objetivos específicos . . . . .	5
3.3. Planificación temporal . . . . .	5
<b>4. Used technologies</b>	<b>7</b>
4.1. HTML5 . . . . .	7
4.1.1. General description . . . . .	7
4.1.2. In this project . . . . .	8
4.2. Javascript . . . . .	8
4.2.1. Main features . . . . .	9
4.2.2. In this project . . . . .	11
4.3. JQuery . . . . .	11

4.4. WebGL . . . . .	11
4.4.1. Support . . . . .	12
4.4.2. In this project . . . . .	14
4.5. Three . . . . .	14
4.5.1. Usage example . . . . .	15
4.5.2. In this project . . . . .	18
4.6. Domevents . . . . .	18
4.7. Crossfilter . . . . .	19
4.7.1. General description . . . . .	19
4.7.2. In this project . . . . .	20
4.8. Orbitcontrols . . . . .	20
<b>5. Development</b>	<b>21</b>
5.0.1. Scrum methodology . . . . .	21
5.0.2. Iteration 0: Investigation and learning . . . . .	23
5.0.3. Iteration 1: First demos . . . . .	33
5.0.4. Iteration 2: Interactivity and events . . . . .	37
5.0.5. Iteration 3: Filtering . . . . .	40
5.0.6. Iteration 4: Framework creation . . . . .	42
5.0.7. Iteration 5: Panel creation and additional features . . . . .	44
<b>6. Design and implementation</b>	<b>47</b>
6.1. Introduction . . . . .	47
6.1.1. General description . . . . .	47
<b>7. Resultados</b>	<b>49</b>
<b>8. Conclusiones</b>	<b>51</b>
8.1. Consecución de objetivos . . . . .	51
8.2. Aplicación de lo aprendido . . . . .	51
8.3. Lecciones aprendidas . . . . .	51
8.4. Trabajos futuros . . . . .	52
8.5. Valoración personal . . . . .	52

<i>ÍNDICE GENERAL</i>	XI
<b>A. Appendix</b>	<b>53</b>
A.1. HTML5 sheet . . . . .	53
A.2. Raycasting example . . . . .	54





# Índice de figuras

1.1. Página con enlaces a hilos . . . . .	2
4.1. Car rendered with Three.js . . . . .	16
4.2. Basic cube made with Three.js . . . . .	18
5.1. The scrum framework . . . . .	22
5.2. Index of Stemkoski tutorials . . . . .	26
5.3. Three.js 'Hello world' by Stemkoski . . . . .	32
5.4. Different materials, same light source (the white sphere) . . . . .	32
5.5. Commits(blue) and authors(red) . . . . .	35
5.6. Two points of view . . . . .	35
5.7. Line and pie charts built with line shapes . . . . .	37
5.8. Color change thanks to ray caster . . . . .	38
5.9. 3D text . . . . .	39
5.10. dc.js example . . . . .	40
5.11. Example of filtering, note that the bars chart is ordered from top to bottom for now . . . . .	41
5.12. Basic mixin structure . . . . .	43
5.13. Extended mixin structure . . . . .	45
6.1. Basic structure . . . . .	48



# Capítulo 1

## Introduction

En este capítulo se introduce el proyecto. Debería tener información general sobre el mismo, dando la información sobre el contexto en el que se ha desarrollado.

### 1.1. Objectives

#### 1.1.1. Problem description

#### 1.1.2. Main Objective

#### 1.1.3. Requeriments

### 1.2. Demos

Sobre el uso de las comas<sup>1</sup>

```
From gaurav at gold-solutions.co.uk  Fri Jan 14 14:51:11 2005
From: gaurav at gold-solutions.co.uk  (gaurav_gold)
Date: Fri Jan 14 19:25:51 2005
Subject: [Mailman-Users] mailman issues
Message-ID: <003c01c4fa40$1d99b4c0$94592252@gaurav7klgnyif>
```

Dear Sir/Madam,

---

<sup>1</sup><http://narrativabreve.com/2015/02/opiniones-de-un-corrector-de-estilo-11-recetas-par>  
html



Figura 1.1: Página con enlaces a hilos

How can people reply to the mailing list? How do i turn off this feature? How can i also enable a feature where if someone replies the newsletter the email gets deleted?

Thanks

From msapiro at value.net Fri Jan 14 19:48:51 2005  
 From: msapiro at value.net (Mark Sapiro)  
 Date: Fri Jan 14 19:49:04 2005  
 Subject: [Mailman-Users] mailman issues  
 In-Reply-To: <003c01c4fa40\$1d99b4c0\$94592252@gaurav7klgnyif>  
 Message-ID: <PC173020050114104851057801b04d55@msapiro>

gaurav\_gold wrote:

>How can people reply to the mailing list? How do i turn off this feature? How can i also enable a feature where if someone replies the newsletter the email gets deleted?

See the FAQ

>Mailman FAQ: <http://www.python.org/cgi-bin/faqw-mm.py>  
 article 3.11

# **Capítulo 2**

## **Project context**

### **2.1. Free software**

### **2.2. Objetivos específicos**

### **2.3. Planificación temporal**



# Capítulo 3

## Objetivos

### 3.1. Objetivo general

labelsec:objetivo-general

### 3.2. Objetivos específicos

labelsec:objetivos-especificos

### 3.3. Planificación temporal

labelsec:planificacion-temporal





# Capítulo 4

## Used technologies

### 4.1. HTML5

#### 4.1.1. General description

HTML5 is a markup language used for structuring and presenting content on the World Wide Web. It was finalized, and published, on 28 October 2014 by the World Wide Web Consortium (W3C) This is the fifth revision of the HTML standard since the inception of the World Wide Web. The previous version, HTML 4, was standardized in 1997.

Its core aims are to improve the language with support for the latest multimedia while keeping it easily readable by humans and consistently understood by computers and devices (web browsers, parsers, etc.). HTML5 is intended to subsume not only HTML 4, but also XHTML 1 and DOM Level 2 HTML.

In particular, HTML5 adds many new syntactic features. These include the new video, audio and canvas elements, as well as the integration of scalable vector graphics (SVG) content (replacing generic object tags) and MathML for mathematical formulas. These features are designed to make it easy to include and handle multimedia and graphical content on the web without having to resort to proprietary plugins and APIs. Other new page structure elements, such as main, section, article, header, footer, aside, nav and figure, are designed to enrich the semantic content of documents. New attributes have been introduced, some elements and attributes have been removed and some elements, such as a, cite and menu, have been changed, redefined or standardized. The APIs and Document Object Model (DOM) are no longer afterthoughts, but

are fundamental parts of the HTML5 specification. HTML5 also defines in some detail the required processing for invalid documents so that syntax errors will be treated uniformly by all conforming browsers and other user agents.

#### 4.1.2. In this project

As we said in the previous subsection, HTML5 adds the new syntactic feature known as Canvas, allowing us to render dynamic graphics and animations on our web pages. Almost all web browsers supports Canvas today. To render 3D charts, we must to tell Three.js the canvas element that will contain our beautiful crafted charts:

```
// attach div element to variable to contain the renderer  
container = document.getElementById( 'ThreeJS' );  
// attach renderer to the container div  
canvas=renderer.domElement  
container.appendChild( canvas );
```

Where the container is the div with ThreeJS tag(for example).

## 4.2. Javascript

JavaScript is a high-level, dynamic, untyped, and interpreted programming language. It has been standardized in the ECMAScript language specification. Alongside HTML and CSS, it is one of the three essential technologies of World Wide Web content production; the majority of websites employ it and it is supported by all modern Web browsers without plug-ins. JavaScript is prototype-based with first-class functions, making it a multi-paradigm language, supporting object-oriented, imperative, and functional programming styles. It has an API for working with text, arrays, dates and regular expressions, but does not include any I/O, such as networking, storage, or graphics facilities, relying for these upon the host environment in which it is embedded.

Despite some naming, syntactic, and standard library similarities, JavaScript and Java are otherwise unrelated and have very different semantics. The syntax of JavaScript is actually derived from C, while the semantics and design are influenced by the Self and Scheme programming languages.

JavaScript is also used in environments that are not Web-based, such as PDF documents, site-specific browsers, and desktop widgets. Newer and faster JavaScript virtual machines (VMs) and platforms built upon them have also increased the popularity of JavaScript for server-side Web applications. On the client side, JavaScript has been traditionally implemented as an interpreted language, but more recent browsers perform just-in-time compilation. It is also used in game development, the creation of desktop and mobile applications, and server-side network programming with runtime environments such as Node.js.

### 4.2.1. Main features

- Imperative and structured: JavaScript supports much of the structured programming syntax from C (e.g., if statements, while loops, switch statements, do while loops, etc.). One partial exception is scoping: JavaScript originally had only function scoping with var. ECMAScript 2015 adds a let keyword for block scoping, meaning JavaScript now has both function and block scoping. Like C, JavaScript makes a distinction between expressions and statements. One syntactic difference from C is automatic semicolon insertion, which allows the semicolons that would normally terminate statements to be omitted.
- Dynamic: As with most scripting languages, JavaScript is dynamically typed; a type is associated with each value, rather than just with each expression. For example, a variable that is at one time bound to a number may later be re-bound to a string. JavaScript supports various ways to test the type of an object, including duck typing. JavaScript includes an eval function that can execute statements provided as strings at run-time.
- Prototype-based (Object-oriented): JavaScript is almost entirely object-based. In JavaScript, an object is an associative array, augmented with a prototype (see below); each string key provides the name for an object property, and there are two syntactical ways to specify such a name: dot notation (`obj.x = 10`) and bracket notation (`obj['x'] = 10`). A property may be added, rebound, or deleted at run-time. Most properties of an object (and any property that belongs to an object's prototype inheritance chain) can be enumerated using a for...in loop.

JavaScript has a small number of built-in objects, including Function and Date.

- Functional: A function is first-class; a function is considered to be an object. As such, a function may have properties and methods, such as `.call()` and `.bind()`. A nested function is a function defined within another function. It is created each time the outer function is invoked. In addition, each nested function forms a lexical closure: The lexical scope of the outer function (including any constant, local variable, or argument value) becomes part of the internal state of each inner function object, even after execution of the outer function concludes. JavaScript also supports anonymous functions.

### Syntax examples:

```
var x; // defines the variable x, the special value 'undefined' (not to be
       confused with an undefined value) is assigned to it by default
var y = 2; // defines the variable y and assigns the value of 2 to it

//A simple recursive function:
function factorial(n) {
    if (n == 0) {
        return 1;
    }
    return n*factorial(n - 1);
}

//Anonymous function (or lambda) syntax and closure example:
var displayClosure = function() {
    var count = 0;
    return function () {
        return ++count;
    };
}
var inc = displayClosure();
inc(); // returns 1
inc(); // returns 2
inc(); // returns 3
```

### 4.2.2. In this project

Is have been used JavaScript for all the scripts in the project, and also, all the libraries we have included are written in JavaScript, these libraries are described in detail on the following sections.

## 4.3. JQuery

PREGUNTAR SI LO INCLUYO, YA QUE SOLO SE USA EVENTUALENTE PARA RE-COGER LOS DATOS Y NO ES PARTE DE LA LIBRERIA

## 4.4. WebGL

WebGL (Web Graphics Library) is a JavaScript API for rendering interactive 3D computer graphics and 2D graphics within any compatible web browser without the use of plug-ins. WebGL is integrated completely into all the web standards of the browser allowing GPU accelerated usage of physics and image processing and effects as part of the web page canvas. WebGL elements can be mixed with other HTML elements and composited with other parts of the page or page background. WebGL programs consist of control code written in JavaScript and shader code that is executed on a computer's Graphics Processing Unit (GPU). WebGL is designed and maintained by the non-profit Khronos Group.

WebGL 1.0 is based on OpenGL ES 2.0 and provides an API for 3D graphics. It uses the HTML5 canvas element and is accessed using Document Object Model interfaces. Automatic memory management is provided as part of the JavaScript language.

Like OpenGL ES 2.0, WebGL does not have the fixed-function APIs introduced in OpenGL 1.0 and deprecated in OpenGL 3.0. This functionality can instead be provided by the user in the JavaScript code space. Shaders in WebGL are expressed directly in GLSL (OpenGL Shading Language, a high-level shading language based on the syntax of the C programming language).

### 4.4.1. Support

WebGL is widely supported in modern browsers. However its availability is dependent on other factors like the GPU supporting it. The official WebGL website offers a simple test page<sup>1</sup>.

More detailed information (like what renderer the browser uses, and what extensions are available) is provided at third-party websites.

#### Desktop Browsers:

- Google Chrome: WebGL has been enabled on all platforms that have a capable graphics card with updated drivers since version 9, released in February 2011. By default on Windows, Chrome uses the ANGLE (Almost Native Graphics Layer Engine) renderer to translate OpenGL ES to Direct X 9.0c or 11.0, which have better driver support. On Linux and Mac OS X the default renderer is OpenGL however. It is also possible to force OpenGL as the renderer on Windows. Since September 2013, Chrome also has a newer Direct3D 11 renderer, which however requires a newer graphics card.
- Mozilla Firefox: WebGL has been enabled on all platforms that have a capable graphics card with updated drivers since version 4.0. Since 2013 Firefox also uses DirectX on the Windows platform via ANGLE.
- Safari: Safari 6.0 and newer versions installed on OS X Mountain Lion, Mac OS X Lion and Safari 5.1 on Mac OS X Snow Leopard implemented support for WebGL, which was disabled by default before Safari 8.0.
- Opera: WebGL has been implemented in Opera 11 and 12, although was disabled by default in 2014.
- Internet Explorer: WebGL is partially supported in Internet Explorer 11. It initially failed the majority of official WebGL conformance tests, but Microsoft later released several updates. The latest 0.94 WebGL engine currently passes 97 % of Khronos tests. WebGL support can also be manually added to earlier versions of Internet Explorer using third-party plugins such as IEWebGL.
- Microsoft Edge: The initial stable release supports WebGL version 0.95.

---

<sup>1</sup><http://get.webgl.org/>

**Mobile Browsers:**

- BlackBerry 10: WebGL is available for BlackBerry devices since OS version 10.00
- BlackBerry 10: WebGL is available via WebWorks and browser in PlayBook OS 2.00
- Android Browser: Basically unsupported, but the Sony Ericsson Xperia range of Android smartphones have had WebGL capabilities following a firmware upgrade. Samsung smartphones also have WebGL enabled (verified on Galaxy SII (4.1.2) and Galaxy Note 8.0 (4.2)). Supported in Google Chrome that replaced Android browser in many phones (but is not a new standard Android Browser).
- Internet Explorer: WebGL is available on Windows Phone 8.1.
- Firefox for mobile WebGL is available for Android and MeeGo devices since Firefox 4.
- Firefox OS
- Google Chrome: WebGL is available for Android devices since Google Chrome 25 and enabled by default since version 30.
- Maemo: In Nokia N900, WebGL is available in the stock microB browser from the PR1.2 firmware update onwards.
- MeeGo: WebGL is unsupported in the stock browser "Web." However, it is available through Firefox.
- Opera Mobile: Opera Mobile 12 supports WebGL (on Android only).
- Sailfish OS: WebGL is supported in the default Sailfish browser.
- Tizen.
- Ubuntu Touch.
- WebOS.
- iOS: WebGL is available for mobile Safari, in iOS 8.

### 4.4.2. In this project

The WebGL API may be too tedious to use directly without some utility libraries due to its low abstraction level. Loading scene graphs and 3D objects in the popular industry formats is also not directly provided for. JavaScript libraries have been built (or sometimes ported to WebGL) to provide the additional functionality. A non-exhaustive list of libraries that provide many high-level features includes BabylonJS, three.js, O3D, OSG.JS, CopperLicht and GLGE. There also has been a rapid emergence of game engines for WebGL, including Unreal Engine 4 and Unity 5. The Stage3D/Flash-based Away3D high-level library also has a port to WebGL via TypeScript. A more light-weight utility library that provides just the vector and matrix math utilities for shaders is sylvester.js. It is sometimes used in conjunction with a WebGL specific extension called glUtils.js.

To avoid this low abstraction level, we use Three.js in our case, but here<sup>2</sup> we can find other useful webGL frameworks. To see Three.js in detail, we will go to the next section.

## 4.5. Three

Three.js is a cross-browser JavaScript library/API used to create and display animated 3D computer graphics in a web browser. Three.js uses WebGL. The source code is hosted at a repository on GitHub<sup>3</sup>.

Three.js allows the creation of GPU-accelerated 3D animations using the JavaScript language as part of a website without relying on proprietary browser plugins. This is possible thanks to the advent of WebGL.

High-level libraries such as Three.js or GLGE, SceneJS, PhiloGL or a number of other libraries make it possible to author complex 3D computer animations that display in the browser without the effort required for a traditional standalone application or a plugin.

#### **Main features:**

1. Effects: Anaglyph, cross-eyed and parallax barrier.
2. Scenes: add and remove objects at run-time; fog.

---

<sup>2</sup>[https://en.wikipedia.org/wiki/List\\_of\\_WebGL\\_frameworks/](https://en.wikipedia.org/wiki/List_of_WebGL_frameworks/)

<sup>3</sup><https://github.com/mrdoob/three.js/>



3. Cameras: perspective and orthographic; controllers: trackball, FPS, path and more.
4. Animation: armatures, forward kinematics, inverse kinematics, morph and keyframe.
5. Lights: ambient, direction, point and spot lights; shadows: cast and receive.
6. Materials: Lambert, Phong, smooth shading, textures and more.
7. Shaders: access to full OpenGL Shading Language (GLSL) capabilities: lens flare, depth pass and extensive post-processing library.
8. Objects: meshes, particles, sprites, lines, ribbons, bones and more - all with Level of detail.
9. Geometry: plane, cube, sphere, torus, 3D text and more; modifiers: lathe, extrude and tube.
10. Data loaders: binary, image, JSON and scene.
11. Utilities: full set of time and 3D math functions including frustum, matrix, quaternion, UVs and more.
12. Export and import: utilities to create Three.js-compatible JSON files from within: Blender, openCTM, FBX, Max, and OBJ.
13. Support: API documentation is under construction, public forum and wiki in full operation.
14. Examples: Over 150 files of coding examples plus fonts, models, textures, sounds and other support files
15. Debugging: Stats.js, WebGL Inspector, Three.js Inspector.

An example of how complex would be our rendered graphics with Three.js: [5.2](#).

#### **4.5.1. Usage example**

The Three.js library is a single JavaScript file. It can be included within a web page by linking to a local or remote copy:



Figura 4.1: Car rendered with Three.js

```
<script src="js/three.js"></script>
```

The following code creates a scene, adds a camera and a cube to the scene, creates a WebGL renderer and adds its viewport in the document.body element. Once loaded, the cube rotates about its X- and Y-axis.

```
var camera, scene, renderer;
var geometry, material, mesh;

init();
animate();

function init() {

    camera = new THREE.PerspectiveCamera(75, window.innerWidth / window.
        innerHeight, 1, 10000);
    camera.position.z = 1000;

    scene = new THREE.Scene();

    var light = new THREE.PointLight(0xffffff, 0.8);
    light.position.set(0, 0, 200);
    scene.add(light);
```

```
geometry = new THREE.BoxGeometry(200, 200, 200);
material = new THREE.MeshLambertMaterial({
    color: 0xff0000,
    wireframe: false
});

mesh = new THREE.Mesh(geometry, material);
scene.add(mesh);

renderer = new THREE.WebGLRenderer();
renderer.setSize(window.innerWidth, window.innerHeight);
renderer.setClearColor( 0xd8d8d8 );

document.body.appendChild(renderer.domElement);
}

function animate() {

    requestAnimationFrame(animate);

    mesh.rotation.x += 0.01;
    mesh.rotation.y += 0.02;

    renderer.render(scene, camera);

}
```

If all went well, we will see something like this: figure 4.2.

Also, you can play with the example following this JSfiddle link <sup>4</sup>

---

<sup>4</sup><https://jsfiddle.net/no0aeknq/>

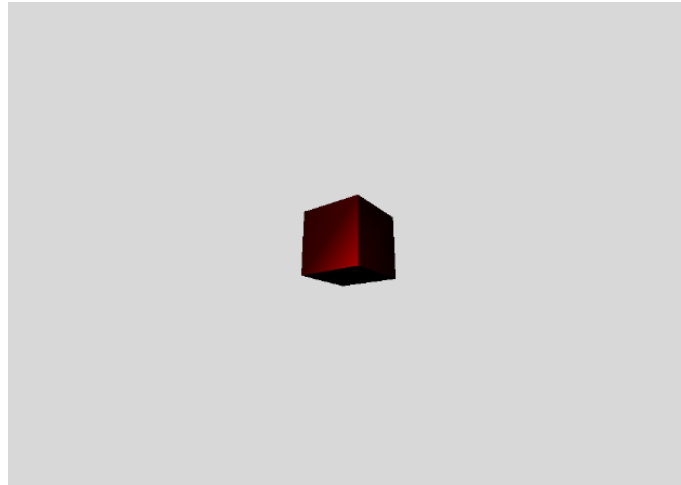


Figura 4.2: Basic cube made with Three.js

### 4.5.2. In this project

We choose Three.js to write our library because it is one of the most extended WebGL graphics library written on JavaScript and it has a growing community of programmers. However, not all good news, due to it is a relatively new technology, its documentation is a little incomplete and outdated. Therefore, the learning mostly consists of reading code from other developers.

We can find some highly commented use examples in several sites, but they are too old in many cases, using old versions of Three.js that require some changes. One of the used tutorials is a good example of this and we can find it on GitHub<sup>5</sup>. It has a large number of examples of increasing complexity, but we will need to make some changes on its basis if we use the latest version of Three.js.

In addition, we have a very complete Udacity course where we can learn the foundations of interactive 3D graphics using Three.js. It contains videos, examples, exercises and even exams. You can register here<sup>6</sup>.

## 4.6. Domevents

To interact with our charts, we need to manage the classic Javascript events, like 'click', 'mouseover', 'mouseup'...etc. With Three we must to create an invisible ray which intersects with the scene

---

<sup>5</sup><http://stemkoski.github.io/Three.js>

<sup>6</sup><https://www.udacity.com/course/interactive-3d-graphics--cs291>

objects and then do the corresponding thing according to the event and the object. We believe this is a little unintuitive and there is a three.js extension which provide dom events inside our 3d scene allowing us to forget the ray casting. This is `THREEx.DomEvent.js`<sup>7</sup>.

All we have to do is to create a `domEvents` object and when we need to bind an event with a mesh just apply a method to the `domEvents` object. Here we have a simple example:

```
//create the domEvents object with Three camera and renderer previously created
var domEvents = new THREEx.DomEvents(camera, renderer.domElement);

//create a simple cube and add it to the scene
var geometry = new THREE.BoxGeometry(200, 200, 200);
var material = new THREE.MeshBasicMaterial({ color: 0xff0000 });
var cube = new THREE.Mesh(geometry, material);
scene.add(cube);

//bind the cube with the event
domEvents.bind(cube, 'click', function(object3d){
    alert('you clicked the cube');
});
```

When we want to unbind an event, just need to call the `unbind` method like this:

```
domEvents.unbind(cube, 'click');
```

## 4.7. Crossfilter

### 4.7.1. General description

Crossfilter is a JavaScript library for exploring large multivariate datasets in the browser. Crossfilter supports extremely fast ( 30ms) interaction with coordinated views, even with datasets containing a million or more records.

Since most interactions only involve a single dimension, and then only small adjustments are made to the filter values, incremental filtering and reducing is significantly faster than starting from scratch. Crossfilter uses sorted indexes (and a few bit-twiddling hacks) to make this

---

<sup>7</sup><https://github.com/jeromeetienne/threex.domevents>

possible, dramatically increasing the performance of live histograms and top-K lists. For more details on how Crossfilter works, see the API reference <sup>8</sup>.

#### 4.7.2. In this project

As we will see in its corresponding section, we can filter the dimensions of our data sets, leading to re-render (or rebuild) the charts related to this dimension, so, in order to improve the performance, we need to handle the data sets as fast as we can, and Crossfilter allow us to do it extremely fast.

AÑADO UN EJEMPLO DE USO CON CODIGO?¿

### 4.8. Orbitcontrols

LO PONGO?¿

Puedes citar libros, como el de Bonabeau et al. sobre procesos estigmérgicos [?].

También existe la posibilidad de poner notas al pie de página, por ejemplo, una para indicarte que visite la página de LibreSoft<sup>9</sup>.

---

<sup>8</sup><https://github.com/square/crossfilter/wiki/API-Reference>

<sup>9</sup><http://www.libresoft.es>

# Capítulo 5

## Development

### 5.0.1. Scrum methodology

Scrum is an iterative and incremental agile software development framework for managing product development. It defines “a flexible, holistic product development strategy where a development team works as a unit to reach a common goal”, challenges assumptions of the “traditional, sequential approach” to product development, and enables teams to self-organize by encouraging physical co-location or close online collaboration of all team members, as well as daily face-to-face communication among all team members and disciplines in the project.

A key principle of scrum is its recognition that during production processes, the customers can change their minds about what they want and need (often called requirements volatility), and that unpredicted challenges cannot be easily addressed in a traditional predictive or planned manner. As such, scrum adopts an empirical approach, accepting that the problem cannot be fully understood or defined, focusing instead on maximizing the team’s ability to deliver quickly, to respond to emerging requirements and to adapt to evolving technologies and changes in market conditions.

In scrum there are three main roles defined:

1. **Product owner:** The person responsible for maintaining the product backlog by representing the interests of the stakeholders, and ensuring the value of the work the development team does.
2. **Scrum master:** The person responsible for the scrum process, making sure it is used correctly and maximizing its benefits.

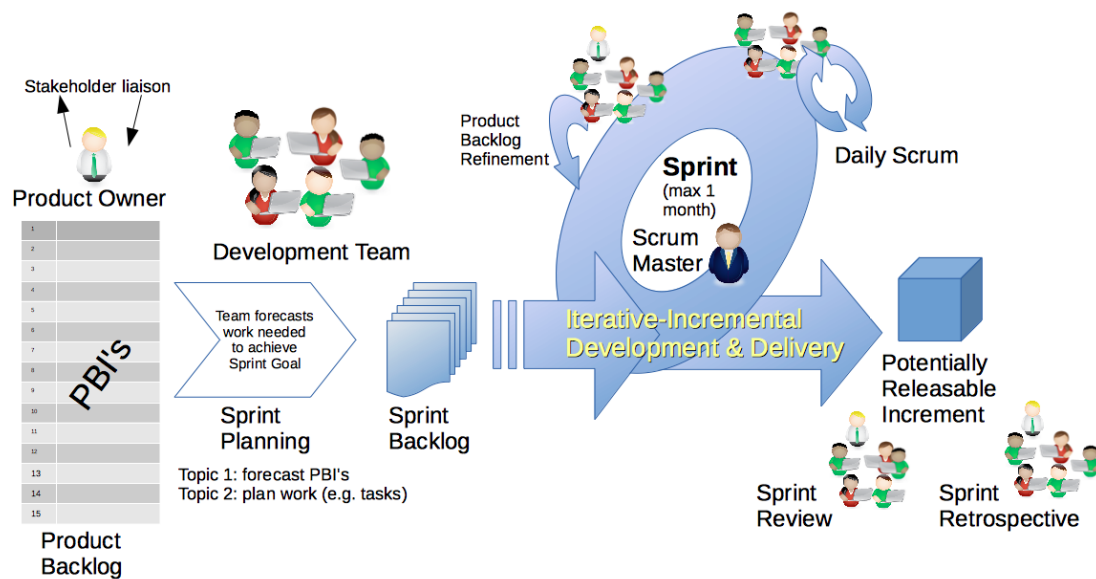


Figura 5.1: The scrum framework

3. **Development team:** A cross-functional group of people responsible for delivering potentially shippable increments of product at the end of every sprint.

However, in our case the product owner and the scrum master are represented by the project tutor, so the development team is the project author. Apart from this, we follow the scrum methodology more faithfully.

A sprint (or iteration) is the basic unit of development in scrum. The sprint is a time-boxed effort; that is, it is restricted to a specific duration. The duration is fixed in advance for each sprint and is normally between one week and one month, with two weeks being the most common.

Each sprint starts with a sprint planning event that aims to define a sprint backlog, identify the work for the sprint, and make an estimated commitment for the sprint goal. Each sprint ends with a sprint review and sprint retrospective, that reviews progress to show to stakeholders and identify lessons and improvements for the next sprints.

Scrum emphasizes working product at the end of the sprint that is really done. In the case of software, this likely includes that the software has been integrated, fully tested and end-user documented.

Sprints or iterations:



1. **Iteration 0:** This step mostly consist of investigation and learning.
2. **Iteration 1:** First simple but functional demo with no interactivity.
3. **Iteration 2:** Add interactivity, handle events.
4. **Iteration 3:** Add Crossfilter functionality.
5. **Iteration 4:** Create the framework architecture and implement it.
6. **Iteration 5:** Add panels to contain related charts.

### 5.0.2. Iteration 0: Investigation and learning

This is not an iteration itself, but it is a necessary part of the development, so we decided to include it as 'iteration 0' and here we will get the tools we will need to make our software.

At the beginning, there was a lot of things to explore. First of all, we had to choose a webGL framework to avoid its low abstraction level, as we said in the webGL section, there are a lot of javascript libraries to do this. Probably, the two most important today are Three.js and Babylon.js, both of them are free software and its code is hosted at Github ,but, although Babylon.js is written by Microsoft workers, Three.js has a larger developer community with more code examples. Here we have a little code demo to see how to create a similar basic scene in Three.js and Babylon.js:

MOVER A APENDICES

- Initialize a blank canvas:

Three:

```
//<div id="ThreeJS"></div>
var container = document.getElementById( ' ThreeJS ' );
```

Babylon:

```
//<div style="height:250px; width: 250px;" id="babylon">
//<canvas id="babylonCanvas"></canvas></div>
var container = document.getElementById( ' babylonCanvas ' );
```

With Three.js we simply create an empty div as our container for the animation. Babylon.js, on the other hand, makes use of an explicitly defined HTML5 canvas to hold its 3D graphics.

-Next, we load the renderer (engine in the case of Babylon) which will draw to the canvas:

Three:

```
var renderer = new THREE.WebGLRenderer();
renderer.setSize(width, height);
container.appendChild(renderer.domElement);
```

Babylon:

```
var engine = new BABYLON.Engine(container, true);
```

-Add scene and cameras:

Three:

```
var scene = new THREE.Scene();
var camera = new THREE.PerspectiveCamera(100, width / height, 1, 1000);
camera.position.set(0, 150, 400);
camera.lookAt(scene.position);
```

Babylon:

```
var scene = new BABYLON.Scene(engine);
var camera = new BABYLON.ArcRotateCamera
("camera", 1, 0.8, 10, new BABYLON.Vector3(0, 0, 0), scene);
scene.activeCamera.attachControl(canvas);
```

-Create a simple cube and add it to the scene:

Three:

```
var geometry = new THREE.CubeGeometry(100, 100, 100);
var texture = THREE.ImageUtils.loadTexture('texture.gif');
texture.anisotropy = renderer.getMaxAnisotropy();
var material = new THREE.MeshBasicMaterial({ map: texture });
var cube = new THREE.Mesh(cube, material);
scene.add(mesh);
```

Babylon:

```
var box = BABYLON.Mesh.CreateBox("box", 3.0, sceneB);
var material = new BABYLON.StandardMaterial("texture", sceneB);
box.material = material;
material.diffuseTexture = new BABYLON.Texture("texture.gif", sceneB);
```

-Finally, add a simple rotate animation and call the animate loop: Three:

```
function animate() {
    requestAnimationFrame(animate);
    cube.rotation.x += 0.005;
    cube.rotation.y += 0.01;
    renderer.render(scene, camera);
}
```

Babylon:

```
engine.runRenderLoop(function () {
    box.rotation.x += 0.005;
    box.rotation.y += 0.01;
    scene.render();
});
```

As we can see in this example, the two frameworks have strong syntax likeness, but finally we opted for Three.js because as we said, it has a bigger developer community than Babylon.js.

Once we choose Three.js to write our framework, the next step was to study the foundations of 3D interactive graphics. If you are a passionate video game player (better known as 'gamer' nowadays) like me, you will be familiar with concepts like rendering, game engine, fps(frames per second), image resolution, pixels, GPU(graphics processing unit)... etc. If you don't, the first lesson of the Udacity course mentioned in the Three.js section [4.5.2](#) would be helpful.

(ME EXTIENDO AQUI?¿)

The next step before to study Three.js was to brush up the Javascript language([4.2](#)) and create a Github repository to contain the project. Once this is done, the best way to learn how to use a framework is to read code and play with it (the Udacity course is very good, but it would take much time), so i preferred to follow the Stemkoski tutorials.

Let's take a look to the Stemkoski's 'Hello world' code: MOVER A APENDICES

```
// //////////
// SCENE //
// //////////

scene = new THREE.Scene();

// //////////
// CAMERA //
```



Figura 5.2: Index of Stemkoski tutorials

```
// ////////////

// set the view size in pixels (custom or according to window size)
// var SCREEN_WIDTH = 400, SCREEN_HEIGHT = 300;
var SCREEN_WIDTH = window.innerWidth, SCREEN_HEIGHT = window.
    innerHeight;
// camera attributes
var VIEW_ANGLE = 45, ASPECT = SCREEN_WIDTH / SCREEN_HEIGHT, NEAR =
    0.1, FAR = 20000;
// set up camera
camera = new THREE.PerspectiveCamera( VIEW_ANGLE, ASPECT, NEAR, FAR
    );
// add the camera to the scene
scene.add(camera);
// the camera defaults to position (0,0,0)
// so pull it back (z = 400) and up (y = 100) and set the
    angle towards the scene origin
camera.position.set(0,150,400);
camera.lookAt(scene.position);

// ////////////
```

```

// RENDERER //
// ///////////////////////////////////

// create and start the renderer; choose antialias setting.
if ( Detector.webgl )
    renderer = new THREE.WebGLRenderer( { antialias:true } );
else
    renderer = new THREE.CanvasRenderer();

renderer.setSize(SCREEN_WIDTH, SCREEN_HEIGHT);

// attach div element to variable to contain the renderer
container = document.getElementById( 'ThreeJS' );
// alternatively: to create the div at runtime, use:
// container = document.createElement( 'div' );
// document.body.appendChild( container );

// attach renderer to the container div
container.appendChild( renderer.domElement );

// ///////////////////////////////////
// CONTROLS //
// ///////////////////////////////////

// move mouse and: left click to rotate ,
//                  middle click to zoom,
//                  right click to pan
controls = new THREE.OrbitControls( camera, renderer.domElement );

// ///////////////////////////////////
// STATS //
// ///////////////////////////////////

// displays current and past frames per second attained by scene
stats = new Stats();
stats.domElement.style.position = 'absolute';
stats.domElement.style.bottom = '0px';

```

```

stats.domElement.style.zIndex = 100;
container.appendChild( stats.domElement );

// //////////
// LIGHT //
// //////////

// create a light
var light = new THREE.PointLight(0xff0000);
light.position.set(0,250,0);
scene.add(light);
var ambientLight = new THREE.AmbientLight(0x111111);
// scene.add(ambientLight);

// //////////
// GEOMETRY //
// //////////

// most objects displayed are a "mesh":
// a collection of points ("geometry") and
// a set of surface parameters ("material")

// Sphere parameters: radius, segments along width, segments along
// height
var sphereGeometry = new THREE.SphereGeometry( 50, 32, 16 );
// use a "lambert" material rather than "basic" for realistic
// lighting.
// (don't forget to add (at least one) light)
var sphereMaterial = new THREE.MeshLambertMaterial( {color: 0
    x8888ff} );
var sphere = new THREE.Mesh(sphereGeometry, sphereMaterial);
sphere.position.set(100, 50, -50);
scene.add(sphere);

// Create an array of materials to be used in a cube, one for each
// side
var cubeMaterialArray = [];

```

```

// order to add materials: x+,x-,y+,y-,z+,z-
cubeMaterialArray.push( new THREE.MeshBasicMaterial( { color: 0
    xff3333 } ) );
cubeMaterialArray.push( new THREE.MeshBasicMaterial( { color: 0
    xff8800 } ) );
cubeMaterialArray.push( new THREE.MeshBasicMaterial( { color: 0
    xffff33 } ) );
cubeMaterialArray.push( new THREE.MeshBasicMaterial( { color: 0
    x33ff33 } ) );
cubeMaterialArray.push( new THREE.MeshBasicMaterial( { color: 0
    x3333ff } ) );
cubeMaterialArray.push( new THREE.MeshBasicMaterial( { color: 0
    x8833ff } ) );
var cubeMaterials = new THREE.MeshFaceMaterial( cubeMaterialArray )
    ;
// Cube parameters: width (x), height (y), depth (z),
//      (optional) segments along x, segments along y, segments
//      along z
var cubeGeometry = new THREE.CubeGeometry( 100, 100, 100, 1, 1, 1 )
    ;
// using THREE.MeshFaceMaterial() in the constructor below
// causes the mesh to use the materials stored in the geometry
cube = new THREE.Mesh( cubeGeometry, cubeMaterials );
cube.position.set(-100, 50, -50);
scene.add( cube );

// create a set of coordinate axes to help orient user
// specify length in pixels in each direction
var axes = new THREE.AxisHelper(100);
scene.add( axes );

// //////////
// FLOOR //
// //////////

// note: 4x4 checkboard pattern scaled so that each square is 25 by
25 pixels.

```

```

var floorTexture = new THREE.ImageUtils.loadTexture( 'images/
    checkerboard.jpg' );
floorTexture.wrapS = floorTexture.wrapT = THREE.RepeatWrapping;
floorTexture.repeat.set( 10, 10 );
// DoubleSide: render texture on both sides of mesh
var floorMaterial = new THREE.MeshBasicMaterial( { map:
    floorTexture, side: THREE.DoubleSide } );
var floorGeometry = new THREE.PlaneGeometry(1000, 1000, 1, 1);
var floor = new THREE.Mesh(floorGeometry, floorMaterial);
floor.position.y = -0.5;
floor.rotation.x = Math.PI / 2;
scene.add(floor);

//////////
// SKY //
//////////

// recommend either a skybox or fog effect (can't use both at the
same time)
// without one of these, the scene's background color is determined
by webpage background

// make sure the camera's "far" value is large enough so that it
will render the skyBox!
var skyBoxGeometry = new THREE.CubeGeometry( 10000, 10000, 10000 );
// BackSide: render faces from inside of the cube, instead of from
outside (default).
var skyBoxMaterial = new THREE.MeshBasicMaterial( { color: 0x9999ff
    , side: THREE.BackSide } );
var skyBox = new THREE.Mesh( skyBoxGeometry, skyBoxMaterial );
// scene.add(skyBox);

// fog must be added to scene before first render
scene.fog = new THREE.FogExp2( 0x9999ff, 0.00025 );
}

function animate()

```



```

{
    requestAnimationFrame( animate );
    render();
    update();
}

function update()
{
    // delta = change in time since last call (in seconds)
    var delta = clock.getDelta();
    controls.update();
    stats.update();
}

function render()
{
    renderer.render( scene , camera );
}
});

```

In this heavily commented code we can see the fundamental aspects of a Three.js scene with no interactivity except for the mouse controls provided by the Three.js extension 'Orbit Controls' which allow us to rotate, zoom and displace the scene, you can see the final result here [5.3](#) and try the demo into your web browser here<sup>1</sup>

One of the most important features is to choose the mesh material, depending on the chosen material, the light affects in different ways to the meshes. There are four main mesh material types:

1. **Basic:** A material for drawing geometries in a simple shaded (flat or wireframe) way [5.4a](#).
2. **Lambert:** A material for non-shiny (Lambertian) surfaces, evaluated per vertex [5.4b](#).
3. **Phong:** A material for shiny surfaces, evaluated per pixel [5.4c](#).
4. **Wireframe:** The triangle's edges are displayed instead of surfaces, is not a mesh material itself (it is a property of the other materials) , but it would be useful in many cases [5.4d](#).


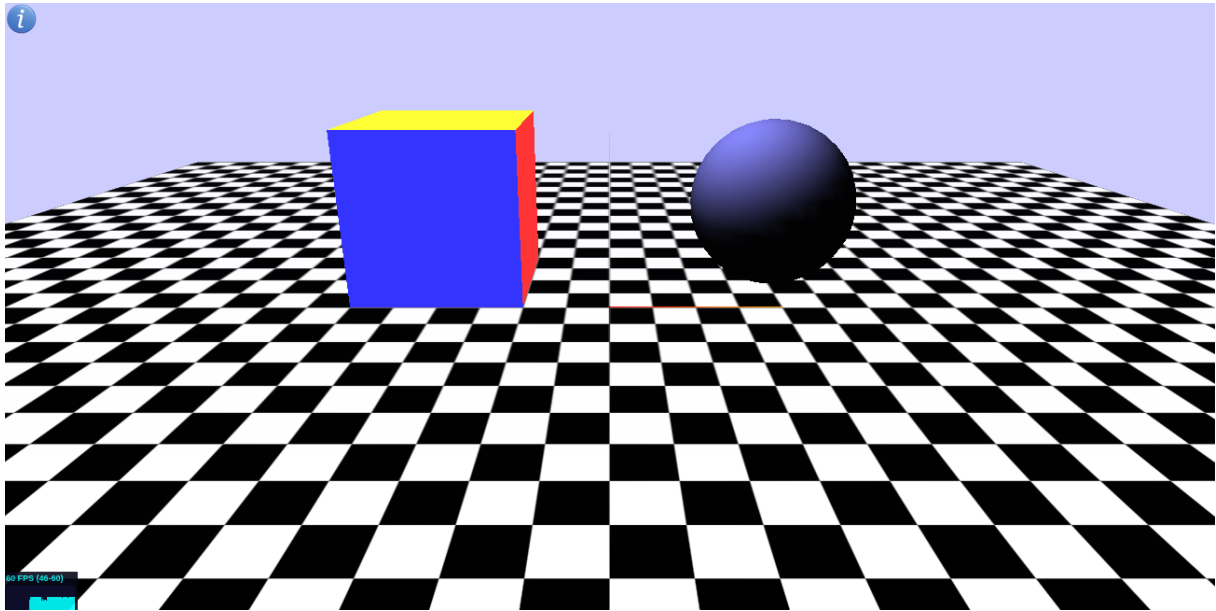


Figura 5.3: Three.js 'Hello world' by Stemkoski

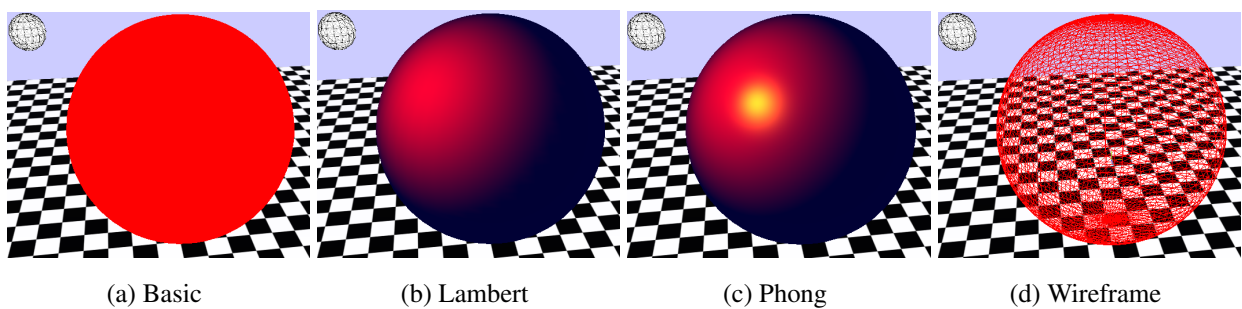

(a) Basic

(b) Lambert

(c) Phong

(d) Wireframe

Figura 5.4: Different materials, same light source (the white sphere)

Following the rest of Stemkoski's demos, we can learn how to add shadows, create our own shapes, add textures to the meshes and much more.

Once we had reviewed Javascript and understood the basics of Three.js, we were able to make our firsts dashboard demos, so let's go to the next subsection.

### 5.0.3. Iteration 1: First demos

The first iteration objective was to explore how to render different Charts types with Three.js, the main chart types we will create are the bars chart to represent discrete values, line chart for continues values and pie charts. In order to follow an appropriate difficulty curve and for simplicity, the first chart we created was the bars chart, because the 'BoxGeometry(or CubeGeometry)' function provides us everything we need. Here we have its constructor:

**BoxGeometry**(width, height, depth, widthSegments, heightSegments, depthSegments):

- width: Width of the sides on the X axis.
- height: Height of the sides on the Y axis.
- depth: Depth of the sides on the Z axis.
- widthSegments: Optional. Number of segmented faces along the width of the sides. Default is 1.
- heightSegments: Optional. Number of segmented faces along the height of the sides. Default is 1.
- depthSegments: Optional. Number of segmented faces along the depth of the sides. Default is 1.

All we have to do is to take some data set and assign each value to the height parameter of the BoxGeometry function, the width value and the depth value are not much important for now (they just have visual impact).

The data set that we used for the firsts demos had an evolutionary time line with statistics from software development, we extracted the data from a JSON and then built two simple bars charts with two example values: 'commits' facing 'authors' along the time.

---

<sup>1</sup><http://stemkoski.github.io/Three.js/HelloWorld.html>

Here: [A](#) we have the entire HTML5 code to see the extensions we used in this first demo if you want to see it.

Once we create the scene in 'script.js' as we learned, we add the custom bars to it:

```
//we create the COMMITS custom chart  
//coordinates for each bar  
var z=1;  
var y=0;  
var x=1;  
  
for (var i = 0; i < json_data.commits.length; i++) {  
    //commit values are normalized for optimal visualization(/10)  
    var geometry = new THREE.CubeGeometry( 1, json_data.commits[i]/10 ,  
        10);  
    // we divide by two to properly align the bars  
    y=json_data.commits[i]/10/2;  
    //red color  
    var material = new THREE.MeshLambertMaterial( {color: "#0000ff"} );  
    var commitBar = new THREE.Mesh(geometry , material);  
    commitBar.position.set(x, y, z);  
    scene.add(commitBar);  
    //the next bar will be on the right  
    x+=1;  
};
```

Using the same process to build the authors chart we can see the final result: [5.5](#)

And here<sup>2</sup> you can try it in your browser with some interactivity that we will see in the next section.

With this representation we can see an obvious relationship between commits and authors along the time, but thanks to the 3D renderer we can place them in different ways, for example we can form a 90 degrees angle easily just with changing the height dimension by depth dimension: [5.6](#)

In addition, we also explored the possibility of joining both charts by rectangles to see if this could give us some information, however, we decided to not include this representation for

---

<sup>2</sup><http://adrianalonsoba.github.io/threeboard/demo2/>

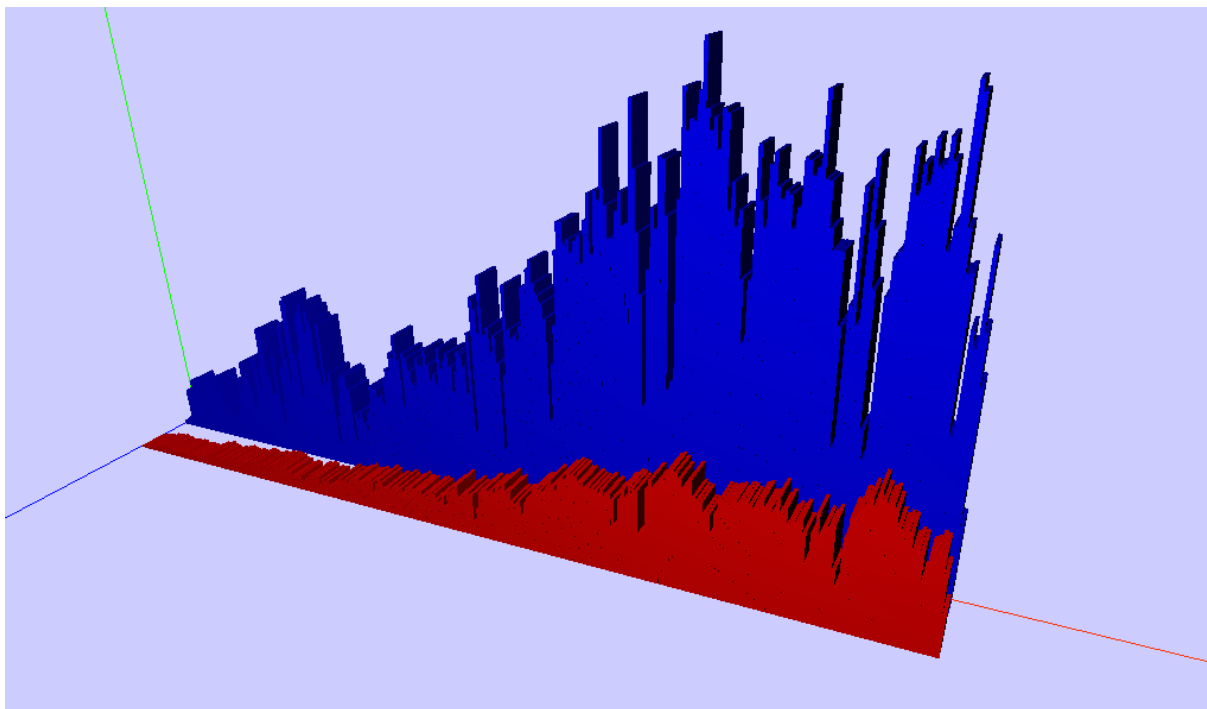


Figura 5.5: Commits(blue) and authors(red)

now. You can see the result here <sup>3</sup>

Now we will focus on the continuous line chart representation, this is a rather more complicated representation than the previous because we have to draw the line manually. In this case, there are no defined mesh geometry in Three.js that can serve us, so we have to do it with the object 'THREE.Shape'. With this, we can draw any shape by connecting points with different methods, having done this, we must to give depth to the shape with 'THREE.ExtrudeGeometry',

<sup>3</sup><http://adrianalonsoba.github.io/threeboard/demo5/>

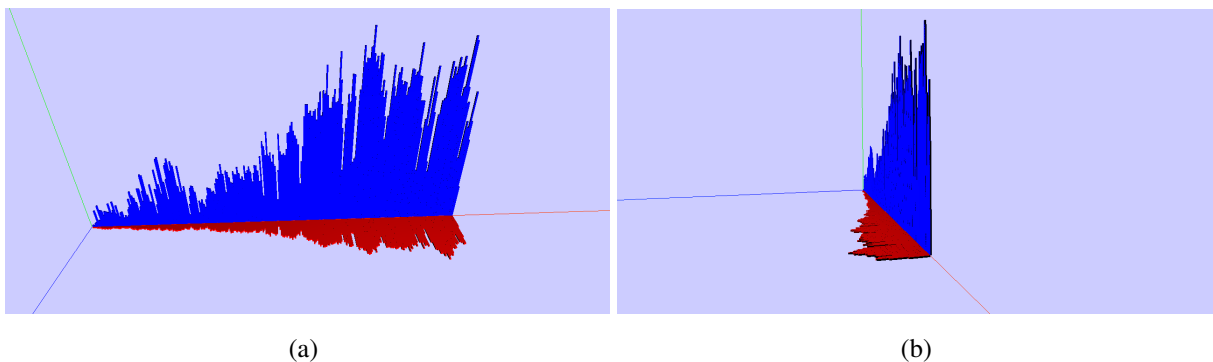


Figura 5.6: Two points of view

a geometry type for the handmade shapes. Here is a code example of how to make a simple line shape made with straight lines:

¿LO PASO A APENDICE?

```
var charShape = new THREE.Shape();
charShape.moveTo( 0,0 );

var x=0;

for (var i = 0; i < json_data.commits.length; i++) {
    charShape.lineTo( x, json_data.commits[i]/10 );
    x+=1.5;
};
//close the shape
charShape.lineTo( x, 0 );
charShape.lineTo( 0, 0 );

var extrusionSettings = {
    size: 30, height: 4, curveSegments: 3,
    bevelThickness: 1, bevelSize: 2, bevelEnabled: false,
    material: 0, extrudeMaterial: 1};

var charGeometry = new THREE.ExtrudeGeometry( charShape,
    extrusionSettings );

var materialSide = new THREE.MeshLambertMaterial( { color: 0x0000ff } );

var extrudeChart = new THREE.Mesh( charGeometry, materialSide );
extrudeChart.position.set(0,0,0);
scene.add(extrudeChart);
```

To finish this sprint we could use the `THREE.Shape` and `THREE.ExtrudeGeometry` to make the pie charts too, but using other method to join the points. In the previous case we don't need to add curves, so we had only to use 'lineTo', but now we need to add curves for each pie part and this is done with the `THREE.Shape` method 'arc'. Let's take a look to the result: [5.7](#)

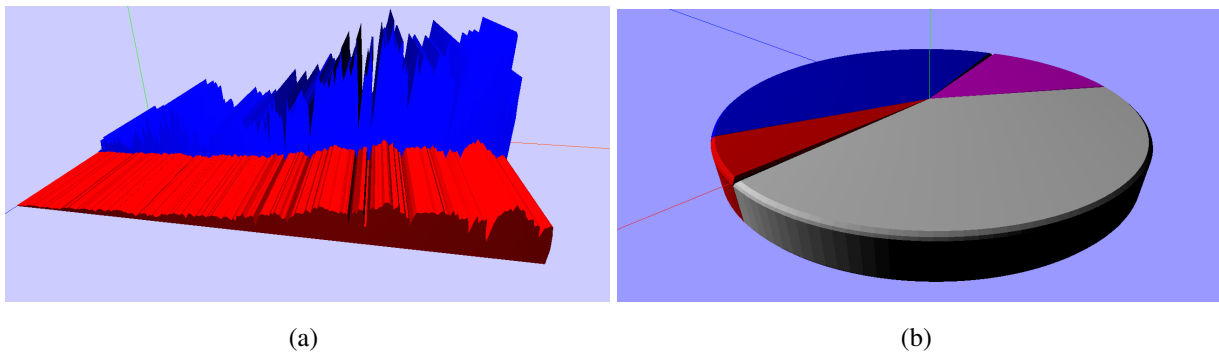


Figura 5.7: Line and pie charts built with line shapes

#### 5.0.4. Iteration 2: Interactivity and events

Now that we have the basic charts, the next sprint requirement was to add interactivity to them:

- Show information about the charts by mouse hovering.
- Be able to fix some chart parts by clicking and test some animation.
- Drag the charts.

There is a specific method to interact with the scene using the mouse: The 'Ray-casting', this method is to create an imaginary ray from the mouse to the scene in the camera direction and it returns an array with all the objects which intersects with the ray. Normally we only take the first intersected object (the first in the array) to do what we need. However, before to create the ray caster object, we need to add some event listeners as we will see.

The first interactivity that we added was to change the color to the object in order to clarify which object is selected by mouse hovering, to do this we need two things, add a 'mouse move' event listener to refresh the mouse coordinates each animation frame (needed by the ray caster) and when the ray returns the array of objects, just change the mesh's color of the first element, you can see an example with code in the appendix [A.2](#)

Once understood the ray-casting method, we realize that it is unintuitive and too much wired, when the ray returns the array of objects, we eventually need to add an 'if' or 'switch' sentence for each mesh type. Having said this, we thought that to use a DOM events similar method would be interesting, being capable of bind any event to any mesh at any moment. Doing a

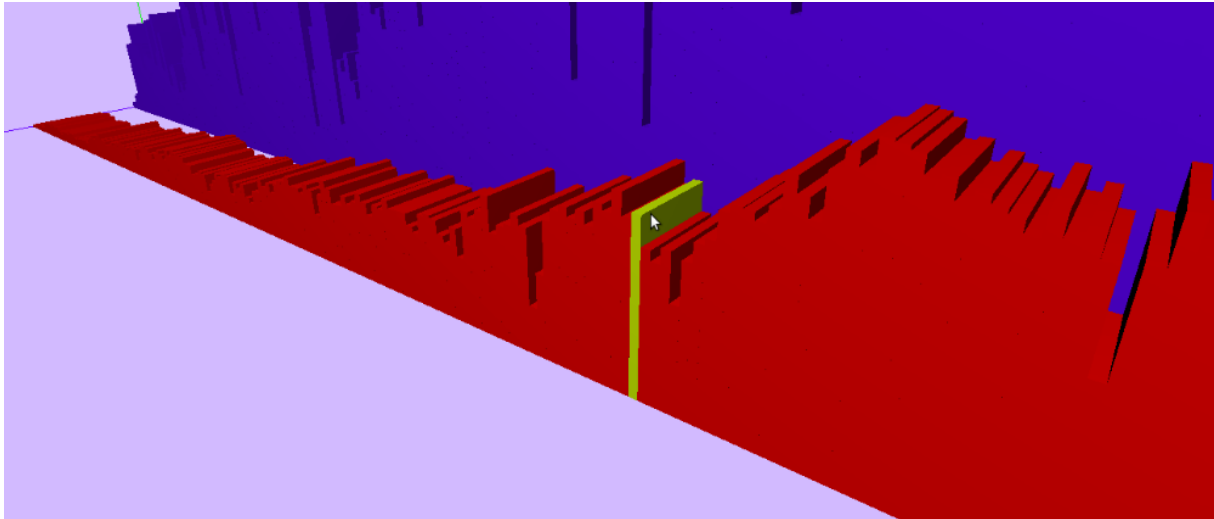


Figura 5.8: Color change thanks to ray caster

little research over the network we found all we need: 'three.domevents'<sup>4.6</sup> a little Three.js extension which allows us to bind any event to any mesh and forget the ray caster.

Add events is much easier than before, to change the bars color just need two 'binds', one for the mouse over and one for the mouse out to restore its original color. From now on we will use this extension for add all events.

Now that we have all the tools to handle events let's go to add a 3D text label to each mesh showing the number of commits or authors. To do this, we can use 'THREE.TextGeometry', a function which makes simple to add 3D text to the scenes just by passing the text, the font family, the size and other optional parameters.

The second iteration objectives are not included in the final version but they gave us an idea of how fast the renderer can add and remove simple meshes from the scene. In this<sup>4</sup> demo you can fix the bars by clicking and in this<sup>5</sup> you can see an animation made with time intervals. OJO CAMBIAR ESTO SI AL FINAL AÑADO ANIMACIONES

The third requirement is probably the most important of the iteration. We have to be able to drag the entire charts to put them at any place of the scene. This is not supported by three.domevents, so this is the only event we must to handle with a ray caster. The process starts like before, adding and event listener to update the mouse coordinates and instantiating the ray caster, but , in addition, now we need to create a plane which will intersect with our meshes or

<sup>4</sup><http://adrianalonsoba.github.io/threeboard/demo6/>

<sup>5</sup><http://adrianalonsoba.github.io/threeboard/demo8/>



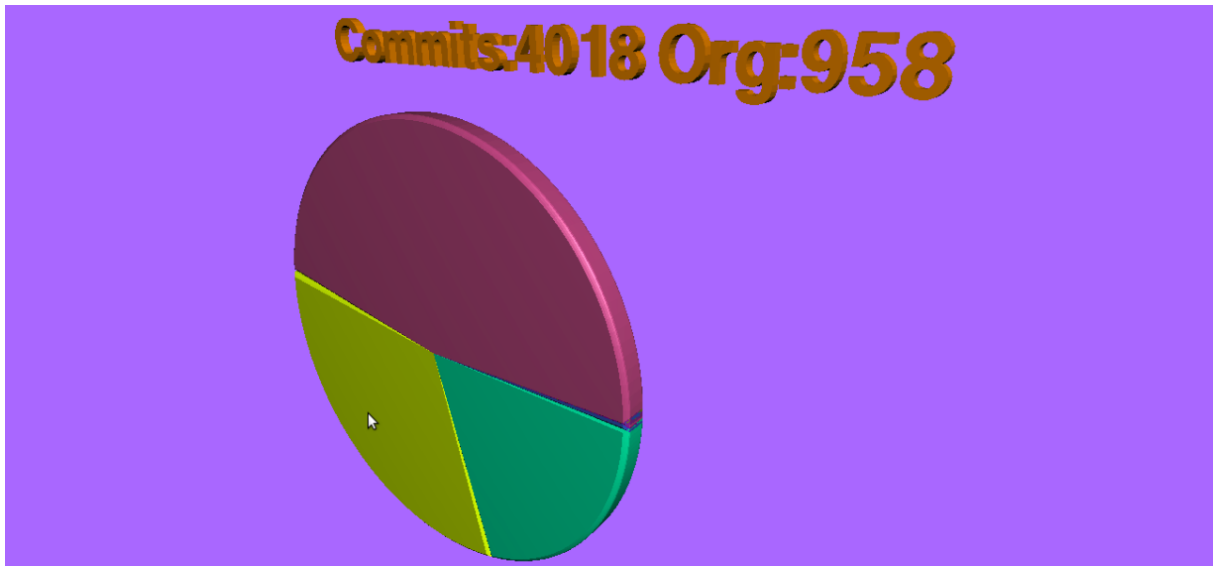


Figura 5.9: 3D text

charts.

```
function onMouseMove( event ) {
    mouse.x = ( event.clientX / window.innerWidth ) * 2 - 1;
    mouse.y = - ( event.clientY / window.innerHeight ) * 2 + 1;
    raycaster.setFromCamera( mouse, camera );
    //we select a mesh with a click event using three.js domevents
    if (SELECTED){
        var intersects = raycaster.intersectObject( plane );
        if ( intersects.length > 0 ) {
            //update the mesh position
            SELECTED.position.copy( intersects[ 0 ].point.sub( offset ) );
        }
        return;
    }
}
```

Doing this, we can move any mesh around the plane. Rotating the plane we can move the meshes in any direction, you can check it here<sup>6</sup>.

<sup>6</sup><http://adrianalonsoba.github.io/threeboard/demo15/>

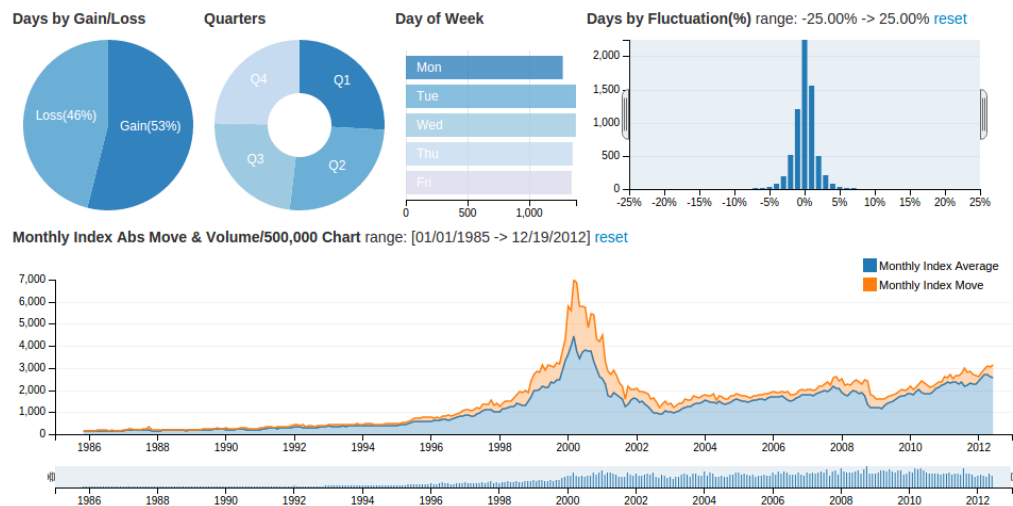


Figura 5.10: dc.js example

### 5.0.5. Iteration 3: Filtering

In this sprint, we must to integrate `crossfilter(4.7)` in order to achieve a functionality that allow us to filter data sets in real time by interacting with the charts. There is already a library that do this: `dc.js`, a charting library with native `crossfilter` support and allowing highly efficient exploration on large multi-dimensional dataset (inspired by `crossfilter`'s demo). It leverages `d3.js` engine to render charts in css friendly svg format.

The main objective is to provide similar functionality to that of `dc.js` in 3D, so first we need to understand how `dc.js` and `crossfilter.js` works.

The basic idea is to filter the data set by clicking the charts, if we click on the line chart for example, we can filter the entire data set using the selected value and we see how the charts change in real time. Also, we can add interval filters by selecting the interval with the mouse. `Crossfilter.js` use the selected values to filter its data set automatically, so when a filter is added, we just need to call the function responsible for drawing the charts.

To create a demo with this, first we need a data set in the format that `Crossfilter` understands, this is an array of objects with the same number of key-value pairs and the same keys, here we have an example where each object represents a commit:

```
var commits=[
{ author: 8, date: "Mon_Oct_20_2014_14:42:24_GMT+0200_(CEST)", hour: 12, id:
  11340, month: "Wed_Oct_01_2014_00:00:00_GMT+0200_(CEST)", org: 958, repo:
  12, tz: 2},
```

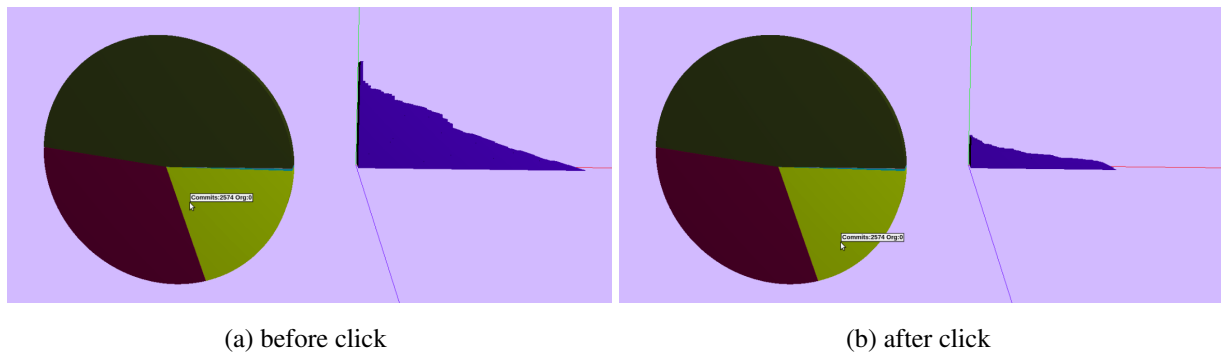


Figura 5.11: Example of filtering, note that the bars chart is ordered from top to bottom for now

```
...]
```

The data set contains 12677 objects like this one with different values but the same keys. Now we must to create a single crossfilter index, a crossfilter dimension for each chart and a group for each dimension:

```
//crossfilter index
cf=crossfilter(commits);
//create a dimension and a group by month
dimByMonth= cf.dimension(function(p) {return p.month;});
groupByMonth= dimByMonth.group();
//create a dimension and a group by organization
dimByOrg= cf.dimension(function(p) {return p.org;});
groupByOrg= dimByOrg.group();
```

Now we can use the groups to build our charts, one chart will contain the number of commits per month(a bars chart for example) and the other, the number of commits per organization(pie chart). Therefore, if we click on a particular month, crossfilter applies this filter to its index, then we call the function responsible for drawing with **no** changes needed, and we will obtain a pie chart that shows the number of commits per organization in this particular month, on the other hand, if we click on a particular organization we will see a bars chart with the number of commits per month of this organization.

In this 5.11 figure we can see that not only the bars are lower than before, the chart is shorter too, this means there are months with no commits in the clicked organization.

You can try this simple demo in here <sup>7</sup>

### 5.0.6. Iteration 4: Framework creation

Now we have all the needed elements to create our library, so the main requirement for this sprint is to build the main architecture and implement it, after this sprint, we should be able to create the previous iteration's demo with a few code lines.

The first thing we need is a global object that will contain the data structures, methods and it gives name to the framework, this object is **THREEDC**(three dimension 'dynamic' charting). THREEDC shall have three main methods and one data structure at least:

- **THREEDC.allCharts[]**: This array will contain each chart instantiation.
- **THREEDC.renderAll()** : This method will use **THREEDC.allCharts** to call the particular render method of each chart type.
- **THREEDC.removeAll()** : The same as the previous , but to remove all charts.
- **THREEDC.baseMixin()** : A mixin object that will be explained next.

Is have been used two remarkable techniques widely used in Javascript, a **mixin** to provide us inheritance between the different chart types avoiding the need of repeating common code(and for abstraction) and the method **chaining**, a technique that can be used to simplify code in scenarios that involve calling multiple functions on the same object consecutively.

The mixin will act like a father class, containing the common features in all charts: Render and build methods, events, and the parameters of the chart:The crossfilter dimensions and groups, chart size and chart color. The parameter methods will return the own mixin in order to make possible the method chaining.

Once we have the mixin structure(5.12), we'll implement the different chart types. All chart types will instantiate a mixin, and then they will add its own build method and parameters. The basic component of a chart will be a '**part**,' a single mesh that will contain info of the crossfilter's groups, this is, keys and values, so the mixin must have another data structure to save this parts. Every chart must build each part separately because the interaction events have

---

<sup>7</sup><http://adrianalonsoba.github.io/threeboard/demo13/>

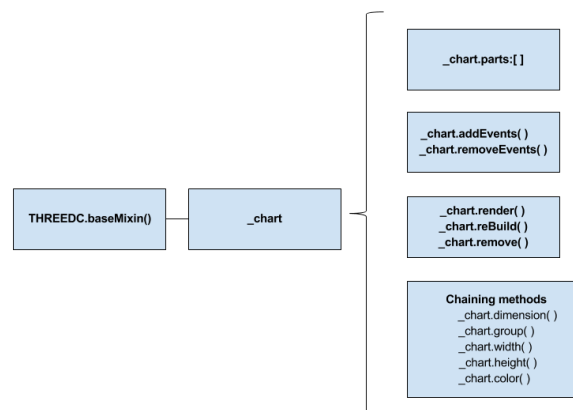


Figura 5.12: Basic mixin structure

to be bound to each part. After call a specific chart type function, this is added to the global data structure (THREEDC.allCharts), then it calls its build function, which creates every chart part, add the basic events using the mixin methods and finally will be rendered if we call the specific render method of this chart or the global render method (THREEDC.renderAll()).

Here we have a code example which creates the previous iteration's demo using the framework:

```

// crossfilter index, dimensions and groups previously created
...
// we pass coordinates to place the chart for now
var bars = THREEDC.barsChart([0,0,0]);
  bars.group(groupOne)
    .dimension(dimemsionOne)
    .width(200)
    .height(200)
    .color(0xff8000);

var pie = THREEDC.pieChart([300,100,0]);
  pie.group(groupTwo)
    .dimension(dimTwo)
    .radius(100)
    .color(0xff0000);
  
```

```
THREEDC.renderAll();
```

Now we can render a lot of charts with a few code lines, and also we can set size and color settings as we prefer.

### 5.0.7. Iteration 5: Panel creation and additional features

Once we built the basic architecture, in the final iteration we will add some additional features:

- Add a new type of chart, the smooth curve chart.
- Add customizable grids and labels.
- Add panels to contain related charts

We have three basic chart types as we have seen, all of them rendered in 3D, but it would be interesting have some type of chart rendered in 2D, this is supported by Three.js in many ways, one of them is to build a CatmullRom spline, it is a type of interpolating spline (a curve that goes through its control points) defined by four control points. This results on a smooth curve along the given points. However, this chart does not have interactivity because the construction process does not allow to create single parts, so we can just drag the chart and see how it changes when other filters are applied.

Now that we have various types of charts, we will create a process to add grids and labels to the charts automatically. The grids and the labels are common in all chart types, except for the pie chart, so we need to add more methods to the mixin **5.13**



Figura 5.13: Extended mixin structure





# Capítulo 6

## Design and implementation

### 6.1. Introduction

In this chapter we will describe the library's architecture in detail, showing how it works with the basic functions and data structures. Let's take a look to a simplification of the library's architecture 6.1:

#### 6.1.1. General description

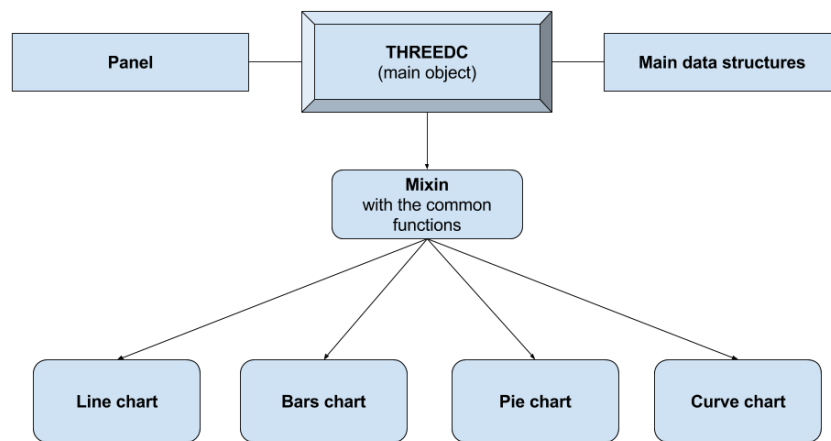


Figura 6.1: Basic structure

## **Capítulo 7**

### **Resultados**



# Capítulo 8

## Conclusiones

### 8.1. Consecución de objetivos

Esta sección es la sección espejo de las dos primeras del capítulo de objetivos, donde se planteaba el objetivo general y se elaboraban los específicos.

Es aquí donde hay que debatir qué se ha conseguido y qué no. Cuando algo no se ha conseguido, se ha de justificar, en términos de qué problemas se han encontrado y qué medidas se han tomado para mitigar esos problemas.

### 8.2. Aplicación de lo aprendido

Aquí viene lo que has aprendido durante el Grado/Máster y que has aplicado en el TF-G/TFM. Una buena idea es poner las asignaturas más relacionadas y comentar en un párrafo los conocimientos y habilidades puestos en práctica.

1. a

2. b

### 8.3. Lecciones aprendidas

Aquí viene lo que has aprendido en el Trabajo Fin de Grado/Máster.

1. a

2. b

## **8.4. Trabajos futuros**

Ningún software se termina, así que aquí vienen ideas y funcionalidades que estaría bien tener implementadas en el futuro.

Es un apartado que sirve para dar ideas de cara a futuros TFGs/TFM.

## **8.5. Valoración personal**

Finalmente (y de manera opcional), hay gente que se anima a dar su punto de vista sobre el proyecto, lo que ha aprendido, lo que le gustaría haber aprendido, las tecnologías utilizadas y demás.

# Apéndice A

## Appendix

### A.1. HTML5 sheet

```
<!DOCTYPE html>
<html>
  <head>
    <title>Threeboard </title>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, user-
      scalable=no, minimum-scale=1.0, maximum-scale=1.0">
    <link rel="stylesheet" href="../css/base.css"/>
  </head>
  <body>
    <div id="ThreeJS" style="z-index: 1; position: absolute;
      left: 0px; top: 0px"></div>
    <!-- only to get the JSON -->
    <script src="https://ajax.googleapis.com/ajax/libs/jquery
      /1.11.2/jquery.min.js"></script>
    <script src="../js/Three.js"></script>
    <script src="../js/OrbitControls.js"></script>
    <!-- to handle window size changes -->
    <script src="../js/THREEx.WindowResize.js"></script>
    <!-- full screen by pressing 'm' -->
    <script src="../js/THREEx.FullScreen.js"></script>
    <!-- here is our custom code with the scene -->
```

```
        <script src="script.js"></script>
    </body>
</html>
```

## A.2. Raycasting example

```
var raycaster = new THREE.Raycaster();
var mouse = new THREE.Vector2();

function onMouseMove( event ) {
    // calculate mouse position in normalized device coordinates
    // (-1 to +1) for both components

    mouse.x = ( event.clientX / window.innerWidth ) * 2 - 1;
    mouse.y = - ( event.clientY / window.innerHeight ) * 2 + 1;
}

function render() {
    // update the picking ray with the camera and mouse position
    raycaster.setFromCamera( mouse, camera );

    // calculate objects intersecting the picking ray
    var intersects = raycaster.intersectObjects( scene.children );

    for ( var i = 0; i < intersects.length; i++ ) {
        //change color of all intersected meshes
        intersects[ i ].object.material.color.set( 0xff0000 );
    }
    renderer.render( scene, camera );
}

window.addEventListener( 'mousemove', onMouseMove, false );
window.requestAnimationFrame( render );
```