Nama : Adrian Haikal

Nim : 124103014

Prodi : Teknik Informatika

Mata Kuliah : Komputasi Awan

Dosen P : HERYUDI GANESHA, S.Sn., M.T.I

Topik : **Tugas 5: Get started with Docker Compose**


Step 5

```yaml
Run All Services
services:
  Run Service
  web:
    build: .
    ports:
      - "${APP_PORT}:5000"
    environment:
      - REDIS_HOST=${REDIS_HOST}
      - REDIS_PORT=${REDIS_PORT}
    depends_on:
      redis:
        condition: service_healthy
    develop:
      watch:
        - action: sync+restart
          path: .
          target: /code
        - action: rebuild
          path: requirements.txt


  Run Service
  redis:
    image: redis:alpine
    volumes:
      - redis-data:/data
    healthcheck:
      test: ["CMD", "redis-cli", "ping"]
      interval: 5s
      timeout: 3s
      retries: 5
      start_period: 10s

volumes:
  redis-data:
```


Output:




Docker Compose Down

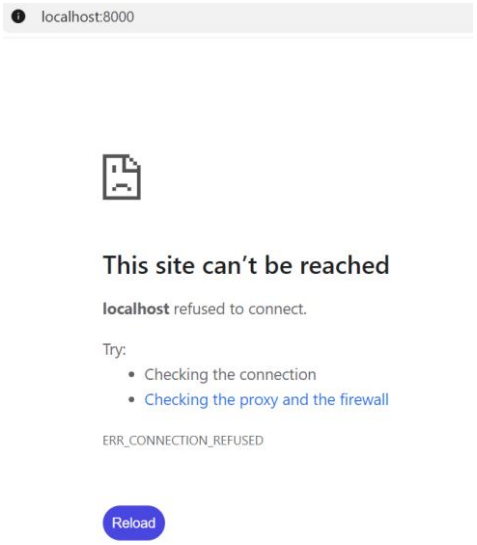

Again docker compose up --watch

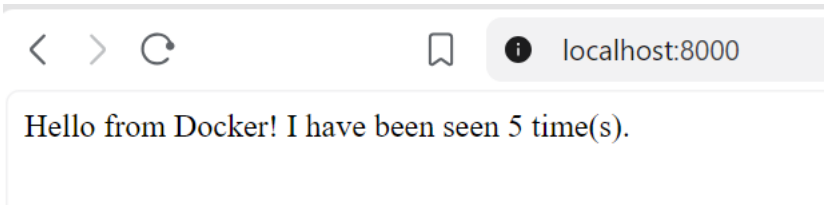

Reset docker compose down -v

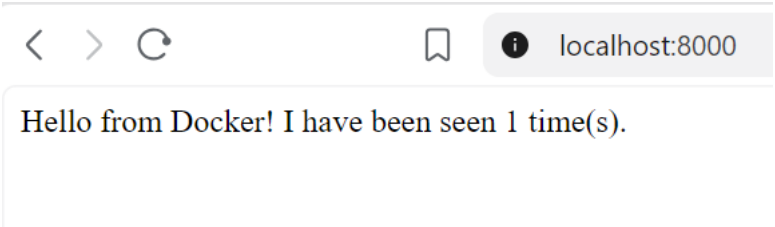

Step 7

```
$ docker compose up -d
[+] up 3/3
 ✔Network compose-demo-komputasi-awan_default    Created
 ✔Container compose-demo-komputasi-awan-redis-1 Healthy
 ✔Container compose-demo-komputasi-awan-web-1    Started
```

```
$ docker compose logs -f
redis-1  | Starting Redis Server
redis-1  | 1:C 10 Nov 2026 10:49:17.104 * oO0OoO0OoO0Oo Redis is starting oO0OoO0OoO0Oo
redis-1  | 1:C 10 Nov 2026 10:49:17.104 * Redis version=8.10.3, bits=64, commit=00000000, modified=1, pid=1, just started
redis-1  | 1:C 10 Nov 2026 10:49:17.104 * Configuration loaded
redis-1  | 1:M 10 Nov 2026 10:49:17.104 * monotonic clock: POSIX clock_gettime
redis-1  | 1:M 10 Nov 2026 10:49:17.105 * Running mode=standalone, port=6379.
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf> RedisBloom version 8.10.1 (Git=unknown)
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf> Registering configuration options: [
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf>  { bf-error-rate       :      0.01 }
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf>  { bf-initial-size     :       100 }
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf>  { bf-expansion-factor :         2 }
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf>  { cf-bucket-size      :         2 }
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf>  { cf-initial-size     :      1024 }
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf>  { cf-max-iterations   :        20 }
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf>  { cf-expansion-factor :         1 }
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf>  { cf-max-expansions   :        32 }
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * <bf> ]
redis-1  | 1:M 10 Nov 2026 10:49:17.106 * Module 'bf' loaded from /usr/local/lib/redis/modules//redisbloom.so
redis-1  | 1:M 10 Nov 2026 10:49:17.110 * <search> search-workers default: 8 (min of MAX_WORKER_THREADS=16 and CPU cores)
redis-1  | 1:M 10 Nov 2026 10:49:17.110 * <search> Redis version found by RedisSearch : 8.10.3 - oss
redis-1  | 1:M 10 Nov 2026 10:49:17.110 * <search> RediSearch version 8.10.1 (Git=)
redis-1  | 1:M 10 Nov 2026 10:49:17.110 * <search> gc: ON, prefix min length: 2, min word length to stem: 4, prefix max expansions: 200, query
meout (ms): 500, timeout policy: return, oom policy: return, cursor read size: 1000, cursor max idle (ms): 300000, max doctable size: 1000000,
x number of search results:  1000000, default scorer: BM25STD,
redis-1  | 1:M 10 Nov 2026 10:49:17.110 * <search> Initialized thread pools!
redis-1  | 1:M 10 Nov 2026 10:49:17.110 * <search> Enabled workers threadpool of size 8
redis-1  | 1:M 10 Nov 2026 10:49:17.110 * <search> Subscribe to config changes
```

```
$ docker compose exec web env | grep REDIS
REDIS_HOST=redis
REDIS_PORT=6379
```

```
$ docker compose exec web python -c "import redis; r = redis.Redis(host='redis'); print(r.ping())"
True
```

```
$ docker compose exec redis redis-cli GET hits
"54"
```