# Supplementary Material for Controlled Reconstruction of Image-Based Time-Series Encodings: Operational Decoders for GAF, RP, and MTF Representations

Adriano García-Giralda Milena et al.

2026

This document supplies extended results for the controlled encoder–decoder study in the main article. It uses the same notation, decoder contracts, data partitions, and distinction between normalised reconstruction and optional physical-unit calibration. No image generator is trained or evaluated here. The artificial signal used below is an analytical sanity check passed through the known encoders; it is not a sample from a generative model and provides no evidence about augmentation or synthetic-to-real transfer.

## S1. Classifier configurations


The classical baselines largely follow their library defaults, with the declared estimator count and seed for Random Forest. The recurrent and convolutional architectures are explicitly specified configurations rather than library defaults. No hyperparameter search used an outer-fold test prediction.

Table S1: Classifier configurations. Each model is trained once per fold on the original (un-reconstructed) windows and reused across all four encodings. Input is $(128, 3)$ for the neural models and the flattened 384-vector for the scikit-learn models; all neural models use the sparse categorical cross-entropy loss.


| Classifier | Configuration | Seed |
|---|---|---|
| KNN | $k = 5$, uniform weights, Minkowski distance ($p = 2$) | — |
| SVM | RBF kernel, $C = 1.0$, $\gamma =$ scale | — |
| Random Forest | 100 trees, Gini split, unlimited depth, `max_features`$= \sqrt{d}$ | 95 |
| LSTM | LSTM(64) $\to$ Dropout(0.2) $\to$ LSTM(32) $\to$ Dropout(0.2) $\to$ Dense-softmax; Adam ($10^{-3}$), 20 epochs, batch 64 | 95 |
| GRU | GRU(64) $\to$ Dropout(0.2) $\to$ GRU(32) $\to$ Dropout(0.2) $\to$ Dense-softmax; Adam ($10^{-3}$), 20 epochs, batch 64 | 95 |
| CNN | Conv1D(196, kernel 16) + MaxPool(4) concatenated with per-channel statistical features (mean, variance, $\sum \lvert \cdot \rvert$, 10-bin histogram); Dense(1024) + Dropout(0.05) + Dense-softmax; $\ell_2 = 10^{-4}$; Adam ($5 \times 10^{-4}$), 20 epochs, batch 64 | 95 |

## S2. Encoding sensitivity to signal inversion

Before evaluating reconstructions, we first test whether each encoding visually distinguishes a time series from its sign-inverted counterpart. This check is important because an encoding that maps both signals to the same image cannot by itself resolve orientation during reconstruction. The same WISDM window (subject 1600, first walking window, $N = 128$) is used for every encoder so the only difference across panels is the encoder itself; the inverted variant negates all three accelerometer channels.

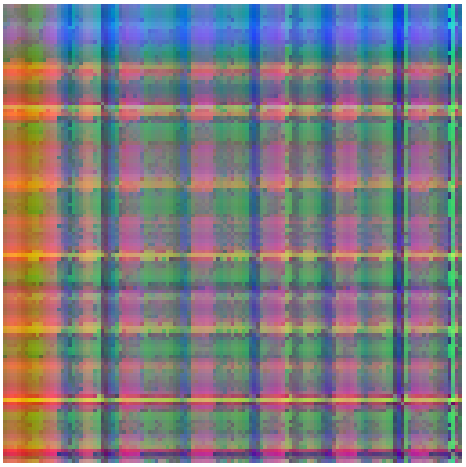


(a) Original

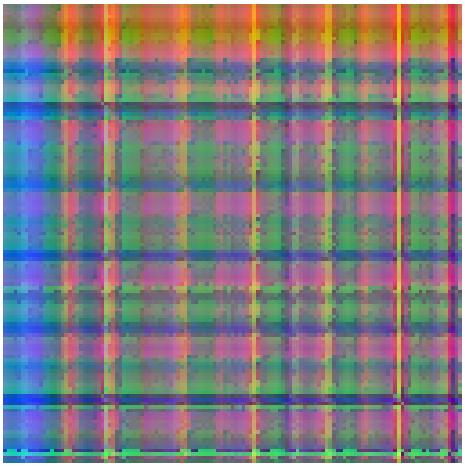


(b) Inverted

Figure S1: Recurrence Plot (RP) images: original vs. inverted.

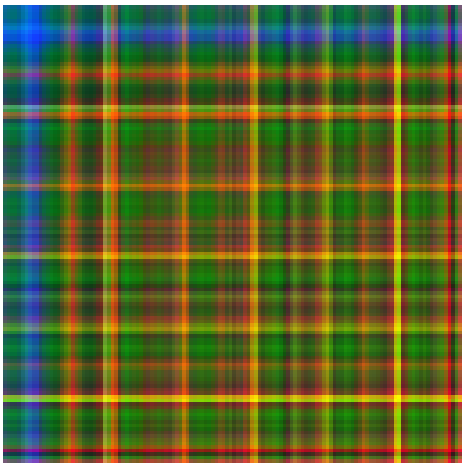


(a) Original

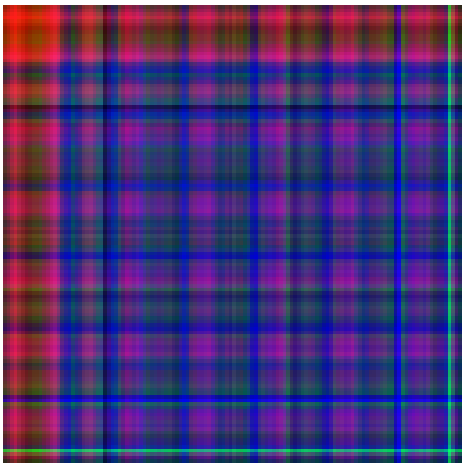


(b) Inverted

Figure S2: Gramian Angular Summation Field (GASF) images: original vs. inverted.

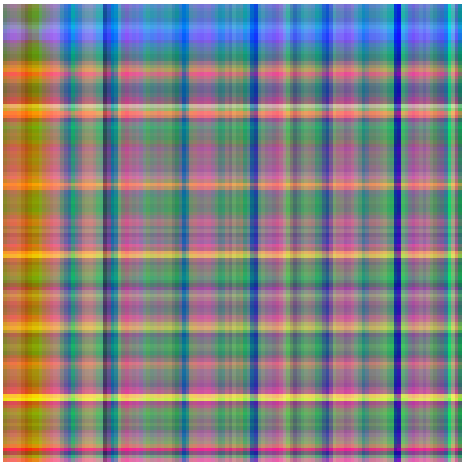


(a) Original

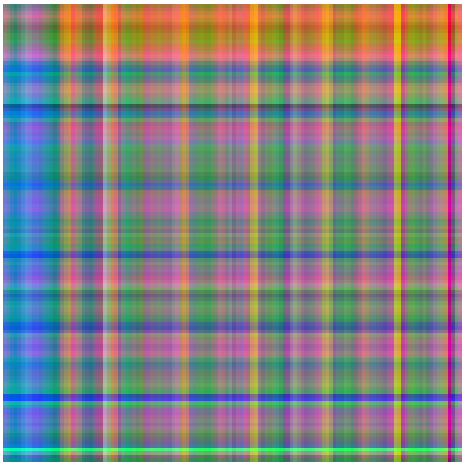


(b) Inverted

Figure S3: Gramian Angular Difference Field (GADF) images: original vs. inverted.

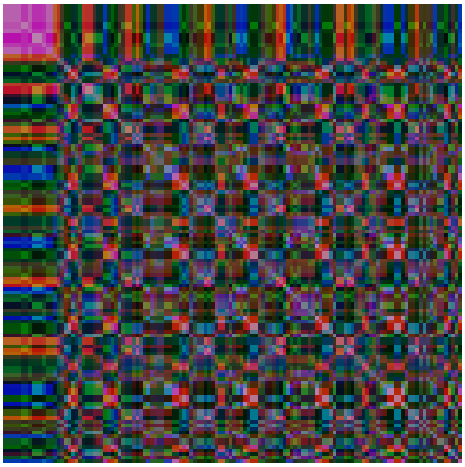

(a) Original

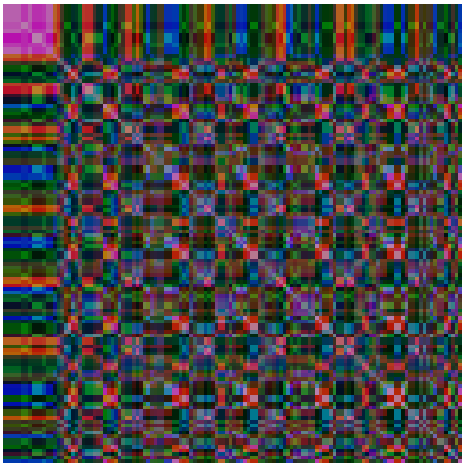

(b) Inverted

Figure S4: Markov Transition Field (MTF) images: original vs. inverted.

Figures S1 and S2 show that RP and GASF distinguish this window from its sign-inverted counterpart. The same holds for GADF (Figure S3): under the symmetric normalisation used here, negating the input flips the sign of $\sin(\phi_i - \phi_j)$ and therefore reverses the image contrast. Conversely, the MTF images in Figure S4 are identical. Under the ideal quantile relabelling $q \mapsto Q{+}1{-}q$, a global sign flip reverses both the bin order and the corresponding rows and columns of $W$, and these two permutations cancel in $M_{a,b} = W_{q_a,q_b}$. This operator-level sanity check illustrates the global-reversal ambiguity stated in Section 3.5; it does not by itself evaluate reconstruction fidelity, and tied quantiles can require additional implementation conventions.

# S3. Additional qualitative diagnostics

## S3.1. Analytical control signal

We construct an analytical three-channel signal $\mathbf{w} \in \mathbb{R}^{N\times 3}$ of length $N = 128$ by sampling an underlying parameter $t$ uniformly over $[0, \pi]$. Concretely, define

$$t_i = \frac{i}{N-1}\,\pi, \qquad i = 0, 1, \ldots, N-1,$$


and let each vector $\mathbf{w}_i = [w_{i,0},\, w_{i,1},\, w_{i,2}]^\top$ be given by

$$w_{i,0} = \cos(t_i), \qquad w_{i,1} = \sin(t_i), \qquad w_{i,2} = \sin(t_i) \;-\; \cos(t_i).$$

Thus the full data matrix is

$$\mathbf{w} = \begin{bmatrix} \cos(t_0) & \sin(t_0) & \sin(t_0) - \cos(t_0) \\ \cos(t_1) & \sin(t_1) & \sin(t_1) - \cos(t_1) \\ \vdots & \vdots & \vdots \\ \cos(t_{N-1}) & \sin(t_{N-1}) & \sin(t_{N-1}) - \cos(t_{N-1}) \end{bmatrix}.$$

This signal, composed of a pure cosine channel, a pure sine channel, and their difference, serves as a controlled sanity check for the RP, GASF, GADF, and MTF reconstruction paths. It is not intended to represent the WISDM distribution or the output of a generative model; it provides a visually interpretable case where phase, shape, and orientation errors are easy to detect. Figure S5 shows the image encodings of the three channels (RP is $127 \times 127$ because of the $N - 1$ pair embedding; the others are $128 \times 128$).

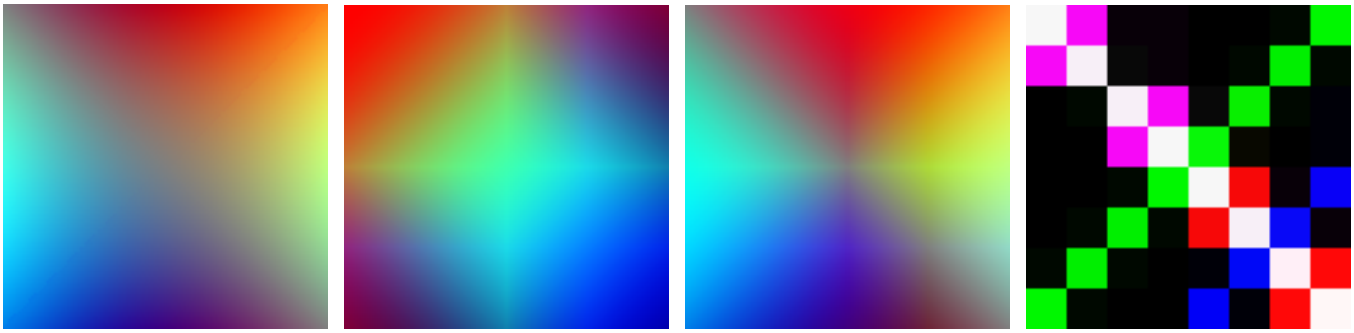

(a) RP (b) GASF (c) GADF (d) MTF

Figure S5: Image encodings of the same analytical three-channel signal (cosine, sine, sine−cosine) under each technique.

After generating the encoded images, we decode them and compare the reconstructed series graphically.

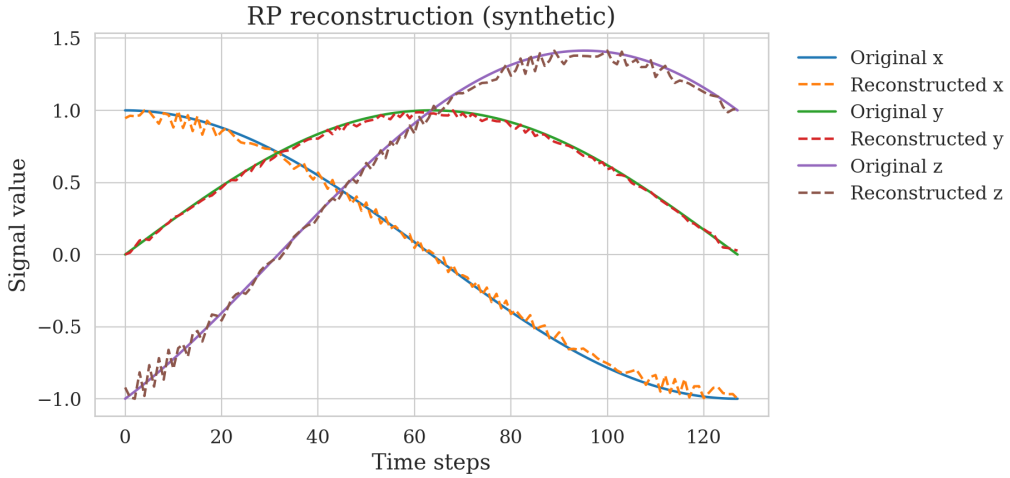



Figure S6: RP reconstruction of the analytical three-channel signal.

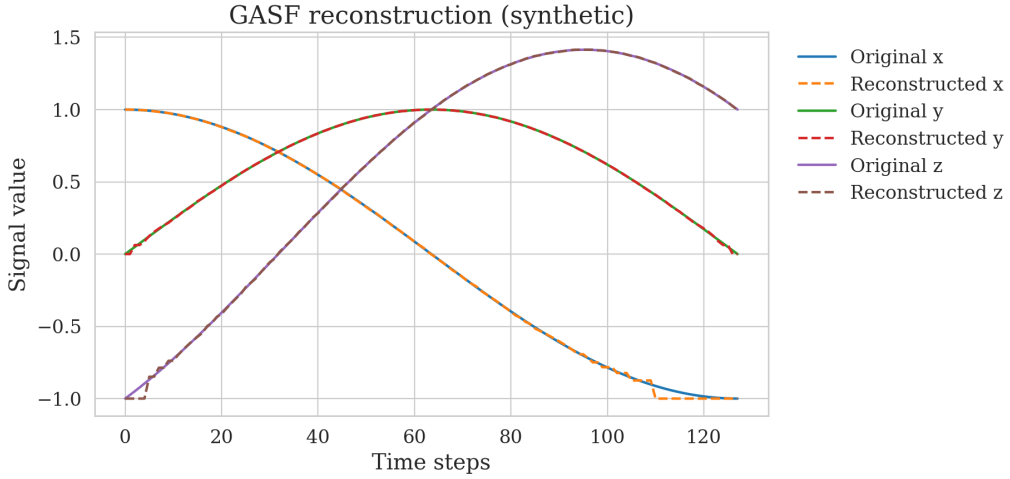



Figure S7: GASF reconstruction of the analytical three-channel signal.

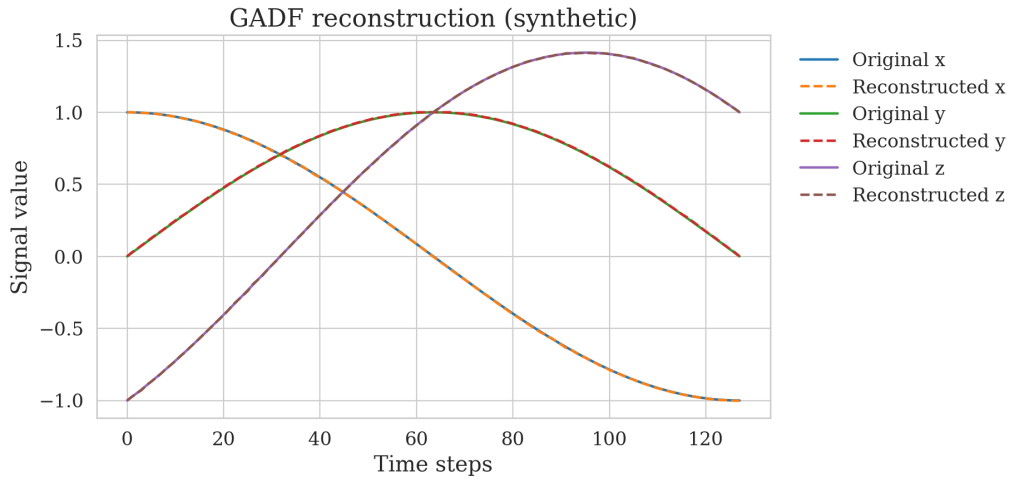



Figure S8: GADF reconstruction of the analytical three-channel signal.

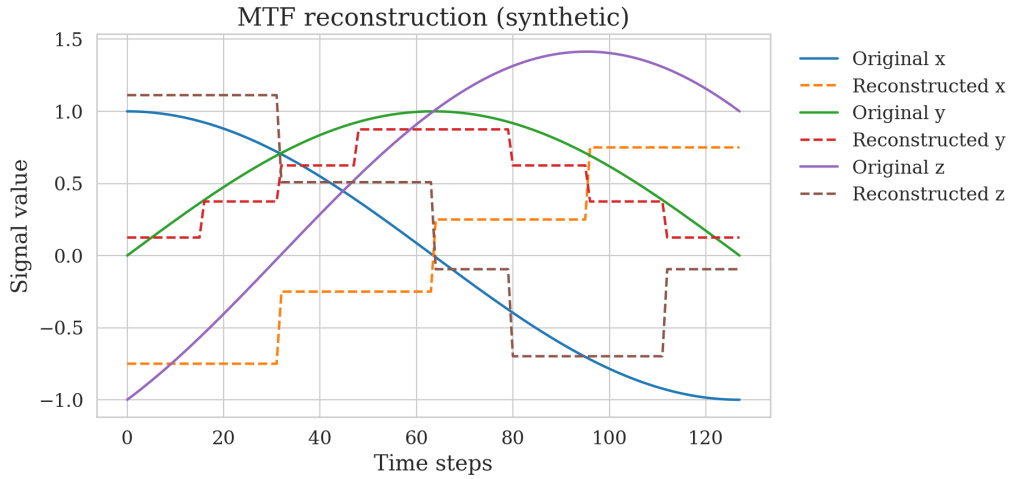



Figure S9: MTF reconstruction of the analytical three-channel signal.

After encoding the analytical signal (Figure S5), we reconstruct each representation and overlay it with the source. RP, GASF, and GADF visually follow the three normalised waveforms closely in Figures S6–S8. The plotted physical amplitudes use the same source-derived per-axis calibration as the main evaluation and therefore should not be interpreted as image-only recovery of physical scale. This single example illustrates the expected decoder behaviour but does not establish aggregate fidelity. MTF (Figure S9) instead exhibits quantised plateaus and the global-orientation ambiguity described above.

## S3.2. Per-axis MTF view of the main WISDM example

The encoded images and four global reconstructions of WISDM walking window `1600×0` already appear in Figures 2 and 3 of the main article and are not duplicated here. Figures S10–S12 provide the additional per-axis view needed to see the quantile-level plateaus and ordering errors that are hidden by the global overlay. This example is qualitative only; aggregate claims rely on the full-dataset tables.

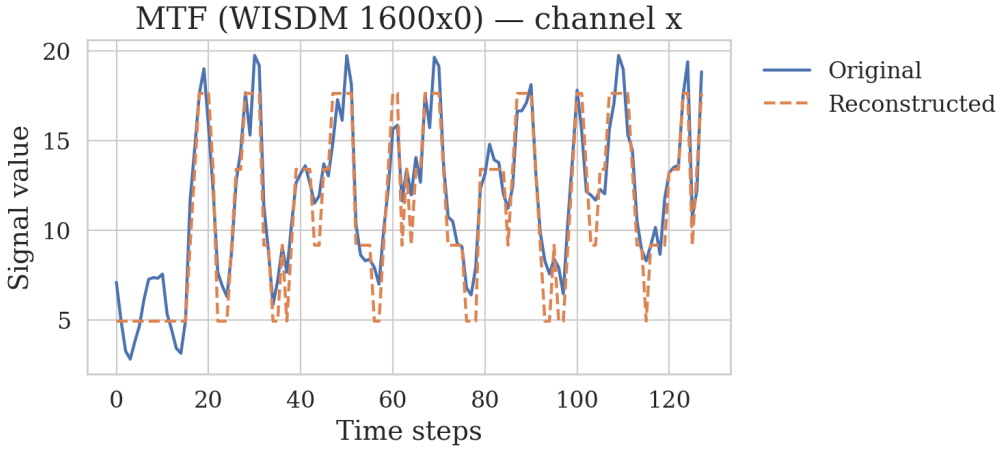



Figure S10: Original vs. MTF reconstruction for sample `1600×0`, axis $x$.

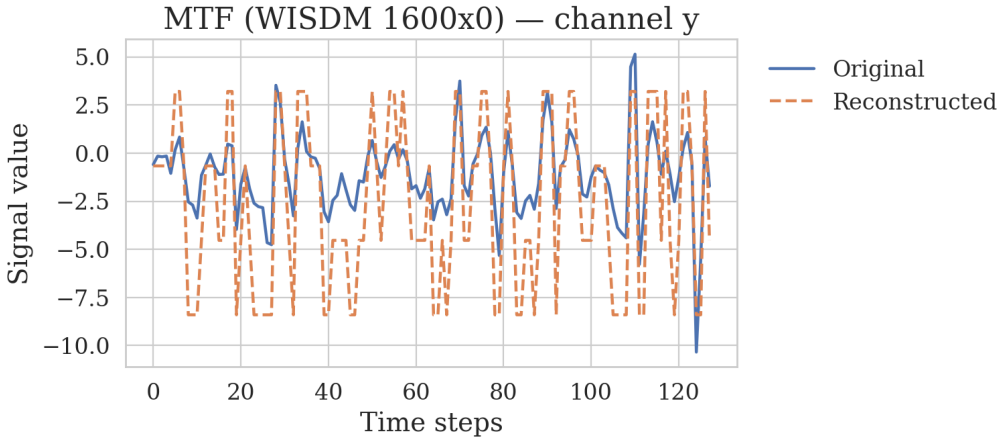



Figure S11: Original vs. MTF reconstruction for sample `1600×0`, axis $y$.

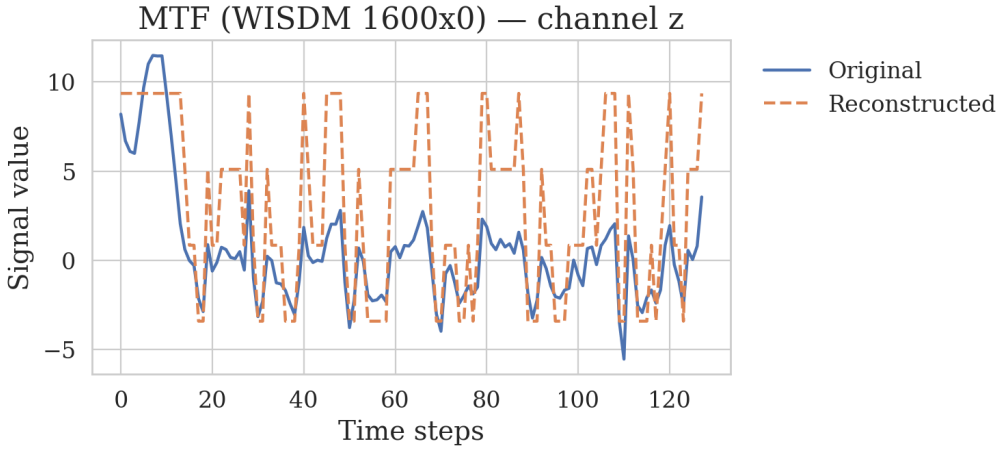



Figure S12: Original vs. MTF reconstruction for sample `1600×0`, axis $z$.

## S4. Additional spectral-fidelity metrics

The main article reports a compact fidelity table. Table S2 adds the quantities omitted from it: the pooled mean squared error; NRMSE, which normalises the root mean squared error by the same per-window amplitude range as NMAE; the relative difference in total Welch power; and the band-shape error, the mean absolute difference in normalised spectral mass over 0–1, 1–3, 3–5, and 5–10 Hz. Neither spectral quantity is folded into the PSD-shape distance of the main table.

MSE is given to five decimals for the near-original trio because RP and GADF agree to four: GADF attains the lower pooled value, 0.00080 against 0.00083 $m^2/s^4$, even though RP has the lower MAE. The reversal follows from a heavier error tail for RP, whose across-window MSE dispersion is 0.0045 against GADF's 0.0018.

Table S2: Complementary fidelity and spectral metrics over 8,172 windows (mean±std across windows, averaged over axes). MSE is in $m^2/s^4$; the remaining columns are dimensionless.

| Method | MSE | NRMSE | Relative total-energy error | Band-shape error |
|---|---|---|---|---|
| RP | $0.00083 \pm 0.0045$ | $0.0012 \pm 0.0009$ | $0.0030 \pm 0.0027$ | $0.00083 \pm 0.00043$ |
| GASF | $0.00430 \pm 0.0088$ | $0.0028 \pm 0.0012$ | $0.0054 \pm 0.0055$ | $0.00085 \pm 0.00085$ |
| GADF | $0.00080 \pm 0.0018$ | $0.0014 \pm 0.0006$ | $0.0011 \pm 0.0009$ | $0.00029 \pm 0.00021$ |
| MTF | $55.43 \pm 113.46$ | $0.326 \pm 0.091$ | $2.199 \pm 8.844$ | $0.05624 \pm 0.03692$ |

## S5. Robustness details and error attribution

The local-stability sample is selected deterministically from trial-out fold 0 (seed 0): 30 windows from each of the five activities, using round-robin sampling over the available subjects within each activity. The resulting 150 windows cover 39 of the 51 subjects. Fold 0 is only a reproducible sampling frame here: the decoders are untrained and no configuration is selected on this sample. For every nonzero noise level, two independent arrays are sampled over all pixels and channels, clipped to $[0, 255]$, rounded to the 8-bit grid, and decoded; replicate errors are averaged within each window. These two draws reduce replicate-specific variation but are not sufficient to characterise the full noise distribution at an individual window. Accordingly, the reported standard deviations and intervals summarise variability *across* windows, and the number of draws is exposed as `TFG_ROBUST_REPS` so the curve can be recomputed with more realizations. The subject-cluster intervals in Table S3 resample the 39 represented subjects as whole clusters. The MTF encoder emitted tied-quantile warnings for some axis-series; allowing fewer distinct bins in those cases is part of the evaluated quantisation behaviour.

Table S3: Subject-cluster bootstrap 95% intervals for mean NMAE along the perturbation curves ($10^4$ resamples). These accompany the between-window standard deviations in the main article.

| Method | $\sigma = 0$ | $\sigma = 2$ | $\sigma = 4$ | $\sigma = 8$ | $\sigma = 16$ |
|---|---|---|---|---|---|
| RP | $[0.0009, 0.0013]$ | $[0.0039, 0.0049]$ | $[0.0075, 0.0089]$ | $[0.0148, 0.0172]$ | $[0.0308, 0.0347]$ |
| GASF | $[0.0015, 0.0017]$ | $[0.0132, 0.0148]$ | $[0.0208, 0.0226]$ | $[0.0357, 0.0376]$ | $[0.0621, 0.0652]$ |
| GADF | $[0.0012, 0.0014]$ | $[0.0076, 0.0081]$ | $[0.0148, 0.0160]$ | $[0.0316, 0.0339]$ | $[0.0633, 0.0666]$ |
| MTF | $[0.2589, 0.2803]$ | $[0.2595, 0.2848]$ | $[0.2604, 0.2851]$ | $[0.2604, 0.2848]$ | $[0.2580, 0.2804]$ |

The cycle residual is the relative Frobenius error defined in the main article and compares native float operator matrices, not PNG intensities. Table S4 also reports the maximum wiring-gate discrepancy over the sample. All four clean reconstructions agree numerically with their cached pipeline counterparts on every window; "passed" means the per-window maximum is below the stated 0.05 threshold, not that the threshold itself is an exactness claim.

Table S4: Self-consistency gate and clean image-domain cycle residual (mean±standard deviation and subject-cluster bootstrap 95% interval).

| Method | Maximum gate NMAE | Cycle residual | Cycle 95% interval |
|---|---|---|---|
| RP | $< 10^{-8}$ | $0.0538 \pm 0.0295$ | $[0.0491, 0.0595]$ |
| GASF | $< 10^{-8}$ | $0.0048 \pm 0.0013$ | $[0.0046, 0.0050]$ |
| GADF | $< 10^{-8}$ | $0.0045 \pm 0.0018$ | $[0.0041, 0.0049]$ |
| MTF | $< 10^{-8}$ | $0.1035 \pm 0.1678$ | $[0.0736, 0.1342]$ |

For the signed RP the cycle residual must not be read as a reconstruction-error measure. The Lu–Tong sign $\sigma(i, j)$ is a threshold on $\hat{u}_{ij} \cdot v$ at $\cos(\pi/4)$, so a pair whose displacement direction lies on that boundary flips sign under a perturbation of the order of double-precision rounding, and its entry then changes by $2|R_{ij}|$. Decoding the three axes of three windows directly from the native float operator reproduces the source signal to $\max_i |x_i - \hat{x}_i| \leq 3 \times 10^{-14}\,\mathrm{m/s^2}$, and yet the per-channel cycle residual ranges from 0.006 to 0.165. The RP row of Table S4 is therefore dominated by boundary flips, and it is not comparable with the GASF, GADF and MTF rows, whose operators are continuous in the signal.

Table S5 decomposes the error of those same 150 windows across the three storage conditions, which is the evidence behind the main article's statement that the clean round-trip error of the near-original trio is attributable to 8-bit quantisation. RP, GASF, and GADF are all exact in floating point, whereas MTF is already lossy before storage. RP's earlier residual float term came from the angular orientation grid and disappears with the closed-form orientation (Section S11).

Table S5: Reconstruction NMAE by source over the 150 activity-balanced robustness windows: native float operator mean, and mean±standard deviation for the clean and perturbed PNG conditions. RP, GASF, and GADF are exact to numerical precision in floating point, so their clean error is entirely 8-bit quantisation; MTF is already lossy before storage.

| Method | Native float operator | 8-bit PNG | Perturbed ($\sigma = 8$) |
|---|---|---|---|
| RP | $9.7 \times 10^{-17}$ | $0.0011 \pm 0.0014$ | $0.0160 \pm 0.0083$ |
| GASF | $4.3 \times 10^{-17}$ | $0.0016 \pm 0.0009$ | $0.0367 \pm 0.0069$ |
| GADF | $7.1 \times 10^{-17}$ | $0.0013 \pm 0.0006$ | $0.0328 \pm 0.0088$ |
| MTF | $0.2698 \pm 0.0826$ | $0.2701 \pm 0.0814$ | $0.2730 \pm 0.0824$ |

## S6. Complete reconstruction results by fold

Table S6: Per-fold reconstruction error for both 3-fold protocols (physical units, $m/s^2$). Each cell is the per-window global metric (averaged over the three axes) averaged over that fold's test windows. Because the decoders are deterministic and untrained, a window reconstructs identically in any fold; the two protocols only repartition the same 8172 windows, so the Pooled column is identical for both and equals the full-dataset value of Table 2. Both protocols hold out whole groups (trials or subjects), so the fold-to-fold spread reflects which recordings are held out.

| | | **Trial-out 3-fold** | | | **Subject-out 3-fold** | | | |
|---|---|---|---|---|---|---|---|---|
| **Encoder** | **Metric** | F0 | F1 | F2 | F0 | F1 | F2 | **Pooled** |
| **RP** | MAE | 0.0145 | 0.0129 | 0.0153 | 0.0133 | 0.0151 | 0.0143 | 0.0142 |
| | MSE | 0.0009 | 0.0005 | 0.0010 | 0.0007 | 0.0010 | 0.0008 | 0.0008 |
| | Pearson | 0.99998 | 0.99999 | 0.99998 | 0.99999 | 0.99998 | 0.99998 | 0.99998 |
| **GASF** | MAE | 0.0198 | 0.0195 | 0.0220 | 0.0189 | 0.0211 | 0.0214 | 0.0205 |
| | MSE | 0.0038 | 0.0038 | 0.0053 | 0.0037 | 0.0041 | 0.0051 | 0.0043 |
| | Pearson | 0.99988 | 0.99988 | 0.99988 | 0.99988 | 0.99988 | 0.99988 | 0.99988 |
| **GADF** | MAE | 0.0156 | 0.0150 | 0.0165 | 0.0147 | 0.0162 | 0.0163 | 0.0157 |
| | MSE | 0.0008 | 0.0007 | 0.0009 | 0.0007 | 0.0008 | 0.0009 | 0.0008 |
| | Pearson | 0.99999 | 0.99999 | 0.99999 | 0.99999 | 0.99999 | 0.99999 | 0.99999 |
| **MTF** | MAE | 3.90 | 3.75 | 4.18 | 3.71 | 4.04 | 4.07 | 3.94 |
| | MSE | 53.16 | 48.43 | 64.52 | 48.13 | 52.54 | 65.43 | 55.43 |
| | Pearson | 0.02529 | 0.01183 | 0.00355 | 0.00977 | 0.00116 | 0.02982 | 0.01355 |

## S7. Complete grouped subject-out classifier results

Table S7: Grouped subject-out three-fold accuracies for all six classifiers (mean±standard deviation across folds). Folds 0, 1 and 2 hold out disjoint groups of 17, 18 and 16 test subjects.

| Classifier | Original | RP | GASF | GADF | MTF |
|---|---|---|---|---|---|
| KNN | $0.504 \pm 0.035$ | $0.504 \pm 0.035$ | $0.504 \pm 0.034$ | $0.505 \pm 0.034$ | $0.465 \pm 0.039$ |
| SVM | $0.738 \pm 0.020$ | $0.738 \pm 0.020$ | $0.738 \pm 0.020$ | $0.738 \pm 0.020$ | $0.665 \pm 0.026$ |
| RF | $0.786 \pm 0.039$ | $0.786 \pm 0.039$ | $0.787 \pm 0.039$ | $0.787 \pm 0.039$ | $0.689 \pm 0.026$ |
| LSTM | $0.744 \pm 0.029$ | $0.744 \pm 0.028$ | $0.744 \pm 0.029$ | $0.744 \pm 0.028$ | $0.672 \pm 0.035$ |
| GRU | $0.811 \pm 0.026$ | $0.811 \pm 0.026$ | $0.811 \pm 0.026$ | $0.811 \pm 0.026$ | $0.702 \pm 0.025$ |
| CNN | $0.796 \pm 0.036$ | $0.796 \pm 0.035$ | $0.796 \pm 0.036$ | $0.796 \pm 0.036$ | $0.686 \pm 0.035$ |

## S8. Trial-out vs subject-out accuracy

Table S8 places the grouped trial-out (T, within-population) and grouped subject-out (S, primary) accuracies side by side for the three representative classifiers reported in the main text. Once whole trials are held out, absolute accuracy stays within 0.025 of the subject-out level for every classifier, higher for GRU, LSTM and KNN and lower for CNN, RF and SVM; a split that let windows of the same trial fall on both sides of a fold gave 0.89–0.92 for these three classifiers, so that gap reflected adjacent-window leakage rather than within-population generalisation. The encoder ranking is identical under both protocols: RP, GASF and GADF track the original signal, while MTF degrades every classifier. The main text reports the subject-out column only.

Table S8: Grouped trial-out (T) vs grouped subject-out (S) three-fold accuracy (mean across folds) for three representative classifiers. The encoder ranking is identical under both protocols.

| | Original | | RP | | GASF | | GADF | | MTF | |
|---|---|---|---|---|---|---|---|---|---|---|
| Classifier | T | S | T | S | T | S | T | S | T | S |
| CNN | 0.793 | 0.796 | 0.793 | 0.796 | 0.793 | 0.796 | 0.794 | 0.796 | 0.685 | 0.686 |
| GRU | 0.825 | 0.811 | 0.825 | 0.811 | 0.825 | 0.811 | 0.825 | 0.811 | 0.708 | 0.702 |
| RF | 0.772 | 0.786 | 0.773 | 0.786 | 0.773 | 0.787 | 0.772 | 0.787 | 0.679 | 0.689 |

## S9. Subject-level classification equivalence

**Simultaneous max-deviation bootstrap algorithm.** The central equivalence result is a joint subject-cluster bootstrap. Because it is the headline statistic, we state the exact procedure. Let a *family* be a set of $C$ comparisons (here $C = 18$ for the primary RP/GASF/GADF family, $C = 6$ for the separate MTF control family), each a fixed (classifier, encoder) pair, evaluated over the same $K = 51$ subjects in a fixed order.

1. **Per-subject differences.** For subject $s$ and comparison $c$, compute the per-subject accuracy difference $\Delta_{c,s} = \mathrm{acc}_s^{\mathrm{orig}} - \mathrm{acc}_s^{\mathrm{recon}(c)}$, where each subject accuracy is that subject's fraction of correctly classified held-out windows (under subject-out validation every subject is a test subject in exactly one outer fold). This gives a $K \times C$ matrix with one row per subject.
2. **Point estimates.** The estimate for comparison $c$ is the subject mean $\hat{\mu}_c = \frac{1}{K}\sum_s \Delta_{c,s}$ (the "mean $\Delta$acc" column). Subjects, not windows, are the sampling unit; no per-subject weighting or standardisation is applied.
3. **Joint resampling.** For $b = 1, \ldots, B$ ($B = 10^4$) draw one index vector of $K$ subjects with replacement and apply the *same* vector to every column, so whole subjects are resampled jointly and the dependence between classifiers and encodings is preserved. Compute the resampled means $\hat{\mu}_c^{(b)}$ for all $c$.
4. **Family-wise critical value.** Centre each resampled mean on its point estimate, $d_c^{(b)} = \hat{\mu}_c^{(b)} - \hat{\mu}_c$ (raw accuracy units; the deviations are *not* studentised or divided by a bootstrap standard error), take the family maximum $D^{(b)} = \max_c |d_c^{(b)}|$, and set the single critical value $\kappa$ to the 95th percentile of $\{D^{(b)}\}_{b=1}^{B}$. One $\kappa$ is shared by all comparisons in the family, which is what makes the coverage simultaneous rather than pointwise.
5. **Intervals and decision.** The simultaneous interval for comparison $c$ is $[\hat{\mu}_c - \kappa,\ \hat{\mu}_c + \kappa]$. Equivalence at margin $m$ is declared iff that whole interval lies inside $[-m, +m]$; the main text uses $m = 0.01$ with $m = 0.02$ as a less stringent sensitivity check.

Each family uses an independent random seed and its own $\kappa$; no resamples or critical values are shared between the primary and MTF families, and none are pooled across the subject-out and trial-out protocols. The compact main-text table reports, for each method, the single classifier-specific interval whose endpoint lies closest to the equivalence margin. The wider "interval spans" used later in Table S10 are unions of the classifier-specific intervals and are descriptive only. This is the `_cluster_bootstrap_simultaneous` routine in `scripts/_stat_tests.py`; the confirmatory paired TOST uses the same per-subject $\Delta_{c,s}$ but a Student-$t$ interval at the bilateral 90% level, so the simultaneous 95% bootstrap is the stricter headline rule.

Table S9 exposes all classifier-specific simultaneous intervals behind the compact worst-case summary in the main article. The primary family contains the 18 RP/GASF/GADF comparisons; MTF's six negative-control comparisons form a separate family. Within each family, all classifiers share the same $10^4$ subject resamples and the same bootstrap maximum-deviation critical value. Thus these are simultaneous intervals, not six unadjusted pointwise intervals and not an "envelope CI."

Table S9: Mean per-subject Δaccuracy and simultaneous 95% interval, Original − reconstruction, under grouped subject-out validation (51 subjects). Bold cells lie wholly inside $[-0.01, +0.01]$.

| Classifier | RP | GASF | GADF | MTF |
|---|---|---|---|---|
| KNN | **−0.0000** [**−0.0022**, **+0.0021**] | **−0.0001** [**−0.0022**, **+0.0021**] | **−0.0005** [**−0.0027**, **+0.0016**] | +0.0474 [+0.0212, +0.0736] |
| SVM | **+0.0004** [**−0.0018**, **+0.0025**] | **+0.0000** [**−0.0022**, **+0.0022**] | **+0.0008** [**−0.0013**, **+0.0030**] | +0.0651 [+0.0389, +0.0913] |
| RF | **+0.0006** [**−0.0016**, **+0.0027**] | **−0.0006** [**−0.0027**, **+0.0016**] | **−0.0002** [**−0.0024**, **+0.0019**] | +0.0910 [+0.0649, +0.1172] |
| LSTM | **+0.0005** [**−0.0017**, **+0.0026**] | **−0.0000** [**−0.0022**, **+0.0021**] | **+0.0001** [**−0.0021**, **+0.0023**] | +0.0697 [+0.0435, +0.0959] |
| GRU | **−0.0004** [**−0.0025**, **+0.0018**] | **−0.0002** [**−0.0023**, **+0.0020**] | **−0.0003** [**−0.0024**, **+0.0019**] | +0.1124 [+0.0862, +0.1386] |
| CNN | **+0.0003** [**−0.0019**, **+0.0024**] | **+0.0003** [**−0.0019**, **+0.0025**] | **+0.0002** [**−0.0020**, **+0.0023**] | +0.1144 [+0.0882, +0.1405] |

The Holm-adjusted paired TOST analysis gives the same method-level decision at the ±0.01 margin: equivalence is established for 6/6 classifiers with RP, GASF, and GADF, and for 0/6 with MTF. This confirmation is secondary to the simultaneous subject-cluster intervals above.

For completeness, Table S10 applies the same simultaneous procedure to a separate 18-comparison family under the secondary trial-out protocol (and a separate six-comparison MTF family). No interval is pooled across protocols. Both protocols yield the same equivalence decisions.

Table S10: Descriptive spans of classifier-specific simultaneous 95% intervals by protocol. Each protocol is analysed as a separate family; the displayed span is not itself a confidence interval.

| | Trial-out (secondary) | | | Subject-out (primary) | | |
|---|---|---|---|---|---|---|
| Method | Mean Δ range | Interval span | Eq. ±0.01 | Mean Δ range | Interval span | Eq. ±0.01 |
| RP | [−0.0006, +0.0005] | [−0.0028, +0.0027] | 6/6 | [−0.0004, +0.0006] | [−0.0025, +0.0027] | 6/6 |
| GASF | [−0.0011, +0.0001] | [−0.0033, +0.0023] | 6/6 | [−0.0006, +0.0003] | [−0.0027, +0.0025] | 6/6 |
| GADF | [−0.0007, +0.0011] | [−0.0028, +0.0032] | 6/6 | [−0.0005, +0.0008] | [−0.0027, +0.0030] | 6/6 |
| MTF | [+0.0496, +0.1249] | [+0.0235, +0.1510] | 0/6 | [+0.0474, +0.1144] | [+0.0212, +0.1405] | 0/6 |

## S10. Extended RP ablation

Table S11 isolates the RP decoder's geometric choices under the current metadata-free diagonal-centred inversion. All two-dimensional arms use the closed-form orientation, so the rows differ only in the stated geometric choice. On this sample, diagonal centring restores a predominantly two-dimensional Euclidean spectrum ($EVR_2 \approx 0.95$). Both the full state geometry and signed selection are necessary for near-lossless reconstruction, whereas inverting the PNG with the signal range instead of centring on the zero diagonal applies an affine shift that destroys the Euclidean structure.

Table S11: Controlled RP geometry ablation on 100 fold-0 windows. MAE is in $m/s^2$; $EVR_2$ is the fraction of positive MDS variance in the two leading dimensions.

| Variant | MAE | Pearson | $EVR_2$ |
|---|---|---|---|
| Metadata-free diagonal + signed selection | **0.011** | **1.000** | 0.947 |
| Incorrect signal-range inversion | 1.691 | 0.931 | 0.219 |
| Without signed selection | 2.940 | 0.745 | 0.947 |
| Legacy Jaccard one-dimensional baseline | 1.935 | 0.936 | 0.760 |

The legacy graph-based row denotes an earlier internal one-dimensional heuristic and is included only as implementation provenance; it is not presented as a faithful reimplementation of any specific prior reconstruction paper.

## S11. RP orientation: angular grid versus closed form

The orientation step of Section 3.2 was previously a search over a grid of $n_\theta = 720$ rotation angles crossed with the two reflections, keeping the eight lowest-overlap candidates for the signed comparison. It is now solved exactly: for each reflection parity the translation-corrected overlap residual is linear in $(\cos\theta, \sin\theta)$, so the minimiser is an eigenvector of a symmetric $2 \times 2$ matrix, giving four exact candidates. Table S12 compares the two on the same 150 activity-balanced windows (450 axis-series) used by the robustness block, with the metadata-free inversion in both arms so that only the orientation differs.

Three points follow. First, on the native float operator the closed form is exact to double precision (mean NMAE $9.7 \times 10^{-17}$; mean normalised squared-overlap diagnostic $3.8 \times 10^{-31}$), whereas the grid retains $3.4 \times 10^{-4}$ — the discretisation error of a 0.5° spacing. This is the term the main text previously attributed to the RP algorithm. Second, the advantage survives 8-bit storage (0.00110 versus 0.00127) but is progressively masked by pixel noise, the two arms differing by under $2 \times 10^{-4}$ from $\sigma = 2$ onwards. Third, total decoding takes 0.27 versus 0.60 s per axis-series in this finite-$N$ Python implementation. Although MDS remains the asymptotically dominant $O(N^3)$ step, at $N = 127$ the interpreted loop over 1,440 grid/reflection candidates dominates wall-clock time; the closed form removes that loop.

The cycle residual is 0.0538 against 0.0520 on clean PNG and 0.1593 against 0.1564 at $\sigma = 8$ (closed form versus grid). These differences do not measure reconstruction quality: as shown in Section S5, the signed-RP cycle residual is governed by sign flips at the $\cos(\pi/4)$ threshold, which a float-exact reconstruction also produces. The column is reported for completeness and no comparison is drawn from it.

The last column counts axis-series where the signed-RP criterion did not select the candidate with the lowest NMAE against the ground truth. The closed form never mis-selects in float and does so on 2 of 450 axis-series on clean 8-bit input, at a mean NMAE regret of $2.2 \times 10^{-5}$. The grid's counts are large but not comparable in kind: its eight-candidate shortlist contains near-identical angles, so a different pick costs a mean NMAE regret of only $1.7 \times 10^{-4}$ on clean 8-bit input rather than a wrong reflection or sign.

Table S12: RP orientation ablation on 150 activity-balanced fold-0 windows (450 axis-series; 900 for each noise level, two draws per window). Both arms use the metadata-free diagonal inversion. "Overlap res." is the normalised diagnostic returned after translation alignment; the closed form minimises its unnormalised quadratic numerator. "Sel. fails" counts axis-series where the signed criterion did not pick the NMAE-optimal candidate.

| Condition | Orientation | NMAE mean | NMAE median | NMAE p95 | NMAE max | Overlap res. | decode s/axis | Sel. fails |
|---|---|---|---|---|---|---|---|---|
| Native float | closed form | $9.7 \times 10^{-17}$ | $7.9 \times 10^{-17}$ | $2.3 \times 10^{-16}$ | $3.5 \times 10^{-15}$ | $3.8 \times 10^{-31}$ | 0.273 | 0/450 |
| | grid, $n_\theta = 720$ | 0.000340 | 0.000197 | 0.001147 | 0.002261 | $1.7 \times 10^{-5}$ | 0.594 | 105/450 |
| Clean 8-bit PNG | closed form | 0.001098 | 0.000819 | 0.001886 | 0.025865 | $1.1 \times 10^{-4}$ | 0.277 | 2/450 |
| | grid, $n_\theta = 720$ | 0.001271 | 0.000905 | 0.002523 | 0.023820 | $1.3 \times 10^{-4}$ | 0.599 | 178/450 |
| PNG $\sigma = 2$ | closed form | 0.004375 | 0.003297 | 0.008674 | 0.049212 | $1.0 \times 10^{-3}$ | 0.273 | 9/900 |
| | grid, $n_\theta = 720$ | 0.004554 | 0.003391 | 0.009231 | 0.055159 | $1.1 \times 10^{-3}$ | 0.600 | 613/900 |
| PNG $\sigma = 4$ | closed form | 0.008225 | 0.006257 | 0.017634 | 0.069255 | $3.3 \times 10^{-3}$ | 0.267 | 9/900 |
| | grid, $n_\theta = 720$ | 0.008357 | 0.006373 | 0.017880 | 0.067395 | $3.4 \times 10^{-3}$ | 0.586 | 627/900 |
| PNG $\sigma = 8$ | closed form | 0.016220 | 0.013091 | 0.040097 | 0.100176 | $1.25 \times 10^{-2}$ | 0.271 | 18/900 |
| | grid, $n_\theta = 720$ | 0.016336 | 0.013256 | 0.040608 | 0.090065 | $1.26 \times 10^{-2}$ | 0.590 | 639/900 |
| PNG $\sigma = 16$ | closed form | 0.033225 | 0.026907 | 0.075235 | 0.161946 | $4.91 \times 10^{-2}$ | 0.277 | 58/900 |
| | grid, $n_\theta = 720$ | 0.033093 | 0.026974 | 0.073581 | 0.160802 | $4.87 \times 10^{-2}$ | 0.604 | 617/900 |

The historical full-corpus snapshot changes from MAE 0.0148 and MSE 0.0010 to 0.0142 $\mathrm{m/s^2}$ and 0.0008 $\mathrm{m^2/s^4}$, with Pearson unchanged at 0.99998. This is a regression check rather than a pure orientation ablation: the earlier snapshot also used operator-range metadata and a scale-dependent selector, whereas the refreshed run uses the production metadata-free path. The causal orientation comparison is therefore the controlled 150-window experiment above. Classification is insensitive at reporting precision: across the six classifiers under the subject-out protocol the largest reconstructed-accuracy change is below 0.001, and the regenerated per-class tables and equivalence verdicts of Table 5 are unaffected.

## S12. Metadata-free RP decoding

The RP diagonal is identically zero, so under min–max storage the constant diagonal pixel level marks where $R = 0$; centring on it ($R = \mathrm{PNG} - \mathrm{median}_i\, \mathrm{PNG}_{ii}$) recovers the signed matrix up to a positive scale that classical MDS and the final range rescale absorb (Section 3.2). Table S13 compares, on 150 activity-balanced fold-0 windows and with the closed-form orientation in both arms, this metadata-free decoder with an operator-range oracle that inverts the PNG using the true per-window $(R_{\min}, R_{\max})$. The two methods receive the same two noise realisations per window, and those replicates are averaged within each window before summarisation. Their range-normalised errors and correlations are descriptively similar in both the clean and $\sigma = 8$ conditions. The metadata-free path has a slightly higher clean physical MAE (0.0145 vs 0.0121 $\mathrm{m/s^2}$); the gap is the price of not storing the operator range, and it is smaller than the pooled RP MAE of 0.0142 $\mathrm{m/s^2}$ reported for the adopted decoder over all 8,172 windows. No inferential equality claim is made from this ablation. The two arms share their noise draws with each other but not with the perturbation curve of Table 3, which is why the metadata-free entry here (0.0161) and the RP entry there (0.0160) differ in the fourth decimal.

Table S13: RP reconstruction with an operator-range oracle (true per-window $(R_{\min}, R_{\max})$) versus the adopted metadata-free diagonal-centred inverse, on 150 activity-balanced fold-0 windows, both using the closed-form orientation. At $\sigma = 8$, two paired noise draws per window are averaged within window.

| Noise | Decoder | NMAE | MAE ($m/s^2$) | Pearson |
|---|---|---|---|---|
| $\sigma = 0$ | operator-range oracle | 0.0009 | 0.0121 | 0.99998 |
| | metadata-free (diagonal) | 0.0011 | 0.0145 | 0.99998 |
| $\sigma = 8$ | operator-range oracle | 0.0163 | 0.2133 | 0.99642 |
| | metadata-free (diagonal) | 0.0161 | 0.2128 | 0.99652 |

## S13. GADF storage range and pivot sensitivity

**Theoretical operator range and fixed PNG map.** Under the restricted normalisation $\bar{x}_i \in [-\alpha, \alpha]$, the largest possible angular separation is $\pi - 2\arccos(\alpha)$. The corresponding GADF magnitude is therefore bounded by

$$\max_{i,j} |G^{\mathrm{D}}_{ij}| = \sin(\pi - 2\arccos\alpha) = 2\alpha\sqrt{1-\alpha^2}.$$

For $\alpha = 0.7$, this bound is approximately 0.9998, and every non-constant window attains it, because the restricted normalisation places one sample at $-\alpha$ and another at $+\alpha$. The encoder's per-window min–max map is therefore exactly the fixed map $[-0.9998, 0.9998] \to [0, 255]$, whereas the decoder inverts the image with $[-1, 1]$ and so applies a deterministic gain of 1.00013. The resulting discrepancy is about $2 \times 10^{-4}$ at either endpoint, below one 8-bit intensity step. This is a deterministic consequence of the declared branch restriction, not an empirical estimate, and is why no per-window range metadata is needed.

**Pivot-ensemble size.** Averaging the reconstruction over the $n_p$ most-central rows, rather than using a single pivot, is the second numerical choice. Table S14 reports a descriptive sweep on 1,500 windows drawn without replacement from the complete WISDM window set with seed 0. On this sample, pointwise error falls monotonically from a single pivot (0.0353) to five (0.0158, the fixed headline setting) and continues to 0.0119 at $n_p = 9$. The measured wall-clock differences are small because each additional pivot adds only an $O(N)$ pass over an already-loaded matrix, and they sit within the run-to-run noise of this machine rather than ordering with $n_p$; the timings describe one implementation run and are not a portable hardware benchmark. The sweep shows the effect of averaging but is not used to revise the already fixed headline configuration.

Table S14: Descriptive GADF pivot-ensemble sweep on 1 500 WISDM windows sampled without replacement with seed 0 (4 500 axis-series) at $\alpha = 0.7$. $n_p$ is the number of averaged central pivot rows; MAE is the 8-bit PNG round-trip error in physical units; time is the observed wall-clock time per axis-series. The fixed headline setting is $n_p = 5$.

| $n_p$ | 1 | 3 | 5 | 7 | 9 |
|---|---|---|---|---|---|
| MAE (8-bit PNG) | 0.0353 | 0.0206 | **0.0158** | 0.0134 | 0.0119 |
| Time (ms/axis) | 1.82 | 1.75 | 2.03 | 1.95 | 1.83 |

## S14. Exploratory MTF sensitivity analyses

**Controlled decoder comparison at fixed $Q = 4$.** Table S15 compares the earlier cosine-pivot decoder, the Fiedler-ordering decoder, and two variants supplied with additional source-derived information. Every variant decodes the *identical* 8-bit image (the same uint8 PNG round trip), so the differences reflect the decoding algorithm alone and not storage precision. The stored values associated with the quantile bins are midpoints of the quantile boundaries, not within-bin sample medians. The optional sign bit records whether the first source sample lies above or below the source midrange and is used only to choose between the two global amplitude orientations. Neither form of side information is part of the headline MTF decoder contract.

Because all variants read the same stored image, the reduction from the cosine-pivot decoder (MAE 5.39) to Fiedler ordering (MAE 3.95) isolates the effect of spectral ordering: it is a genuine algorithmic improvement, not a storage-precision artefact. Adding source-derived within-bin information reduces the error further, but even with a per-bin midpoint and a sign bit the many-to-one quantisation loss keeps MTF (MAE 1.99) far above the continuous decoders (RP/GASF/GADF at $\sim$ 0.01–0.02).

Table S15: Controlled MTF decoder comparison at $Q = 4$ on 100 randomly selected fold-0 windows (seed 0, $T = 128$). Every variant decodes the identical 8-bit image; MAE ($m/s^2$) and Pearson are averaged across axes.

| Decoder variant | MAE | Pearson |
|---|---|---|
| Cosine-pivot heuristic | 5.385 | −0.020 |
| Fiedler ordering | 3.949 | +0.033 |
| Fiedler + boundary-midpoint metadata | 3.132 | +0.044 |
| Fiedler + midpoint + sign bit | 1.986 | +0.483 |

The reductions after adding midpoint and orientation information illustrate which ambiguities these metadata can remove. They are not lower bounds on the error attainable by every possible MTF decoder, and the many-to-one loss within each quantile state remains. All headline MTF results use Fiedler ordering without midpoint or sign-bit metadata.

**Bin-count sensitivity across $Q$.** Table S16 sweeps $Q$ over all 8,172 pooled windows. The pointwise MAE and Pearson are decoder-only, because every deterministic decoder reconstructs a given window identically regardless of its cross-validation assignment. The six right-hand columns add the regenerated downstream classifier sensitivity across $Q$: the mean accuracy on the MTF reconstructions at each $Q$, obtained by predicting with the fixed original-trained models under the trial-out 3-fold protocol.

Table S16: MTF bin-count sensitivity over all pooled windows ($N = 8\,172$). Pointwise MAE ($m/s^2$) and Pearson are decoder-only (each window reconstructs identically regardless of fold); the KNN–CNN columns are mean downstream accuracy on the MTF reconstructions at each $Q$ under the trial-out 3-fold protocol, using the fixed original-trained models. Highlighting marks the headline $Q = 4$ and is descriptive, not nested model selection. Each row re-encodes and re-decodes every window at that $Q$, so the $Q = 4$ row is an independent recomputation and reproduces Table 2 to within $0.01\,m/s^2$ rather than exactly.

| $Q$ | MAE | Pearson | KNN | SVM | RF | LSTM | GRU | CNN |
|---|---|---|---|---|---|---|---|---|
| 2 | 4.11 | +0.002 | 0.415 | 0.673 | 0.685 | 0.698 | 0.703 | 0.689 |
| **4** | **3.95** | **+0.013** | 0.471 | 0.667 | 0.679 | 0.701 | 0.708 | 0.685 |
| 6 | 4.01 | +0.004 | 0.463 | 0.665 | 0.674 | 0.695 | 0.701 | 0.682 |
| 8 | 4.03 | −0.001 | 0.450 | 0.664 | 0.676 | 0.701 | 0.704 | 0.685 |
| 10 | 4.07 | +0.000 | 0.443 | 0.660 | 0.668 | 0.699 | 0.702 | 0.678 |
| 16 | 4.13 | −0.014 | 0.435 | 0.664 | 0.675 | 0.700 | 0.704 | 0.675 |

Both the pointwise error and the downstream accuracy vary little across $Q$: MAE stays within 3.95–4.13 and every classifier moves by at most a few points (KNN, the most $Q$-sensitive, ranges from 0.42 at $Q = 2$ to 0.47 at $Q = 4$; the neural models stay between 0.68 and 0.71). $Q = 4$ attains the lowest pointwise MAE and is at or near the best accuracy for most classifiers, so the headline choice is not a cherry-picked optimum. Because the sweep reuses the evaluation windows it is a sensitivity check rather than a nested selection, so we do not claim $Q = 4$ is optimal for unseen subjects; MTF remains a descriptive lossy control.

# S15. RP–GADF structural diagnostic

## S15.1. Null-Corrected RP/GADF Regional Overlap

The visual proximity between RP and GADF is easy to overstate from a single example, so we add a diagnostic test that deliberately separates spatial region alignment from marginal colour statistics. On the full set of non-overlapping smartwatch-accelerometer WISDM windows (window length $N = 128$), we encode the same signal as signed RP and GADF, align the matrices on the common $127 \times 127$ support, and quantise each image channel into $B$ visual intensity ranges. For every matched pair $(\mathrm{RP}_i, \mathrm{GADF}_i)$, we compare the quantised regions against a conservative null pair $(\mathrm{RP}_i, \mathrm{GADF}_j)$, where $j \neq i$ is drawn from the same activity class. The primary statistic is a weighted regional Jaccard score, $\sum_b |R_b \cap G_b| / \sum_b |R_b \cup G_b|$, averaged across the grayscale view and the three RGB/axis channels. We also compute a distribution-only overlap that ignores pixel position and a boundary-F1 score between quantised region edges.

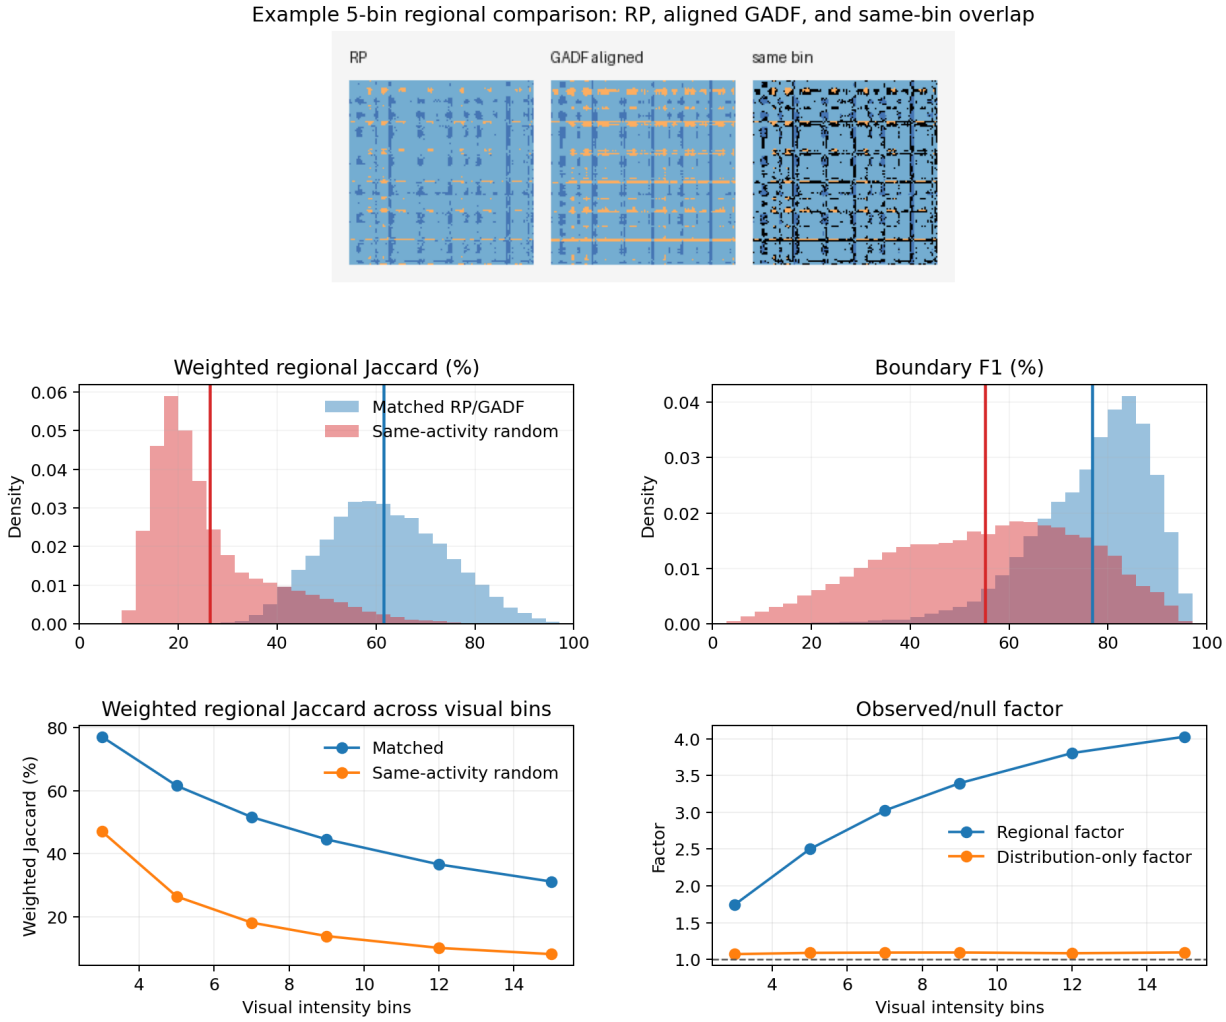



Figure S13: Null-corrected RP/GADF structural-overlap diagnostic. The top panel shows one 5-bin visual comparison: quantised RP, aligned quantised GADF, and pixels landing in the same bin. The middle histograms compare matched RP/GADF pairs against same-activity random pairings. The bottom row shows that matched regional overlap remains above the null baseline across independent visual quantisation levels $B \in \{3, 5, 7, 9, 12, 15\}$, while the distribution-only factor stays close to one.

Table S17: Null-corrected RP/GADF weighted regional overlap across visual intensity bins. Values are averaged over grayscale and the three axis channels. The null baseline pairs each RP image with a GADF image from a different window of the same activity class. Jaccard values are percentages; the Matched/null factor is the mean over the four channels of the per-channel matched/null ratio, so it is not the ratio of the two displayed column means.

| Visual bins $B$ | Matched Jaccard | Same-activity null | Matched–null gain | Matched/null factor |
|---|---|---|---|---|
| 3 | 77.16 | 47.11 | +30.05 | 1.75× |
| 5 | 61.57 | 26.43 | +35.14 | 2.50× |
| 7 | 51.64 | 18.14 | +33.50 | 3.02× |
| 9 | 44.55 | 13.87 | +30.68 | 3.40× |
| 12 | 36.62 | 10.12 | +26.50 | 3.81× |
| 15 | 31.17 | 8.14 | +23.03 | 4.03× |

Table S17 and Figure S13 support a narrow descriptive claim: RP and GADF are not equivalent encodings, yet their coarse regions are more aligned when they come from the same signal window than under the same-activity pairing used here. As $B$ increases, the absolute Jaccard decreases because the match becomes stricter, while the matched/null factor rises from 1.75× to 4.03×. This pattern is consistent with a spatial contribution beyond broad intensity histograms. The distribution-only factor stays near 1.07×–1.09× across the same sweep. Boundary F1 gives the same direction at coarse quantisation but becomes less diagnostic at high $B$ because every image develops

many region edges. The diagnostic uses one declared null-pairing scheme and provides no subject-clustered inferential interval; it should therefore not be read as proof of operator equivalence or as a population-level hypothesis test.

## S15.2. Structural relationship between signed RP and GADF

**Operator-level comparison of pairwise structure.** Before discussing the first-order amplitude expansion, it is useful to put signed RP and GADF in a common notation without claiming equality of their output spaces. Both can be written as pairwise functions of two-dimensional states,

$$M_{ij} \;=\; \omega(z_i, z_j),$$

where $z_i \in \mathbb{R}^2$ is method specific and $\omega : \mathbb{R}^2 \times \mathbb{R}^2 \to \mathbb{R}$ is the associated pairwise operator. The two methods differ in both the state construction and the operator:

- RP under the Lu–Tong convention uses the sequence-dependent adjacent state $z_k = (x_k,\, x_{k+1})$ and a signed Euclidean distance, $\omega_{\mathrm{RP}}(u, v) = \sigma(u, v)\|u - v\|_2$, where the sign is assigned *externally* by the projection onto the reference direction $v_\star = (1, 1)^\top/\sqrt{2}$. With the thresholded sign rule used here, $\sigma(u, v)$ is not guaranteed to satisfy $\sigma(u, v) = -\sigma(v, u)$ for every pair, so the resulting matrix is directional but not necessarily antisymmetric.
- GADF uses the polar state $z_k = (\tilde{x}_k, \sqrt{1 - \tilde{x}_k^2}) = (\cos\phi_k, \sin\phi_k)$ and the operator $\omega_{\mathrm{GADF}}(u, v) = \det[v \mid u] = u_2v_1 - u_1v_2 = \sin(\phi_i - \phi_j)$, the signed area of the parallelogram spanned by the two states, whose sign is *intrinsic* to the operator and matches $G^{\mathrm{D}}_{ij}$ in Eq. (4).

The important consequence is therefore an analogy, not an identity. GADF lies *within* the $\binom{N}{2}$-dimensional space of antisymmetric zero-diagonal matrices by construction, because the determinant changes sign when its arguments are swapped; more specifically, its factorisation $G^{\mathrm{D}} = \mathbf{s}\,\mathbf{c}^\top - \mathbf{c}\,\mathbf{s}^\top$ (with $s_i = \sin\phi_i$, $c_i = \cos\phi_i$) shows it occupies only a rank-$\leq 2$ subvariety of that ambient space, not the whole of it. Signed RP has a zero diagonal and carries directional pairwise-distance information, but the Lu–Tong sign rule used in this paper does not force exact antisymmetry for nearly orthogonal displacements. The first-order expansion below quantifies why the two images can nevertheless look and behave similarly, while the structural differences between the two operators — GADF's intrinsic sign and its closed-form one-pass inverse, versus signed RP's externally assigned sign and its MDS-based reconstruction — follow from the determinant-based operator rather than from an exact shared matrix space.

**Local first-order analogy.** The visual proximity between RP and GADF can be examined through a local approximation without claiming a shared operator. GADF produces an antisymmetric zero-diagonal matrix, while signed RP produces a zero-diagonal directional distance matrix with related pairwise-difference content. For smooth signals whose local increments vary slowly (so that $x_{i+1} - x_i \approx x_{j+1} - x_j$ over the compared indices), both can be approximated by functions of the pairwise-difference matrix $\{x_i - x_j\}_{i,j}$. The signed RP under the Lu–Tong embedding satisfies

$$R_{ij} \;\approx\; \sigma(i, j)\,\sqrt{2}\,|x_i - x_j|,$$

where $\sigma(i, j)$ is the external orientation flag computed from the projection of $s_i - s_j$ onto $v = (1, 1)^\top/\sqrt{2}$. The GADF entry, expanded around a common normalized amplitude $\bar{x}$, satisfies

$$G^{\mathrm{D}}_{ij} \;=\; \sin(\phi_i - \phi_j) \;\approx\; \frac{\bar{x}_j - \bar{x}_i}{\sqrt{1 - \bar{x}^2}},$$

because $d(\arccos x)/dx = -1/\sqrt{1 - x^2}$, with both the samples $\bar{x}_i, \bar{x}_j$ and the expansion point $\bar{x}$ taken in the restricted $[-\alpha, \alpha]$ normalization of the GADF decoder. The sign of the GADF term is intrinsic to the trigonometric form rather than imposed externally. Thus, both expressions depend on pairwise amplitude differences at first order and both are zero on the diagonal, but only GADF is strictly antisymmetric under the stated construction. The restricted-branch GADF inverse is closed form because the angular interval $[\arccos(\alpha), \arccos(-\alpha)]$, with $\alpha = 0.7 < 1/\sqrt{2}$, keeps every angular difference on the principal branch and the image-derived anchor restores the global offset. Signed RP instead recovers a two-dimensional state geometry through MDS and uses overlap plus its external sign convention to choose an orientation. The approximation offers a plausible local explanation for visual similarity; it does not imply that the matrices contain identical information or admit the same inverse.

**Practical interpretation.** The operator analysis and the regional diagnostic are consistent with the empirical finding that both RP and GADF preserve enough directional pairwise structure for accurate controlled reconstruction, but they reach that result through different contracts. GASF supplies single-sample information on its diagonal; GADF supplies anchored angular differences under a restricted branch; and signed RP supplies adjacent-state distances plus an external orientation convention. The fidelity and equivalence results establish the usefulness of all three under those declared contracts. They do not establish a formal information equivalence among the encodings or a general preference outside the controlled reconstruction task.

# A. Per-axis reconstruction errors

Table 2 in the main text reports the per-window global reconstruction error (averaged over the three accelerometer axes) for each encoder. This appendix gives the per-axis breakdown over the same $N = 8\,172$ pooled windows for RP (Table S18), MTF (Table S19), GASF (Table S20), and GADF (Table S21); in each, the Global column reproduces the per-window global figure of Table 2.

Table S18: RP per-axis reconstruction errors over all $N = 8\,172$ pooled windows (physical units, $m/s^2$); mean±std across windows. The Global column averages the three axes per window.

| **Metric** | **x** | **y** | **z** | **Global** |
|---|---|---|---|---|
| Mean Absolute Error | $0.0151 \pm 0.0203$ | $0.0153 \pm 0.0201$ | $0.0122 \pm 0.0156$ | $0.0142 \pm 0.0156$ |
| Mean Squared Error | $0.0010 \pm 0.0075$ | $0.0009 \pm 0.0086$ | $0.0006 \pm 0.0027$ | $0.0008 \pm 0.0045$ |
| Pearson Correlation Coefficient | $0.99998 \pm 0.00009$ | $0.99999 \pm 0.00005$ | $0.99998 \pm 0.00006$ | $0.99998 \pm 0.00005$ |

Table S19: MTF per-axis reconstruction errors over all $N = 8\,172$ pooled windows (physical units, $m/s^2$); mean±std across windows. The Global column averages the three axes per window.

| **Metric** | **x** | **y** | **z** | **Global** |
|---|---|---|---|---|
| Mean Absolute Error | $4.13 \pm 5.11$ | $4.18 \pm 5.32$ | $3.53 \pm 4.66$ | $3.94 \pm 4.25$ |
| Mean Squared Error | $57.39 \pm 123.57$ | $61.72 \pm 157.60$ | $47.18 \pm 158.11$ | $55.43 \pm 113.46$ |
| Pearson Correlation Coefficient | $-0.00217 \pm 0.84528$ | $0.03600 \pm 0.83941$ | $0.00680 \pm 0.82844$ | $0.01355 \pm 0.48871$ |

Table S20: GASF per-axis reconstruction errors over all $N = 8\,172$ pooled windows (physical units, $m/s^2$); mean±std across windows. The Global column averages the three axes per window.

| **Metric** | **x** | **y** | **z** | **Global** |
|---|---|---|---|---|
| Mean Absolute Error | $0.0236 \pm 0.0243$ | $0.0195 \pm 0.0223$ | $0.0183 \pm 0.0216$ | $0.0205 \pm 0.0199$ |
| Mean Squared Error | $0.0050 \pm 0.0107$ | $0.0048 \pm 0.0127$ | $0.0030 \pm 0.0121$ | $0.0043 \pm 0.0088$ |
| Pearson Correlation Coefficient | $0.99987 \pm 0.00020$ | $0.99990 \pm 0.00024$ | $0.99987 \pm 0.00027$ | $0.99988 \pm 0.00014$ |

Table S21: GADF per-axis reconstruction errors over all $N = 8\,172$ pooled windows (physical units, $m/s^2$); mean±std across windows. The Global column averages the three axes per window.

| **Metric** | **x** | **y** | **z** | **Global** |
|---|---|---|---|---|
| Mean Absolute Error | $0.0159 \pm 0.0189$ | $0.0169 \pm 0.0215$ | $0.0144 \pm 0.0199$ | $0.0157 \pm 0.0167$ |
| Mean Squared Error | $0.0008 \pm 0.0020$ | $0.0009 \pm 0.0028$ | $0.0007 \pm 0.0028$ | $0.0008 \pm 0.0018$ |
| Pearson Correlation Coefficient | $0.99999 \pm 0.00002$ | $0.99999 \pm 0.00002$ | $0.99999 \pm 0.00002$ | $0.99999 \pm 0.00001$ |

# B. Per-Class Classification Results

This appendix reports the complete per-class precision, recall, and F1-score results for the six evaluated classifiers. The main text retains only the compact accuracy comparison required to interpret the differences among reconstruction methods. Per-class Support values are per-class fold-means rounded to integers and may sum to 2723 rather than the 2724 windows per fold reported in the Accuracy row (independent rounding).

Table S22: Classification Results for GRU on the grouped trial-out 3-fold protocol (mean ± std across folds 0, 1, 2). Per-class precision/recall/F1 and support averaged over the same three folds; footer accuracies averaged likewise.

| | Original | | | | RP | | | | MTF | | | | GASF | | | | GADF | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Class | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp |
| 0 | 0.82±0.06 | 0.73±0.08 | 0.77±0.02 | 544 | 0.82±0.06 | 0.73±0.08 | 0.77±0.02 | 544 | 0.62±0.05 | 0.54±0.16 | 0.57±0.12 | 544 | 0.82±0.06 | 0.72±0.08 | 0.76±0.02 | 544 | 0.82±0.06 | 0.73±0.08 | 0.77±0.02 | 544 |
| 1 | 0.98±0.01 | 0.98±0.02 | 0.98±0.01 | 532 | 0.98±0.01 | 0.97±0.02 | 0.98±0.01 | 532 | 0.73±0.05 | 0.97±0.04 | 0.83±0.03 | 532 | 0.98±0.01 | 0.98±0.02 | 0.98±0.01 | 532 | 0.98±0.01 | 0.98±0.02 | 0.98±0.01 | 532 |
| 2 | 0.72±0.03 | 0.82±0.05 | 0.77±0.01 | 536 | 0.72±0.03 | 0.82±0.05 | 0.77±0.01 | 536 | 0.52±0.03 | 0.53±0.04 | 0.53±0.02 | 536 | 0.72±0.03 | 0.82±0.06 | 0.77±0.01 | 536 | 0.72±0.03 | 0.82±0.06 | 0.77±0.01 | 536 |
| 3 | 0.83±0.07 | 0.80±0.14 | 0.80±0.05 | 551 | 0.83±0.07 | 0.80±0.14 | 0.80±0.05 | 551 | 0.85±0.07 | 0.75±0.15 | 0.78±0.07 | 551 | 0.83±0.08 | 0.80±0.14 | 0.80±0.05 | 551 | 0.83±0.07 | 0.80±0.14 | 0.80±0.05 | 551 |
| 4 | 0.84±0.10 | 0.82±0.12 | 0.81±0.02 | 560 | 0.84±0.10 | 0.81±0.12 | 0.81±0.02 | 560 | 0.87±0.11 | 0.75±0.13 | 0.79±0.03 | 560 | 0.84±0.10 | 0.82±0.12 | 0.82±0.02 | 560 | 0.84±0.10 | 0.82±0.12 | 0.81±0.02 | 560 |
| Accuracy | 0.83±0.01 (2724) | | | | 0.82±0.01 (2724) | | | | 0.71±0.03 (2724) | | | | 0.82±0.01 (2724) | | | | 0.82±0.01 (2724) | | | |
| Macro Avg | 0.84±0.00/0.83±0.01/0.82±0.01 | | | | 0.84±0.00/0.83±0.01/0.82±0.01 | | | | 0.72±0.03/0.71±0.03/0.70±0.04 | | | | 0.84±0.00/0.83±0.01/0.82±0.01 | | | | 0.84±0.00/0.83±0.01/0.82±0.01 | | | |
| Weighted Avg | 0.84±0.00/0.83±0.01/0.82±0.01 | | | | 0.84±0.00/0.82±0.01/0.82±0.01 | | | | 0.72±0.03/0.71±0.03/0.70±0.04 | | | | 0.84±0.00/0.82±0.01/0.82±0.01 | | | | 0.84±0.00/0.82±0.01/0.82±0.01 | | | |

Table S23: Classification Results for KNN on the grouped trial-out 3-fold protocol (mean ± std across folds 0, 1, 2). Per-class precision/recall/F1 and support averaged over the same three folds; footer accuracies averaged likewise.

| | Original | | | | RP | | | | MTF | | | | GASF | | | | GADF | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Class | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp |
| 0 | 0.64±0.07 | 0.31±0.07 | 0.41±0.06 | 544 | 0.64±0.07 | 0.31±0.07 | 0.41±0.06 | 544 | 0.57±0.08 | 0.37±0.03 | 0.45±0.04 | 544 | 0.64±0.07 | 0.31±0.06 | 0.41±0.05 | 544 | 0.64±0.07 | 0.31±0.06 | 0.41±0.05 | 544 |
| 1 | 1.00±0.00 | 0.59±0.02 | 0.74±0.01 | 532 | 1.00±0.00 | 0.59±0.02 | 0.74±0.01 | 532 | 0.99±0.01 | 0.30±0.02 | 0.46±0.03 | 532 | 1.00±0.00 | 0.59±0.02 | 0.74±0.01 | 532 | 1.00±0.00 | 0.59±0.01 | 0.74±0.01 | 532 |
| 2 | 0.33±0.15 | 0.04±0.02 | 0.08±0.04 | 536 | 0.33±0.14 | 0.04±0.02 | 0.08±0.03 | 536 | 0.36±0.05 | 0.07±0.01 | 0.12±0.01 | 536 | 0.33±0.13 | 0.04±0.02 | 0.07±0.03 | 536 | 0.33±0.14 | 0.04±0.02 | 0.08±0.03 | 536 |
| 3 | 0.66±0.02 | 0.76±0.17 | 0.70±0.09 | 551 | 0.66±0.02 | 0.76±0.17 | 0.70±0.09 | 551 | 0.53±0.04 | 0.76±0.16 | 0.62±0.07 | 551 | 0.66±0.02 | 0.76±0.17 | 0.70±0.09 | 551 | 0.66±0.02 | 0.76±0.17 | 0.70±0.09 | 551 |
| 4 | 0.32±0.01 | 0.83±0.10 | 0.47±0.01 | 560 | 0.32±0.01 | 0.83±0.10 | 0.47±0.01 | 560 | 0.36±0.04 | 0.83±0.10 | 0.50±0.05 | 560 | 0.33±0.01 | 0.83±0.10 | 0.47±0.01 | 560 | 0.33±0.01 | 0.83±0.10 | 0.47±0.01 | 560 |
| Accuracy | 0.51±0.02 (2724) | | | | 0.51±0.02 (2724) | | | | 0.47±0.01 (2724) | | | | 0.51±0.02 (2724) | | | | 0.51±0.02 (2724) | | | |
| Macro Avg | 0.59±0.04/0.51±0.02/0.48±0.02 | | | | 0.59±0.04/0.51±0.02/0.48±0.02 | | | | 0.56±0.01/0.47±0.01/0.43±0.01 | | | | 0.59±0.04/0.51±0.02/0.48±0.02 | | | | 0.59±0.04/0.51±0.02/0.48±0.02 | | | |
| Weighted Avg | 0.59±0.04/0.51±0.02/0.48±0.02 | | | | 0.59±0.04/0.51±0.02/0.48±0.02 | | | | 0.56±0.01/0.47±0.01/0.43±0.01 | | | | 0.59±0.04/0.51±0.02/0.48±0.02 | | | | 0.59±0.04/0.51±0.02/0.48±0.02 | | | |

Table S24: Classification Results for CNN on the grouped trial-out 3-fold protocol (mean ± std across folds 0, 1, 2). Per-class precision/recall/F1 and support averaged over the same three folds; footer accuracies averaged likewise.

| | Original | | | | RP | | | | MTF | | | | GASF | | | | GADF | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Class | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp |
| 0 | 0.77±0.07 | 0.73±0.10 | 0.74±0.03 | 544 | 0.77±0.07 | 0.73±0.10 | 0.74±0.03 | 544 | 0.57±0.06 | 0.63±0.13 | 0.59±0.07 | 544 | 0.77±0.07 | 0.73±0.10 | 0.74±0.03 | 544 | 0.77±0.07 | 0.73±0.10 | 0.74±0.03 | 544 |
| 1 | 0.89±0.07 | 0.99±0.00 | 0.93±0.04 | 532 | 0.89±0.07 | 0.99±0.00 | 0.93±0.04 | 532 | 0.74±0.06 | 0.98±0.01 | 0.84±0.04 | 532 | 0.89±0.07 | 0.99±0.00 | 0.93±0.04 | 532 | 0.89±0.07 | 0.99±0.00 | 0.93±0.04 | 532 |
| 2 | 0.82±0.08 | 0.73±0.14 | 0.76±0.06 | 536 | 0.82±0.08 | 0.73±0.14 | 0.75±0.06 | 536 | 0.62±0.03 | 0.44±0.22 | 0.47±0.18 | 536 | 0.82±0.08 | 0.73±0.14 | 0.76±0.06 | 536 | 0.82±0.08 | 0.73±0.14 | 0.76±0.06 | 536 |
| 3 | 0.81±0.07 | 0.71±0.19 | 0.73±0.10 | 551 | 0.81±0.07 | 0.71±0.19 | 0.73±0.10 | 551 | 0.82±0.07 | 0.63±0.20 | 0.68±0.13 | 551 | 0.81±0.07 | 0.71±0.19 | 0.73±0.10 | 551 | 0.81±0.07 | 0.71±0.19 | 0.73±0.10 | 551 |
| 4 | 0.76±0.10 | 0.82±0.10 | 0.77±0.03 | 560 | 0.76±0.10 | 0.82±0.10 | 0.78±0.03 | 560 | 0.76±0.10 | 0.75±0.12 | 0.74±0.02 | 560 | 0.76±0.10 | 0.82±0.10 | 0.77±0.03 | 560 | 0.76±0.10 | 0.82±0.10 | 0.77±0.03 | 560 |
| Accuracy | 0.79±0.03 (2724) | | | | 0.79±0.03 (2724) | | | | 0.69±0.04 (2724) | | | | 0.79±0.03 (2724) | | | | 0.79±0.03 (2724) | | | |
| Macro Avg | 0.81±0.01/0.79±0.03/0.79±0.04 | | | | 0.81±0.01/0.79±0.03/0.79±0.04 | | | | 0.70±0.02/0.69±0.04/0.66±0.06 | | | | 0.81±0.01/0.79±0.03/0.79±0.03 | | | | 0.81±0.01/0.79±0.03/0.79±0.04 | | | |
| Weighted Avg | 0.81±0.01/0.79±0.03/0.79±0.04 | | | | 0.81±0.01/0.79±0.03/0.79±0.04 | | | | 0.70±0.02/0.69±0.04/0.66±0.06 | | | | 0.81±0.01/0.79±0.03/0.79±0.03 | | | | 0.81±0.01/0.79±0.03/0.79±0.04 | | | |

Table S25: Classification Results for Random Forest on the grouped trial-out 3-fold protocol (mean ± std across folds 0, 1, 2). Per-class precision/recall/F1 and support averaged over the same three folds; footer accuracies averaged likewise.

| | Original | | | | RP | | | | MTF | | | | GASF | | | | GADF | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Class | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp |
| 0 | 0.74±0.07 | 0.59±0.10 | 0.65±0.06 | 544 | 0.74±0.07 | 0.59±0.10 | 0.65±0.06 | 544 | 0.62±0.05 | 0.53±0.07 | 0.57±0.06 | 544 | 0.74±0.07 | 0.59±0.09 | 0.65±0.06 | 544 | 0.74±0.07 | 0.59±0.10 | 0.65±0.06 | 544 |
| 1 | 0.88±0.07 | 0.98±0.01 | 0.93±0.04 | 532 | 0.88±0.07 | 0.98±0.01 | 0.93±0.04 | 532 | 0.64±0.03 | 0.99±0.00 | 0.78±0.02 | 532 | 0.88±0.07 | 0.98±0.01 | 0.93±0.04 | 532 | 0.88±0.08 | 0.98±0.01 | 0.93±0.04 | 532 |
| 2 | 0.67±0.02 | 0.77±0.04 | 0.72±0.02 | 536 | 0.67±0.01 | 0.77±0.04 | 0.72±0.02 | 536 | 0.57±0.03 | 0.48±0.02 | 0.52±0.02 | 536 | 0.68±0.02 | 0.77±0.03 | 0.72±0.02 | 536 | 0.67±0.02 | 0.77±0.03 | 0.72±0.02 | 536 |
| 3 | 0.82±0.07 | 0.75±0.15 | 0.77±0.07 | 551 | 0.82±0.07 | 0.75±0.14 | 0.77±0.07 | 551 | 0.85±0.09 | 0.72±0.14 | 0.76±0.07 | 551 | 0.82±0.07 | 0.75±0.15 | 0.77±0.07 | 551 | 0.82±0.07 | 0.75±0.15 | 0.77±0.07 | 551 |
| 4 | 0.80±0.08 | 0.78±0.14 | 0.77±0.02 | 560 | 0.80±0.08 | 0.78±0.13 | 0.77±0.03 | 560 | 0.79±0.07 | 0.68±0.14 | 0.72±0.04 | 560 | 0.80±0.07 | 0.78±0.13 | 0.77±0.03 | 560 | 0.79±0.08 | 0.78±0.14 | 0.77±0.02 | 560 |
| Accuracy | 0.77±0.01 (2724) | | | | 0.77±0.01 (2724) | | | | 0.68±0.01 (2724) | | | | 0.77±0.01 (2724) | | | | 0.77±0.01 (2724) | | | |
| Macro Avg | 0.78±0.01/0.77±0.01/0.77±0.01 | | | | 0.78±0.01/0.77±0.01/0.77±0.01 | | | | 0.69±0.01/0.68±0.01/0.67±0.01 | | | | 0.78±0.01/0.77±0.01/0.77±0.01 | | | | 0.78±0.01/0.77±0.01/0.77±0.01 | | | |
| Weighted Avg | 0.78±0.01/0.77±0.01/0.77±0.01 | | | | 0.78±0.01/0.77±0.01/0.77±0.01 | | | | 0.69±0.00/0.68±0.01/0.67±0.01 | | | | 0.78±0.01/0.77±0.01/0.77±0.01 | | | | 0.78±0.01/0.77±0.01/0.77±0.01 | | | |

Table S26: Classification Results for Support Vector Machine on the grouped trial-out 3-fold protocol (mean ± std across folds 0, 1, 2). Per-class precision/recall/F1 and support averaged over the same three folds; footer accuracies averaged likewise.

| | Original | | | | RP | | | | MTF | | | | GASF | | | | GADF | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Class | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp |
| 0 | 0.68±0.04 | 0.52±0.09 | 0.58±0.04 | 544 | 0.68±0.04 | 0.52±0.10 | 0.58±0.05 | 544 | 0.52±0.03 | 0.69±0.12 | 0.59±0.06 | 544 | 0.68±0.05 | 0.52±0.09 | 0.58±0.04 | 544 | 0.68±0.04 | 0.52±0.10 | 0.58±0.05 | 544 |
| 1 | 0.93±0.05 | 0.97±0.01 | 0.95±0.03 | 532 | 0.93±0.05 | 0.97±0.01 | 0.95±0.03 | 532 | 0.68±0.04 | 0.99±0.00 | 0.81±0.03 | 532 | 0.93±0.05 | 0.97±0.01 | 0.95±0.03 | 532 | 0.93±0.05 | 0.97±0.01 | 0.95±0.03 | 532 |
| 2 | 0.58±0.01 | 0.62±0.07 | 0.60±0.03 | 536 | 0.58±0.01 | 0.63±0.06 | 0.60±0.02 | 536 | 0.46±0.02 | 0.17±0.03 | 0.25±0.03 | 536 | 0.58±0.01 | 0.62±0.07 | 0.60±0.03 | 536 | 0.58±0.01 | 0.62±0.07 | 0.60±0.03 | 536 |
| 3 | 0.80±0.05 | 0.75±0.15 | 0.76±0.06 | 551 | 0.80±0.05 | 0.75±0.16 | 0.76±0.06 | 551 | 0.83±0.07 | 0.72±0.14 | 0.76±0.06 | 551 | 0.80±0.05 | 0.75±0.15 | 0.76±0.06 | 551 | 0.80±0.05 | 0.75±0.15 | 0.76±0.06 | 551 |
| 4 | 0.72±0.07 | 0.80±0.12 | 0.75±0.02 | 560 | 0.71±0.07 | 0.80±0.13 | 0.74±0.02 | 560 | 0.81±0.10 | 0.76±0.13 | 0.77±0.02 | 560 | 0.72±0.07 | 0.80±0.12 | 0.75±0.02 | 560 | 0.72±0.07 | 0.80±0.12 | 0.74±0.02 | 560 |
| Accuracy | 0.73±0.01 (2724) | | | | 0.73±0.01 (2724) | | | | 0.67±0.02 (2724) | | | | 0.73±0.01 (2724) | | | | 0.73±0.01 (2724) | | | |
| Macro Avg | 0.74±0.01/0.73±0.01/0.73±0.02 | | | | 0.74±0.01/0.73±0.01/0.73±0.02 | | | | 0.66±0.02/0.67±0.02/0.63±0.01 | | | | 0.74±0.01/0.73±0.01/0.73±0.02 | | | | 0.74±0.01/0.73±0.01/0.73±0.02 | | | |
| Weighted Avg | 0.74±0.01/0.73±0.01/0.73±0.02 | | | | 0.74±0.01/0.73±0.01/0.73±0.02 | | | | 0.66±0.01/0.67±0.02/0.64±0.01 | | | | 0.74±0.01/0.73±0.01/0.73±0.02 | | | | 0.74±0.01/0.73±0.01/0.73±0.02 | | | |

Table S27: Classification Results for LSTM on the grouped trial-out 3-fold protocol (mean ± std across folds 0, 1, 2). Per-class precision/recall/F1 and support averaged over the same three folds; footer accuracies averaged likewise.

| | Original | | | | RP | | | | MTF | | | | GASF | | | | GADF | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Class | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp | Prec | Rec | F1 | Supp |
| 0 | 0.74±0.08 | 0.65±0.17 | 0.67±0.08 | 544 | 0.74±0.08 | 0.65±0.17 | 0.67±0.08 | 544 | 0.56±0.03 | 0.60±0.12 | 0.57±0.07 | 544 | 0.74±0.08 | 0.65±0.17 | 0.67±0.08 | 544 | 0.74±0.08 | 0.64±0.17 | 0.66±0.08 | 544 |
| 1 | 0.94±0.05 | 0.95±0.02 | 0.95±0.03 | 532 | 0.94±0.05 | 0.96±0.02 | 0.95±0.02 | 532 | 0.77±0.04 | 0.94±0.04 | 0.85±0.03 | 532 | 0.94±0.05 | 0.95±0.02 | 0.95±0.03 | 532 | 0.94±0.05 | 0.95±0.02 | 0.95±0.03 | 532 |
| 2 | 0.70±0.08 | 0.69±0.14 | 0.68±0.03 | 536 | 0.70±0.08 | 0.69±0.14 | 0.68±0.03 | 536 | 0.58±0.03 | 0.47±0.08 | 0.51±0.05 | 536 | 0.69±0.07 | 0.69±0.14 | 0.68±0.03 | 536 | 0.69±0.08 | 0.69±0.14 | 0.67±0.03 | 536 |
| 3 | 0.77±0.04 | 0.76±0.12 | 0.75±0.05 | 551 | 0.77±0.04 | 0.76±0.12 | 0.75±0.05 | 551 | 0.79±0.04 | 0.75±0.12 | 0.76±0.05 | 551 | 0.77±0.04 | 0.76±0.12 | 0.75±0.05 | 551 | 0.77±0.04 | 0.76±0.12 | 0.75±0.05 | 551 |
| 4 | 0.76±0.07 | 0.80±0.10 | 0.77±0.04 | 560 | 0.76±0.07 | 0.80±0.10 | 0.77±0.04 | 560 | 0.81±0.07 | 0.75±0.10 | 0.77±0.04 | 560 | 0.76±0.07 | 0.80±0.10 | 0.77±0.04 | 560 | 0.76±0.07 | 0.80±0.10 | 0.77±0.04 | 560 |
| Accuracy | 0.77±0.01 (2724) | | | | 0.77±0.02 (2724) | | | | 0.70±0.01 (2724) | | | | 0.77±0.01 (2724) | | | | 0.77±0.01 (2724) | | | |
| Macro Avg | 0.78±0.00/0.77±0.01/0.76±0.02 | | | | 0.78±0.00/0.77±0.01/0.76±0.02 | | | | 0.70±0.01/0.70±0.01/0.69±0.01 | | | | 0.78±0.00/0.77±0.01/0.76±0.02 | | | | 0.78±0.00/0.77±0.01/0.76±0.02 | | | |
| Weighted Avg | 0.78±0.00/0.77±0.01/0.76±0.02 | | | | 0.78±0.00/0.77±0.02/0.76±0.02 | | | | 0.70±0.01/0.70±0.01/0.69±0.01 | | | | 0.78±0.00/0.77±0.01/0.76±0.02 | | | | 0.78±0.00/0.77±0.01/0.76±0.02 | | | |