



Tables of Contents

▾ Getting Started

Introduction

Developer account registration

App management

API calls

Push Mechanism notifications

Authorization and Authentication

Sandbox Testing V2

Service Partner Program

V2.0 API Call Flow

CNSC API Integration Guide

KRSC API Integration Guide

V2.0 Data Definition

Requesting Access to Sensitiv...

TW New Developer Audit

BR SPI App Creation User Gui...

▾ BRASIL | Jornada do Des...

▾ Sua trilha começa aqui!

Desenvolva uma integração

Crie um login

Crie a conta de desenvolv...

Crie seu App

Realize testes (Sandbox)

Publique seu App (Go Live)

Autorize sua primeira loja

Dados Sensíveis (Sensitiv...

Faça sua primeira chama...

Push Notifications (Webh...

Perguntas Frequentes

Referências

Boas práticas antes de ab...

Getting Started > Authorization and Authenti...

Authorization and Authentication

Last Updated: 2026-07-23

 Language Supported: English / 简体中文 / 繁體中文 / Português (Brasil) / ไทย

Authorization is an important step to using Open API. You need to be authorized by the seller in order for your App to call non-public APIs required for shop management.

You will be authenticated based on the public parameters passed to Open API. If the authentication fails, your call will fail and an error will be returned.

Note

- Authorization Validity

The maximum validity period for each authorization is 365 days. Sellers may customize the authorization expiration time during the authorization process. Once the authorization expires, you will need to contact the seller to re-authorize your App.

- SIP Shops Authorization

If a CB SIP primary shop grants authorization to an application, all SIP linked shops will automatically receive the same authorization. However, API access permissions for linked shops are limited. For more details, please refer to the [FAQ](#).

The authorization process

There are 3 steps to complete authorization: generating the authorization link, acquiring authorization from shop(s), and getting and refreshing the access_token.

These will be explained in detail below, along with information on what to prepare before authorization, details of the authorization process, and how to use the information returned after authorization to pass the authentication of the platform.

Generating the authorization link

To improve integration efficiency, the platform provides a new method for generating authorization links. The authorization link is composed of a fixed authorization URL and authorization parameters. All types of Apps can generate authorization links according to the specifications below.

Note:

- For Seller in House System Apps, you can log in to the Open Platform > App list > click "Authorize" > fill in Redirect URL to generate an authorization link.
- For all other type of App: there is no "Authorize" display, you need to create an authorization link with the following specifications. The authorization link comprises a fixed authorization URL and other required parameters.

(Seller in House System Apps)



App Management

App List

Push Mechanism

Tools

Test Account

API Test Tool

API Access Log

Push Log

Ticket System

App List

123

Online

Test Partner_Id: [redacted] [Authorize](#) [Unlink](#)

Live Partner_Id: [redacted] [Authorize](#) [Unlink](#)

App Category: Seller In House System

just test for a

Online

Test Partner_Id: [redacted] [Authorize](#) [Unlink](#)

Live Partner_Id: [redacted] [Authorize](#) [Unlink](#)

App Category: Seller In House System

(Other Apps)

App Management

App List

Push Mechanism

Tools

Test Account-Sandbox v2

Test Order

API Test Tool

API Access Log

Push Log

API Calls Statistics

Ticket System

Raise Ticket

App List

Congratulations! Your account has been upgraded to a m

App List

Shopee Test Third party Type

Online

Test Partner_Id

Live Partner_Id

Live API Partner Key Expire: 22/09/26 12:59

App Category: ERP System

Fixed authorization URL:

Environment	Region	URL
Production	Global (excluding Mainland China and Brazil)	https://open.shopee.com/auth
	Mainland China	https://open.shopee.cn/auth
	Brazil	https://open.shopee.com.br/auth
Sandbox	Global (excluding Mainland China and Brazil)	https://open.sandbox.test-stable.shopee.com/auth
	Mainland China	https://open.sandbox.test-stable.shopee.cn/auth
	Brazil	https://open.sandbox.test-stable.shopee.com.br/auth

Other required parameters:

Parameter name	Type	Required	Description
partner_id	int	Yes	partner_id obtained from the App.
auth_type	string	Yes	The role type to be authorized. Enum values: - seller: used when authorizing a shop or merchant; - supplier: used when authorizing suppliers (for SCS users); - user: used when authorizing users (for livestream-related apps, see https://open.shopee.com/announcements/1190 .



redirect_uri	string	Yes	The URL where the authorization code (code) is received after the seller completes authorization. Production environment: If the production callback URL domain of the app is empty, the redirect_uri domain is not validated; otherwise, it must match the configured production callback URL domain. Sandbox environment: If the sandbox callback URL domain is empty, the redirect_uri domain is not validated; otherwise, it must match the configured sandbox callback URL domain.
response_type	string	Yes	The authorization type. Fixed value: "code".
state	string	No	A random, unguessable string used to prevent CSRF attacks. It will be returned as-is to the redirect_uri after authorization is completed.

Redirect URL Domain Validation Requirements

To ensure seller data security, the platform has introduced domain validation for the callback address (redirect_uri) in authorization links. All developers are required to configure the Test Redirect URL Domain and Live Redirect URL Domain for each App in the Console.

The redirect_uri parameter mentioned above refers to the callback URL configured in the App information page. You can view it as follows:

Shopee Open Platform Console

App Management

App List

Push Mechanism

Tools

Test Account-Sandbox v2

Test Order

API Test Tool

API Access Log

App List > ERP

API Call Limit

App Description

Authorization Information

Test Redirect URL Domain

Live Redirect URL Domain

Notes on Redirect URL Domain Validation

- For Apps that have already been created but have not yet declared a callback URL domain, developers should log in to the Console and complete the configuration in the App edit page as soon as possible. Before the configuration is completed, the platform will not enforce domain validation, and the existing authorization process will not be affected.
- If the domain of the redirect_uri parameter (or the redirect parameter in legacy links) does not match the Redirect URL Domain configured in the Console when generating an authorization link, the platform will return the following error:
"The domain of redirect_uri is not consistent with the Redirect URL Domain declared in console"
(The domain of the callback URL does not match the Redirect URL Domain declared in the Console.)

Authorization Link Examples

The following are examples of authorization links for both the Production and Sandbox environments for your reference.

Production Environment:
https://open.shopee.com/auth?
partner_id=10090&auth_type=seller&redirect_uri=https://open.shopee.com&response_type=code



stable.shopee.com&response_type=code

 Note

The timestamp used to calculate the sign is only valid for 5 minutes. After the timestamp and the sign expire, the authorization link will no longer be valid, and you need to generate a new link.

Acquiring authorizations from shop(s)


After you share the authorization link with the seller, the seller needs to log in to their account, fill in the verification code sent to their mobile phone, and enter the authorization page.

Account types:

- Shop account: can authorize a single shop;
- Main account: can authorize multiple merchants / shops;
- Sub-account: cannot log in to the authorization page.


Authorizing from a shop account

1. The seller fills in their login details and selects Log In.

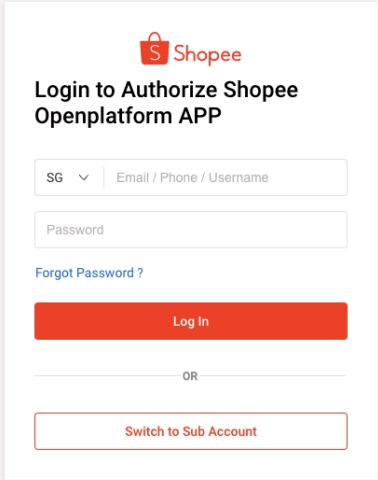


The image shows a screenshot of the Shopee login interface. At the top, there is the Shopee logo. Below it, the text "Login to Authorize Shopee Openplatform APP" is displayed. The form contains a dropdown menu for "SG" with a downward arrow, followed by a text input field for "Email / Phone / Username". Below this is a "Password" input field. A link "Forgot Password?" is positioned below the password field. A prominent red "Log In" button is centered below the input fields. Below the button, the word "OR" is centered. At the bottom of the form, there is a button labeled "Switch to Sub Account". Below the entire form, the text "English" is followed by a downward arrow.

2. The seller fills in the verification code sent to their mobile phone and selects Verify.

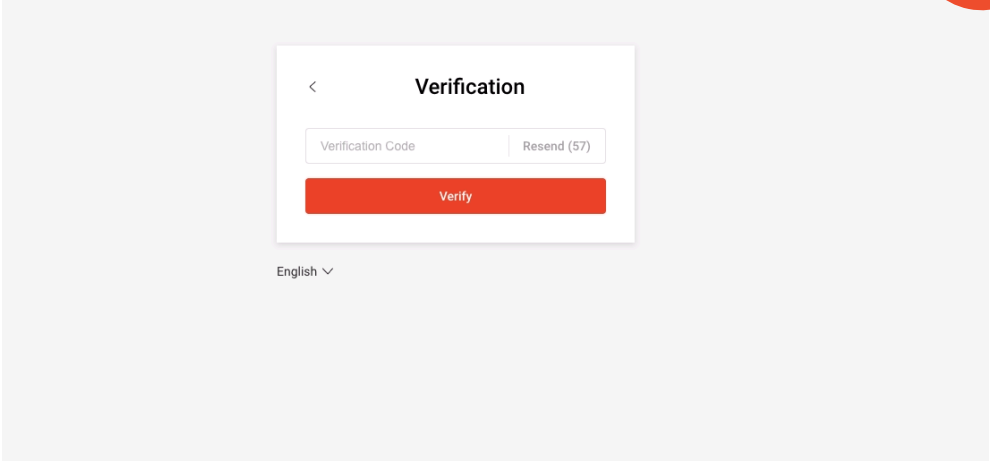

3. Upon logging in, the seller selects Confirm Authorization.

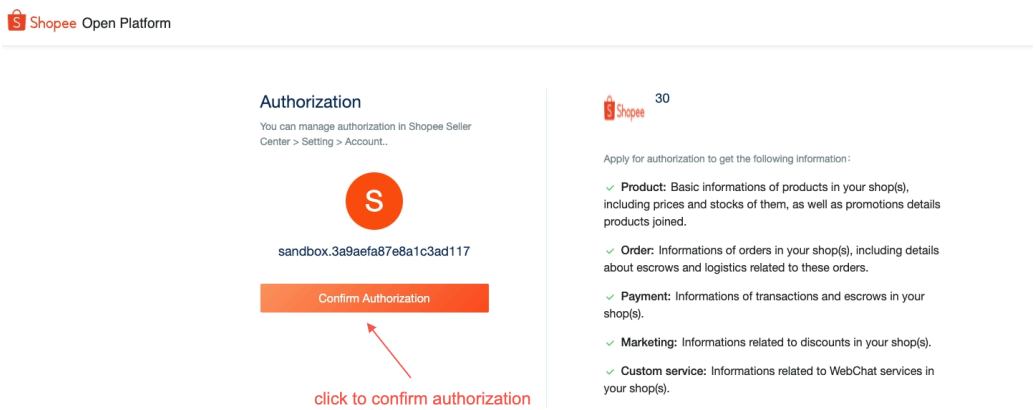

4. The system will display an authorization validity period selector. Sellers can choose from preset durations (7 days, 30 days, 90 days, 180 days, or 365 days), or select "Customize Expiration Time" to set any expiration date within 365 days.

5. After authorization is completed, the frontend page will redirect to the redirect_uri specified in the authorization link, along with the authorization code (code) and shop ID (shop_id):
https://open.shopee.com/?code=xxxxxxxx&shop_id=xxxxxx

Authorizing from a main account

1. To log in to a main account, the seller selects Switch to Sub Account on the login page.



Shopee

Login to Authorize Shopee Openplatform APP

SG ▾ SANDBOX.3a9aefa87e8a1c3ad117

.....

[Forgot Password ?](#)

Log In

OR

Switch to Sub Account

English ▾

2. The seller can then fill in their login details and select Log In.

Shopee

Login to Authorize Shopee Openplatform APP

Email / Phone / Username

Password

[Forgot Password ?](#)

Log In

OR

Switch to Shop Account

English ▾

3. The seller selects the shops that need to be authorized.

Note: For cross border sellers, If you need to call the merchant's API, please remind the seller to select the Auth Merchant checkbox.

☐ Auth Merchant☐ Auth Merchant

3242


Authorization Details

1. After authorized to the App, you can obtain API permissions for Shop dimensions. Please select the Shop authorized to the App first.
2. The authorized shop is valid for one year.
3. The authorized shop can be re-authorized, and the validity period will be calculated from the new authorization date.



Z zly_uat_local1:main

Confirm Authorization



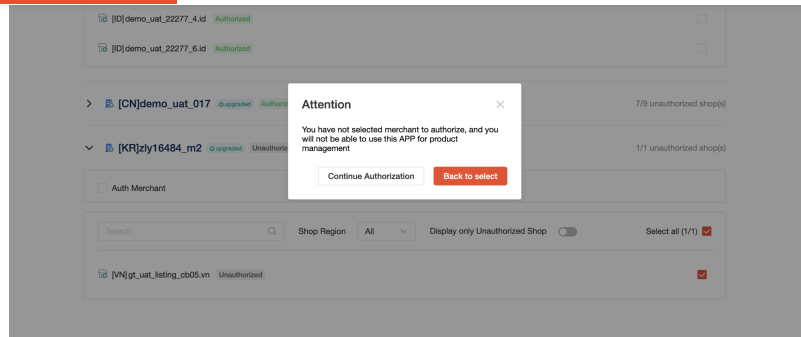

5. The seller selects Confirm Authorization to confirm their selection.

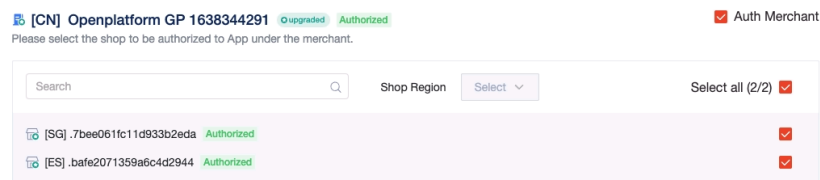

6. After authorization is completed, the frontend page will redirect to the `redirect_uri` specified in the authorization link, along with the authorization code (code) and main account ID (main_account_id):

https://open.shopee.com/?code=xxxxxx&main_account_id=xxxxxx

Getting and using the authorization code

After the seller completes authorization, the frontend page will redirect to the `redirect_uri` specified in the authorization link, along with the authorization code (code) and shop_id / main_account_id. Taking main_account_id as an example:

https://open.shopee.com/?code=xxxxxx&main_account_id=xxxxxx

You can use this authorization code (code) to obtain the initial access token (access_token).

Parameters Returned in the Redirect URL

Parameter name	Type	Description
code	string	Returned when the call is successful. This code is used to obtain access_token and refresh_token. It is valid for only once and expires after 10 minutes.
shop_id	int	The ID of the shop that just granted authorization to your App. Returned after authorization was done on a shop account.
main_account_id	int	The ID of the main account that just granted authorization to your shop. . Returned after authorization was done on a main account.

Note: If the domain of the `redirect_uri` parameter (or the `redirect` parameter in legacy links) does not match the Redirect URL Domain declared in the Console when generating the authorization link, the following error will be returned:

"The domain of redirect_uri is not consistent with the Redirect URL Domain declared in console"

(The domain of the callback URL is inconsistent with the Redirect URL Domain declared in the Console.)

Getting and refreshing the access_token

The access_token is a dynamic token required for calling non-public APIs. It is valid for 4 hours and can be used multiple times within its validity period.

Before the access_token expires, you need to use the refresh_token to call the Refresh Access Token API (RefreshAccessToken) to obtain a new access_token. The refresh_token is valid for 30 days.





- stored separately;
- After a new access_token is generated, the previous access_token will remain valid for another 5 minutes;
 - Re-authorization will refresh both the refresh_token and access_token;
 - The RefreshAccessToken API must be called within the authorization validity period;
 - If the latest available refresh_token and access_token are lost, please refer to the relevant [FAQ](#).

GetAccesstoken

After successful authorization, use the code and shop_id or main_account_id in the redirect URL to call this API. This helps you obtain the shop_id, merchant_id, access_token and refresh_token.

Request Information

Path	Details
Production Environment	https://partner.shopeemobile.com/api/v2/auth/token/get
Sandbox Environment	https://openplatform.sandbox.test-stable.shopee.sg/api/v2/auth/token/get
Request Method	POST

Common parameters

Parameter name	Type	Required	Description
sign	string	True	The signature obtained by sign base string (order: partner_id, api path, timestamp...) HMAC-SHA256 hashing with the partner_key.
partner_id	int	True	The partner_id obtained from the App. This partner_id is put into the query.
timestamp	int	True	Timestamp, valid for 5 minutes.

Request parameters:

Parameter name	Type	Required	Description
code	string	True	The code in the redirect URL after authorization. It is only valid once and expires after 10 minutes.
partner_id	int	True	The partner_id obtained from the App. This partner_id is put into the request body.
shop_id	int	True, input 1 only.	For the shop_id authorized to you, either the shop_id or main_account_id can be selected as the input parameter.
main_account_id	int		For the main_account_id authorized to you, either the shop_id or main_account_id can be selected as the input parameter.

Response parameters:





name		
request_id	string	ID of API requests; always returned. Used to diagnose problems.
error	string	Error codes for API requests; always returned. When the API call is successful, the error code returned is empty.
refresh_token	string	Returned when the API call is successful. Use refresh_token to get a new access_token. Valid for each shop_id and merchant_id respectively, for 30 days.
access_token	string	Returned when the API call is successful. A dynamic token that can be used multiple times and expires after 4 hours.
expire_in	int	Returned when the API call is successful. The validity period of the access_token, in seconds.
message	string	Always returned. Provides detailed error information.
merchant_id_list	int[]	Returned when there is main_account_id in the input parameter, including all the merchant_ids authorized this time under the main account.
shop_id_list	int[]	Returned when there is main_account_id in the input parameter, including all shop_ids authorized this time under the main account.
supplier_id_list	int[]	Returned when auth_type=supplier
user_id_list	int[]	Returned when auth_type=user

Calculating the sign parameter

The sign parameter is not only a component of the authorization link, but also a parameter used for authentication each time it is called. This section will explain how to create a sign base string and calculate the authentication signature through HMAC-SHA256.

Creating a sign base string

There are 3 types of APIs that require the use of different parameters to create the sign base string. (consistent with its common parameters).

Concatenate the API path (without host) and the common parameters below into a single sign base string in the following order:

- For Shop APIs: partner_id, api path, timestamp, access_token, shop_id
- For Merchant APIs: partner_id, api path, timestamp, access_token, merchant_id
- For Public APIs: partner_id, api path, timestamp

Calculating the authentication signature

Use HMAC-SHA256 to hash the sign base string, and use the partner key as the encryption key. The hexadecimal all-lowercase hash value is the authentication signature.

Python Code Demo:

```
import hmac
import json
import time
import requests
import hashlib

def shop_auth():
```

Python

```

redirect_url = "https://www.baidu.com/"
partner_id = 80001
tmp = "test..."
partner_key = tmp.encode()
tmp_base_string = "%s%s%s" % (partner_id, path, timest)
base_string = tmp_base_string.encode()
sign = hmac.new(partner_key, base_string, hashlib.sha256).hexdigest()
##generate api
url = host + path + "?partner_id=%s&timestamp=%s&sign=%s&redirect=%s" % (partner_id,
timest, sign, redirect_url)
print(url)

```

Go Code Demo:

```

func auth_shop(){
    timest := strconv.FormatInt(time.Now().Unix(),10)
    host := "https://openplatform.sandbox.test-stable.shopee.sg"
    path := "/api/v2/shop/auth_partner"
    redirectUrl := "https://www.baidu.com/"
    partnerId := strconv.Itoa(2006566)
    partnerKey := "1391fd986fe8ec7569bebed75b0c33ee35eb5a305bed7038657a5cd5f75b1c88"
    baseString := fmt.Sprintf("%s%s%s", partnerId,path,timest)
    h := hmac.New(sha256.New,[]byte(partnerKey))
    h.Write([]byte(baseString))
    sign := hex.EncodeToString(h.Sum(nil))
    url := fmt.Sprintf(host+path+"?partner_id=%s&timestamp=%s&sign=%s&redirect=%s",
partnerId,timest,sign, redirectUrl)
    fmt.Println(url)
}

```

Java Code Demo:

```

//generate auth url
public static void shop_auth(){
    long timest = System.currentTimeMillis() / 1000L;
    String host = "https://partner.shopeemobile.com";
    String path = "/api/v2/shop/auth_partner";
    String redirect_url = "https://www.baidu.com/";
    long partner_id = 123456L;
    String tmp_partner_key = "...";
    String tmp_base_string = String.format("%s%s%s", partner_id, path, timest);
    byte[] partner_key;
    byte[] base_string;
    String sign = "";
    try {
        base_string = tmp_base_string.getBytes("UTF-8");
        partner_key = tmp_partner_key.getBytes("UTF-8");
        Mac mac = Mac.getInstance("HmacSHA256");
        SecretKeySpec secret_key = new SecretKeySpec(partner_key, "HmacSHA256");
        mac.init(secret_key);
        sign = String.format("%064x",new BigInteger(1,mac.doFinal(base_string)));
    } catch (Exception e) {
        e.printStackTrace();
    }
    String url = host + path + String.format("?
partner_id=%s&timestamp=%s&sign=%s&redirect=%s", partner_id,timest, sign, redirect_url);
    System.out.println(url);
}

```

PHP Code Demo:



```
function authShop($partnerId, $partnerKey) {
    global $host;
    $path = "/api/v2/shop/auth_partner";
    $redirectUrl = "https://www.baidu.com/";

    $timest = time();
    $baseString = sprintf("%s%s%s", $partnerId, $path, $timest);
    $sign = hash_hmac('sha256', $baseString, $partnerKey);
    $url = sprintf("%s%s?partner_id=%s&timestamp=%s&sign=%s&redirect=%s", $host, $path,
    $partnerId, $timest, $sign, $redirectUrl);
    return $url;
}

$host="https://openplatform.sandbox.test-stable.shopee.sg";

$partnerId = 847892;
$partnerKey = "57615053704d6470644f554a78656d50484143644964436a5568777544524579";

echo authShop($partnerId, $partnerKey);
?>
```

GetAccesstoken Demo

Python Code Demo:

```
print(shop_auth())
# first time request token
def get_token_shop_level(code, partner_id, tmp_partner_key, shop_id):
    timest = int(time.time())
    host = "https://partner.shopeemobile.com"
    path = "/api/v2/auth/token/get"
    body = {"code": code, "shop_id": shop_id, "partner_id": partner_id}
    tmp_base_string = "%s%s%s" % (partner_id, path, timest)
    base_string = tmp_base_string.encode()
    partner_key = tmp_partner_key.encode()
    sign = hmac.new(partner_key, base_string, hashlib.sha256).hexdigest()
    url = host + path + "?partner_id=%s&timestamp=%s&sign=%s" % (partner_id, timest, sign)
    # print(url)
    headers = {"Content-Type": "application/json"}
    resp = requests.post(url, json=body, headers=headers)
    ret = json.loads(resp.content)
    access_token = ret.get("access_token")
    new_refresh_token = ret.get("refresh_token")
    return access_token, new_refresh_token

def get_token_account_level(code, partner_id, tmp_partner_key, main_account_id):
    timest = int(time.time())
    host = "https://openplatform.sandbox.test-stable.shopee.sg"
    path = "/api/v2/auth/token/get"
    body = {"code": code, "main_account_id": main_account_id, "partner_id": partner_id}
    tmp_base_string = "%s%s%s" % (partner_id, path, timest)
    base_string = tmp_base_string.encode()
    partner_key = tmp_partner_key.encode()
    sign = hmac.new(partner_key, base_string, hashlib.sha256).hexdigest()
    url = host + path + "?partner_id=%s&timestamp=%s&sign=%s" % (partner_id, timest, sign)

    headers = {"Content-Type": "application/json"}
    resp = requests.post(url, json=body, headers=headers)
    ret = json.loads(resp.content)
    access_token = ret.get("access_token")
```

Python





Java Code Demo:

Java

```

import com.alibaba.fastjson.JSONObject;
import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;
import java.io.*;
import java.math.BigInteger;
import java.nio.charset.StandardCharsets;
import java.text.ParseException;
import java.util.HashMap;
import java.net.HttpURLConnection;
import java.net.URL;
import java.util.Map;
import com.alibaba.fastjson.JSON;

public class shop_auth {
    public static void main(String[] args) throws ParseException, IOException {
        shop_auth();
        //get_token_shop_level(code,partner_id,partner_key,shop_id);
    }
    //generate auth url
    public static void shop_auth(){
        long timest = System.currentTimeMillis() / 1000L;
        String host = "https://partner.shopeemobile.com";
        String path = "/api/v2/shop/auth_partner";
        String redirect_url = "https://www.baidu.com/";
        long partner_id = 123456L;
        String tmp_partner_key = "...";
        String tmp_base_string = String.format("%s%s%s", partner_id, path, timest);
        byte[] partner_key;
        byte[] base_string;
        String sign = "";
        try {
            base_string = tmp_base_string.getBytes("UTF-8");
            partner_key = tmp_partner_key.getBytes("UTF-8");
            Mac mac = Mac.getInstance("HmacSHA256");
            SecretKeySpec secret_key = new SecretKeySpec(partner_key, "HmacSHA256");
            mac.init(secret_key);
            sign = String.format("%064x",new BigInteger(1,mac.doFinal(base_string)));
        } catch (Exception e) {
            e.printStackTrace();
        }
        String url = host + path + String.format("?
partner_id=%s&timestamp=%s&sign=%s&redirect=%s", partner_id,timest, sign, redirect_url);
        System.out.println(url);
    }

    //shop request for access token for the first time
    public static String[] get_token_shop_level(String code,long partner_id,String
tmp_partner_key,long shop_id) throws ParseException,IOException{
        String[] res = new String[2];
        long timest = System.currentTimeMillis() / 1000L;
        String host = "https://partner.shopeemobile.com";
        String path = "/api/v2/auth/token/get";
        String tmp_base_string = String.format("%s%s%s", partner_id, path, timest);
        byte[] partner_key;
        byte[] base_string;
        BigInteger sign = null;
        String result = "";
        try {
            base_string = tmp_base_string.getBytes("UTF-8");
            partner_key = tmp_partner_key.getBytes("UTF-8");
            Mac mac = Mac.getInstance("HmacSHA256");
            SecretKeySpec secret_key = new SecretKeySpec(partner_key, "HmacSHA256");

```





```

        e.printStackTrace();
    }
    String tmp_url = host + path + String.format("?partner_id=%s&timestamp=%s&sign=%s",
partner_id,timestamp, String.format("%032x",sign));
    URL url = new URL(tmp_url);
    HttpURLConnection conn = null;
    PrintWriter out = null;
    BufferedReader in = null;
    try {
        conn = (HttpURLConnection) url.openConnection();
        conn.setRequestMethod("POST");
        conn.setDoOutput(true);
        conn.setDoInput(true);
        conn.setConnectTimeout(30000);
        conn.setReadTimeout(10000);
        conn.setRequestProperty("Content-Type", "application/json");
        conn.setRequestProperty("Accept", "application/json");
        Map<String,Object> map = new HashMap<>();
        map.put("code",code);
        map.put("shop_id",shop_id);
        map.put("partner_id",partner_id);
        String json = JSON.toJSONString(map);
        conn.connect();
        out = new PrintWriter(conn.getOutputStream());
        out.print(json);
        out.flush();
        in = new BufferedReader(new InputStreamReader(conn.getInputStream()));
        String line = "";
        while((line=in.readLine())!=null){
            result +=line;
        }
        JSONObject jsonObject = JSONObject.parseObject(result);
        res[0] = (String) jsonObject.get("access_token");
        res[1] = (String) jsonObject.get("refresh_token");
    } catch (Exception e){
        e.printStackTrace();
    } finally {
        try{
            if(out != null){
                out.close();
            }
            if(in != null){
                in.close();
            }
        } catch (IOException ioe){
            ioe.printStackTrace();
        }
    }
    return res;
}

//main account request for the access token for the first time
public static String[] get_token_account_level(String code,long partner_id,String
tmp_partner_key,long main_account_id) throws ParseException,IOException{
    String[] res = new String[2];
    long timest = System.currentTimeMillis() / 1000L;
    String host = "https://openplatform.sandbox.test-stable.shopee.sg";
    String path = "/api/v2/auth/token/get";
    String tmp_base_string = String.format("%s%s%s", partner_id, path, timest);
    byte[] partner_key;
    byte[] base_string;
    BigInteger sign = null;
    String result = "";
    try {
        base_string = tmp_base_string.getBytes("UTF-8");
        partner_key = tmp_partner_key.getBytes("UTF-8");
        Mac mac = Mac.getInstance("HmacSHA256");

```



```

    } catch (Exception e) {
        e.printStackTrace();
    }
    String tmp_url = host + path + String.format("?partner_id=%s&timestamp=%s&sign=%s",
partner_id,timestamp, String.format("%032x",sign));
    URL url = new URL(tmp_url);
    HttpURLConnection conn = null;
    PrintWriter out = null;
    BufferedReader in = null;
    try {
        conn = (HttpURLConnection) url.openConnection();
        conn.setRequestMethod("POST");
        conn.setDoOutput(true);
        conn.setDoInput(true);
        conn.setConnectTimeout(30000);
        conn.setReadTimeout(10000);
        conn.setRequestProperty("Content-Type", "application/json");
        conn.setRequestProperty("Accept", "application/json");
        Map<String, Object> map = new HashMap<>();
        map.put("code", code);
        map.put("main_account_id", main_account_id);
        map.put("partner_id", partner_id);
        String json = JSON.toJSONString(map);
        conn.connect();
        out = new PrintWriter(conn.getOutputStream());
        out.print(json);
        out.flush();
        in = new BufferedReader(new InputStreamReader(conn.getInputStream()));
        String line = "";
        while((line=in.readLine())!=null){
            result +=line;
        }
        JSONObject jsonObject = JSONObject.parseObject(result);
        res[0] = (String) jsonObject.get("access_token");
        res[1] = (String) jsonObject.get("refresh_token");
    } catch (Exception e){
        e.printStackTrace();
    } finally {
        try{
            if(out != null){
                out.close();
            }
            if(in != null){
                in.close();
            }
        } catch (IOException ioe){
            ioe.printStackTrace();
        }
    }
    return res;
}

```

PHP Code Demo:

```

<?php

function getTokenShopLevel($code, $partnerId, $partnerKey, $shopId) {
    global $host;
    $path = "/api/v2/auth/token/get";

    $timest = time();
    $body = array("code" => $code, "shop_id" => $shopId, "partner_id" => $partnerId);
    $baseString = sprintf("%s%s%s", $partnerId, $path, $timest);
    $sign = hash_hmac('sha256', $baseString, $partnerKey);
    $url = sprintf("%s%s?partner_id=%s&timestamp=%s&sign=%s", $host, $path, $partnerId,

```

PHP



```

$c = curl_init($url);
curl_setopt($c, CURLOPT_POST, 1);
curl_setopt($c, CURLOPT_POSTFIELDS, json_encode($body));
curl_setopt($c, CURLOPT_HTTPHEADER, array('Content-Type: application/json'));
curl_setopt($c, CURLOPT_RETURNTRANSFER, 1);
$resp = curl_exec($c);
echo "raw result: $resp";

$ret = json_decode($resp, true);
$accessToken = $ret["access_token"];
$newRefreshToken = $ret["refresh_token"];
echo "\naccess_token: $accessToken, refresh_token: $newRefreshToken raw: $ret"."\\n";
return $ret;
}

function getTokenAccountLevel($code, $partnerId, $partnerKey, $mainAccountId) {
    global $host;
    $path = "/api/v2/auth/token/get";

    $timest = time();
    $body = array("code" => $code, "main_account_id" => $mainAccountId, "partner_id" =>
$partnerId);
    $baseString = sprintf("%s%s", $partnerId, $path, $timest);

    $sign = hash_hmac('sha256', $baseString, $partnerKey);
    $url = sprintf("%s%s?partner_id=%s&timestamp=%s&sign=%s", $host, $path, $partnerId,
$timest, $sign);

    $c = curl_init($url);
    curl_setopt($c, CURLOPT_POST, 1);
    curl_setopt($c, CURLOPT_POSTFIELDS, json_encode($body));
    curl_setopt($c, CURLOPT_HTTPHEADER, array('Content-Type: application/json'));
    curl_setopt($c, CURLOPT_RETURNTRANSFER, 1);
    $result = curl_exec($c);
    echo "\nraw result ".$result."\\n";

    $ret = json_decode($result, true);
    $accessToken = $ret["access_token"];
    $newRefreshToken = $ret["refresh_token"];
    echo "\naccess_token: ".$accessToken.", refresh_token: ".$newRefreshToken."\\n";
    return $ret;
}

$host="https://partner.shopeemobile.com";

$partnerId = 847892;
$partnerKey = "57615053704d6470644f554a78656d50484143644964436a5568777544524579";

$code="494d7a4a4f5a66524556776f66425453";

// $shopId=200520705;
// getTokenShopLevel($code, $partnerId, $partnerKey, $shopId);

$saccountId=19479;
getTokenAccountLevel($code, $partnerId, $partnerKey, $accountId)

?>

```

RefreshAccessToken

Before the access_token expires, use the refresh_token to call this API to obtain a new access_token and refresh_token. The new refresh_token must be used for the next refresh request.

Request Information



Parameter name	Type	Description
request_id	string	ID of API requests; always returned. Used to diagnose problems.
error	string	Error codes for API requests; always returned. When the API call is successful, the error code returned is empty.
refresh_token	string	New refresh_token Returned when the API call is successful. Use a refresh_token to get a new access_token. Each refresh_token is valid for 30 days, and can only be used once by either a shop_id or merchant_id.
access_token	string	Returned when the API call is successful. Each new access_token is a dynamic token that can be used multiple times. It expires after 4 hours.
expire_in	int	Returned when the API call is successful. The validity period of the access_token, in seconds.
message	string	Always returned. Provides detailed error information.
merchant_id	int	Returned when the API call is successful. The merchant_id for this refresh, for identifying each merchant.
shop_id	int	Returned when the API call is successful. The shop_id for this refresh
partner_id	int	Returned when the API call is successful. The partner_id you used for this refresh
supplier_id_list	int[]	Return when auth_type=supplier
user_id_list	int[]	Return when auth_type=user

RefreshAccessToken Demo

Python Code Demo:

refresh token

def get_access_token_shop_level(shop_id, partner_id, tmp_partner_key, refresh_token):
 timest = int(time.time())
 host = "https://openplatform.sandbox.test-stable.shopee.sg"
 path = "/api/v2/auth/access_token/get"
 body = {"shop_id": shop_id, "refresh_token": refresh_token, "partner_id": partner_id}
 tmp_base_string = "%s%s" % (partner_id, path, timest)
 base_string = tmp_base_string.encode()
 partner_key = tmp_partner_key.encode()
 sign = hmac.new(partner_key, base_string, hashlib.sha256).hexdigest()
 url = host + path + "?partner_id=%s×t=%s&sign=%s" % (partner_id, timest, sign)
 # print(url)
 headers = {"Content-Type": "application/json"}
 resp = requests.post(url, json=body, headers=headers)



```
return access_token, new_refresh_token
```

```
def get_access_token_merchant_level(merchant_id, partner_id, tmp_partner_key, refresh_token):
    timest = int(time.time())
    host = "https://openplatform.sandbox.test-stable.shopee.sg"
    path = "/api/v2/auth/access_token/get"
    body = {"merchant_id": merchant_id, "refresh_token": refresh_token}
    tmp_base_string = "%s%s%s" % (partner_id, path, timest)
    base_string = tmp_base_string.encode()
    partner_key = tmp_partner_key.encode()
    sign = hmac.new(partner_key, base_string, hashlib.sha256).hexdigest()
    url = host + path + "?partner_id=%s&timest=%s&sign=%s" % (partner_id, timest, sign)

    headers = {"Content-Type": "application/json"}
    resp = requests.post(url, json=body, headers=headers)
    ret = json.loads(resp.content)
    access_token = ret.get("access_token")
    new_refresh_token = ret.get("refresh_token")
    return access_token, new_refresh_token

partner_id = 2006566
partner_key = "1a78dde5d6c3342f56ac939cbdd81607654c0e87725e118736ba5e3ae31c579c"
shop_id = 602226924
main_account_id = 31219
merchant_id = 45719
code = "c01204cada7b4cd0e4688154f5a256ca"
print(shop_auth())
# access_token,refresh_token = get_token_shop_level(code,partner_id,partner_key,602226924)
# print(access_token)
# print(refresh_token)
# print(get_access_token_shop_level(shop_id,partner_id,partner_key,refresh_token))

access_token,refresh_token =
get_token_account_level(code,partner_id,partner_key,main_account_id)
print(access_token)
print(refresh_token)
print(get_access_token_merchant_level(merchant_id,partner_id,partner_key,refresh_token))
```

Java Code Demo:

```
//shop refresh the access token
public static String[] get_access_token_shop_level(String refresh_token,long
partner_id,String tmp_partner_key,long shop_id) throws ParseException,IOException{
    String[] res = new String[2];
    long timest = System.currentTimeMillis() / 1000L;
    String host = "https://partner.shopeemobile.com";
    String path = "/api/v2/auth/access_token/get";
    String tmp_base_string = String.format("%s%s%s", partner_id, path, timest);
    byte[] partner_key;
    byte[] base_string;
    BigInteger sign = null;
    String result = "";
    try {
        base_string = tmp_base_string.getBytes("UTF-8");
        partner_key = tmp_partner_key.getBytes("UTF-8");
        Mac mac = Mac.getInstance("HmacSHA256");
        SecretKeySpec secret_key = new SecretKeySpec(partner_key, "HmacSHA256");
        mac.init(secret_key);
        sign = new BigInteger(1,mac.doFinal(base_string));
    } catch (Exception e) {
        e.printStackTrace();
    }
```



```

URL url = new URL(tmp_url);
URLConnection conn = null;
PrintWriter out = null;
BufferedReader in = null;
try {
    conn = (URLConnection) url.openConnection();
    conn.setRequestMethod("POST");
    conn.setDoOutput(true);
    conn.setDoInput(true);
    conn.setConnectTimeout(30000);
    conn.setReadTimeout(10000);
    conn.setRequestProperty("Content-Type", "application/json");
    conn.setRequestProperty("Accept", "application/json");
    Map<String, Object> map = new HashMap<>();
    map.put("refresh_token", refresh_token);
    map.put("shop_id", shop_id);
    map.put("partner_id", partner_id);
    String json = JSON.toJSONString(map);
    conn.connect();
    out = new PrintWriter(conn.getOutputStream());
    out.print(json);
    out.flush();
    in = new BufferedReader(new InputStreamReader(conn.getInputStream()));
    String line = "";
    while((line=in.readLine())!=null){
        result +=line;
    }
    JSONObject jsonObject = JSONObject.parseObject(result);
    res[0] = (String) jsonObject.get("access_token");
    res[1] = (String) jsonObject.get("refresh_token");
} catch (Exception e) {
    e.printStackTrace();
} finally {
    try {
        if(out != null){
            out.close();
        }
        if(in != null){
            in.close();
        }
    } catch (IOException ioe) {
        ioe.printStackTrace();
    }
}
return res;
}

//merchant refresh the access token
public static String[] get_access_token_merchant_level(String refresh_token, long
partner_id, String tmp_partner_key, long merchant_id) throws ParseException, IOException {
    String[] res = new String[2];
    long timest = System.currentTimeMillis() / 1000L;
    String host = "https://partner.shopeemobile.com";
    String path = "/api/v2/auth/access_token/get";
    String tmp_base_string = String.format("%s%s%s", partner_id, path, timest);
    byte[] partner_key;
    byte[] base_string;
    BigInteger sign = null;
    String result = "";
    try {
        base_string = tmp_base_string.getBytes("UTF-8");
        partner_key = tmp_partner_key.getBytes("UTF-8");
        Mac mac = Mac.getInstance("HmacSHA256");
        SecretKeySpec secret_key = new SecretKeySpec(partner_key, "HmacSHA256");
        mac.init(secret_key);
        sign = new BigInteger(1, mac.doFinal(base_string));
    } catch (Exception e) {

```



```

partner_id,timest, String.format("%032x",sign));
    URL url = new URL(tmp_url);
    HttpURLConnection conn = null;
    PrintWriter out = null;
    BufferedReader in = null;
    try {
        conn = (HttpURLConnection) url.openConnection();
        conn.setRequestMethod("POST");
        conn.setDoOutput(true);
        conn.setDoInput(true);
        conn.setConnectTimeout(30000);
        conn.setReadTimeout(10000);
        conn.setRequestProperty("Content-Type", "application/json");
        conn.setRequestProperty("Accept", "application/json");
        Map<String,Object> map = new HashMap<>();
        map.put("refresh_token",refresh_token);
        map.put("merchant_id",merchant_id);
        map.put("partner_id",partner_id);
        String json = JSON.toJSONString(map);
        conn.connect();
        out = new PrintWriter(conn.getOutputStream());
        out.print(json);
        out.flush();
        in = new BufferedReader(new InputStreamReader(conn.getInputStream()));
        String line = "";
        while((line=in.readLine())!=null){
            result +=line;
        }
        JSONObject jsonObject = JSONObject.parseObject(result);
        res[0] = (String) jsonObject.get("access_token");
        res[1] = (String) jsonObject.get("refresh_token");
    } catch (Exception e){
        e.printStackTrace();
    }finally {
        try{
            if(out != null){
                out.close();
            }
            if(in != null){
                in.close();
            }
        }catch (IOException ioe){
            ioe.printStackTrace();
        }
    }
    return res;
}
}

```

PHP Code Demo:

```

<?php

function getAccessTokenShopLevel($partnerId, $partnerKey, $shopId, $refreshToken) {
    global $host;
    $path = "/api/v2/auth/access_token/get";

    $timest = time();
    $body = array("partner_id" => $partnerId, "shop_id" => $shopId, "refresh_token" =>
    $refreshToken);
    $baseString = sprintf("%s%s", $partnerId, $path, $timest);
    $sign = hash_hmac('sha256', $baseString, $partnerKey);
    $url = sprintf("%s%s?partner_id=%s&timestamp=%s&sign=%s", $host, $path, $partnerId,
    $timest, $sign);
}

```



```

curl_setopt($c, CURLOPT_POSTFIELDS, json_encode($body));
curl_setopt($c, CURLOPT_HTTPHEADER, array('Content-Type: application/json'));
curl_setopt($c, CURLOPT_RETURNTRANSFER, 1);

$result = curl_exec($c);
echo "\nraw result ".$result."\n";

$ret = json_decode($result, true);

$accessToken = $ret["access_token"];
$newRefreshToken = $ret["refresh_token"];
echo "\naccess_token: ".$accessToken.", refresh_token: ".$newRefreshToken."\n";
return $ret;
}

function getAccessTokenMerchantLevel($partnerId, $partnerKey, $merchantId, $refreshToken) {
    global $host;
    $path = "/api/v2/auth/access_token/get";

    $timest = time();
    $body = array("partner_id" => $partnerId, "merchant_id" => $merchantId, "refresh_token" =>
$refreshToken);
    $baseString = sprintf("%s%s", $partnerId, $path, $timest);
    $sign = hash_hmac('sha256', $baseString, $partnerKey);
    $url = sprintf("%s%s?partner_id=%s&timestamp=%s&sign=%s", $host, $path, $partnerId,
$timest, $sign);

    $c = curl_init($url);
    curl_setopt($c, CURLOPT_POST, 1);
    curl_setopt($c, CURLOPT_POSTFIELDS, json_encode($body));
    curl_setopt($c, CURLOPT_HTTPHEADER, array('Content-Type: application/json'));
    curl_setopt($c, CURLOPT_RETURNTRANSFER, 1);
    $result = curl_exec($c);
    echo "\nraw result ".$result."\n";

    $ret = json_decode($result, true);
    $accessToken = $ret["access_token"];
    $newRefreshToken = $ret["refresh_token"];
    echo "\naccess_token: ".$accessToken.", refresh_token: ".$newRefreshToken."\n";
    return $ret;
}

$host="https://partner.shopeemobile.com";

$partnerId = 847892;
$partnerKey = "57615053704d6470644f554a78656d50484143644964436a5568777544524579";

// $shopId=200520705;
// $shopRefreshToken="71724c4e68746b546965424c70617244";
// getAccessTokenShopLevel($partnerId, $partnerKey, $shopId, $shopRefreshToken)

$merchantId=1018829;
$merchantRefreshToken="546e506462704269675645527774f53";
getAccessTokenMerchantLevel($partnerId, $partnerKey, $merchantId, $merchantRefreshToken)

?>

```

Refreshing the access_token and refresh_token on a shop account

1. Use the code and shop_id from the redirect URL https://open.shopee.com/?code=7867624d4e76616648544f6e52625557&shop_id=54804 to call the GetAccessToken API to obtain the first pair of



```
partner_id=1000016&timestamp=1657263479&sign=9c685bc7e4a74e90f45fe1933f1d72b2d9705acda4093a9fb1ec7e2b57ccea2a
```

```
{
  "shop_id": 54804,
  "code": "7867624d4e76616648544f6e52625557",
  "partner_id": 1000016
}
```

2. Save the first pair of access_token and refresh_token returned.

```
{
  "refresh_token": "456e416149664b76745a6a794156794a",
  "access_token": "6a55746e61546f707579627656637464",
  "expire_in": 13859,
  "request_id": "c040b886cfcabdfa5a23af51c595cd1b",
  "error": "",
  "message": ""
}
```

3. Call the RefreshAccessToken API to refresh the access_token and refresh_token.

Query: [https://partner.shopeemobile.com/api/v2/auth/access_token/get?](https://partner.shopeemobile.com/api/v2/auth/access_token/get?partner_id=1000016×tamp=1657263479&sign=9c685bc7e4a74e90f45fe1933f1d72b2d9705acda4093a9fb1ec7e2b57ccea2a)

```
partner_id=1000016&timestamp=1657263479&sign=9c685bc7e4a74e90f45fe1933f1d72b2d9705acda4093a9fb1ec7e2b57ccea2a
```

```
{
  "shop_id": 54804,
  "refresh_token": "456e416149664b76745a6a794156794a",
  "partner_id": 1000016
}
```

4. Save the new access_token and refresh_token.

```
{
  "partner_id": 1000016,
  "refresh_token": "666478546b6c63464867685554477a57",
  "access_token": "7a5970754768697552654a466f425573",
  "expire_in": 14400,
  "request_id": "6d79dd0ffe4e070e185c71ca5153cd51",
  "error": "",
  "message": "",
  "shop_id": 54804
}
```

Refreshing the access_token and refresh_token on a main account

1. Use the code and main_account_id from the URL obtained during authorization to call the GetAccessToken API and obtain the first pair of access_token and refresh_token.

Redirect URL : https://open.shopee.com/?code=644d4e487873706c5a444c776d4b59&main_account_id=10208

Query: [https://partner.shopeemobile.com/api/v2/auth/token/get?](https://partner.shopeemobile.com/api/v2/auth/token/get?partner_id=1000016×tamp=1657263479&sign=9c685bc7e4a74e90f45fe1933f1d72b2d9705acda4093a9fb1ec7e2b57ccea2a)

```
partner_id=1000016&timestamp=1657263479&sign=9c685bc7e4a74e90f45fe1933f1d72b2d9705acda4093a9fb1ec7e2b57ccea2a
```

```
{
  "main_account_id": 10208,
  "code": "644d4e487873706c5a444c776d4b59",
  "partner_id": 1000016
}
```

2. Save the first pair of access_token and refresh_token returned.

```
{
  "refresh_token": "684d42685667777868597a4477587455",
  "access_token": "44776151594778486943647644745361",
  "expire_in": 14344,
  "request_id": "9199e13ee74b22411498209cb5516e24",
  "merchant_id_list": [
    1001705
  ],
  "shop_id_list": [
    33142,

```





```
"message": ""
}
```

3.Call the RefreshAccessToken API to refresh the access_token and refresh_token of shop_id and merchant_id respectively

Query: [https://partner.shopeemobile.com/api/v2/auth/access_token/get?](https://partner.shopeemobile.com/api/v2/auth/access_token/get?partner_id=1000016×tamp=1657868745&sign=b78833ddcf533903cfae818bbfcf2b6b630e3bc0c941dd65453632f63bf7b495)

partner_id=1000016×tamp=1657868745&sign=b78833ddcf533903cfae818bbfcf2b6b630e3bc0c941dd65453632f63bf7b495

```
{
  "shop_id": 33142,
  "refresh_token": "684d42685667777868597a4477587455",
  "partner_id": 1000016
}
```

Query: [https://partner.shopeemobile.com/api/v2/auth/access_token/get?](https://partner.shopeemobile.com/api/v2/auth/access_token/get?partner_id=1000016×tamp=1657868745&sign=b78833ddcf533903cfae818bbfcf2b6b630e3bc0c941dd65453632f63bf7b495)

partner_id=1000016×tamp=1657868745&sign=b78833ddcf533903cfae818bbfcf2b6b630e3bc0c941dd65453632f63bf7b495

```
{
  "merchant_id": 1001705,
  "refresh_token": "684d42685667777868597a4477587455",
  "partner_id": 1000016
}
```

4.Save the new access_token and refresh_token.

```
{
  "partner_id": 1000016,
  "refresh_token": "417472546e73504949676279576c477a",
  "access_token": "646d474965714a696177764963775743",
  "expire_in": 14400,
  "request_id": "78e64d11cb6dec6f6669282839fca916",
  "error": "",
  "message": "",
  "shop_id": 33142
}
{
  "partner_id": 1000016,
  "refresh_token": "715075736d6c6570544364774f437369",
  "access_token": "69634c664a7350696c6b466d5a53714a",
  "expire_in": 14400,
  "request_id": "51eacbc81bd6fa8fdddf1e0ef2dee16",
  "error": "",
  "message": "",
  "merchant_id": 1001705
}
```

By following the steps above, you can call the RefreshAccessToken API within 4 hours to get new access_token and refresh_token. Maintaining the API call loop will ensure you can continue to obtain new sets of access_token and refresh_token within the authorization validity period.



Note

If you did not save the new refresh_token and access_token returned, [see possible solutions](#).

Canceling authorization

You can cancel an authorization by changing the authorization URL or via Seller Center.

Canceling authorization by changing the authorization URL

Authorization can be revoked either by generating a cancellation authorization link or by performing the operation in Seller Center.

Revoking authorization via cancellation link

The method for generating a cancellation authorization link is the same as that for the authorization link, except that the fixed authorization URL should be replaced with the fixed cancellation authorization URL.

Fixed Cancellation Authorization URL





Production	Global (excluding Mainland China and Brazil)	https://open.shopee.com/cancel_auth
	Mainland China	https://open.shopee.cn/cancel_auth
	Brazil	https://open.shopee.com.br/cancel_auth
Sandbox	Global (excluding Mainland China and Brazil)	https://open.sandbox.test-stable.shopee.com/cancel_auth
	Mainland China	https://open.sandbox.test-stable.shopee.cn/cancel_auth
	Brazil	https://open.sandbox.test-stable.shopee.com.br/cancel_auth


Cancellation Authorization Link Examples

Production Environment:
https://open.shopee.com/cancel_auth?partner_id=10090&auth_type=seller&redirect_uri=https://open.shopee.com&response_type=code

Sandbox Environment:
https://open.test-stable.shopee.com/cancel_auth?partner_id=1000016&auth_type=seller&redirect_uri=https://open.test-stable.shopee.com&response_type=code

Cancellation Process

1. Generate the cancellation authorization link according to the specifications above;
2. The seller logs in via the cancellation authorization link;

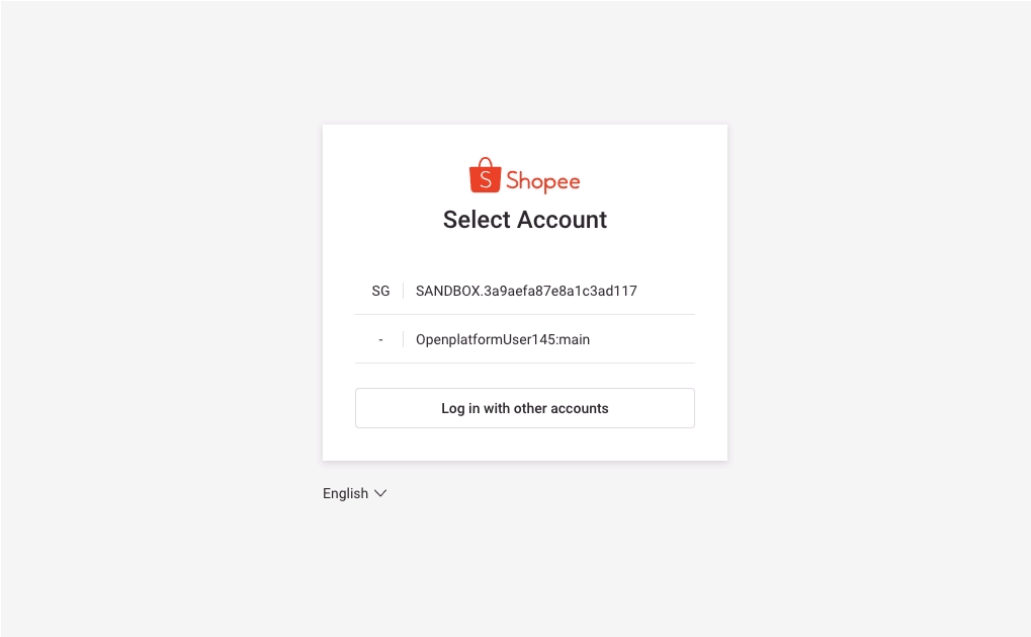

3. The seller clicks "Cancel Authorization" to complete the process. After cancellation, the application will no longer have access to the seller's information.



Cancel Authorization

Once canceled, app will no longer be authorized to access your info

S

sandbox.3a9aefa87e8a1c3ad117

⇌

Shopee

30

Cancel Authorization

Canceling authorization on Seller Center

- Local Sellers:
1. The seller logs in to Seller Center and navigates to "Home Page > Platform Partner";
 2. On the Platform Partner page, the seller can view all apps authorized by the shop / main account, along with their authorization expiration time;
 3. The seller clicks "Separate" in the action column to revoke authorization for the corresponding application.

Home page > Platform Partner

uat.c53f152ee30aa2be9d90

Seller Education Center

Shop Health

Seller Progress

Seller's Mission

Program Star

Buyer Service

Chat Assistant

Assistant FAQ

Order Updates

Shop

Store Rating

Store Profile

Shop Decoration

Store Category

Media Storage

My Report

Arrangement

My Address

Store Settings

Account

Platform Partner

Platform Partner

Connect 0Frozen 0Has Ended 0Separate 0

Here are the partners you have allowed and connected with.

Application	Nama Developer	End Date	Action
wenting test15	went zhan	29/03/2023	Separate
local Taiwan	-	27/01/2023	Separate
wenting test	-	25/10/2022	Separate

End authorization

CNSC/KRSC Sellers

"Home Page > Open Platform Management": Sellers can view which apps have been authorized by the main account. In the authorization management page, sellers can directly revoke the authorization relationship for the merchant or shop.



店铺商品

添加商品

营销中心

营销中心

Shopee广告

财务

我的收入

银行账户

付款设置

客户服务

聊天处理

自动推送

商店

商店评价

商店介绍

商店装饰

商店分类

我的报告

设置

我的地址

店铺账号

商家设置

商店设置

开放平台管理

App	开发者名称	授权中	操作
30	-	0	授权管理

首页 > 开放平台管理 > 授权管理

OpenplatformUser14...

授权管理

以下展示已授权的店铺

合作伙伴平台

应用: 30

开发者名称:

商家授权

商家账户名称	状态	取消关联日期
Openplatform GP 1653033602	取消连接	2022/07/15

店铺授权

搜索 冻结 0 已过期 0 取消连接 1

Search 地区 所有

Shop Username	Region	截止日期	操作
---------------	--------	------	----

没有数据

FAQs on authorization and authentication

If you encounter errors during the authorization process, you can refer to our [FAQs on authorization and authentication](#).

User Guide

- Developer Guide
- API reference
- Push Mechanism
- Shopee Open Platform Data Protection Policy

Shopee Markets

- Service Market
- Seller Education Hub (Singapore)
- Seller Education Hub (Malaysia)
- Seller Education Hub (Thailand)
- Seller Education Hub (Vietnam)
- Seller Education Hub (Indonesia)
- Seller Education Hub (Philippines)
- Seller Education Hub (Brazil)
- Seller Education Hub (Japan)
- Seller Education Hub (Korea)

Support

- Announcement
- FAQ
- Raise Ticket



