Basic
Prototype Pattern

Returns created
Clone to Client

Client
Operation()

asks for Clone

Spawner
return Clone()

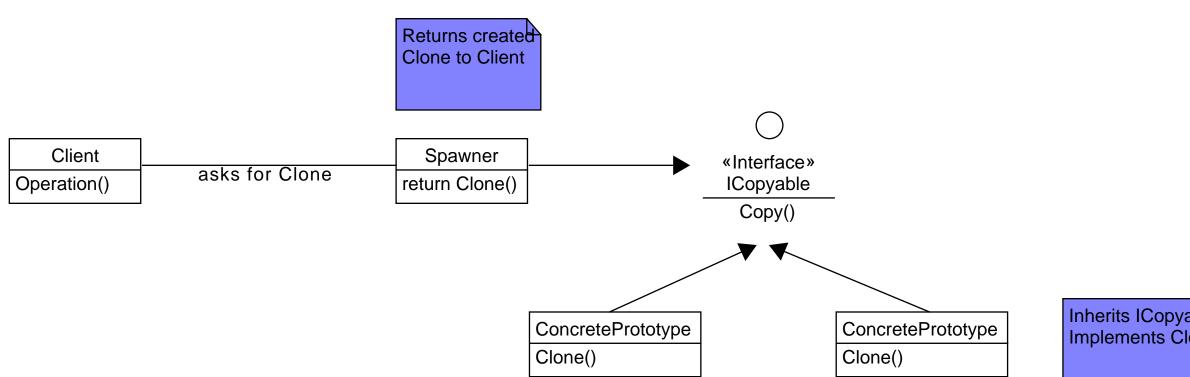«Interface»
ICopyable
Copy()

ConcretePrototype
Clone()

ConcretePrototype
Clone()

Inherits ICopyable and
Implements Clone()