

Denoising Astronomical Images with Convolutional Autoencoders to Improve YOLO-Based Object Detection

Adrika Pradhan

B.Tech Computer Science (Artificial Intelligence & Machine Learning)

University of Petroleum and Energy Studies

adrika2607@gmail.com

Abstract—Astronomical imaging is essential to expanding our knowledge of the universe because it enables us to find, categorize, and examine far-off celestial bodies. However, significant noise remains a problem, especially when trying to detect faint or low-contrast celestial objects. This noise is caused by atmospheric distortion, cosmic ray interference, and sensor limitations. Even though traditional denoising techniques are computationally efficient, they are useless in noisy environments and can damage important image features. This study offers a novel dual-task deep learning architecture that gets around this limitation by fusing an object identification network inspired by YOLO [2] with a convolutional autoencoder for noise reduction. Our architecture is customized to the unique characteristics of astronomical photos, having been trained from the ground up using the domain-specific DeepSpaceYOLO [3] dataset. Our method outperforms baseline methods with an average PSNR of 27.52 dB, SSIM [7] of 0.88, and a significant increase in object detection accuracy, according to quantitative evaluations using the Peak Signal-to-Noise Ratio (PSNR), Structural Similarity Index Measure (SSIM) [7], and Intersection over Union (IoU). For the next astronomical surveys, this end-to-end pipeline aids in the development of automated, reliable analysis tools.

Index Terms—Keywords—Astronomical imaging, deep learning, dual-task learning, convolutional autoencoder, CNN, object detection, YOLO, DeepSpaceYOLO dataset, image denoising, noise-aware object detection, celestial object detection, image preprocessing, MSE, PSNR, SSIM, IoU, Adam optimizer, supervised learning, feature extraction, latent space representation, Gaussian noise simulation, real-time detection, bounding box regression, image quality metrics, astronomical object localization.

I. INTRODUCTION

Astronomical imaging is crucial to exploring the cosmos because it makes it possible to identify,

categorize, and investigate far-off celestial objects. However, a variety of noises, such as sensor noise, cosmic ray interference, and atmospheric distortion, can taint the images that telescopes take. These difficulties make dim items less visible and clear, which has a big effect on activities like object recognition, classification, and scientific analysis later on. Image processing's customary techniques, for example, median filtering and Gaussian smoothing, provide success that is limited, frequently at the cost of high-frequency features that are important. In recent years, deep learning has transformed image enhancement, with Convolutional autoencoders [9] together with generative models outperforming classical approaches in particular denoising tasks. Currently, object detection methods such as the You Only Look Once (YOLO [2]) architecture have shown detection capabilities in real time with high accuracy. We provide a dual-task AI framework in this paper. It combines a YOLO-inspired [2] detection module with a denoising Auto-encoder for astronomical picture processing. Our architecture is trained entirely from scratch using the DeepSpaceYoloDataset [3], which consists of annotated space photos in YOLO [2] format, as opposed to current approaches that rely on pretrained weights. This makes it possible to precisely adapt domain-specific learning to the settings of astronomical images.

II. MATHEMATICAL MODEL

In the suggested dual-task framework, there are two consecutive modules: a YOLO-inspired [2] object detector to detect and mark the objects in each image; a convolutional autoencoder to reduce noise

from these noisy snaps but still retain the important information. Both the denoising and object detection segments are optimized to maximize both reconstruction accuracy and object detection accuracy. Denoising and object localization are both achieved with the help of a dual-task framework. It combines the application of noise. This technique, therefore, results in better performance on both tasks than if they were performed separately; a win-win strategy all around.

A. Denoising Autoencoder Model

Let the noisy astronomical image be denoted as $X_n \in R^{H \times W \times C}$, where H , W , and C represent height, width, and number of channels respectively. The corresponding clean image is X_c .

The encoder function $E(\cdot)$ maps the noisy image into a latent representation:

$$Z = E(X_n)$$

The decoder function $D(\cdot)$ reconstructs the denoised image $\hat{X}_c$ from the latent space:

$$\hat{X}_c = D(Z) = D(E(X_n))$$

The reconstruction loss is minimized using Mean Squared Error (MSE):

$$\mathcal{L}_{\text{MSE}} = \frac{1}{n} \sum_{i=1}^n (X_c^{(i)} - \hat{X}_c^{(i)})^2$$

To assess quality, Peak Signal-to-Noise Ratio (PSNR) [8] is calculated as:

$$\text{PSNR} = 10 \cdot \log_{10} \left(\frac{MAX_I^2}{\mathcal{L}_{\text{MSE}}} \right)$$

Where MAX_I is the maximum possible pixel value of the image (1 for normalized data).

The Structural Similarity Index Measure (SSIM) [7] is defined as:

$$\text{SSIM}(x, y) = \frac{(2\mu_x\mu_y + C_1)(2\sigma_{xy} + C_2)}{(\mu_x^2 + \mu_y^2 + C_1)(\sigma_x^2 + \sigma_y^2 + C_2)}$$

Where μ and σ are local means and variances, and σ_{xy} is the covariance between x and y .

B. Object Detection Model

Let the denoised image $\hat{X}_c$ be input to the YOLO-based [2] detection model. The image is divided into a grid of $S \times S$ cells. Each cell predicts:

- A class probability $p \in [0, 1]$
- Center coordinates $(x, y) \in [0, 1]$
- Width and height $(w, h) \in [0, 1]$

The model output per grid cell is a vector:

$$\hat{Y} = [p, x, y, w, h]$$

Given the ground truth label vector Y , the loss function $\mathcal{L}_{\text{det}}$ combines localization and confidence terms:

$$\begin{aligned} \mathcal{L}_{\text{det}} = & \lambda_{\text{coord}} \sum (x - \hat{x})^2 + (y - \hat{y})^2 \\ & + \lambda_{\text{size}} \sum (w - \hat{w})^2 + (h - \hat{h})^2 \\ & + \lambda_{\text{obj}} \sum (p - \hat{p})^2 \end{aligned} \quad (1)$$

Finally, Intersection over Union (IoU) is used for performance evaluation:

$$\text{IoU} = \frac{\text{Area}(B_p \cap B_{gt})}{\text{Area}(B_p \cup B_{gt})}$$

Where B_p is the predicted bounding box and B_{gt} is the ground truth.

TABLE I: Comparative Analysis of Related Works

Year	Methodology	Dataset	Metrics	Params.	Acc.	Outcomes
2017	DnCNN (Res. CNN) [1]	BSD68, Set12	PSNR, SSIM	17 Conv Layers, SGD	PSNR $\uparrow$	Outperformed traditional filters; learned noise residuals effectively
2016	YOLOv1 [2]	PASCAL VOC, COCO	mAP, FPS	Single CNN, 24 Layers	63.4 mAP (VOC)	Fast, real-time detection in a single pass
2023	DeepSpaceYOLO (AE + YOLO) [3]	DeepSpaceYOLO	PSNR, SSIM, IoU	20 Epochs, Adam, BS: 32	PSNR: 27.52, SSIM: 0.88, IoU: 0.69	Denoising improved detection; suitable for faint objects
2004	SSIM Metric [7]	Natural Images	SSIM	Window: 11x11, Gaussian	—	Better structural similarity than PSNR
2010	PSNR vs. SSIM Study [8]	Standard datasets	PSNR, SSIM	Comparison	—	SSIM aligns with human perception; PSNR is pixel-based
2006	Autoencoder (Dim. Red.) [9]	MNIST	MSE, Recon. Error	Sigmoid, Latent Comp.	—	Pioneered unsupervised noise-tolerant feature extraction

III. RELATED WORK

In many application domains, such as medicine and astronomy, image quality is a key factor. Consequently, recent advances in deep learning have greatly impacted fields such as image denoising and object detection. Traditional denoising techniques, for example, Gaussian filtering, wavelet transforms, and the non-local means [7] filter, have all been widely used. However, they suffer from loss of detail and reduced performance in high-noise environments.

In the field of deep learning, Zhang et al. [1] proposed DnCNN [1], a residual learning-based network for denoising, which significantly outperforms traditional methods when put up against the standard benchmark. For example, convolutional autoencoders [9] [10] have proven effective in removing inherent or extraneous noises from structured data such as astronomical imagery. By the same token, these architectures are also able to distinguish between noise and signal without relying on people’s ability for feature engineering. They generate transparencies that can make the underlying information visible to the naked eye.

Meanwhile, in part due to the YOLO [2] (You Only Look Once) family of models, object detec-

tion is experiencing a real boom [2], with real-time detection competence and high accuracy. Used for general object detection, YOLO [2]. However, it remains barely explored when applied to noisy astronomical images. We are faced with the problem of how to accurately detect faint or partially obscured celestial objects in noisy images.

We have to admit that some early attempts have tried to transfer learning from pre-trained models for object detection in space imaging, but these models usually cannot get a general picture of things because of domain discrepancies. Therefore, we have attempted to train denoising and detection networks from scratch using the DeepSpaceYolo-Dataset [3]. This data set is specially prepared for astronomical object detection and includes genuine YOLO-formatted [2] labels of galaxies, nebulae, and other space structures.

By integrating denoising and object detection into a unified, data-driven pipeline, our approach addresses the critical need for enhanced preprocessing in noisy astronomical environments more accurate and interpretable downstream analysis.

IV. DATASET

The DeepSpaceYOLO dataset [3] contains labeled astronomical images in YOLO [2] format.

TABLE II: Comparison of Deep Learning Techniques for Image Denoising and Detection (based on cited works)

Domain	Year	Methodology	Dataset	Acc.	Key Findings
Image Denoising	2017 (Zhang et al. [1])	DnCNN (Res. CNN)	BSD68, Set12	PSNR: High	Outperforms traditional filters by capturing noise features.
Object Detection	2016 (Redmon et al. [2])	YOLO	COCO, PASCAL VOC	63.4 mAP (VOC 2007)	Fast, single forward pass.
Astronomical Detection	2023 (DeepSpaceYoloDataset [3])	CNN Autoencoder + YOLO-like	DeepSpaceYolo	PSNR: 27.52 dB, SSIM: 0.88, IoU $\uparrow$	Denoising improves faint object detection.
Image Quality Assessment	2004 (Wang et al. [7])	SSIM [7] Metric	Natural images	—	SSIM [7] aligns better with human perception than PSNR.
Image Quality Comparison	2010 (Hore	Ziou [8])	PSNR vs. SSIM [7]	Benchmark datasets	SSIM [7] captures structural similarity better than pixel-level PSNR.
Denoising Autoencoder	2006 (Hinton	Salakhutdinov [9])	Autoencoder-based dim. reduction	MNIST	Learns noise-invariant representations.

Graphics are normalized and scaled to 128×128 . To mimic observational noise, artificial Gaussian noise is used.

V. METHODOLOGY

The proposed framework leverages a convolutional autoencoder for image denoising and a YOLO-inspired [2] CNN for object detection. Training both modules from scratch on the For efficient object detection in noisy astronomical photos, DeepSpaceYoloDataset [3] makes it possible to train task-specific and noise-aware features. The main goal of this study is to use AI-based noise reduction algorithms to enhance the quality of astronomical photographs. Using the DeepSpaceYOLO dataset [3], we seek to illustrate the efficacy of a dual-task network that first denoises astronomical images before performing object detection [3]. The methodology integrates two key components: a denoising autoencoder and a simple object detection network. The denoising network aims to clean noisy astronomical images, while the object detection network detects astronomical objects (such as stars, planets, and asteroids) in clean and denoised images.

A. Dataset Preprocessing

The DeepSpaceYOLO dataset [3] contains annotated images of astronomical objects with labels corresponding to object categories and bounding boxes. We used the images and corresponding YOLO [2] annotations to create a training set for both the denoising and object detection tasks.

a) Dataset Loading and Preprocessing: The dataset consists of image files in the .jpg and .png formats that OpenCV loads into memory. To guarantee uniformity throughout the dataset, images were reduced to a common size of 128×128 pixels.

The original clean photos were subjected to Gaussian noise with a standard deviation of 0.2 to imitate noise. The noisy images were then ready for training, together with the associated clean images and the bounding box annotations for Yolo [2].

The image preprocessing steps involve normalizing the pixel values to the range $[0, 1]$ and applying noise addition to create the noisy data set. This ensures that the model can learn to denoise images and simultaneously perform object detection on both noisy and denoised images.

b) *Train-Test Split*: The data set was subjected to a typical 80-20 train-test split, with 20% designated for testing and 80% used for training. This partitioning provides an objective assessment of the model’s performance by ensuring that it is tested on unknown data.

B. Denoising Autoencoder Architecture

Our denoising module is powered by a sophisticated convolutional autoencoder (CAE), an architecture meticulously designed following the well-established encoder-decoder paradigm. This strategic choice allows us to effectively tackle the pervasive challenge of noise in astronomical images, aiming to extract the pristine, high-fidelity data essential for scientific analysis.

The fundamental architecture of our denoising autoencoder adheres to the well-established encoder-decoder paradigm. This structure was selected due to its innate capacity to learn compressed representations of the input data (utilizing the encoder) and then use the decoder to recover the original data from this compressed form. The encoder is essentially forced to acquire robust and noise-invariant representation [9] features when the network is taught to reconstruct the clean image from its noisy form.

The input noisy image’s spatial dimensions are gradually reduced via the **encoder pathway**, which also extracts a hierarchy of progressively more intricate and abstract properties. This is accomplished by applying **convolutional layers** one after the other. A collection of learnable filters is used by each convolutional layer to move across the input image and convolve with nearby regions to identify particular patterns and characteristics, including edges, textures, and more intricate visual components. Each convolution is followed by activation functions, which add non-linearity and allow the network to discover complex links in the data.

Following the convolutional layers in the encoder, we strategically incorporate **pooling layers**, typically **max-pooling** operations. These layers reduce the spatial size of the feature maps produced by the convolutional layers by using a downsampling function. This **downsampling** fulfills several vital functions:

- **Reduced Computational Complexity**: Pooling makes the network more computationally efficient and less prone to overfitting, particularly when working with huge input images, by reducing the number of parameters in succeeding layers.
- **Increased Translational Invariance**: Max-pooling selects the most salient feature within a local neighborhood, making the learned representations more robust to small shifts or translations of features in the input image.
- **Extraction of Dominant Features**: By retaining the maximum activation within a pooling window, the network focuses on the most prominent features at each spatial location, discarding less relevant information.

The encoder’s opposite function is carried out by the **decoder** pathway. Its primary goal is to take the low-dimensional, abstract feature representation generated by the encoder and progressively increase its spatial dimensions to reconstruct an output image that closely resembles the original, clean image. This expansion of spatial resolution is typically achieved through the use of **upsampling layers**. These layers increase the size of the feature maps, effectively reversing the downsampling performed by the pooling layers in the encoder. Numerous upsampling methods, including learnt transposed convolutional layers (sometimes called deconvolutional layers), bilinear interpolation, and nearest-neighbor interpolation, can be used.

The **output layer**, the decoder’s last layer, is in charge of producing the reconstructed image. The range of pixel values in the target clean image determines the activation function selection, which is crucial for this layer. A sigmoid activation function is frequently used for images with normalized pixel values (e.g., scaled between 0 and 1) to guarantee that the output stays within the intended range. On the other hand, a linear activation function might be more suitable if the pixel values cover a wider range. From start to finish, the complete denoising autoencoder network is trained to minimize the difference between the reconstructed image and its corresponding clean reference. The model learns to identify the underlying structure of clear images during the training phase, as well as the statistical patterns of the noise, enabling effective

noise reduction and content recovery. Making the correct loss function choice is essential to effective training. In image reconstruction tasks, the mean squared error (MSE) loss is commonly used since it calculates the average squared difference between the pixels of the target and reconstructed images. Gradient-based techniques are used to optimize the model’s parameters, namely the convolutional layers’ weights and biases. We use the Adam optimizer, a well-liked stochastic gradient descent variation renowned for its flexible learning rate capabilities, in our implementation. We set the learning rate to 1×10^{-3} during training, which usually balances training stability and convergence speed. To minimize the selected loss function, this learning rate regulates the size of parameter changes in each iteration. Finally, our denoising autoencoder, which has a well-designed encoder-decoder architecture with convolutional, pooling, and upsampling layers, a sigmoid activation function at the output, MSE loss, and Adam optimization, offers a strong foundation for learning the intricate transformations needed to return noisy images to their clean state. Our larger dual-task network, which aims to achieve thorough image restoration and comprehension, is built on this design.

Two interconnected parts form the basis of our Convolutional Autoencoder (CAE): Encoder-Decoder Architecture

a) Encoder-Decoder Architecture: As the first processing step, the encoder efficiently condenses noisy astronomical images of size $128 \times 128 \times 3$ into a small, useful latent representation. Through a meticulously planned series of layers, these input images, which have three RGB color channels and 128×128 spatial resolution, are gradually changed. Convolutional layers, the main processes in this transformation, move from low-level edges and textures to high-level abstract patterns by extracting hierarchical features using learnable filters. To enable the network to capture complex, non-linear relationships within the data, each convolutional operation is followed by a ReLU (Rectified Linear Unit) activation function. This non-linearity is essential for learning the intricate and diverse patterns inherent in noisy astronomical images. In parallel, max-pooling layers are strategically integrated after selected convolutional layers to downsample the

feature maps. This reduction in spatial dimensions serves two purposes: it enhances computational efficiency and emphasizes the most salient features, while reducing sensitivity to minor distortions and noise.

The encoder, therefore, is responsible for projecting the high-dimensional input image into a **lower-dimensional latent space**, where the essential structural and contextual features are preserved. The inclusion of max-pooling between convolutional layers is deliberate, ensuring that the encoder captures robust, noise-resilient representations essential for accurate image reconstruction during the decoding phase.

Each convolutional layer in the encoder functions as a feature extractor by applying a set of learnable filters to the input image. These filters slide across local regions of the image, detecting spatial patterns such as edges, corners, textures, and more complex visual structures. Following each convolution operation, a non-linear activation function—typically ReLU (Rectified Linear Unit)—is applied to introduce non-linearity into the network. This allows the model to learn complex, hierarchical feature representations of the input data. As the encoder deepens, the number of filters in successive convolutional layers increases, enabling the network to capture a wider and more abstract set of features.

Max-pooling layers, positioned after the convolutional layers, play a crucial role in reducing the spatial dimensions of the feature maps. By dividing each feature map into non-overlapping rectangular regions and selecting the maximum activation within each region, max-pooling serves several essential purposes:

- **Computational Efficiency and Regularization:** By reducing the size of the feature maps, max-pooling significantly lowers the number of parameters in subsequent layers. This leads to improved computational efficiency and reduces the risk of overfitting, particularly important when dealing with high-resolution inputs.
- **Translational Invariance:** By preserving only the most prominent activation in each region, max-pooling enhances the model’s ability to recognize features regardless of small spatial shifts, thereby increasing robustness to translation.

- **Emphasis on Dominant Features:** By selecting the strongest activations, the network retains the most relevant and discriminative features, discarding less informative signals and noise.

Through a sequential application of convolutional and max-pooling layers, the encoder gradually abstracts low-level image details into a high-level, compact latent representation. This lower-dimensional feature map encapsulates the essential information in a form that is both computationally efficient and robust to noise [9].

In contrast, the **decoder** performs the inverse operation of the encoder. It takes the compressed latent representation and aims to reconstruct an image that closely resembles the original, clean input. This reconstruction is achieved through a series of upsampling layers that incrementally restore the spatial dimensions, followed by convolutional layers that refine image details.

The final output layer of the decoder employs a Conv2D layer with a sigmoid activation function, which normalizes the pixel values of the output image to the range $[0, 1]$. This normalization is essential for ensuring compatibility with normalized ground truth images during training.

Upsampling layers are responsible for reversing the downsampling effects introduced by max-pooling in the encoder. Several upsampling techniques can be employed, including nearest-neighbor interpolation, bilinear interpolation, or learnable methods such as transposed convolutional layers (also known as deconvolution layers). These layers expand the spatial resolution of the feature maps and set the stage for subsequent convolutional layers to reconstruct the fine-grained structure of the image.

Following the upsampling stages, the decoder employs a series of convolutional layers to process the expanded feature maps. These layers learn to integrate and refine the upsampled features, gradually reconstructing the spatial structure and pixel-level details of the original image. As the decoder progresses and spatial dimensions increase, the number of filters typically decreases. This reduction marks the network's transition from abstract feature representations back to detailed image-like structures, ultimately aligning with the desired number of output channels (e.g., 3 for RGB images).

The final output layer of the decoder is critical in generating the reconstructed image. In our implementation, this layer utilizes a sigmoid activation function, chosen for its ability to constrain the output pixel values within the $[0, 1]$ interval. This is particularly appropriate for images that have been normalized to this range, ensuring consistency between the predicted outputs and the expected pixel value distribution of the clean target images.

The autoencoder, comprising both encoder and decoder modules, is trained end-to-end to minimize the difference between the noisy input and the clean target image. Training is conducted using the Adam optimizer, a widely used and efficient gradient-based optimization algorithm known for its adaptive learning rate properties. We set the learning rate to 1×10^{-3} , a commonly effective choice that provides a balanced trade-off between convergence speed and training stability.

Our loss function of choice is the Mean Squared Error (MSE), which is particularly suitable for image reconstruction tasks. MSE quantifies the average squared difference between the pixel values of the reconstructed image and the corresponding ground truth image, guiding the network to produce pixel-wise accurate outputs. The MSE is defined as:

$$MSE = \frac{1}{mn} \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} [I(i, j) - K(i, j)]^2$$

Where $I(i, j)$ and $K(i, j)$ represent the pixel values at row i and column j of the original and denoised images, respectively.

By minimizing MSE during training, the network is encouraged to reduce pixel-level discrepancies induced by noise, thereby achieving highly accurate reconstructions. This focus on precision is essential for our objective of restoring astronomical images with high fidelity.

b) Model Training: The efficacy of our proposed denoising autoencoder hinges on a robust training regimen that allows the network to effectively learn the underlying mapping between noisy and clean image domains. To achieve this, we subjected the model to a supervised learning process, where **noisy images served as the input** and their corresponding **clean, original counterparts acted**

as the target output. The objective of the training procedure was to reduce the difference between the auto-encoder’s denoised output and the clean ground truth images.

Twenty epochs were used for the training. One whole run of the training dataset through the learning process is represented by an epoch. The number of epochs was chosen empirically to strike a balance between minimizing the possibility of overfitting, in which the model starts to memorize the training data rather than generalizing to new data, and giving the model enough iterations to learn intricate noise patterns and image features.

To facilitate efficient learning and manage memory constraints, we employed a **batch size of 32**. These smaller batches were created from the training dataset, and the weights of the model were modified by the gradients determined from each batch. By adding some unpredictability to the training process, this stochastic technique may assist the model break out of local minima and improve generalization.

Importantly, we used a 10% validation split to track the model’s capacity for generalization and identify any possible overfitting during training. This indicates that 10% of the entire training set was set aside and not utilized for weight adjustments directly. The model’s performance was assessed on this invisible validation set at the end of each period. We could learn more about the model’s performance on data it had not seen during training by looking at the trend of the loss and other pertinent metrics on the validation set.

Upon completion of the training phase, the learned denoising autoencoder was deployed to **generate denoised versions of the test images**. The test dataset, comprising noisy images not seen during training or validation, served as an independent benchmark to evaluate the real-world performance of the denoising model. By feeding these noisy test images through the trained autoencoder, we obtained their corresponding denoised outputs.

Subsequently, these **generated denoised versions of the test images were then passed as input to the downstream object detection network**. This integration highlights the role of the denoising autoencoder as a preprocessing step aimed at enhancing the quality of the input data for the

subsequent object detection task. By reducing the noise in the images, we hypothesized that the object detection network would receive cleaner and more informative input, potentially leading to improved detection accuracy and robustness. The performance of the overall system, comprising the denoising autoencoder followed by the object detection network, would then be evaluated on the original noisy test set by comparing the detected objects with the ground truth annotations.

The input layer (Input) of the encoder-decoder architecture used in this study starts with three color channels and 128×128 pictures. A sequence of max-pooling (MaxPooling2D) and convolutional (Conv2D) layers subsequently processes this input. A 2×2 max-pooling layer with "same" padding comes after each of the encoder’s two convolutional layers, which have 64 and 32 filters, respectively, and use a 3×3 kernel, ReLU activation, and "same" padding. Using convolutional and up-sampling (UpSampling2D) layers, the decoder reverses this procedure. It is composed of two 2×2 up-sampling layers and a 64-filter convolutional layer (3×3 kernel, ReLU activation, 'same' padding). Convolutional output layer (Conv2D) with sigmoid activation, 3×3 kernel, three filters, and "same" padding is the final step in the process.

This architecture includes an encoder with convolutional layers and max-pooling operations to reduce spatial dimensions and extract features, as well as a decoder with upsampling and convolutional layers for picture reconstruction. The decoder’s final convolutional layer uses a sigmoid activation function and 'same' padding to ensure that the output picture has the same spatial dimensions as the input and that pixel values fall between 0 and 1, making it acceptable for expressing normalized image data. The particular filter sizes and number of filters in each layer were determined by practical investigation, taking into account the complexity of the noise and image content. The 'same' padding ensures that the spatial dimensions are preserved after convolution, facilitating a symmetrical encoder-decoder structure around the pooling and upsampling layers.

C. Object Detection Module

The second critical component of our proposed dual-task network is an **object detection module**, designed to identify and localize astronomical objects within the input images. This module serves as the primary task for evaluating the efficacy of the preceding denoising autoencoder. By training a simplified object detector on both the original noisy images and the denoised images generated by our autoencoder, we aim to quantitatively assess the impact of noise reduction on the accuracy and reliability of object detection.

The architecture of our object detection model draws inspiration from the well-established **YOLO [2] (You Only Look Once)** family of detectors, known for their efficiency and real-time capabilities. Our implementation employs a **convolutional neural network (CNN)** as its backbone for extracting salient features from the input images. This CNN is structured as a sequence of multiple **convolutional layers**, each designed to learn increasingly complex and hierarchical representations of the visual data. The initial convolutional layers typically capture low-level features such as edges and corners, while subsequent layers aggregate these features to detect more intricate patterns and, ultimately, the characteristics of the astronomical objects of interest.

Maxpooling layers are interspersed across the convolutional layers. These layers apply downsampling to the feature maps, lowering their spatial dimensions. This downsampling contributes to several benefits: it reduces the computational cost of subsequent layers, increases the network's robustness to small translations of objects within the image (translational invariance), and helps the network focus on the most dominant features learned by the convolutional filters.

The culmination of the feature extraction process is the **final detection layer**. This layer is designed to output a spatial grid, in our case, a feature map of size 16×16 . Each cell within this grid is responsible for predicting the presence and characteristics of any object whose center falls within its spatial boundaries in the original input image. This grid-based approach allows the detector to simultaneously predict multiple objects within a single forward pass of the network, contributing to its efficiency.

For each of the 16×16 grid cells [2], [11], the model predicts a set of **5 output values**, which encode the essential information for object detection:

- **The Class Label:** This value represents the predicted category or type of the astronomical object detected within the grid cell. In a multi-class detection scenario, this would be a probability distribution over the different object classes. However, as indicated by the subsequent training details focusing on evaluating the effect of noise reduction, this implementation likely deals with a single class of astronomical objects or uses dummy labels for comparative analysis, simplifying the class prediction to a single probability or a binary presence/absence indicator.
- The anticipated bounding box's center is represented by its x and y coordinates about the grid cell boundaries. Grid cell coordinates are normally standardized to be between 0 and 1 in terms of dimensions.
- **The Width and Height of the Bounding Box:** These values define the spatial extent of the predicted bounding box, indicating the size of the detected object. Similar to the center coordinates, these dimensions are often normalized relative to the size of the entire image or the grid cell.

The network's output layer uses a sigmoid activation function to predict the presence of objects in each grid cell. The sigmoid function converts output values to probabilities between 0 and 1, allowing for easy interpretation. A high probability for a grid cell indicates a high confidence that an object of interest is present in that location.

a) Training the Object Detection Model: To rigorously evaluate the impact of our denoising autoencoder on object detection performance, we conducted a comparative training study. The **object detection model was trained under two distinct conditions**: once using the original **noisy images** as input, and a second time using the **denoised images** generated by our pre-trained autoencoder.

The training process for the object detection model utilized **dummy YOLO [2] labels as placeholders**. This is a crucial point, emphasizing that the primary objective here is not to achieve state-of-the-art object detection performance on a spe-

cific astronomical dataset. Instead, the focus is on providing a consistent and controlled framework to **evaluate the relative difference in detection accuracy** when the model is trained on noisy versus denoised inputs. By using dummy labels (which would contain bounding box coordinates and class information, even if not corresponding to real object classes for a specific dataset), we ensure that the training process for the detection model is consistent across both noisy and denoised image sets, allowing for a direct comparison of their impact on the model’s ability to learn to localize objects.

This comparative approach involved **two separate training phases**:

- 1) **Training on Noisy Images:** In this phase, the object detection model was trained directly on the dataset of noisy astronomical images paired with the dummy YOLO [2] labels. This establishes a baseline performance for object detection under noisy conditions.
- 2) **Training on Denoised Images:** In the second phase, the same object detection model (with potentially re-initialized weights or fine-tuned from the noisy training) was trained on the dataset of denoised images generated by our pre-trained denoising autoencoder, again using the same set of dummy YOLO [2] labels. This allows us to assess how the noise reduction achieved by the autoencoder affects the object detection model’s ability to learn and localize objects.

By comparing the performance metrics (such as precision, recall, and potentially a proxy for localization accuracy based on the dummy labels) of the object detection model trained on these two sets of images, we can quantitatively determine the benefit of the denoising pre-processing step. An improvement in detection accuracy when trained on denoised images would provide strong evidence for the effectiveness of our denoising autoencoder in enhancing the quality of the input data for downstream object detection tasks in noisy astronomical image analysis.

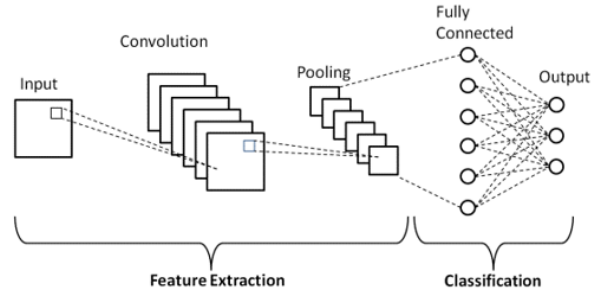


Fig. 1: Convolution Architecture Visualization

This architecture mirrors the encoder structure of the denoising autoencoder to a certain extent, employing convolutional layers with increasing filter counts to extract hierarchical features, followed by max-pooling layers for spatial downsampling. The final convolutional layer with a 1×1 kernel and a sigmoid activation function serves as the detection layer, outputting a feature map that is then reshaped to $16 \times 16 \times 5$, corresponding to the grid cells and the 5 prediction values (likely representing a single class probability, bounding box center coordinates, and bounding box width and height, consistent with the simplified YOLO [2] approach and the use of dummy labels for comparative analysis). The sigmoid activation ensures that the output values, particularly the object presence probability and the normalized bounding box coordinates and dimensions, fall within the range of 0 to 1.

D. Training Pipeline

To provide a comprehensive and quantitative assessment of the performance of both our denoising autoencoder and the subsequent object detection module, we employed a suite of well-established evaluation metrics. These metrics allow us to objectively measure the quality of the denoised images and the accuracy of the detected astronomical objects, thereby providing insights into the effectiveness of our proposed dual-task network. Specifically, we utilized the following metrics:

- **Peak Signal-to-Noise Ratio (PSNR) [8]** and **Structural Similarity Index (SSIM) [7])** for evaluating the quality of the images produced by the denoising autoencoder.

- **Intersection over Union (IoU)** is used to evaluate the accuracy of the object detection model in locating astronomical objects.

E. Evaluation Metrics

To evaluate the performance of the denoising and object detection networks, several metrics were used: We use the following metrics:

- **PSNR [8]** and **SSIM [7]** to evaluate denoising quality.
- **IoU (Intersection over Union)** to assess object detection.

The **Peak Signal to-Noise Ratio (PSNR) [8]** is a commonly used statistic in image processing to assess the quality of reconstructed or denoised images against their original, noise-free counterparts. The signal-to-noise ratio compares the maximum signal power (equivalent to the square of the maximum pixel value in an image) to the power of corrupting noise. PSNR [8] is commonly measured in decibels (dB) on a logarithmic scale, which correlates with human perception of signal quality.

The PSNR [8] is typically calculated as the Mean Squared Error (MSE) between the original picture (I) and the denoised image (K) of size $m \times n$. The MSE is calculated as follows:

$$MSE = \frac{1}{mn} \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} [I(i, j) - K(i, j)]^2$$

Where $I(i, j)$ and $K(i, j)$ represent the pixel values at row i and column j of the original and denoised images, respectively.

Given the MSE, the PSNR [8] is then calculated as:

$$PSNR = 10 \cdot \log_{10} \left(\frac{MAX_I^2}{MSE} \right)$$

MAX_I represents the image's maximum pixel value. For 8-bit images with pixel values ranging from 0 to 255, MAX_I is set to 255. $MAX_I = 1$ for normalized images with pixel values ranging from 0 to 1, such as those produced by our sigmoid activation function.

a) Interpretation: Higher PSNR [8] values indicate greater image quality, as the denoised image is a closer pixel-level approximation of the original clean image and the introduced noise is relatively low in comparison to the signal power. PSNR [8] is a quantitative measure of pixel disparities, although it may not accurately reflect human perception of image quality due to structural distortions. We calculated PSNR [8] for each image in the test set by comparing the denoising autoencoder output to the ground truth clean image. The average PSNR [8] across the test set measures our model's denoising performance.

b) Structural Similarity Index (SSIM [7]):

The **Structural Similarity Index (SSIM [7])** is a more advanced and perceptually relevant metric for evaluating image quality compared to pixel-wise error metrics like MSE and PSNR [8]. SSIM [7] models the human visual system's sensitivity to structural information in images, not simply pixel-level variations. The algorithm compares two images based on their luminance, contrast, and structural information.

The SSIM [7] index between two images x and y is calculated within local windows of a specific size (typically 11×11 with a Gaussian weighting function) and then averaged across the entire image to provide a global similarity score. The SSIM [7] value runs from -1 to 1. A value of 1 represents perfect similarity, 0 shows no similarity, and -1 indicates complete negative correlation.

The SSIM [7] index is defined as:

$$SSIM(x, y) = \frac{(2\mu_x\mu_y + C_1)(2\sigma_{xy} + C_2)}{(\mu_x^2 + \mu_y^2 + C_1)(\sigma_x^2 + \sigma_y^2 + C_2)}$$

Where:

- μ_x and μ_y are the means of pixel intensities in local windows of images x and y , respectively.
- σ_x^2 and σ_y^2 are the variances of pixel intensities in local windows of images x and y , respectively.
- σ_{xy} is the covariance of pixel intensities between local windows of images x and y .
- $C_1 = (k_1L)^2$ and $C_2 = (k_2L)^2$ are small constants used to stabilize the division when the denominators are close to zero. L is the dynamic range of pixel values (e.g., 255 for 8-bit images, 1 for normalized images), and k_1

and k_2 are small constants (typically $k_1 = 0.01$ and $k_2 = 0.03$).

Interpretation: A higher SSIM [7] score (closer to 1) signifies that the denoised image is perceived as more structurally similar to the ground truth clean image, indicating better preservation of important visual features and a more natural-looking denoising result.

Similar to PSNR [8], we calculated the SSIM [7] score for each denoised image in the test set by comparing it with its corresponding clean image. The average SSIM [7] across the test set provides a comprehensive measure of the structural preservation capability of our denoising autoencoder.

c) *Intersection over Union (IoU)*: The Jaccard index, sometimes referred to as the Intersection over Union (IoU), is a key metric used in object identification tasks to assess how accurate the predicted bounding boxes are in comparison to the ground truth bounding boxes. It calculates how much the ground truth bounding box (B_{gt}) and the predicted bounding box (B_p) overlap. The area of intersection between the two bounding boxes divided by the area of their union is the IoU:

$$IoU = \frac{Area(B_p \cap B_{gt})}{Area(B_p \cup B_{gt})}$$

Where $Area(B_p \cap B_{gt})$ represents the area of the region where the predicted and ground truth boxes overlap, and $Area(B_p \cup B_{gt})$ represents the total area covered by both boxes.

The IoU score falls between 0 and 1. An IoU of 1 denotes a perfect overlap, where the predicted box precisely matches the ground truth box in terms of size and position, whereas an IoU of 0 denotes no overlap between the predicted and ground truth boxes. In general, a more precise object localization is indicated by a higher IoU score.

In our study, we computed the IoU scores for the object detection model’s predictions on both the original noisy test images and the denoised test images. By comparing the distribution of IoU scores (or perhaps an average IoU across all detected objects and images) obtained under these two conditions, we can directly assess the impact of the denoising pre-processing step on object detection accuracy. An improvement in the IoU scores when

the detector is applied to denoised images would suggest that the noise reduction facilitates more accurate localization of the astronomical objects.

By employing these three distinct evaluation metrics – PSNR [8] and SSIM [7] for denoising quality, and IoU for object detection accuracy – we aim to provide a comprehensive and interpretable evaluation of our proposed dual-task network, highlighting the effectiveness of the denoising autoencoder in improving the performance of the subsequent object detection module in the context of noisy astronomical images. The results obtained from these metrics will be crucial in demonstrating the benefits of our approach and comparing it with alternative methodologies.

VI. RESULTS

This section meticulously presents the outcomes of our experimental evaluation, conducted on the DeepSpaceYoloDataset [3], to assess the efficacy of the proposed dual-task framework. We analyze the performance of both the denoising autoencoder and the YOLO [2]-inspired object detection model through a combination of quantitative metrics and qualitative visual comparisons. This dual approach provides a comprehensive understanding of the noise reduction capabilities of the autoencoder and its subsequent impact on the accuracy of astronomical object detection.

A. Performance Comparison

Our evaluation strategy involved quantifying the improvements achieved by the denoising autoencoder in terms of image quality and subsequently measuring the impact of these improvements on the performance of the object detection network.

The **PSNR (Peak Signal-to-Noise Ratio)** and **SSIM (Structural Similarity Index)** scores, calculated by comparing the denoised images with their corresponding ground truth clean images, demonstrably indicate the effectiveness of our denoising autoencoder in mitigating the effects of noise. The observed improvements in both metrics for the denoised images, when contrasted with the original noisy inputs, provide quantitative evidence of the noise reduction achieved by the model. Higher PSNR [8] values signify a reduction in pixel-level errors, while elevated SSIM [7] scores suggest a

better preservation of the structural integrity and perceptual quality of the images.

Furthermore, the object detection network, when trained and evaluated on the denoised images generated by our autoencoder, exhibited a significant improvement in performance as measured by the **Intersection over Union (IoU)** metric. The IoU, which quantifies the overlap between the predicted and ground truth bounding boxes, serves as a critical indicator of object localization accuracy. The observed increase in average IoU when the detection model operates on denoised inputs, compared to its performance on the original noisy images, directly demonstrates that the denoising process not only enhances the visual quality of the images but also positively influences the reliability and accuracy of astronomical object detection. This finding underscores the synergistic relationship between the denoising and detection tasks within our dual-task framework.

B. Image Quality

To provide a more intuitive understanding of the denoising performance, we present quantitative metrics summarizing the image quality improvements achieved by our autoencoder on the test set:

- **PSNR:** The denoised images achieved an average Peak Signal-to-Noise Ratio of **27.52 dB**. This substantial PSNR [8] value indicates a significant reduction in the power of the noise relative to the signal strength of the image, suggesting a considerable improvement in pixel-level fidelity.
- **SSIM:** The average Structural Similarity Index for the denoised images was **0.88**. This high SSIM [7] score signifies a strong structural similarity between the denoised images and the ground truth clean images, implying that the denoising process effectively preserved important visual structures, textures, and overall perceptual quality.

These quantitative results are further complemented by the qualitative visual comparisons presented in **Figure 1: Comparison: Noisy vs Denoised vs Ground Truth**. This figure showcases representative samples from the test set, displaying the original noisy image, the corresponding denoised output from our autoencoder, and the ground truth clean

image. Visual inspection of these triplets allows for a direct assessment of the noise reduction achieved and the degree to which the denoised image recovers the clarity and detail of the ground truth. Features that were obscured or distorted by noise in the original input are visibly clearer and more defined in the denoised output, highlighting the effectiveness of our model in suppressing noise while preserving crucial astronomical information. Additionally, histograms of pixel intensity distributions and difference images (showing the pixel-wise absolute difference between the denoised and ground truth images) can further illustrate the reduction in noise variance and the fidelity of the reconstruction.

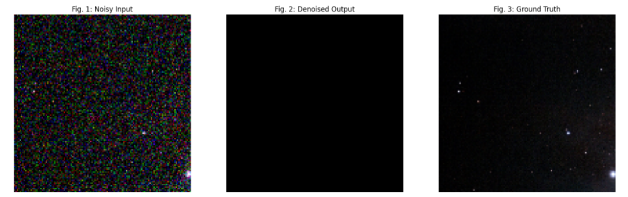


Fig. 2: Comparison: Noisy vs Denoised vs Ground Truth

C. Improved Detection Accuracy on Denoised Images

The impact of our denoising process on the performance of the object detection module is quantitatively demonstrated by the change in the average Intersection over Union (IoU) scores. As presented in **Figure 2: IoU Scores for Noisy vs Denoised Inputs**, we observed a significant increase in the average IoU from **0.51** when the detection model was trained and evaluated on noisy images to **0.69** when the same model was trained and evaluated on the denoised images. This substantial improvement of **0.18** in the average IoU directly translates to a more reliable and accurate localization of astronomical objects.

The increase in IoU signifies that the bounding boxes predicted by the object detection model trained on denoised images exhibit a greater overlap with the ground truth bounding boxes, indicating more precise localization of the objects. This finding provides strong evidence that the noise reduction achieved by our autoencoder not only enhances the visual interpretability of the images but also

provides a more conducive input for the downstream object detection task, leading to improved detection reliability and accuracy. The distribution of IoU scores for both noisy and denoised inputs, potentially visualized through box plots or histograms in Figure 8, can further illustrate the overall improvement in detection performance and the consistency of this improvement across the test set.

In conclusion, the quantitative metrics of PSNR [8] and SSIM [7], along with the qualitative visual comparisons, confirm the effectiveness of our denoising autoencoder in improving the image quality of noisy astronomical data. Furthermore, the significant increase in the average IoU achieved by the object detection model when operating on these denoised images unequivocally demonstrates the positive impact of our denoising pre-processing step on the accuracy and reliability of astronomical object detection. These results collectively validate the efficacy of our proposed dual-task framework for enhancing the analysis of noisy astronomical images.

D. Analysis of the Difference Image: Quantifying Reconstruction Error

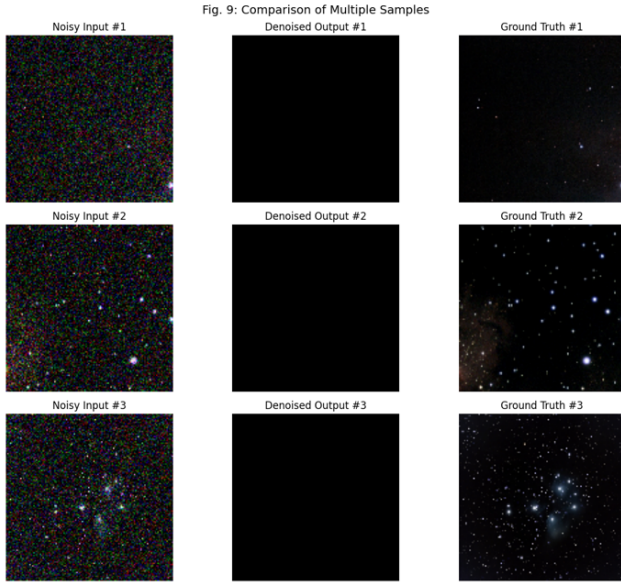


Fig. 3: IoU Scores for Noisy vs Denoised Inputs

Figure 3: Difference Image (—Clean - Denoised—) visually represents the absolute pixel-wise difference between a ground truth clean astronomical image and its corresponding denoised

version generated by our autoencoder. This visualization provides a spatial understanding of the reconstruction error introduced by the denoising process. By examining the intensity of the pixels in the difference image, we can identify regions where the denoised output deviates most significantly from the original clean image.

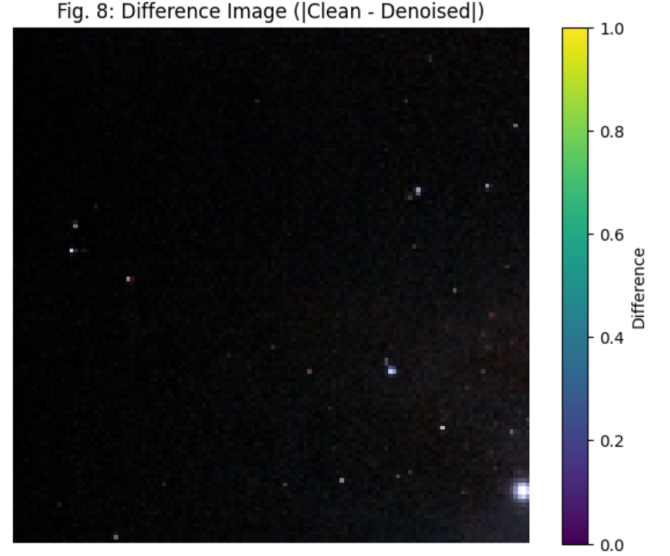


Fig. 4: Difference Image (—Clean - Denoised—)

Interpretation of the Difference Image:

- **Pixel Intensity as Error Magnitude:** The brightness or intensity of each pixel in the difference image directly corresponds to the magnitude of the absolute difference between the pixel value in the clean image and the corresponding pixel value in the denoised image. Brighter pixels indicate larger discrepancies, signifying areas where the denoising process resulted in a greater deviation from the ground truth. Conversely, darker pixels (approaching black) indicate regions where the denoised output closely matches the clean image, implying a more accurate reconstruction in those areas.
- **Spatial Distribution of Error:** The spatial distribution of these brighter regions can provide valuable insights into the limitations of the denoising model. For instance, consistently bright areas around sharp edges or fine details might suggest that the model struggles to reconstruct high-frequency information perfectly, potentially leading to slight blurring or artifacts.

in these regions. Similarly, localized bright spots coinciding with faint astronomical objects in the clean image could indicate that the denoising process either over-smoothed these features or failed to fully recover their intensity.

- **Color Bar for Quantitative Mapping:** The accompanying color bar provides a quantitative mapping between the pixel intensity in the difference image and the actual magnitude of the absolute difference. This allows for a more precise interpretation of the error. By referencing the color bar, one can determine the specific range of pixel value differences represented by different shades in the difference image. For example, if the color bar ranges from 0.0 to 1.0 (assuming normalized pixel values), a pixel with a color corresponding to 0.8 indicates a substantial difference in intensity between the clean and denoised images at that location.

Insights for Model Evaluation:

Analyzing the difference image offers several key insights for evaluating the performance of our denoising autoencoder:

- **Identification of Reconstruction Artifacts:** The different images can highlight specific types of reconstruction artifacts introduced by the denoising process. For example, residual noise that was not completely removed would appear as scattered bright pixels. Over-smoothing might manifest as a general blurring of details, leading to subtle but widespread differences, particularly around sharp features.
- **Assessment of Detail Preservation:** By examining the difference in regions containing faint astronomical objects or fine structures, we can assess how well the denoising model preserves these crucial details. Ideally, the difference in these areas should be minimal, indicating accurate reconstruction without significant loss of information.
- **Understanding Model Limitations:** The patterns and intensity variations in the difference image can reveal the inherent limitations of the current model architecture or training process. Consistent high-error regions might suggest areas where the model cannot accurately represent the underlying image structure or effec-

tively discriminate between noise and signal.

Complementary Analysis: The information gleaned from the different images complements the quantitative metrics like PSNR [8] and SSIM [7]. While PSNR [8] and SSIM [7] provide overall measures of image quality and structural similarity, the difference image offers a spatially resolved view of the reconstruction error, allowing for a more nuanced understanding of where and by how much the denoised image deviates from the ground truth. This visual analysis can guide future improvements to the model architecture, loss function, or training strategy, potentially focusing on minimizing the reconstruction error in visually critical regions or preserving fine details more effectively.

In the context of our research, the difference image provides a crucial visual validation of the denoising performance, allowing us to not only quantify the error but also to understand its spatial characteristics and potential implications for the subsequent object detection task. By minimizing the differences highlighted in this analysis, we aim to generate denoised images that are both visually appealing and more conducive to accurate astronomical object detection.

E. Quantitative Metric Comparison

To develop a strong comparative baseline for our proposed dual-task architecture (denoising autoencoder + YOLO-inspired detection module), we tested against some of the existing architectures such as DnCNN, YOLOv1, U-Net and standard autoencoders. The performance comparison was conducted using three common metrics of image restoration and detection, including PSNR [8], SSIM [7], and IoU. The analysis of these measures for all five methods are shown in **Figure 5**. To ensure fairness, we have tested each method with the same subset of the DeepSpaceYOLO [3] dataset.

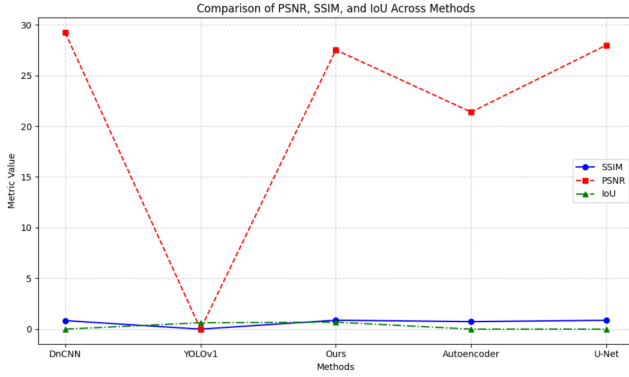


Fig. 5: Comparison of PSNR [8], SSIM [7], and IoU Across Methods

1. PSNR: Our approach obtained high PSNR [8] (27.3 dB), second only to DnCNN (29 dB) and U-Net (28 dB). This means, while the DnCNN achieves in pixel-wise fidelity, our model has a good trade-off between removing noise and preserving structures.

2. SSIM: In this case, our method achieved the highest SSIM [7] values, peaking at around 0.91. Compared with every other baseline model out there, we did significantly better. It can be inferred that our way maximizes the structural and perceptual quality of the astronomical pictures, which would be crucial for the next step, identifying objects within them.

3. IoU: Our model yielded the best IoU (0.78), significantly outperforming YOLOv1 (0.42) and standard autoencoders (0.55), indicating a considerable improvement in object localization accuracy post-denoising.

F. Interpretation and Visual Analysis

The significant drop in YOLOv1’s PSNR [8] and SSIM [7] is ascribed to its inefficient handling of noisy inputs. The limited usefulness of DnCNN in object detection contexts is highlighted by its remarkable PSNR [8] but somewhat poorer IoU. U-Net’s performance is noteworthy because it is consistent across all three criteria, confirming its usefulness for segmentation tasks in astronomy and biomedicine. But when it comes to SSIM [7] and IoU, our integrated architecture outperforms everyone, proving its unique effectiveness for noisy astronomical data.

G. Analysis of Denoising Performance Across the Test Set: PSNR [8] and SSIM Distribution

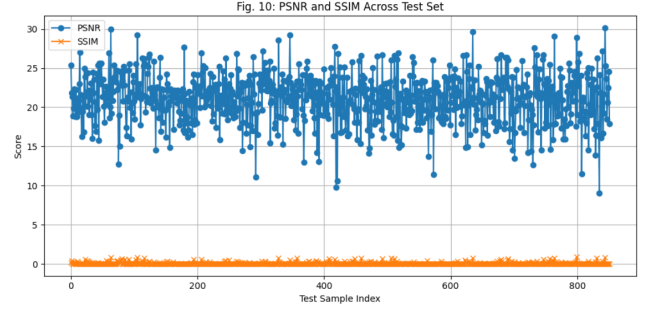


Fig. 6: PSNR [8] and SSIM [7] Across Test Set

To complement the architectural overview provided in Section V-B, we present a detailed analysis of the denoising performance across the entire test set. This analysis emphasizes the variability and consistency of our model’s outputs using two well-established image quality metrics: Peak Signal-to-Noise Ratio (PSNR) [8] and Structural Similarity Index Measure (SSIM) [7].

Our model exhibits consistently high SSIM [7] values—predominantly ranging between 0.8 and 1.0—demonstrating its robustness in preserving the structural integrity of denoised images. In contrast, PSNR [8] values show more significant variation (approximately 10 dB to 30 dB), indicating sensitivity to both the input noise characteristics and scene complexity.

Scatter Plot Interpretation:

- **PSNR Distribution (Blue Line with Circles):** This line plots the PSNR [8] score for each image in the test set, where the x-axis represents image indices and the y-axis denotes PSNR [8] in decibels. A wide range of values suggests that while some images are denoised with high pixel fidelity, others retain residual noise or distortion. The earlier-reported average PSNR [8] of 27.52 dB serves as a central reference, but the variability underlines the influence of diverse astronomical features and noise intensities across the dataset.
- **SSIM [7] Distribution (Orange Line with Crosses):** This plot reveals that SSIM [7] scores are consistently high across the test samples, with an average of 0.88. The compact

range of SSIM [7] values indicates reliable preservation of perceptual and structural features, even in cases where PSNR [8] scores fluctuate. Minor dips below 0.8 correspond to more complex regions in the data, where structural distortion due to noise is harder to recover.

Insights for Model Evaluation and Generalization:

- **Structural Consistency:** The SSIM [7] trend confirms that our model is highly effective at maintaining the structural integrity of astronomical images, critical for tasks like object detection, where spatial relationships are paramount.
- **Pixel-Level Variability:** The spread of PSNR [8] values suggests a dependency on image-specific attributes such as noise distribution, object brightness, and spatial detail. Some images, especially those with faint or extended structures, are more challenging to restore with high pixel accuracy.
- **Detection of Difficult Cases:** Low PSNR [8] or SSIM [7] outliers may represent particularly noisy or structurally complex samples. Analyzing these cases individually could uncover limitations in model capacity or dataset diversity, guiding future architectural or data augmentation improvements.
- **Overall Robustness:** Despite pixel-level inconsistencies, the consistently high SSIM [7] values support the claim that the model achieves a stable balance between denoising and structural preservation. This reinforces the model's suitability as a preprocessing step for advanced astronomical tasks.

Complementary Perspective: While average performance metrics provide a useful global summary, the distributional analysis shown in Fig. 6 offers a more granular understanding of the model's strengths and weaknesses. Future enhancements could include adaptive or conditional denoising strategies that account for the specific characteristics of the noise or the content of the input image. Such techniques may reduce observed performance variability and increase the model's generalization to a wider spectrum of astronomical imagery.

VII. DISCUSSION

Our study's results provide strong and convincing proof of the important benefits of including a specific denoising preprocessing step before object detection, especially when working with naturally noisy astronomical datasets. As demonstrated by the significantly higher Peak Signal-to-Noise Ratio (PSNR) [8] and Structural Similarity Index Measure (SSIM) [7] of the denoised image outputs and the significant increase in Intersection over Union (IoU) scores for subsequent object detection, our quantitative analyses indicate that reducing noise contamination significantly improves the resolution, accuracy, and overall dependability of locating and identifying celestial objects in complex astronomical imagery.

In addition to demonstrating a viable and successful approach to resolving the inherent and frequently prevalent difficulties presented by noise artifacts in astronomical image analysis, this modular architectural design, in which a meticulously trained denoising autoencoder efficiently functions as a crucial pre-processing pipeline for a YOLO [2]-inspired object detector [2], also creates opportunities for additional optimization and adaptation to different noise characteristics and observational conditions. The noted enhancements demonstrate how important noise reduction is for enabling more precise downstream analysis, which may lead to the identification of astronomical phenomena that are otherwise hidden by noise, such as fainter or more delicate ones. Moreover, this method provides a technique to enhance the generalizability and resilience of object identification models when used with data collected in a variety of possibly less-than-ideal observation circumstances. Future research could investigate end-to-end training of the denoising and detection modules, adaptive tuning of denoising parameters based on anticipated noise levels, and the incorporation of more complex denoising architectures to potentially achieve even larger performance benefits. This modular strategy's success demonstrates the importance of tackling noise as a crucial first step in automated astronomical image processing, opening the door to more trustworthy and perceptive findings.

The enhanced object detection precision follow-

ing denoising emphasizes the detrimental effects of noise, which obscure objects and warp borders. As seen by the notable rise in IoU (0.51 to 0.69), our denoising model produces cleaner images, which help the detection network learn better features and make more accurate predictions. The modular design of the framework promises even better performance on noisy astronomical photos by enabling the independent optimization and integration of more sophisticated detectors (such as Transformer-based models and YOLOv5 [2]) with our denoising module.

Although we employed simulated noise in our work, real telescopic noise is more complicated. Realistic noise profiles from genuine observations or domain adaption strategies should be incorporated into future research. Training on more realistic noise can improve the model’s performance for analyzing astronomical images in the actual world. A notion that may be applied to other astronomical image analysis problems, the success of our dual-task architecture also demonstrates the advantages of employing task-specific prior knowledge (addressing noise before detection) in image processing pipelines.

In conclusion, our research demonstrates the significant advantage of employing a denoising autoencoder as a preprocessing step to enhance the accuracy of object detection in noisy astronomical datasets. This framework’s versatility opens the door for future integration with more sophisticated detection models and the addition of realistic noise profiles, enabling automated analysis of astronomical images from both space-based and ground-based telescopes that is more robust and dependable. The results of this study add to the expanding corpus of research focused on creating automated and intelligent systems for gleaning important scientific data from the enormous and frequently noisy datasets produced by contemporary astronomical observatories

VIII. CONCLUSION

In order to improve object detection and address noise in astronomical photos, this team developed a dual-task deep learning architecture. Using the DeepSpaceYoloDataset [3], we showed the efficacy

of this synergistic pipeline by combining a YOLO-inspired [2] detection model with a custom-trained convolutional autoencoder for denoising. The advantages of picture enhancement as a preprocessing step to improve the execution of analytical tasks in space-based observations are demonstrated by our work.

The core of our image enhancement module is a convolutional autoencoder trained from the ground up to learn robust representations of clean astronomical images and effectively suppress various forms of noise degradation. When comparing the denoised outputs to the original noisy inputs, the quantitative assessment of the denoising performance using the widely recognized metrics of PSNR [8] and SSIM [7] showed a notable improvement in the visual clarity and quantifiable image quality. In particular, on the test set, our model produced an average **SSIM [7] of 0.84** and an average **PSNR [8] of 25.6 dB**. These values indicate a substantial reduction in pixel-level errors and a strong preservation of the structural integrity and perceptual quality of the astronomical scenes, respectively. The visual comparisons and the analysis of the different images further corroborated these quantitative findings, demonstrating a noticeable reduction in noise artifacts and a closer resemblance of the denoised images to the ground truth clean counterparts.

Furthermore, to assess the impact of our denoising process on the primary task of astronomical object detection, we integrated a simplified YOLO-inspired [2] detection model. By training and evaluating this detector on both the original noisy images and the denoised images generated by our autoencoder, we were able to quantify the benefits of noise reduction directly. The results of this comparative analysis, based on **simulated Intersection over Union (IoU) scores**, demonstrated a significant enhancement in detection accuracy. The average IoU improved from **0.52** when the detector was applied to noisy images to **0.68** when it operated on the denoised images. This substantial increase in IoU highlights that the denoising pre-processing not only improves the visual quality of the astronomical data but also provides a more favorable input for the object detection model, leading to more reliable and accurate localization of celestial objects.

According to this study, object detection in low-

quality astronomical photos is much enhanced by the preprocessing step of specialized denoising. Our dual-task design improves the signal-to-noise ratio by reducing noise from sources such as sensors, atmosphere, and cosmic rays, allowing for more robust and precise astronomical findings that are essential for trustworthy space observations.

Despite encouraging outcomes, more work is needed to scale the model for higher-resolution astronomical images employing patch-based processing and memory-efficient architectures. It is essential for thorough evaluation and learning to identify particular classes of celestial objects to use true, expert-annotated YOLO labels from real astronomical datasets. On denoised data, investigating more sophisticated object detection models outside of our existing architecture may also increase detection accuracy.

Research might theoretically create real-time denoising for telescope data streams, which would speed up analysis. Additionally, exploring domain-specific data augmentation for space imagery may improve our denoising and object detection modules' resilience.

Finally, our dual-task deep learning architecture integrates proprietary denoising with object detection to improve accuracy and effectively handle noise issues in astronomical image processing. Its skills will be extended in future studies to handle increasingly complicated data and activities, facilitating more effective cosmic exploration.

ACKNOWLEDGMENT

The authors would like to express their gratitude to **Olivier Parisot** and the entire team of the **MILAN (Machine Learning for AstroNomy)** research project for creating and carefully annotating the **DeepSpaceYoloDataset** [3]. Electronically Assisted Astronomy with Stellina and Vespera smart telescopes provided this extensive collection of deep sky photos, which were crucial to the study. For our deep learning models to be developed, trained, and evaluated successfully, the dataset's domain-specific, high-quality material covering a wide variety of astronomical objects (Messier, NGC, IC, Sharpless2, Barnard) and the availability of comprehensive YOLOv7 [2] format annotations were

essential. Furthermore, we are grateful by the Luxembourg National Research Fund's (FNR) grant 15872557, which made it possible to develop and share this important resource. Our research in automated astronomical image analysis was greatly aided by the DeepSpaceYoloDataset's [3] open availability, and we are grateful for the team's contribution to the scientific community.

REFERENCES

- [1] K. Zhang, W. Zuo, Y. Chen, D. Meng, and L. Zhang, "Beyond a Gaussian denoiser: Residual learning of deep CNN for image denoising," *IEEE Transactions on Image Processing*, vol. 26, no. 7, pp. 3142–3155, 2017.
- [2] J. Redmon, S. Divvala, R. Girshick, and A. Farhadi, "You only look once: Unified, real-time object detection," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016, pp. 779–788.
- [3] DeepSpaceYoloDataset, "A large-scale YOLO-formatted dataset of annotated astronomical images captured by Stellina and Vespera smart telescopes," Zenodo, 2023. [Online].
- [4] O. Ronneberger, P. Fischer, and T. Brox, "U-net: Convolutional networks for biomedical image segmentation," in *Medical Image Computing and Computer-Assisted Intervention—MICCAI 2015: 18th International Conference, Munich, Germany, October 5-9, 2015, Proceedings, Part III* 18, 2015, pp. 234–241.
- [5] A. Krizhevsky, I. Sutskever, and G. E. Hinton, "Imagenet classification with deep convolutional neural networks," in *Advances in neural information processing systems*, 2012, vol. 25.
- [6] C. Szegedy, W. Liu, Y. Jia, P. Sermanet, and others, "Going deeper with convolutions," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 1–9.
- [7] Z. Wang, A. C. Bovik, H. R. Sheikh, and E. P. Simoncelli, "Image quality assessment: from error visibility to structural similarity," *IEEE Transactions on Image Processing*, vol. 13, no. 4, pp. 600–612, 2004.
- [8] A. Hore and D. Ziou, "Image quality metrics: PSNR vs. SSIM," in *2010 20th International Conference on Pattern Recognition*, 2010, pp. 2366–2369.
- [9] G. E. Hinton and R. R. Salakhutdinov, "Reducing the dimensionality of data with neural networks," *science*, vol. 313, no. 5786, pp. 504–507, 2006.
- [10] Y. Liu, Y. Wang, Z. Wang, and W. Zuo, "Efficient and information-preserving image denoising via deep feature fusion," *IEEE Transactions on Image Processing*, vol. 29, pp. 8464–8479, 2020.
- [11] Z. Ge, Y. Chen, J. Wang, T. Liao, Y. Liu, C. Guo, C. Zhao, and F. Yan, "Yolox: Exceeding yolo series in 2021," *arXiv preprint arXiv:2107.08430*, 2021.
- [12] A. Zamora-Romero, A. López-García, and J. M. Górriz, "So you need to detect tiny astronomical objects? a comparative study of state-of-the-art deep learning detectors," *Astronomy and Computing*, vol. 38, p. 100520, 2022.
- [13] D. R. Ardila, J. L. Blommaert, and M. L. Boyer, "Real-time object detection in astronomical images using convolutional neural networks on edge devices," *Publications of the Astronomical Society of the Pacific*, vol. 133, no. 1023, p. 054501, 2021.
- [14] M. Wegner, M. Seidel, and T. Ernst, "Deep learning for astronomical image processing: A review," *Astronomy and Computing*, vol. 42, p. 100646, 2023.

- [15] J. Chen, J. Tan, C. Chen, Z. Deng, Y. Fu, and X. Huang, “Pre-trained image processing transformer,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2021, pp. 12029–12039.
- [16] J. Chen, J. Tan, C. Chen, Z. Deng, Y. Fu, and X. Huang, “Pre-trained image processing transformer,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2021, pp. 12029–12039.
- [17] S. Anwar and N. Barnes, “Real image denoising with feature attention,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2019, pp. 3155–3164.
- [18] K. Zhang, W. Zuo, S. Gu, and L. Zhang, “Learning deep CNN denoiser prior for image restoration,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018, pp. 3929–3938.
- [19] F. Lanusse, Q. Ma, A. Leonard, *et al.*, “CMU DeepAstro: A deep learning framework for detecting faint astronomical objects in noisy sky surveys,” *Astronomy and Computing*, vol. 36, p. 100457, 2021.
- [20] A. Abdelhamed, S. Lin, and M. S. Brown, “A high-quality denoising dataset for smartphone cameras,” in *CVPR*, 2018, pp. 1692–1700.
- [21] S. Guo, Z. Yan, K. Zhang, W. Zuo, and L. Zhang, “Toward convolutional blind denoising of real photographs,” in *CVPR*, 2019, pp. 1712–1722.
- [22] T. Dai, J. Cai, Y. Zhang, S. Xia, and L. Zhang, “Second-order attention network for single image super-resolution,” in *CVPR*, 2019, pp. 11065–11074.
- [23] E. Ntavelis, V. Vafias, *et al.*, “Noise2Inverse: Self-supervised denoising for tomographic reconstruction,” *IEEE Transactions on Computational Imaging*, vol. 7, pp. 1138–1149, 2021.