

NEXUS SETUP AND INTEGRATED TO JENKINS


STEP-1: LAUNCH INSTANCE WITH **C7I-FLEX.LARGE** AND **8081** PORT AND **20 GB** OF EBS VOLUME

STEP-2: Install Nexus

- `yum install java-17-amazon-corretto -y`
- `cd /opt`
- `wget https://download.sonatype.com/nexus/3/nexus-3.91.0-07-linux-x86_64.tar.gz`
- `tar -zxvf nexus-3.91.0-07-linux-x86_64.tar.gz`
- `useradd nexus`
- `chown -R nexus:nexus nexus-3.91.0-07 sonatype-work`
- `su - nexus`
- `cd /app/nexus-3.91.0-07/bin/`
- `./nexus start`

STEP-3: CONNECT TO NEXUS (public:8081)

AFTER LOGIN INTO NEXUS SIGN OUT FROM THE DASHBOARD, BECAUSE THAT IS THE DEFAULT PAGE, WE NEED TO CREATE OUR BY OWN

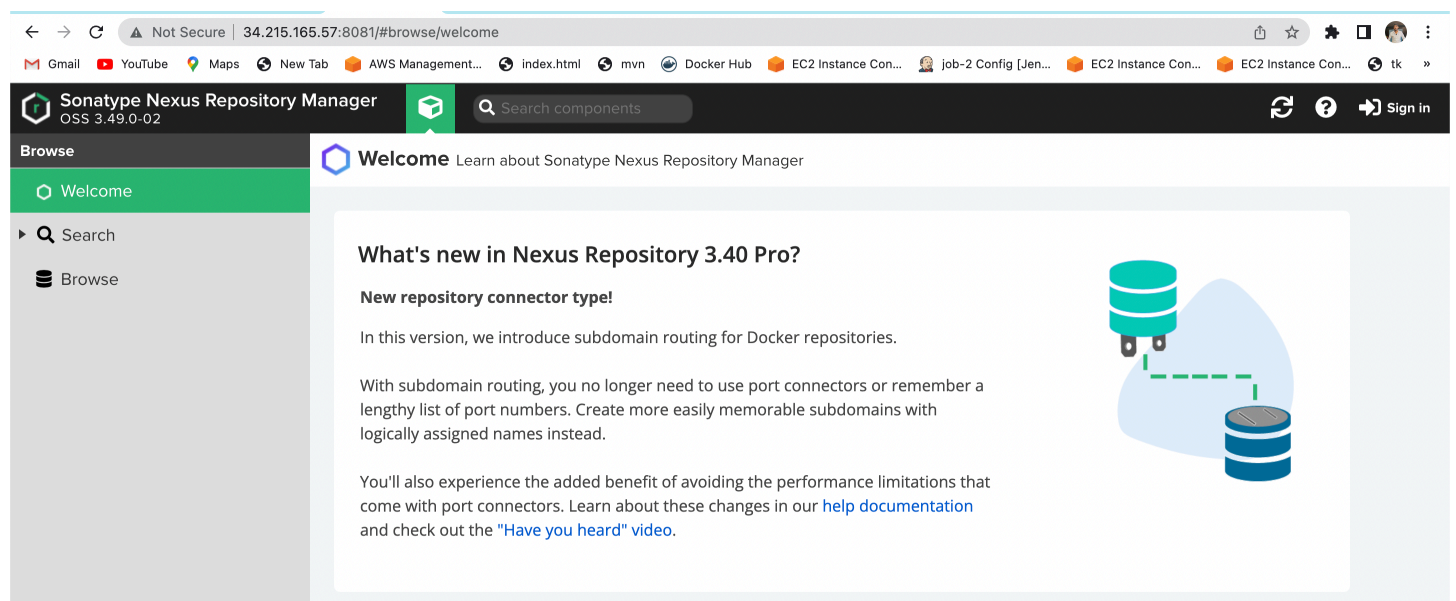



CLICK ON **SIGN-IN**

IT WILL ASKS THE USER NAME & PASSWORD

USERNAME: admin

PASSWORD: cat /app/sonatype-work/nexus3/admin.password

use this command in our server to get the password and paste it into our nexus dashboard

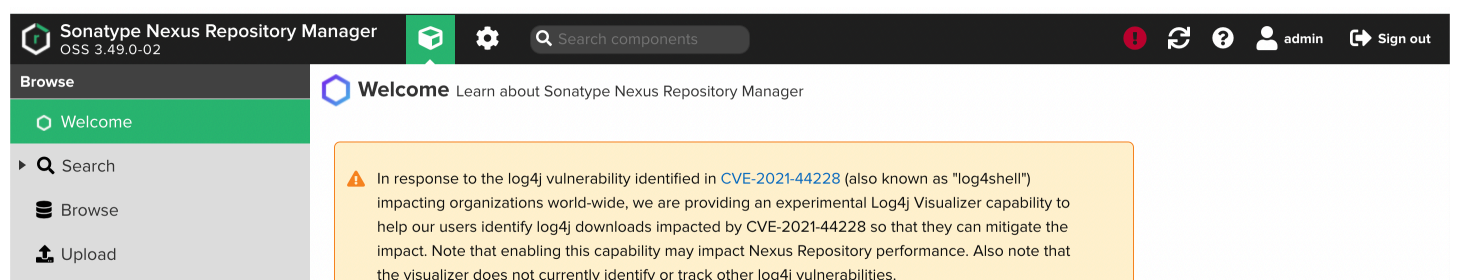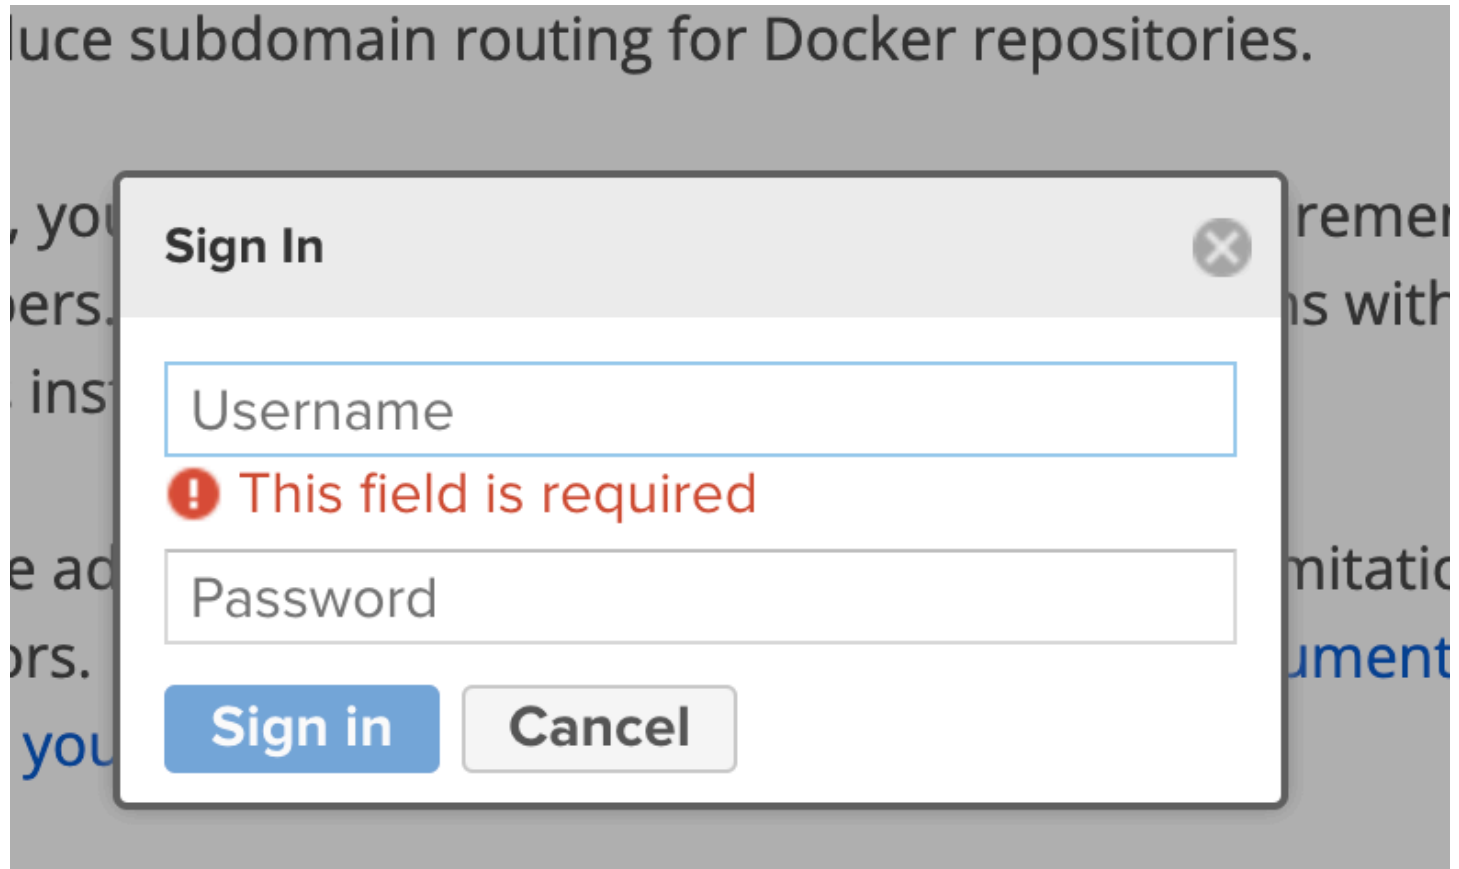

NOW GO TO SERVER ADMINISTRATION AND CONFIGURATION

SELECT REPOSITORIES

 Create repository

 Filter

	Name ↑	Type	Format	Status	URL	Health check	IQ Policy Vi...	
	maven-central	proxy	maven2	Online - Ready to Connect	 copy	Analyze		>
	maven-public	group	maven2	Online	 copy			>
	maven-releases	hosted	maven2	Online	 copy			>
	maven-snapshots	hosted	maven2	Online	 copy			>
	nuget-group	group	nuget	Online	 copy			>
	nuget-hosted	hosted	nuget	Online	 copy			>
	nuget.org-proxy	proxy	nuget	Online - Remote Available	 copy	Analyze		>

 **sonatype nexus repository**
Community Edition

 Dashboard

 Search 

 Browse

 Upload

 Settings

SELECT CREATE-REPOSITORY

Recipe ↑	
 apt (hosted)	>
 apt (proxy)	>
 bower (group)	>
 bower (hosted)	>
 bower (proxy)	>
 cocoapods (proxy)	>
 conan (proxy)	>
 conda (proxy)	>
 docker (group)	>
 docker (hosted)	>
 docker (proxy)	>
 gitlfs (hosted)	>
 go (group)	>
 go (proxy)	>
 helm (hosted)	>
 helm (proxy)	>
 maven2 (group)	>
 maven2 (hosted)	>
 maven2 (proxy)	>
 npm (group)	>
 npm (hosted)	>

SELECT MAVEN2(HOSTED)

Name:

A unique identifier for this repository

! This field is required

Online:
☒ If checked, the repository accepts incoming requests

Maven 2

Version policy:

What type of artifacts does this repository store?

Release

Layout policy:

Validate that all paths are maven artifact or metadata paths

Strict

Content Disposition:

Add Content-Disposition header as 'Attachment' to disable some content from being inline in a browser.

Inline

GIVE REPOSITORY NAME AS myapp-releases and click on create repositories



Repositories

Manage repositories

+

Create repository

Filter

	Name ↑	Type	Format	Status	URL	Health check	IQ Policy Vi...	
	maven-central	proxy	maven2	Online - Ready to Connect	 copy	Analyze		>
	maven-public	group	maven2	Online	 copy			>
	maven-releases	hosted	maven2	Online	 copy			>
	maven-snapshots	hosted	maven2	Online	 copy			>
	myapp-releases	hosted	maven2	Online	 copy			>
	nuget-group	group	nuget	Online	 copy			>
	nuget-hosted	hosted	nuget	Online	 copy			>
	nuget.org-proxy	proxy	nuget	Online - Remote Available	 copy	Analyze		>

now you can see our repository created in dashboard

NOW GO TO JENKINS AND INSTALL PLUGIN "**nexus artifactory uploader**"

NOW GO AND CREATE A JOB

GIT: URL OF OUR PROJECT

Dashboard > job-1 > Configuration

Configure

General

Source Code Management

Build Triggers

Build Environment

Build Steps

Post-build Actions

None

Git

Repositories

Repository URL

https://github.com/devops0014/one.git

Credentials

- none -

Add

Advanced

Add Repository

ADD BUILD STEP: invoke top-level maven targets

Build Steps

Invoke top-level Maven targets

Goals

clean package

Advanced

ADD BUILD STEP: Nexus artifact uploader

Nexus artifact uploader

Nexus Details

Nexus Version

NEXUS3

Protocol

HTTP

Nexus URL ?

34.25.165.57:8081

Credentials

admin/***** (nexus)

Add

GroupId

in.javahome

Version

8.2.4

Repository ?

ashokit-releases

Artifacts

Artifact

ArtifactId

myweb

Type ?

.war

Classifier ?

File ?

target/myweb-8.3.1.war

Add

NOW GO TO POST BUILD ACTIONS: deploy war/ear to container

Configure

General

Source Code Management

Build Triggers

Build Environment

Build Steps

Post-build Actions

Post-build Actions

Deploy war/ear to a container

WAR/EAR files ?

target/*.war

Context path ?

swiggy

Containers

Tomcat 9.x Remote

Credentials

tomcat/***** (tomcat credentials) ▼

Add ▼

Tomcat URL ?

http://52.25.184.150:8080/

NOW SAVE AND BUILD THE JOB

IF THE BUILD GETS SUCCESS:

then we can see that war files are stored in nexus repository