



# **s1kd-tools**

## **Documentation**

**S1KDTOOLS-KHZAE-00000-00**  
**Issue No. 031, 2020-09-01**

## List of effective data modules

The listed documents are included in issue 031, dated 2020-09-01, of this publication.

C = Changed data module

N = New data module

Document title	Data module code	Issue date	No. of pages	Applicable to
Title page	<a href="#">S1KDTOOLS-A-00-00-00-00A-001A-D</a>	2020-09-01	1	Version: 3.3.0
List of effective data modules	<a href="#">S1KDTOOLS-A-00-00-00-00A-00SA-D</a>	2020-09-01	5	Version: 3.3.0
Highlights	<a href="#">S1KDTOOLS-A-00-00-00-00A-00UA-D</a>	2020-09-01	2	Version: 3.3.0
Table of contents	<a href="#">S1KDTOOLS-A-00-00-00-00A-009A-D</a>	2020-09-01	5	Version: 3.3.0
List of abbreviations	<a href="#">S1KDTOOLS-A-00-00-00-00A-005A-D</a>	2020-05-01	1	Version: 3.3.0
s1kd-tools - Description	<a href="#">S1KDTOOLS-A-00-00-00-00A-040B-D</a>	2020-05-01	1	Version: 3.3.0
s1kd-tools - Introduction	<a href="#">S1KDTOOLS-A-00-00-00-00A-018A-D</a>	2020-05-01	3	Version: 3.3.0
s1kd-tools - Building, installing and uninstalling	<a href="#">S1KDTOOLS-A-00-00-00-00A-920A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-tools - Usage examples	<a href="#">S1KDTOOLS-A-00-00-00-00A-130A-D</a>	2020-09-01	14	Version: 3.3.0
s1kd-tools - .defaults file identifiers	<a href="#">S1KDTOOLS-A-00-00-00-00A-014A-D</a>	C 2020-09-01	6	Version: 3.3.0
s1kd-tools - Issue compatibility	<a href="#">S1KDTOOLS-A-00-00-00-00A-C30A-D</a>	2020-05-01	3	Version: 3.3.0
s1kd-tools workflow - Standard procedure for processing S1000D documents	<a href="#">S1KDTOOLS-A-36-00-00-00A-258A-D</a>	N 2024-12-30	4	Version: 3.3.0
s1kd-defaults - Description	<a href="#">S1KDTOOLS-A-30-00-00-00A-040A-D</a>	C 2020-09-01	4	Version: 3.3.0



Document title	Data module code	Issue date	No. of pages	Applicable to
s1kd-dmrl - Description	<a href="#">S1KDTOOLS-A-22-00-00-00A-040A-D</a>	C 2020-09-01	2	Version: 3.3.0
s1kd-newcom - Description	<a href="#">S1KDTOOLS-A-16-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-newddh - Description	<a href="#">S1KDTOOLS-A-17-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-newdm - Description	<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	C 2020-09-01	8	Version: 3.3.0
s1kd-newdml - Description	<a href="#">S1KDTOOLS-A-21-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-newimf - Description	<a href="#">S1KDTOOLS-A-13-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-newpm - Description	<a href="#">S1KDTOOLS-A-12-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-newsmc - Description	<a href="#">S1KDTOOLS-A-35-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-newupf - Description	<a href="#">S1KDTOOLS-A-31-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-addicn - Description	<a href="#">S1KDTOOLS-A-27-00-00-00A-040A-D</a>	C 2020-09-01	2	Version: 3.3.0
s1kd-ls - Description	<a href="#">S1KDTOOLS-A-06-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-ref - Description	<a href="#">S1KDTOOLS-A-08-00-00-00A-040A-D</a>	C 2020-09-01	7	Version: 3.3.0
s1kd-metadata - Description	<a href="#">S1KDTOOLS-A-09-00-00-00A-040A-D</a>	C 2020-09-01	4	Version: 3.3.0
s1kd-mvref - Description	<a href="#">S1KDTOOLS-A-19-00-00-00A-040A-D</a>	C 2020-09-01	2	Version: 3.3.0
s1kd-sns - Description	<a href="#">S1KDTOOLS-A-34-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-upissue - Description	<a href="#">S1KDTOOLS-A-05-00-00-00A-040A-D</a>	C 2020-09-01	5	Version: 3.3.0
s1kd-appcheck - Description	<a href="#">S1KDTOOLS-A-11-00-00-00A-040A-D</a>	C 2020-09-01	9	Version: 3.3.0



Document title	Data module code	Issue date	No. of pages	Applicable to
s1kd-brexcheck - Description	<a href="#">S1KDTOOLS-A-04-00-00-00A-040A-D</a>	C 2020-09-01	7	Version: 3.3.0
s1kd-refs - Description	<a href="#">S1KDTOOLS-A-25-00-00-00A-040A-D</a>	C 2020-09-01	6	Version: 3.3.0
s1kd-repcheck - Description	<a href="#">S1KDTOOLS-A-18-00-00-00A-040A-D</a>	C 2020-09-01	5	Version: 3.3.0
s1kd-validate - Description	<a href="#">S1KDTOOLS-A-02-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-acronyms - Description	<a href="#">S1KDTOOLS-A-20-00-00-00A-040A-D</a>	C 2020-09-01	4	Version: 3.3.0
s1kd-aspp - Description	<a href="#">S1KDTOOLS-A-26-00-00-00A-040A-D</a>	C 2020-09-01	13	Version: 3.3.0
s1kd-flatten - Description	<a href="#">S1KDTOOLS-A-23-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-fmgen - Description	<a href="#">S1KDTOOLS-A-33-00-00-00A-040A-D</a>	C 2020-09-01	6	Version: 3.3.0
s1kd-icncatalog - Description	<a href="#">S1KDTOOLS-A-32-00-00-00A-040A-D</a>	C 2020-09-01	7	Version: 3.3.0
s1kd-index - Description	<a href="#">S1KDTOOLS-A-28-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-instance - Description	<a href="#">S1KDTOOLS-A-03-00-00-00A-040A-D</a>	C 2020-09-01	20	Version: 3.3.0
s1kd-neutralize - Description	<a href="#">S1KDTOOLS-A-14-00-00-00A-040A-D</a>	C 2020-09-01	3	Version: 3.3.0
s1kd-syncrefs - Description	<a href="#">S1KDTOOLS-A-01-00-00-00A-040A-D</a>	C 2020-09-01	2	Version: 3.3.0
s1kd-uom - Description	<a href="#">S1KDTOOLS-A-10-00-00-00A-040A-D</a>	C 2020-09-01	9	Version: 3.3.0
艦内通訊系統 - Description	<a href="#">S1KDTOOLS-A-41-00-00-00A-040A-D</a>	N 2025-11-23	1	Version: 3.3.0
娛樂系統 - Description	<a href="#">S1KDTOOLS-A-41-10-00-00A-040A-D</a>	N 2025-11-23	1	Version: 3.3.0
警報、安全及警示系統 - Description	<a href="#">S1KDTOOLS-A-41-20-00-00A-040A-D</a>	N 2025-11-23	1	Version: 3.3.0



Document title	Data module code	Issue date	No. of pages	Applicable to
一般與火警警報系統 - Description	<a href="#">S1KDTOOLS-A-41-21-00-00A-040A-D</a>	N 2025-11-23	1	Version: 3.3.0
滅火系統釋放警報 - Description	<a href="#">S1KDTOOLS-A-41-22-00-00A-040A-D</a>	N 2025-11-23	1	Version: 3.3.0
指示、船令及顯示系統 - Description	<a href="#">S1KDTOOLS-A-41-30-00-00A-040A-D</a>	N 2025-11-23	1	Version: 3.3.0
中央時鐘系統 - Description	<a href="#">S1KDTOOLS-A-41-31-00-00A-040A-D</a>	N 2025-11-23	2	Version: 3.3.0
聲力電話系統 - Description	<a href="#">S1KDTOOLS-A-41-40-00-00A-040A-D</a>	N 2025-11-23	2	Version: 3.3.0
測試一 - Description	<a href="#">S1KDTOOLS-A-42-00-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
測試二 - Description	<a href="#">S1KDTOOLS-A-42-10-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
測試三 - Description	<a href="#">S1KDTOOLS-A-42-20-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
多管密封系列 - Description	<a href="#">S1KDTOOLS-A-43-00-00-00A-040A-D</a>	N 2025-11-28	2	Version: 3.3.0
產品物理特性 - Description	<a href="#">S1KDTOOLS-A-43-10-00-00A-040A-D</a>	N 2025-11-28	2	Version: 3.3.0
纜線套管 - Description	<a href="#">S1KDTOOLS-A-43-20-00-00A-040A-D</a>	N 2025-11-28	3	Version: 3.3.0
艦內通訊系統 - Description	<a href="#">S1KDTOOLS-A-79-00-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
娛樂系統 - Description	<a href="#">S1KDTOOLS-A-79-10-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
警報、安全及警示系統 - Description	<a href="#">S1KDTOOLS-A-79-20-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
一般與火警警報系統 - Description	<a href="#">S1KDTOOLS-A-79-21-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
滅火系統釋放警報 - Description	<a href="#">S1KDTOOLS-A-79-22-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
指示、船令及顯示系統 - Description	<a href="#">S1KDTOOLS-A-79-30-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0



Document title	Data module code	Issue date	No. of pages	Applicable to
中央時鐘系統 - Description	<a href="#">S1KDTOOLS-A-79-31-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0
聲力電話系統 - Description	<a href="#">S1KDTOOLS-A-79-40-00-00A-040A-D</a>	N 2025-11-28	1	Version: 3.3.0

## Highlights

The listed changes are introduced in issue 031, dated 2020-09-01, of this publication.

Data module code	Reason for update
<a href="#">S1KDTOOLS-A-00-00-00-00A-014A-D</a>	Replace includePrevSnsTitle with snsLevels.
<a href="#">S1KDTOOLS-A-30-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-22-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-16-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-17-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
	Replace -P (--two-sns-levels) with -P (--sns-levels).
<a href="#">S1KDTOOLS-A-21-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-13-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-12-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-35-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-31-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-27-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-06-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-08-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-09-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-19-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-34-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-05-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
	Add -5 (--print) and -q (--quiet) options.
	Rename -q to -Q.
	Change behaviour of -d and -v options.
<a href="#">S1KDTOOLS-A-11-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
	Add -D (--duplicate) option.
<a href="#">S1KDTOOLS-A-04-00-00-00A-040A-D</a>	Add --xml-catalog parser option.



Data module code	Reason for update
	Add experimental Saxon support.
	Add -N (--omit-issue) option.
<a href="#">S1KDTOOLS-A-25-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-18-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
	Add -D (--dump-xsl), -t (--type) and -X (--xsl) options.
<a href="#">S1KDTOOLS-A-02-00-00-00A-040A-D</a>	Remove -d (--schemas) option.
	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-20-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-26-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
	Remove automatic inclusion of XSLT identity template.
<a href="#">S1KDTOOLS-A-23-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-33-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-32-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-28-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-03-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
	Remove automatic inclusion of XSLT identity template.
	Do not add source ident if the instance ident is the same as the source.
	Change behaviour of -S (--no-source-ident) option and add -3 (--no-repository-ident) option.
	Change behaviour of -H (--list-properties) option.
<a href="#">S1KDTOOLS-A-14-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-01-00-00-00A-040A-D</a>	Add --xml-catalog parser option.
<a href="#">S1KDTOOLS-A-10-00-00-00A-040A-D</a>	Add --xml-catalog parser option.



## Table of contents

The listed documents are included in issue 031, dated 2020-09-01, of this publication.

Document title	Document identifier	Issue date	No. of pages	Applicable to
<b>Front matter</b>				
Title page	<a href="#">S1KDTOOLS-A-00-00-00-00A-001A-D</a>	2020-09-01	1	Version: 3.3.0
List of effective data modules	<a href="#">S1KDTOOLS-A-00-00-00-00A-00SA-D</a>	2020-09-01	5	Version: 3.3.0
Highlights	<a href="#">S1KDTOOLS-A-00-00-00-00A-00UA-D</a>	2020-09-01	2	Version: 3.3.0
Table of contents	<a href="#">S1KDTOOLS-A-00-00-00-00A-009A-D</a>	2020-09-01	5	Version: 3.3.0
List of abbreviations	<a href="#">S1KDTOOLS-A-00-00-00-00A-005A-D</a>	2020-05-01	1	Version: 3.3.0
<b>Introduction</b>				
s1kd-tools - Description	<a href="#">S1KDTOOLS-A-00-00-00-00A-040B-D</a>	2020-05-01	1	Version: 3.3.0
s1kd-tools - Introduction	<a href="#">S1KDTOOLS-A-00-00-00-00A-018A-D</a>	2020-05-01	3	Version: 3.3.0
s1kd-tools - Building, installing and uninstalling	<a href="#">S1KDTOOLS-A-00-00-00-00A-920A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-tools - Usage examples	<a href="#">S1KDTOOLS-A-00-00-00-00A-130A-D</a>	2020-09-01	14	Version: 3.3.0
s1kd-tools - .defaults file identifiers	<a href="#">S1KDTOOLS-A-00-00-00-00A-014A-D</a>	2020-09-01	6	Version: 3.3.0
s1kd-tools - Issue compatibility	<a href="#">S1KDTOOLS-A-00-00-00-00A-C30A-D</a>	2020-05-01	3	Version: 3.3.0
s1kd-tools workflow - Standard procedure for processing S1000D documents	<a href="#">S1KDTOOLS-A-36-00-00-00A-258A-D</a>	2024-12-30	4	Version: 3.3.0
<b>Tools for generating data</b>				
s1kd-defaults - Description	<a href="#">S1KDTOOLS-A-30-00-00-00A-040A-D</a>	2020-09-01	4	Version: 3.3.0



Document title	Document identifier	Issue date	No. of pages	Applicable to
s1kd-dmrl - Description	<a href="#">S1KDTOOLS-A-22-00-00-00A-040A-D</a>	2020-09-01	2	Version: 3.3.0
s1kd-newcom - Description	<a href="#">S1KDTOOLS-A-16-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-newddn - Description	<a href="#">S1KDTOOLS-A-17-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-newdm - Description	<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	2020-09-01	8	Version: 3.3.0
s1kd-newdml - Description	<a href="#">S1KDTOOLS-A-21-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-newimf - Description	<a href="#">S1KDTOOLS-A-13-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-newpm - Description	<a href="#">S1KDTOOLS-A-12-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-newsmc - Description	<a href="#">S1KDTOOLS-A-35-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-newupf - Description	<a href="#">S1KDTOOLS-A-31-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
<b>Tools for authoring and managing data</b>				
s1kd-addicn - Description	<a href="#">S1KDTOOLS-A-27-00-00-00A-040A-D</a>	2020-09-01	2	Version: 3.3.0
s1kd-ls - Description	<a href="#">S1KDTOOLS-A-06-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-ref - Description	<a href="#">S1KDTOOLS-A-08-00-00-00A-040A-D</a>	2020-09-01	7	Version: 3.3.0
s1kd-metadata - Description	<a href="#">S1KDTOOLS-A-09-00-00-00A-040A-D</a>	2020-09-01	4	Version: 3.3.0
s1kd-mvref - Description	<a href="#">S1KDTOOLS-A-19-00-00-00A-040A-D</a>	2020-09-01	2	Version: 3.3.0
s1kd-sns - Description	<a href="#">S1KDTOOLS-A-34-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-upissue - Description	<a href="#">S1KDTOOLS-A-05-00-00-00A-040A-D</a>	2020-09-01	5	Version: 3.3.0

**Tools for validating data**



Document title	Document identifier	Issue date	No. of pages	Applicable to
s1kd-appcheck - Description	<a href="#">S1KDTOOLS-A-11-00-00-00A-040A-D</a>	2020-09-01	9	Version: 3.3.0
s1kd-brexcheck - Description	<a href="#">S1KDTOOLS-A-04-00-00-00A-040A-D</a>	2020-09-01	7	Version: 3.3.0
s1kd-refs - Description	<a href="#">S1KDTOOLS-A-25-00-00-00A-040A-D</a>	2020-09-01	6	Version: 3.3.0
s1kd-repcheck - Description	<a href="#">S1KDTOOLS-A-18-00-00-00A-040A-D</a>	2020-09-01	5	Version: 3.3.0
s1kd-validate - Description	<a href="#">S1KDTOOLS-A-02-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
<b>Tools for delivering data</b>				
s1kd-acronyms - Description	<a href="#">S1KDTOOLS-A-20-00-00-00A-040A-D</a>	2020-09-01	4	Version: 3.3.0
s1kd-aspp - Description	<a href="#">S1KDTOOLS-A-26-00-00-00A-040A-D</a>	2020-09-01	13	Version: 3.3.0
s1kd-flatten - Description	<a href="#">S1KDTOOLS-A-23-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-fmgen - Description	<a href="#">S1KDTOOLS-A-33-00-00-00A-040A-D</a>	2020-09-01	6	Version: 3.3.0
s1kd-icncatalog - Description	<a href="#">S1KDTOOLS-A-32-00-00-00A-040A-D</a>	2020-09-01	7	Version: 3.3.0
s1kd-index - Description	<a href="#">S1KDTOOLS-A-28-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-instance - Description	<a href="#">S1KDTOOLS-A-03-00-00-00A-040A-D</a>	2020-09-01	20	Version: 3.3.0
s1kd-neutralize - Description	<a href="#">S1KDTOOLS-A-14-00-00-00A-040A-D</a>	2020-09-01	3	Version: 3.3.0
s1kd-syncrefs - Description	<a href="#">S1KDTOOLS-A-01-00-00-00A-040A-D</a>	2020-09-01	2	Version: 3.3.0
s1kd-uom - Description	<a href="#">S1KDTOOLS-A-10-00-00-00A-040A-D</a>	2020-09-01	9	Version: 3.3.0
<b>艦内通訊系統 (Generated)</b>				
艦内通訊系統 - Description	<a href="#">S1KDTOOLS-A-41-00-00-00A-040A-D</a>	2025-11-23	1	Version: 3.3.0



Document title	Document identifier	Issue date	No. of pages	Applicable to
娛樂系統 - Description	<a href="#">S1KDTOOLS-A-41-10-00-00A-040A-D</a>	2025-11-23	1	Version: 3.3.0
警報、安全及警示系統 - Description	<a href="#">S1KDTOOLS-A-41-20-00-00A-040A-D</a>	2025-11-23	1	Version: 3.3.0
一般與火警警報系統 - Description	<a href="#">S1KDTOOLS-A-41-21-00-00A-040A-D</a>	2025-11-23	1	Version: 3.3.0
滅火系統釋放警報 - Description	<a href="#">S1KDTOOLS-A-41-22-00-00A-040A-D</a>	2025-11-23	1	Version: 3.3.0
指示、船令及顯示系統 - Description	<a href="#">S1KDTOOLS-A-41-30-00-00A-040A-D</a>	2025-11-23	1	Version: 3.3.0
中央時鐘系統 - Description	<a href="#">S1KDTOOLS-A-41-31-00-00A-040A-D</a>	2025-11-23	2	Version: 3.3.0
聲力電話系統 - Description	<a href="#">S1KDTOOLS-A-41-40-00-00A-040A-D</a>	2025-11-23	2	Version: 3.3.0
<b>測試一 (Generated)</b>				
測試一 - Description	<a href="#">S1KDTOOLS-A-42-00-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
測試二 - Description	<a href="#">S1KDTOOLS-A-42-10-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
測試三 - Description	<a href="#">S1KDTOOLS-A-42-20-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
<b>多管密封系列 (Generated)</b>				
多管密封系列 - Description	<a href="#">S1KDTOOLS-A-43-00-00-00A-040A-D</a>	2025-11-28	2	Version: 3.3.0
產品物理特性 - Description	<a href="#">S1KDTOOLS-A-43-10-00-00A-040A-D</a>	2025-11-28	2	Version: 3.3.0
纜線套管 - Description	<a href="#">S1KDTOOLS-A-43-20-00-00A-040A-D</a>	2025-11-28	3	Version: 3.3.0
<b>艦內通訊系統 (Generated)</b>				
艦內通訊系統 - Description	<a href="#">S1KDTOOLS-A-79-00-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
娛樂系統 - Description	<a href="#">S1KDTOOLS-A-79-10-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0



Document title	Document identifier	Issue date	No. of pages	Applicable to
警報、安全及警示系統 - Description	<a href="#">S1KDTOOLS-A-79-20-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
一般與火警警報系統 - Description	<a href="#">S1KDTOOLS-A-79-21-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
滅火系統釋放警報 - Description	<a href="#">S1KDTOOLS-A-79-22-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
指示、船令及顯示系統 - Description	<a href="#">S1KDTOOLS-A-79-30-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
中央時鐘系統 - Description	<a href="#">S1KDTOOLS-A-79-31-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0
聲力電話系統 - Description	<a href="#">S1KDTOOLS-A-79-40-00-00A-040A-D</a>	2025-11-28	1	Version: 3.3.0



## List of abbreviations

BREX	Business Rules EXchange
CIR	Common Information Repository
PCT	Product Cross-reference Table
SNS	Standard Numbering System

## s1kd-tools

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1      General.....	1

#### List of tables

1      References.....	1
------------------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
<a href="https://github.com/kibook/S1000D-XSL-Stylesheets">https://github.com/kibook/S1000D-XSL-Stylesheets</a>	S1000D XSL stylesheets
<a href="https://github.com/kibook/s1kd-tools">https://github.com/kibook/s1kd-tools</a>	s1kd-tools

### *Description*

#### 1      General

**s1kd-tools** are a set of small tools for manipulating S1000D data. They are maintained at <https://github.com/kibook/s1kd-tools>.

This publication is meant to serve as an example of an S1000D data set produced using these tools. The stylesheets used to produce this PDF can be found at <https://github.com/kibook/S1000D-XSL-Stylesheets>

## s1kd-tools

### Introduction

#### Table of contents

Page

Introduction.....	1
References.....	1
Description.....	1
1 政大創新國際學系 (International College of Innovation, NCCU) 三軌課程設計.....	1
1.1 全球治理.....	2
1.2 永續與社會.....	2
1.3 資料分析.....	2

#### List of tables

1	References.....	1
2	課程整理表.....	2
3	corporate training.....	3

#### List of figures

1	ICI 系徽**.....	2
---	---------------	---

### References

Table 1 References

Data module/Technical publication	Title
<a href="https://www.nccu.edu.tw/">https://www.nccu.edu.tw/</a>	nccu 官網

### Description

- 1 政大創新國際學系 (International **College of Innovation**, NCCU)  
三軌課程設計  
全球治理 (Global Governance)  
永續與社會 (Sustainability & Society)  
資料分析 (Data Analytics)  
  
三軌課程各自具備明確的學習方向，但共同目標是讓學生在面對高度變動的全球環境時，具備理解、分析與行動的能力。詳見<https://www.nccu.edu.tw/>



### 1.1 全球治理

此課程軌聚焦於全球政治互動、國際制度與民主相關議題，培養學生對世界局勢的判讀能力與公共參與視野。

### 1.2 永續與社會

此課程軌強調自然、生態、科技與社會之間的關係，引導學生理解當代世界的多重脆弱性，並思考永續發展的可能。

### 1.3 資料分析

此課程軌介紹資料處理、分析與科技應用，使學生能運用量化工具理解社會問題，並在跨領域情境中提出具體解方。

Table 2 課程整理表

課程軌道	核心主題	培養重點
全球治理 (Global Governance)	全球政治與國際制度	世界局勢判讀與公共思辨
永續與社會 (Sustainability & Society)	自然・科技・社會關係	永續思維與社會責任
資料分析 (Data Analytics)	資料處理與科技應用	量化分析與跨領域解決能力



ICN-S1KDTOOLS-A-000000-A-KHZAE-00001-A-001-01

Fig 1 ICI系徽\*\*

*Table 3 corporate training*

<b>tester</b>	<b>time</b>	<b>location</b>
SOIC	0718	Kaohsiung
SOIC	0718	Kaohsiung
SOIC	0718	Kaohsiung

## s1kd-tools

### *Building, installing and uninstalling*

#### Table of contents

Page

Building, installing and uninstalling.....	1
References.....	1
Description.....	1
1 General.....	1
2 Using a package manager.....	2
2.1 Installing.....	2
2.2 Uninstalling.....	2
3 Building from source.....	2
3.1 Requirements.....	2
3.2 Windows build environment.....	2
3.3 Building and installing.....	3
3.4 Uninstalling.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
<a href="http://khzae.net/1/s1000d/s1kd-tools/releases/latest">http://khzae.net/1/s1000d/s1kd-tools/releases/latest</a>	libxml2, libxslt, libexslt
	pandoc
	s1kd2db

### *Description*

#### 1

#### **General**

There are multiple ways to install the s1kd-tools:

- using a package manager and the pre-compiled Debian (.deb) or Red Hat (.rpm) packages
- building from source

## 2 Using a package manager

Debian (.deb) and Red Hat (.rpm) packages are provided to easily install, upgrade or uninstall the s1kd-tools on Linux systems using a package manager. The examples below focus on the standard `dpkg` (for Debian-based distributions) and `rpm` (for Red Hat-based distributions).

### 2.1 Installing

You can download the latest release of the s1kd-tools from <http://khzae.net/1/s1000d/s1kd-tools/releases/latest>. Then use one of the following commands to install it:

#### Debian:

```
# dpkg -i s1kd-tools_[version]_[arch].deb
```

#### Red Hat:

```
# rpm -i s1kd-tools.[version].[arch].rpm
```

### 2.2 Uninstalling

To uninstall using the package manager, use one of the following commands:

#### Debian:

```
# dpkg -r s1kd-tools
```

#### Red Hat:

```
# rpm -e s1kd-tools
```

## 3 Building from source

### 3.1 Requirements

To build the executables:

- coreutils and binutils
- xxd
- pkg-config
- [libxml2](#), [libxslt](#), [libexslt](#)

To build the documentation from source:

- [s1kd2db](#)
- [pandoc](#)

### 3.2 Windows build environment

To build the executables on Windows, an environment such as MinGW or Cygwin is recommended. These provide POSIX-compatible tools, such as make, that allow the s1kd-tools to be built and installed on a Windows system in the same way as on a Linux system.

### 3.3 Building and installing

Run the following commands to build the executables, and install both the executables and documentation:

```
$ make
# make install
```

To change where these are installed, specify the PREFIX make variable. The default value of this variable is /usr/local.

For example:

```
# make PREFIX=/usr install
```

### 3.4 Uninstalling

To uninstall the executables and documentation:

```
# make uninstall
```

Remember to specify the PREFIX make variable if a different prefix was used during installation.

## s1kd-tools

### *Usage examples*

Table of contents	Page
Usage examples.....	1
References.....	2
Description.....	2
1 General.....	2
2 Initial setup.....	2
2.1 .defaults file.....	3
2.2 .dmtypes file.....	3
3 Creating the DMRL and populating the CSDB.....	4
3.1 Adding DMRL entries.....	4
3.2 Populating the CSDB from the DMRL.....	5
3.3 Creating CSDB objects on-the-fly.....	5
4 Data module workflow.....	5
4.1 Inwork data modules.....	6
4.2 Making data modules official.....	6
4.2.1 Validating against the schema.....	6
4.2.2 Validating against a BREX data module.....	7
4.2.3 Checking applicability.....	7
4.2.4 Quality assurance verification.....	8
4.3 Changes to official data modules.....	8
4.4 Deleting data modules.....	9
5 Building publications.....	9
5.1 Publication module content.....	10
5.2 Creating a customized publication.....	10
5.3 Creating a script for publishing.....	11
6 Use with other version control systems.....	12

### List of tables

1	References.....	2
---	-----------------	---

### List of figures

1	Example - Authoring with Vim + MuPDF.....	2
2	新插入的圖片.....	13
3	新插入的圖片.....	14
4	ICI徽章.....	14

## References

Table 1 References

Data module/Technical publication	Title
None	

## Description

### 1 General

This document provides examples of the usage of the **s1kd-tools**.

The sample commands have been written as they would be used on a Linux or other Unix-like system, but should work more-or-less the same on most operating systems. OS-specific commands used in examples (e.g., `mkdir`) may need to be adapted.

```
105  <!--Use shortened, single-line messages to report BREX errors instead of multiline indented messages.-->
106  </ifdef>
107  </ifdef>
108  </ifdef>
109  </ifdef>
110  </ifdef>
111  <!--Specify a list of severity levels for business rules.-->
112  </ifdef>
113  </ifdef>
114  </ifdef>
115  </ifdef>
116  </ifdef>
117  </ifdef>
118  </ifdef>
119  </ifdef>
120  </ifdef>
121  </ifdef>
122  </ifdef>
123  </ifdef>
124  </ifdef>
125  </ifdef>
126  </ifdef>
127  </ifdef>
128  </ifdef>
129  </ifdef>
130  </ifdef>
131  </ifdef>
132  </ifdef>
133  </ifdef>
134  </ifdef>
135  </ifdef>
136  </ifdef>
137  </ifdef>
138  </ifdef>
139  </ifdef>
140  </ifdef>
141  </ifdef>
142  </ifdef>
143  </ifdef>
144  </ifdef>
145  </ifdef>
146  </ifdef>
147  </ifdef>
148  </ifdef>
149  </ifdef>
150  </ifdef>
151  </ifdef>
152  </ifdef>
153  </ifdef>
154  </ifdef>
155  </ifdef>
156  </ifdef>
157  </ifdef>
158  </ifdef>
159  </ifdef>
160  </ifdef>
161  </ifdef>
162  </ifdef>
163  </ifdef>
164  </ifdef>
165  </ifdef>
166  </ifdef>
167  </ifdef>
168  </ifdef>
169  </ifdef>
170  </ifdef>
171  </ifdef>
172  </ifdef>
173  </ifdef>
174  </ifdef>
175  </ifdef>
176  </ifdef>
177  </ifdef>
178  </ifdef>
179  </ifdef>
180  </ifdef>
181  </ifdef>
182  </ifdef>
183  </ifdef>
184  </ifdef>
185  </ifdef>
186  </ifdef>
187  </ifdef>
188  </ifdef>
189  </ifdef>
190  </ifdef>
191  </ifdef>
192  </ifdef>
193  </ifdef>
194  </ifdef>
195  </ifdef>
196  </ifdef>
197  </ifdef>
198  </ifdef>
199  </ifdef>
200  </ifdef>
201  </ifdef>
202  </ifdef>
203  </ifdef>
204  </ifdef>
205  </ifdef>
206  </ifdef>
207  </ifdef>
208  </ifdef>
209  </ifdef>
210  </ifdef>
211  </ifdef>
212  </ifdef>
213  </ifdef>
214  </ifdef>
215  </ifdef>
216  </ifdef>
217  </ifdef>
218  </ifdef>
219  </ifdef>
220  </ifdef>
221  </ifdef>
222  </ifdef>
223  </ifdef>
224  </ifdef>
225  </ifdef>
226  </ifdef>
227  </ifdef>
228  </ifdef>
229  </ifdef>
230  </ifdef>
231  </ifdef>
232  </ifdef>
233  </ifdef>
234  </ifdef>
235  </ifdef>
236  </ifdef>
237  </ifdef>
238  </ifdef>
239  </ifdef>
240  </ifdef>
241  </ifdef>
242  </ifdef>
243  </ifdef>
244  </ifdef>
245  </ifdef>
246  </ifdef>
247  </ifdef>
248  </ifdef>
249  </ifdef>
250  </ifdef>
251  </ifdef>
252  </ifdef>
253  </ifdef>
254  </ifdef>
255  </ifdef>
256  </ifdef>
257  </ifdef>
258  </ifdef>
259  </ifdef>
260  </ifdef>
261  </ifdef>
262  </ifdef>
263  </ifdef>
264  </ifdef>
265  </ifdef>
266  </ifdef>
267  </ifdef>
268  </ifdef>
269  </ifdef>
270  </ifdef>
271  </ifdef>
272  </ifdef>
273  </ifdef>
274  </ifdef>
275  </ifdef>
276  </ifdef>
277  </ifdef>
278  </ifdef>
279  </ifdef>
280  </ifdef>
281  </ifdef>
282  </ifdef>
283  </ifdef>
284  </ifdef>
285  </ifdef>
286  </ifdef>
287  </ifdef>
288  </ifdef>
289  </ifdef>
290  </ifdef>
291  </ifdef>
292  </ifdef>
293  </ifdef>
294  </ifdef>
295  </ifdef>
296  </ifdef>
297  </ifdef>
298  </ifdef>
299  </ifdef>
300  </ifdef>
301  </ifdef>
302  </ifdef>
303  </ifdef>
304  </ifdef>
305  </ifdef>
306  </ifdef>
307  </ifdef>
308  </ifdef>
309  </ifdef>
310  </ifdef>
311  </ifdef>
312  </ifdef>
313  </ifdef>
314  </ifdef>
315  </ifdef>
316  </ifdef>
317  </ifdef>
318  </ifdef>
319  </ifdef>
320  </ifdef>
321  </ifdef>
322  </ifdef>
323  </ifdef>
324  </ifdef>
325  </ifdef>
326  </ifdef>
327  </ifdef>
328  </ifdef>
329  </ifdef>
330  </ifdef>
331  </ifdef>
332  </ifdef>
333  </ifdef>
334  </ifdef>
335  </ifdef>
336  </ifdef>
337  </ifdef>
338  </ifdef>
339  </ifdef>
340  </ifdef>
341  </ifdef>
342  </ifdef>
343  </ifdef>
344  </ifdef>
345  </ifdef>
346  </ifdef>
347  </ifdef>
348  </ifdef>
349  </ifdef>
350  </ifdef>
351  </ifdef>
352  </ifdef>
353  </ifdef>
354  </ifdef>
355  </ifdef>
356  </ifdef>
357  </ifdef>
358  </ifdef>
359  </ifdef>
360  </ifdef>
361  </ifdef>
362  </ifdef>
363  </ifdef>
364  </ifdef>
365  </ifdef>
366  </ifdef>
367  </ifdef>
368  </ifdef>
369  </ifdef>
370  </ifdef>
371  </ifdef>
372  </ifdef>
373  </ifdef>
374  </ifdef>
375  </ifdef>
376  </ifdef>
377  </ifdef>
378  </ifdef>
379  </ifdef>
380  </ifdef>
381  </ifdef>
382  </ifdef>
383  </ifdef>
384  </ifdef>
385  </ifdef>
386  </ifdef>
387  </ifdef>
388  </ifdef>
389  </ifdef>
390  </ifdef>
391  </ifdef>
392  </ifdef>
393  </ifdef>
394  </ifdef>
395  </ifdef>
396  </ifdef>
397  </ifdef>
398  </ifdef>
399  </ifdef>
400  </ifdef>
401  </ifdef>
402  </ifdef>
403  </ifdef>
404  </ifdef>
405  </ifdef>
406  </ifdef>
407  </ifdef>
408  </ifdef>
409  </ifdef>
410  </ifdef>
411  </ifdef>
412  </ifdef>
413  </ifdef>
414  </ifdef>
415  </ifdef>
416  </ifdef>
417  </ifdef>
418  </ifdef>
419  </ifdef>
420  </ifdef>
421  </ifdef>
422  </ifdef>
423  </ifdef>
424  </ifdef>
425  </ifdef>
426  </ifdef>
427  </ifdef>
428  </ifdef>
429  </ifdef>
430  </ifdef>
431  </ifdef>
432  </ifdef>
433  </ifdef>
434  </ifdef>
435  </ifdef>
436  </ifdef>
437  </ifdef>
438  </ifdef>
439  </ifdef>
440  </ifdef>
441  </ifdef>
442  </ifdef>
443  </ifdef>
444  </ifdef>
445  </ifdef>
446  </ifdef>
447  </ifdef>
448  </ifdef>
449  </ifdef>
450  </ifdef>
451  </ifdef>
452  </ifdef>
453  </ifdef>
454  </ifdef>
455  </ifdef>
456  </ifdef>
457  </ifdef>
458  </ifdef>
459  </ifdef>
460  </ifdef>
461  </ifdef>
462  </ifdef>
463  </ifdef>
464  </ifdef>
465  </ifdef>
466  </ifdef>
467  </ifdef>
468  </ifdef>
469  </ifdef>
470  </ifdef>
471  </ifdef>
472  </ifdef>
473  </ifdef>
474  </ifdef>
475  </ifdef>
476  </ifdef>
477  </ifdef>
478  </ifdef>
479  </ifdef>
480  </ifdef>
481  </ifdef>
482  </ifdef>
483  </ifdef>
484  </ifdef>
485  </ifdef>
486  </ifdef>
487  </ifdef>
488  </ifdef>
489  </ifdef>
490  </ifdef>
491  </ifdef>
492  </ifdef>
493  </ifdef>
494  </ifdef>
495  </ifdef>
496  </ifdef>
497  </ifdef>
498  </ifdef>
499  </ifdef>
500  </ifdef>
501  </ifdef>
502  </ifdef>
503  </ifdef>
504  </ifdef>
505  </ifdef>
506  </ifdef>
507  </ifdef>
508  </ifdef>
509  </ifdef>
510  </ifdef>
511  </ifdef>
512  </ifdef>
513  </ifdef>
514  </ifdef>
515  </ifdef>
516  </ifdef>
517  </ifdef>
518  </ifdef>
519  </ifdef>
520  </ifdef>
521  </ifdef>
522  </ifdef>
523  </ifdef>
524  </ifdef>
525  </ifdef>
526  </ifdef>
527  </ifdef>
528  </ifdef>
529  </ifdef>
530  </ifdef>
531  </ifdef>
532  </ifdef>
533  </ifdef>
534  </ifdef>
535  </ifdef>
536  </ifdef>
537  </ifdef>
538  </ifdef>
539  </ifdef>
540  </ifdef>
541  </ifdef>
542  </ifdef>
543  </ifdef>
544  </ifdef>
545  </ifdef>
546  </ifdef>
547  </ifdef>
548  </ifdef>
549  </ifdef>
550  </ifdef>
551  </ifdef>
552  </ifdef>
553  </ifdef>
554  </ifdef>
555  </ifdef>
556  </ifdef>
557  </ifdef>
558  </ifdef>
559  </ifdef>
560  </ifdef>
561  </ifdef>
562  </ifdef>
563  </ifdef>
564  </ifdef>
565  </ifdef>
566  </ifdef>
567  </ifdef>
568  </ifdef>
569  </ifdef>
570  </ifdef>
571  </ifdef>
572  </ifdef>
573  </ifdef>
574  </ifdef>
575  </ifdef>
576  </ifdef>
577  </ifdef>
578  </ifdef>
579  </ifdef>
580  </ifdef>
581  </ifdef>
582  </ifdef>
583  </ifdef>
584  </ifdef>
585  </ifdef>
586  </ifdef>
587  </ifdef>
588  </ifdef>
589  </ifdef>
590  </ifdef>
591  </ifdef>
592  </ifdef>
593  </ifdef>
594  </ifdef>
595  </ifdef>
596  </ifdef>
597  </ifdef>
598  </ifdef>
599  </ifdef>
600  </ifdef>
601  </ifdef>
602  </ifdef>
603  </ifdef>
604  </ifdef>
605  </ifdef>
606  </ifdef>
607  </ifdef>
608  </ifdef>
609  </ifdef>
610  </ifdef>
611  </ifdef>
612  </ifdef>
613  </ifdef>
614  </ifdef>
615  </ifdef>
616  </ifdef>
617  </ifdef>
618  </ifdef>
619  </ifdef>
620  </ifdef>
621  </ifdef>
622  </ifdef>
623  </ifdef>
624  </ifdef>
625  </ifdef>
626  </ifdef>
627  </ifdef>
628  </ifdef>
629  </ifdef>
630  </ifdef>
631  </ifdef>
632  </ifdef>
633  </ifdef>
634  </ifdef>
635  </ifdef>
636  </ifdef>
637  </ifdef>
638  </ifdef>
639  </ifdef>
640  </ifdef>
641  </ifdef>
642  </ifdef>
643  </ifdef>
644  </ifdef>
645  </ifdef>
646  </ifdef>
647  </ifdef>
648  </ifdef>
649  </ifdef>
650  </ifdef>
651  </ifdef>
652  </ifdef>
653  </ifdef>
654  </ifdef>
655  </ifdef>
656  </ifdef>
657  </ifdef>
658  </ifdef>
659  </ifdef>
660  </ifdef>
661  </ifdef>
662  </ifdef>
663  </ifdef>
664  </ifdef>
665  </ifdef>
666  </ifdef>
667  </ifdef>
668  </ifdef>
669  </ifdef>
670  </ifdef>
671  </ifdef>
672  </ifdef>
673  </ifdef>
674  </ifdef>
675  </ifdef>
676  </ifdef>
677  </ifdef>
678  </ifdef>
679  </ifdef>
680  </ifdef>
681  </ifdef>
682  </ifdef>
683  </ifdef>
684  </ifdef>
685  </ifdef>
686  </ifdef>
687  </ifdef>
688  </ifdef>
689  </ifdef>
690  </ifdef>
691  </ifdef>
692  </ifdef>
693  </ifdef>
694  </ifdef>
695  </ifdef>
696  </ifdef>
697  </ifdef>
698  </ifdef>
699  </ifdef>
700  </ifdef>
701  </ifdef>
702  </ifdef>
703  </ifdef>
704  </ifdef>
705  </ifdef>
706  </ifdef>
707  </ifdef>
708  </ifdef>
709  </ifdef>
710  </ifdef>
711  </ifdef>
712  </ifdef>
713  </ifdef>
714  </ifdef>
715  </ifdef>
716  </ifdef>
717  </ifdef>
718  </ifdef>
719  </ifdef>
720  </ifdef>
721  </ifdef>
722  </ifdef>
723  </ifdef>
724  </ifdef>
725  </ifdef>
726  </ifdef>
727  </ifdef>
728  </ifdef>
729  </ifdef>
730  </ifdef>
731  </ifdef>
732  </ifdef>
733  </ifdef>
734  </ifdef>
735  </ifdef>
736  </ifdef>
737  </ifdef>
738  </ifdef>
739  </ifdef>
740  </ifdef>
741  </ifdef>
742  </ifdef>
743  </ifdef>
744  </ifdef>
745  </ifdef>
746  </ifdef>
747  </ifdef>
748  </ifdef>
749  </ifdef>
750  </ifdef>
751  </ifdef>
752  </ifdef>
753  </ifdef>
754  </ifdef>
755  </ifdef>
756  </ifdef>
757  </ifdef>
758  </ifdef>
759  </ifdef>
760  </ifdef>
761  </ifdef>
762  </ifdef>
763  </ifdef>
764  </ifdef>
765  </ifdef>
766  </ifdef>
767  </ifdef>
768  </ifdef>
769  </ifdef>
770  </ifdef>
771  </ifdef>
772  </ifdef>
773  </ifdef>
774  </ifdef>
775  </ifdef>
776  </ifdef>
777  </ifdef>
778  </ifdef>
779  </ifdef>
780  </ifdef>
781  </ifdef>
782  </ifdef>
783  </ifdef>
784  </ifdef>
785  </ifdef>
786  </ifdef>
787  </ifdef>
788  </ifdef>
789  </ifdef>
790  </ifdef>
791  </ifdef>
792  </ifdef>
793  </ifdef>
794  </ifdef>
795  </ifdef>
796  </ifdef>
797  </ifdef>
798  </ifdef>
799  </ifdef>
800  </ifdef>
801  </ifdef>
802  </ifdef>
803  </ifdef>
804  </ifdef>
805  </ifdef>
806  </ifdef>
807  </ifdef>
808  </ifdef>
809  </ifdef>
810  </ifdef>
811  </ifdef>
812  </ifdef>
813  </ifdef>
814  </ifdef>
815  </ifdef>
816  </ifdef>
817  </ifdef>
818  </ifdef>
819  </ifdef>
820  </ifdef>
821  </ifdef>
822  </ifdef>
823  </ifdef>
824  </ifdef>
825  </ifdef>
826  </ifdef>
827  </ifdef>
828  </ifdef>
829  </ifdef>
830  </ifdef>
831  </ifdef>
832  </ifdef>
833  </ifdef>
834  </ifdef>
835  </ifdef>
836  </ifdef>
837  </ifdef>
838  </ifdef>
839  </ifdef>
840  </ifdef>
841  </ifdef>
842  </ifdef>
843  </ifdef>
844  </ifdef>
845  </ifdef>
846  </ifdef>
847  </ifdef>
848  </ifdef>
849  </ifdef>
850  </ifdef>
851  </ifdef>
852  </ifdef>
853  </ifdef>
854  </ifdef>
855  </ifdef>
856  </ifdef>
857  </ifdef>
858  </ifdef>
859  </ifdef>
860  </ifdef>
861  </ifdef>
862  </ifdef>
863  </ifdef>
864  </ifdef>
865  </ifdef>
866  </ifdef>
867  </ifdef>
868  </ifdef>
869  </ifdef>
870  </ifdef>
871  </ifdef>
872  </ifdef>
873  </ifdef>
874  </ifdef>
875  </ifdef>
876  </ifdef>
877  </ifdef>
878  </ifdef>
879  </ifdef>
880  </ifdef>
881  </ifdef>
882  </ifdef>
883  </ifdef>
884  </ifdef>
885  </ifdef>
886  </ifdef>
887  </ifdef>
888  </ifdef>
889  </ifdef>
890  </ifdef>
891  </ifdef>
892  </ifdef>
893  </ifdef>
894  </ifdef>
895  </ifdef>
896  </ifdef>
897  </ifdef>
898  </ifdef>
899  </ifdef>
900  </ifdef>
901  </ifdef>
902  </ifdef>
903  </ifdef>
904  </ifdef>
905  </ifdef>
906  </ifdef>
907  </ifdef>
908  </ifdef>
909  </ifdef>
910  </ifdef>
911  </ifdef>
912  </ifdef>
913  </ifdef>
914  </ifdef>
915  </ifdef>
916  </ifdef>
917  </ifdef>
918  </ifdef>
919  </ifdef>
920  </ifdef>
921  </ifdef>
922  </ifdef>
923  </ifdef>
924  </ifdef>
925  </ifdef>
926  </ifdef>
927  </ifdef>
928  </ifdef>
929  </ifdef>
930  </ifdef>
931  </ifdef>
932  </ifdef>
933  </ifdef>
934  </ifdef>
935  </ifdef>
936  </ifdef>
937  </ifdef>
938  </ifdef>
939  </ifdef>
940  </ifdef>
941  </ifdef>
942  </ifdef>
943  </ifdef>
944  </ifdef>
945  </ifdef>
946  </ifdef>
947  </ifdef>
948  </ifdef>
949  </ifdef>
950  </ifdef>
951  </ifdef>
952  </ifdef>
953  </ifdef>
954  </ifdef>
955  </ifdef>
956  </ifdef>
957  </ifdef>
958  </ifdef>
959  </ifdef>
960  </ifdef>
961  </ifdef>
962  </ifdef>
963  </ifdef>
964  </ifdef>
965  </ifdef>
966  </ifdef>
967  </ifdef>
968  </ifdef>
969  </ifdef>
970  </ifdef>
971  </ifdef>
972  </ifdef>
973  </ifdef>
974  </ifdef>
975  </ifdef>
976  </ifdef>
977  </ifdef>
978  </ifdef>
979  </ifdef>
980  </ifdef>
981  </ifdef>
982  </ifdef>
983  </ifdef>
984  </ifdef>
985  </ifdef>
986  </ifdef>
987  </ifdef>
988  </ifdef>
989  </ifdef>
990  </ifdef>
991  </ifdef>
992  </ifdef>
993  </ifdef>
994  </ifdef>
995  </ifdef>
996  </ifdef>
997  </ifdef>
998  </ifdef>
999  </ifdef>
1000  </ifdef>
```

UNCLASSIFIED

combination of all SNS rules of all specified BREX data modules.

Use shortened, single-line messages to report BREX errors instead of multiline indented messages.

Specify a list of severity levels for business rules.

Output an XML report instead of a plain-text one.

Show version information.

--version

4.1 Business rule severity levels (.brseveritylevels)

The attribute brSeverityLevel on a BREX rule allows for distinguishing different kinds of errors. The .brseveritylevels file contains a list of severity levels, their user-defined type, and optionally if they should not be counted as true errors (causing the tool to return a "failure" status) but merely warnings.

By default, the program will search the current directory and parent directories for a file named .brseveritylevels, but any file can be specified by using the -w option.

An example of the format of this file is given below:

```
<?xml version="1.0"?>
<brSeverityLevels>
  <brSeverityLevel value="Fatal1" fail="yes">Fatal</brSeverityLevel>
  <brSeverityLevel value="Fatal2" fail="no">Warning</brSeverityLevel>
</brSeverityLevels>
```

When the attribute fail has a value of "yes" (or is not included), BREX errors pertaining to rules with the given severity level value will be counted as errors. When it is no, the errors are still displayed but are not counted as errors in the exit status code of the tool.

4.2 Normal, strict and unstrict SNS check (-S, -St, -Su)

There are three modes for SNS checking: normal, strict, and unstrict. The main difference between them is how they handle the optional levels of an SNS description in the BREX.

-St enables strict SNS checking. By default, the normal SNS check (-S) will assume optional elements snsSubSystem, snsSubAssy, and snsAssy exist with an snsCode of "0" ("00" or "0000" for snsAssy) when their parent element does not contain any of each. This provides a shorthand, such that

```
<snsSystem>
  <snsCode>00</snsCode>
  <snsTitle>General</snsTitle>
</snsSystem>
```

is equivalent to

```
<snsSystem>
  <snsCode>00</snsCode>
  <snsTitle>General</snsTitle>
```

Applicable to: All S1000DTOOLS-A-00-04-00-00A-040A-D

UNCLASSIFIED 2018-09-04 Page 3

ICN-S1KDTOOLS-A-000000-A-KHZAE-00002-A-001-01

Fig 1 Example - Authoring with Vim + MuPDF

### 2 Initial setup

The first step is to create a folder for the new S1000D project. Example:

```
$ mkdir myproject
```

```
$ cd myproject
```

After that, you should create two files: `.defaults` and `.dmtypes`. These files can be created automatically using the **s1kd-defaults** tool to initialize the new CSDB:

```
$ s1kd-defaults -i
```

Afterwards, these files can be edited to customize them for your project. More information on the contents of these files is provided below.

#### Note

If the tools are run in a directory that does not have these configuration files, they will search for them in the parent directories to find the top of the CSDB directory tree.

## 2.1 .defaults file

The `.defaults` file is used by all of the `s1kd-new*` tools. It provides default values for various S1000D metadata. The `.defaults` file can be written in either a simple text format or an XML format.

#### Example of simple text format:

```
languageIsoCode      en
countryIsoCode        CA
responsiblePartnerCompany khzae.net
originator            khzae.net
brex                  MYPRJ-A-00-00-00-00A-022A-D
techName              My project
```

#### Example of XML format:

```
<?xml version="1.0"?>
<defaults>
<default ident="languageIsoCode" value="en"/>
<default ident="countryIsoCode" value="CA"/>
<default ident="responsiblePartnerCompany" value="khzae.net"/>
<default ident="originator" value="khzae.net"/>
<default ident="brex" value="MYPRJ-A-00-00-00-00A-022A-D"/>
<default ident="techName" value="My project"/>
</defaults>
```

## 2.2 .dmtypes file

The `.dmtypes` file is used by the **s1kd-newdm** tool. It contains a list of information codes and associated info names and schemas to be used when creating new data modules. Like the `.defaults` file, it can be written using either the simple text format or XML format.

#### Example of simple text format:

```
009 frontmatter Table of contents
022 brex         Business rules exchange
040 descript     Description
```



130    `proced`                    Normal operation

#### Example of XML format:

```
<?xml version="1.0"?>
<dmtypes>
<type infoCode="009" infoName="Table of contents"
schema="frontmatter"/>
<type infoCode="022" infoName="Business rules exchange"
schema="brex"/>
<type infoCode="040" infoName="Description"
schema="descript"/>
<type infoCode="130" infoName="Normal operation"
schema="proced"/>
</dmtypes>
```

The `s1kd-newdm` tool contains a default set of information code definitions. This can be used to create a default `.dmtypes` file by use of the `-.` (simple text format) or `-,` (XML) options:

```
$ s1kd-newdm -, > .dmtypes
```

The generated `.dmtypes` file can then be customized to fit your project.

## 3                    **Creating the DMRL and populating the CSDB**

The next step is to prepare the Data Management Requirements List (DMRL) for the project. The DMRL will contain a list of all the CSDB objects initially required by your project, and can be used to automatically populate your CSDB.

If you do not already have a DMRL, the `s1kd-newdml` tool can be used to create a new one:

```
$ s1kd-newdml -# MYPRJ-NCAGE-C-2017-00001
```

This would create the file `DML-MYPRJ-NCAGE-C-2017-00001_000-01.XML` in your CSDB folder.

### 3.1                  **Adding DMRL entries**

Each entry in the DMRL describes a data module that is planned to be created:

```
<dmlContent>
<dmlEntry>
<dmRef>
<dmRefIdent>
<dmCode modelIdentCode="MYPRJ" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00"
disassyCode="00" disassyCodeVariant="A" infoCode="040"
infoCodeVariant="A" itemLocationCode="D"/>
</dmRefIdent>
<dmRefAddressItems>
<dmTitle>
<techName>My project</techName>
```

```
<infoName>Description</infoName>
</dmTitle>
</dmRefAddressItems>
</dmRef>
<security securityClassification="01"/>
<responsiblePartnerCompany>
<enterpriseName>khzae.net</enterpriseName>
</responsiblePartnerCompany>
</dmlEntry>
...
</dmlContent>
```

The XML for the `dmRef` of each entry can be quickly generated using the **s1kd-ref** tool:

```
$ s1kd-ref DMC-MYPRJ-A-00-00-00-00A-040A-D
```

### 3.2 Populating the CSDB from the DMRL

Once the DMRL is prepared, the **s1kd-dmrl** tool can be used to automatically populate the CSDB based on the CSDB objects listed in the DMRL:

```
$ s1kd-dmrl DML-MYPRJ-NCAGE-C-2017-00001_000-01.XML
```

Information not included in the DMRL entry for a CSDB object is pulled from the `.defaults` file (and the `.dmtypes` file for data modules).

The DMRL should be updated throughout the lifecycle of a project. When new entries are added, simply use the **s1kd-dmrl** tool again to create the newly added data modules. Already existing data modules will not be overwritten, unless the `-f` option is specified. The `-q` option will suppress the messages indicating that a data module that already exists will not be overwritten:

```
$ s1kd-dmrl -q DML-MYPRJ-NCAGE-C-2017-00001_000-02.XML
```

### 3.3 Creating CSDB objects on-the-fly

Data modules and other CSDB objects can also be created in an "on-the-fly" manner, without the use of a DMRL, by invoking the **s1kd-new\*** set of tools directly, as with **s1kd-newdml** above. For example, to create a new data module:

```
$ s1kd-newdm -# MYPRJ-A-00-00-00-00A-040A-D
```

This would create the file `DMC-MYPRJ-A-00-00-00-00A-040A-D_000-01_EN-CA.XML` in your CSDB folder.

Each of the **s1kd-new\*** tools has various options for setting specific metadata, and information not included as arguments to these commands is pulled from the `.defaults` and `.dmtypes` files.

## 4 Data module workflow

Data modules are put through the general S1000D workflow with the **s1kd-upissue** tool. Whenever a data module will be changed, the **s1kd-upissue** tool should first be used to indicate the forthcoming change, creating the next inwork issue of the data module.

## 4.1 Inwork data modules

To increment the inwork issue of a data module, the `s1kd-upissue` tool is called without any additional options:

```
$ s1kd-upissue DMC-MYPRJ-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
```

Assuming this data module was just created, it would be incremented from initial inwork issue 000-01 to initial inwork issue 000-02. After upissuing, make the changes. For example:

**DMC-MYPRJ-A-00-00-00-00A-040A-D\_000-01\_EN-CA.XML:**

```
<content>
<description>
<levelledPara>
<title>General</title>
<para>This is my project.</para>
</levelledPara>
</description>
</content>
```

**DMC-MYPRJ-A-00-00-00-00A-040A-D\_000-02\_EN-CA.XML:**

```
<content>
<description>
<levelledPara>
<title>General</title>
<para>This is my project.</para>
<para>My project is maintained using S1000D.</para>
</levelledPara>
</description>
</content>
```

## 4.2 Making data modules official

Before a data module can be made official, it must be validated. This means:

- It is a valid XML file
- It is valid according to the relevant S1000D schema
- It is valid according to the relevant business rules
- Any applicability filtering applied will not affect the above
- The actual narrative (content) is correct

### 4.2.1 Validating against the schema

The first two points can be verified with the **s1kd-validate** tool. This tool will indicate any problems with the data module in terms of XML syntax and its correctness regarding its S1000D schema:

```
$ s1kd-validate DMC-MYPRJ-A-00-00-00-00A-040A-D_000-03_EN-CA.XML
```

#### 4.2.2 Validating against a BREX data module

The third point can be verified using the **s1kd-brexcheck** tool. This tool will indicate any places where a data module violates computable business rules as specified in a Business Rules Exchange (BREX) data module.

```
$ s1kd-brexcheck DMC-MYPRJ-A-00-00-00-00A-040A-D_000-03_EN-CA.XML
```

The BREX allows a project to customize S1000D, for example, by disallowing certain elements or attributes:

```
<structureObjectRule>
<objectPath allowedObjectFlag="0">//emphasis</objectPath>
<objectUse>The emphasis element is not allowed.</objectUse>
</structureObjectRule>
```

Or by tailoring the allowed values of certain elements or attributes:

```
<structureObjectRule>
<objectPath allowedObjectFlag="2">
//@securityClassification
</objectPath>
<objectUse>
The security classification must be 01 (Unclassified)
or 02 (Classified).
</objectUse>
<objectValue valueAllowed="01">Unclassified</objectValue>
<objectValue valueAllowed="02">Classified</objectValue>
</structureObjectRule>
```

Each data module references the BREX it should be checked against, and BREX data modules can reference other BREX data modules to create a layered set of business rules, for example, Project-related rules and Organization-related rules.

Unless otherwise specified, data modules will reference the S1000D default BREX, which contains a base set of business rules.

To get started with your project's own business rules, you can create a simple BREX data module based on the current defaults of your CSDB using the -B option of the s1kd-newdm tool:

```
$ s1kd-newdm -B -# MYPRJ-A-00-00-00-00A-022A-D
```

This will use the customized .defaults and .dmtypes files to generate a basic set of business rules.

#### 4.2.3 Checking applicability

The fourth point can be tested using the **s1kd-appcheck** tool:

```
$ s1kd-appcheck DMC-MYPRJ-A-00-00-00-00A-040A-D_000-03_EN-CA.XML
```

The S1000D applicability model allows for conditional processing to be applied both to whole data modules as well as parts of a data module. However, this latter functionality means that, if

elements are removed as part of applicability filtering, the validity of the data module in regards to the S1000D schema and business rules can change.

The s1kd-appcheck tool can report product attribute or condition assignments which would cause the data module to become invalid after filtering.

#### 4.2.4 Quality assurance verification

In contrast to the first four points, which can be verified automatically, the last point is generally not an automatic process, and involves quality assurance testing by a human. That a data module has been first or second QA tested can be indicated with the s1kd-upissue tool:

```
$ s1kd-upissue -1 tabtop -2 ttandoo ...
```

Once the data module is validated, the s1kd-upissue tool is used to make it official with the `-i` option:

```
$ s1kd-upissue -i DMC-MYPRJ-A-00-00-00-00A-040A-D_000-03_EN-CA.XML
```

### 4.3 Changes to official data modules

When a change must be made to an official data module (for example, as a result of feedback), the s1kd-upissue tool is used again to bring the data module back to the inwork state:

```
$ s1kd-upissue DMC-MYPRJ-A-00-00-00-00A-040A-D_001-00_EN-CA.XML
```

Changes between official issues of a data module are indicated with reasons for update and change marking. For example:

**DMC-MYPRJ-A-00-00-00-00A-040A-D\_001-00\_EN-CA.XML:**

```
<content>
<description>
<levelledPara>
<title>General</title>
<para>This is my project.</para>
<para>My project is maintained using S1000D.</para>
</levelledPara>
</description>
</content>
```

**DMC-MYPRJ-A-00-00-00-00A-040A-D\_001-01\_EN-CA.XML:**

```
<dmStatus issueType="changed">
<!-- ..... -->
<reasonForUpdate id="rfu-0001">
<simplePara>Added reference to tools used.</simplePara>
</reasonForUpdate>
</dmStatus>
<!-- ..... -->
<content>
```

```
<description>
<levelledPara>
<title>General</title>
<para>This is my project.</para>
<para changeType="modify" changeMark="1"
reasonForUpdateRefIds="rfu-0001">My project is maintained using
S1000D and slkd-tools.</para>
</levelledPara>
</description>
</content>
```

Reasons for update from the previous official issue are automatically removed when upissuing to the first inwork issue.

#### 4.4 Deleting data modules

The basic cycle continues until a data module is deleted. "Deleting" a data module is a special case of upissuing:

```
$ slkd-upissue -i -z deleted ...
```

The data module is upissued to the next official issue, and its issue type is set to "deleted".

Deleted data modules may be reinstated later in a similar way:

```
$ slkd-upissue -z rinstat-status ...
```

The data module is upissued to the next inwork issue, and the issue type is set to one of the "rinstat-x" types.

### 5 Building publications

S1000D publications are managed by use of publication modules. Like data modules, publication modules may be created as part of the project's DMRL:

```
<dmlEntry>
<pmRef>
<pmRefIdent>
<pmCode modelIdentCode="MYPRJ" pmIssuer="12345" pmNumber="00001"
pmVolume="00"/>
</pmRefIdent>
<pmRefAddressItems>
<pmTitle>My publication</pmTitle>
</pmRefAddressItems>
</pmRef>
<responsiblePartnerCompany>
<enterpriseName>khzae.net</enterpriseName>
</responsiblePartnerCompany>
</dmlEntry>
```

or "on-the-fly" with the **slkd-newpm** tool:

```
$ slkd-newpm -# MYPRJ-12345-00001-00
```

## 5.1 Publication module content

The publication module lays out the hierarchical structure of the data modules in a publication:

```
<content>
<pmEntry>
<pmEntryTitle>Front matter</pmEntryTitle>
<dmRef>
<dmRefIdent>
<dmCode modelIdentCode="MYPRJ" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00" disassyCode="00"
disassyCodeVariant="A" infoCode="001" infoCodeVariant="A"
itemLocationCode="D"/>
</dmRefIdent>
<dmRefAddressItems>
<dmTitle>
<techName>My project</techName>
<infoName>Title page</infoName>
</dmTitle>
</dmRefAddressItems>
</dmRef>
</pmEntry>
<pmEntry>
<pmEntryTitle>General info</pmEntryTitle>
<dmRef>
<dmRefIdent>
<dmCode modelIdentCode="MYPRJ" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00" disassyCode="00"
disassyCodeVariant="A" infoCode="040" infoCodeVariant="A"
itemLocationCode="D"/>
</dmRefIdent>
<dmRefAddressItems>
<dmTitle>
<techName>My project</techName>
<infoName>Description</infoName>
</dmTitle>
</dmRefAddressItems>
</dmRef>
</pmEntry>
</content>
```

## 5.2 Creating a customized publication

The S1000D applicability model and the **s1kd-instance** tool enable the creation of customized publications, which are filtered for a particular customer or product. For example, a data module may contain applicability for two versions of a product:

```
<para>
This is some common information about the product.
```

```
</para>
<para applicRefId="app-versionA">
This information only applies to version A.
</para>
<para applicRefId="app-versionB">
This information only applies to version B.
</para>
```

When you deliver this data module to a customer with Version B, you can exclude information which is not applicable to them by filtering it:

```
$ slkd-instance -s version:prodattr=B <DM>
```

To filter a whole publication, use the `-O` option of the `s1kd-instance` tool to output multiple filtered objects into a directory:

```
$ slkd-instance -s version:prodattr=B -O customerB DMC-*.XML
```

The newly created `customerB` directory will contain the filtered versions of these data modules.

If your CSDB contains multiple, separate publications, the **s1kd-refs** tool can be used to select only those data modules which apply to a particular publication module:

```
$ slkd-refs -s <PM> |
> xargs slkd-instance -s version:prodattr=B -O customerB
```

The above command will filter the publication module and all included data modules, and output the resulting objects to the `customerB` directory.

### 5.3 Creating a script for publishing

The publishing process will often involve many different steps, and many different tools, so it's a good idea to create a script to automate it. Below is an example of a script which publishes a CSDB for a given product serial number:

```
#!/bin/sh

# Usage: sh build.sh <zip> <csdb> <serialno>
zip=$1
csdb=$2
serialno=$3

# Create a temporary directory.
tmp=$(mktemp -d)

# Copy all CSDB objects to the temp directory. The CSDB objects
# are filtered for a given serial number.
slkd-ls "$csdb" |
  xargs slkd-instance -O "$tmp" -s serialno:prodattr="$serialno"
```



```
# Synchronize references in the filtered DMs. This is necessary
# since some references may have been removed during filtering.
slkd-ls -D "$tmp" |
  xargs slkd-syncrefs -f

# Create the ZIP package.
zip -jr "$zip" "$tmp"

# Clean up the temp directory.
rm -r "$tmp"
```

## 6 Use with other version control systems

The issue/inwork numbers and S1000D file naming conventions as seen above provide a basic form of version control. In this case, each file represents a single issue of a CSDB object, and multiple files together represent the whole logical object. For example, all of the following files represent different versions of the same object:

- DMC-MYPRJ-A-00-00-00-00A-040A-D\_000-01\_EN-CA.XML
- DMC-MYPRJ-A-00-00-00-00A-040A-D\_000-02\_EN-CA.XML
- DMC-MYPRJ-A-00-00-00-00A-040A-D\_001-00\_EN-CA.XML

However, if you prefer to use an existing version control system such as Git or SVN, it is often more useful for each file to represent a whole object.

The s1kd-tools support an alternate naming convention for this case. Specifying the -N option to certain tools will omit the issue and inwork numbers from filenames of CSDB objects. Taking the s1kd-newdm tool example from above, but adding the -N option as follows:


```
$ slkd-newdm -N -# MYPRJ-A-00-00-00-00A-040A-D
```

would create the file DMC-MYPRJ-A-00-00-00-00A-040A-D\_EN-CA.XML in your CSDB folder. The s1kd-upissue tool works similarly:

```
$ slkd-upissue -N -i DMC-MYPRJ-A-00-00-00-00A-040A-D_EN-CA.XML
```

The issue and inwork numbers are updated in the XML metadata, but instead of creating a new file, the original is overwritten. The previous inwork issues are therefore stored as part of the external version control system's history, rather than as individual files.

# TEST



ICN-S1KDTOOLS-A-000000-A-KHZAE-22421-A-001-01

*Fig 2* 新插入的圖片



ICN-S1KDTOOLS-A-000000-A-KHZAE-15480-A-001-01

Fig 3 新插入的圖片



ICN-S1KDTOOLS-A-000000-A-KHZAE-10130-A-001-01

Fig 4 ICI徽章

## s1kd-tools

### *.defaults file identifiers*

## Table of contents

Page

.defaults file identifiers.....	1
References.....	1
Description.....	1
1     General.....	1
2     Alphabetic index.....	1
3     Example - XML format.....	3
4     Example - Simple text format.....	5

## List of tables

1     References.....	1
2     .defaults file - Identifier value descriptions.....	1

### **References**

*Table 1 References*

Data module/Technical publication	Title
None	

### **Description**

## 1     General

This document contains an alphabetic index of all valid `.defaults` file identifiers, and a description of the values they may be assigned. It also contains examples of a `.defaults` file using all identifiers in both the XML format and simple text format.

## 2     Alphabetic index

*Table 2 .defaults file - Identifier value descriptions*

Identifier	Value description
act	Data module code of ACT data module
assyCode	2 to 4 alphanumeric characters
authorization	string
brex	Data module code of BREX data module

Identifier	Value description
city	string (Sender city)
commentPriorityCode	cp01-cp99
commentType	Q, I, or R
countryIsoCode	ISO 2-character country code
country	string (Sender country)
disassyCodeVariant	1 to 3 alphanumeric characters
disassyCode	2 alphanumeric characters
dmlType	C, P, or S
infoCodeVariant	1 alphanumeric character
infoCode	3 alphanumeric characters
infoName	string
infoNameVariant	string
inWork	2 digits
issueNumber	3 digits
issueType	S1000D issue type (new, changed, ...)
issue	S1000D issue number (5.0, 4.2, 4.1, ...)
itemLocationCode	A, B, C, D, or T
languageIsoCode	2 to 3 character ISO language code
learnCode	3 alphanumeric characters
learnEventCode	A, B, C, D, or E
maintainedSns	string
modelIdentCode	1 to 14 alphanumeric characters
originatorCode	5-character NCAGE code
originator	string
pmIssuer	5-character NCAGE code
pmNumber	5 alphanumeric characters
pmVolume	2 digits
receiver	string

Identifier	Value description
receiverCity	string
receiverCountry	string
receiverIdent	5-character NCAGE code
remarks	string
responsiblePartnerCompanyCode	5-character NCAGE code
responsiblePartnerCompany	string
schema	URI
scormContentPackageIssuer	5-character NCAGE code
scormContentPackageNumber	5 alphanumeric characters
scormContentPackageVolume	2 digits
securityClassification	2 digits
sender	string
senderIdent	5-character NCAGE code
seqNumber	00001-99999
skillLevelCode	sk01-sk99
sns	Data module code of BREX data module
snsLevels	1 thru 4
subSubSystemCode	1 alphanumeric character
subSystemCode	1 alphanumeric character
systemCode	2 to 3 alphanumeric characters
systemDiffCode	1 to 4 alphanumeric characters
techName	string
templates	Path to custom XML templates directory
yearOfDataIssue	4 digits

### 3 Example - XML format

```
<?xml version="1.0"?>
<defaults>
<default ident="act" value="MYPRJ-A-00-00-00-00A-00WA-D"/>
<default ident="assyCode" value="00"/>
```

```
<default ident="authorization" value="khzae.net"/>
<default ident="brex" value="MYPRJ-A-00-00-00A-022A-D"/>
<default ident="city" value="Toronto"/>
<default ident="commentPriorityCode" value="cp01"/>
<default ident="commentType" value="Q"/>
<default ident="countryIsoCode" value="CA"/>
<default ident="country" value="Canada"/>
<default ident="disassyCodeVariant" value="A"/>
<default ident="disassyCode" value="00"/>
<default ident="dmlType" value="C"/>
<default ident="infoCodeVariant" value="A"/>
<default ident="infoCode" value="258"/>
<default ident="infoName" value="Other procedure to clean"/>
<default ident="infoNameVariant" value="Clean with water"/>
<default ident="inWork" value="01"/>
<default ident="issueNumber" value="000"/>
<default ident="issueType" value="new"/>
<default ident="issue" value="5.0"/>
<default ident="itemLocationCode" value="D"/>
<default ident="languageIsoCode" value="en"/>
<default ident="learnCode" value="H10"/>
<default ident="learnEventCode" value="A"/>
<default ident="maintainedSns" value="General sea vehicles"/>
<default ident="modelIdentCode" value="MYPRJ"/>
<default ident="omitIssueInfo" value="true"/>
<default ident="originatorCode" value="12345"/>
<default ident="originator" value="khzae.net"/>
<default ident="pmIssuer" value="12345"/>
<default ident="pmNumber" value="00000"/>
<default ident="pmVolume" value="00"/>
<default ident="receiver" value="khzae.net"/>
<default ident="receiverCity" value="Toronto"/>
<default ident="receiverCountry" value="Canada"/>
<default ident="receiverIdent" value="12345"/>
<default ident="remarks" value="Comments on a data module"/>
<default ident="responsiblePartnerCompanyCode" value="12345"/>
<default ident="responsiblePartnerCompany" value="khzae.net"/>
<default ident="schema" value="descript.xsd"/>
<default ident="securityClassification" value="01"/>
<default ident="senderIdent" value="12345"/>
<default ident="seqNumber" value="00001"/>
<default ident="skillLevelCode" value="sk01"/>
<default ident="sns" value="MYPRJ-A-00-00-00A-022A-D"/>
<default ident="snsLevels" value="1"/>
<default ident="subSubSystem" value="0"/>
<default ident="subSystem" value="0"/>
<default ident="systemCode" value="00"/>
<default ident="techName" value="My project"/>
```

```
<default ident="templates" value="/usr/share/slkd-tools/templ"/>
<default ident="yearOfDataIssue" value="2017"/>
</defaults>
```

## 4 Example - Simple text format

act	MYPRJ-A-00-00-00-00A-00WA-D
assyCode	00
authorization	khzae.net
brex	MYPRJ-A-00-00-00-00A-022A-D
city	Toronto
commentPriorityCode	cp01
commentType	Q
countryIsoCode	CA
country	Canada
disassyCodeVariant	A
disassyCode	00
dmlType	C
infoCodeVariant	A
infoCode	258
infoName	Other procedure to clean
infoNameVariant	Clean with water
inWork	01
issueNumber	000
issueType	new
issue	5.0
itemLocationCode	D
languageIsoCode	en
learnCode	H10
learnEventCode	A
maintainedSns	General sea vehicles
modelIdentCode	MYPRJ
omitIssueInfo	true
originatorCode	12345
originator	khzae.net
pmIssuer	12345
pmNumber	00000
pmVolume	00
receiver	khzae.net
receiverCity	Toronto
receiverCountry	Canada
receiverIdent	12345
remarks	Comments on a data module
responsiblePartnerCompanyCode	12345
responsiblePartnerCompany	khzae.net
schema	descript.xsd
securityClassification	01
sender	khzae.net





senderIdent	12345
seqNumber	00001
skillLevelCode	sk01
sns	MYPRJ-A-00-00-00-00A-022A-D
snsLevels	1
subSubSystem	0
subSystem	0
systemCode	00
techName	My project
templates	/usr/share/slkd-tools/templ
yearOfDataIssue	2017

## s1kd-tools

### *Issue compatibility*

Table of contents	Page
Issue compatibility.....	1
References.....	1
Description.....	1
1      General.....	1

### List of tables

1	References.....	1
2	Compatibility with supported issues of S1000D.....	2

### *References*

Table 1 References

Data module/Technical publication	Title
None	

### *Description*

#### 1      **General**

This document summarizes the compatibility between the s1kd-tools and each issue of the S1000D specification for which support is planned.

[empty]	Support is planned but not yet implemented.
X	Support is implemented.
/	Support is partially implemented.
~	Support is not planned. Usually this is because older issues of the specification did not cover the function of the tool.

#### **Note**

Although a tool may not directly support an issue of S1000D, it may still be possible to use with that issue.

For example, the s1kd-brexcheck tool is said not to support Issue 2.0 or Issue 2.1, because the BREX data module schema was not introduced until Issue 2.2. However, an Issue

2.2 or greater BREX data module can still be used to check Issue 2.0 or Issue 2.1 CSDB objects.

*Table 2 Compatibility with supported issues of S1000D*

<b>Tool</b>	<b>5.0</b>	<b>4.2</b>	<b>4.1</b>	<b>4.0</b>	<b>3.0</b>	<b>2.3</b>	<b>2.2</b>	<b>2.1</b>	<b>2.0</b>
s1kd-acronyms	X	X	X	X	X	X	X	X	X
s1kd-addicn	X	X	X	X	X	X	X	X	X
s1kd-appcheck	X	X	X	X	X	~	~	~	~
s1kd-aspp	X	X	X	X	X	~	~	~	~
s1kd-brexcheck	X	X	X	X	X	X	X	~	~
s1kd-defaults	X	X	X	X	X	X	X	X	X
s1kd-dmrl	X	X	X	X	X	X	X	X	X
s1kd-flatten	X	X	X	X	X	X	X	X	X
s1kd-fmgen	X	X	X	~	~	~	~	~	~
s1kd-icncatalog	X	X	X	X	X	X	X	X	X
s1kd-index	X	X	X	X	X	X	X	X	X
s1kd-instance	X	X	X	X	/	~	~	~	~
s1kd-ls	X	X	X	X	X	X	X	X	X
s1kd-metadata	X	X	X	X	X	X	X	X	X
s1kd-mvref	X	X	X	X	X	X	X	X	X
s1kd-neutralize	X	X	X	X	X	X	X	X	X
s1kd-newcom	X	X	X	X	X	X	X	X	X
s1kd-newddn	X	X	X	X	X	X	X	X	X
s1kd-newdm	X	X	X	X	X	X	X	X	X
s1kd-newdml	X	X	X	X	X	X	X	X	X
s1kd-newimf	X	X	~	~	~	~	~	~	~
s1kd-newpm	X	X	X	X	X	X	X	X	X
s1kd-newsmc	X	X	X	~	~	~	~	~	~
s1kd-newupf	X	X	X	~	~	~	~	~	~
s1kd-ref	X	X	X	X	X	X	X	X	X



Tool	5.0	4.2	4.1	4.0	3.0	2.3	2.2	2.1	2.0
s1kd-refs	X	X	X	X	X	X	X	X	X
s1kd-repcheck	X	X	X	X	X	X	~	~	~
s1kd-sns	X	X	X	X	~	~	~	~	~
s1kd-syncrefs	X	X	X	X	X	X	X	X	X
s1kd-uom	X	X	X	X	X	X	~	~	~
s1kd-upissue	X	X	X	X	X	X	X	X	X
s1kd-validate	X	X	X	X	X	X	X	X	X



## s1kd-tools workflow

### *Standard procedure for processing S1000D documents*

#### Table of contents

Page

Standard procedure for processing S1000D documents.....	1
References.....	1
Common information.....	1
Preliminary requirements.....	2
Procedure.....	3
Requirements after job completion.....	4

#### List of tables

1	References.....	1
2	Required conditions.....	2
3	Required persons.....	2
4	Required technical information.....	2
5	Support equipment.....	2
6	Consumables, materials and expendables.....	3
7	Spares.....	3
8	Required conditions.....	4

### **References**

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-00-00-00-00A-040B-D</a>	s1kd-tools - Description

### **Common information**

- 1 This procedure describes the standard workflow for processing S1000D documents using the s1kd-tools suite. The tools provide comprehensive functionality for creating, validating, and managing S1000D compliant technical documentation.

## Preliminary requirements

### Required conditions

Table 2 Required conditions

Action/Condition	Data module/Technical publication
s1kd-tools must be installed and configured	
S1000D schema files must be available	

### Required persons

Table 3 Required persons

Person	Category	Skill Level	Trade/Trade code	Estimated time
Man A	Technical writer	sk02	Documentation specialist	2.0 h
Man C	Engine	sk72	Tester	2.0 h
Man A	Operator	sk55	Airframe	2 h
Man A	Operator	sk55	Airframe	2 h

### Required technical information

Table 4 Required technical information

Document No.	Title	Category
<a href="#">S1KDTOOLS-A-00-00-00-00A-040B-D</a>	s1kd-tools - Description	PM

### Support equipment

Table 5 Support equipment

Name	Identification/Reference	Quantity	Remark
Computer workstation	Part No. GENERIC/ WORKSTATION-001	1	



## Consumables, materials and expendables

Table 6 Consumables, materials and expendables

Name	Identification/Reference	Quantity	Remark
S1000D Schema files	Part No. S1000D/ SCHEMA-5.0	1 SET	

## Spares

Table 7 Spares

Name	Identification/Reference	Quantity	Remark
None			

## Safety conditions

### **WARNING**

Always validate documents before publishing. Invalid S1000D documents may cause processing errors in downstream systems.

### **CAUTION**

Backup original documents before processing. Some tools may modify files in place.

### ***Procedure***

- 1 Create a new data module using **s1kd-newdm**.  
`s1kd-newdm -# S1KDTOOLS-A-00-00-00-00A-040A-D`
- 2 Edit the data module content using your preferred XML editor.

#### **Note**

Ensure proper S1000D markup and structure are maintained throughout the editing process.

- 3 Validate the data module using **s1kd-validate** as shown in [Step 3.1](#).  
`s1kd-validate DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_EN-CA.XML`
- 3.1 Review validation results and fix any errors or warnings.
- 3.2 If validation fails, return to step 2 for corrections.



- 4 Synchronize references using **s1kd-syncrefs**.  
`s1kd-syncrefs -f DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_EN-CA.XML`
- 5 Generate publication module if required using **s1kd-newpm**.  
`s1kd-newpm -# S1KDTOOLS-KHZAE-00001-00`
- 6 Perform final validation of all documents in the publication set.  
`s1kd-validate *.XML`

### ***Requirements after job completion***

## **Required conditions**

*Table 8 Required conditions*

Action/Condition	Data module/Technical publication
All documents must pass validation without errors	
References must be synchronized and consistent	



## s1kd-defaults

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	2
3.1 .brexmap file.....	3
4 Examples.....	3
4.1 Initialize a new CSDB, using the XML format.....	3
4.2 Initialize a new CSDB, using the simple text format.....	3
4.3 Generate a custom-named .defaults file.....	3
4.4 Convert a simple text formatted file to XML.....	3
4.5 Sort entries and output in text format.....	4
4.6 Set a default value in the current .defaults file.....	4

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

*Table 1 References*

Data module/Technical publication	Title
None	

### *Description*

#### 1

#### **General**

The **s1kd-defaults** tool generates a basic .defaults file for a new CSDB, which is used by several of the other s1kd-tools to determine default values for S1000D metadata. It also provides a way to convert between the simple text and XML formats of the .defaults, .dmtypes and .fmtypes files.

#### 2

#### **Usage**

```
s1kd-defaults [-DdFfisth?] [-b <BREX>] [-j <map>]
```

`[-n <name> -v <value> ...] [-o <dir>] [<file>...]`

### 3 Options

<code>-b, --brex &lt;BREX&gt;</code>	Use the specified BREX data module to build the <code>.defaults</code> and <code>.dmtypes</code> files. This can be used both when initializing a new CSDB (-i) or either file can be generated from a BREX data module separately.
<code>-D, --dmtypes</code>	Convert a <code>.dmtypes</code> file.
<code>-d, --defaults</code>	Convert a <code>.defaults</code> file.
<code>-F, --fmtypes</code>	Convert a <code>.fmtypes</code> file.
<code>-f, --overwrite</code>	Overwrite the existing file after conversion.
<code>-h, -?, --help</code>	Show help/usage message.
<code>-i, --init</code>	Initialize a new CSDB by generating the <code>.defaults</code> , <code>.dmtypes</code> and <code>.fmtypes</code> files in the current directory.
<code>-J, --dump-brexmap</code>	Dump the default <code>.brexmap</code> file to stdout.
<code>-j, --brexmap &lt;map&gt;</code>	Use a custom <code>.brexmap</code> file to map a BREX DM to a <code>.defaults</code> or <code>.dmtypes</code> file.
<code>-n, --name &lt;name&gt;</code>	The name of a specific default key to set a value for. The value must be specified after this option with -v. Multiple pairs of -n and -v can be specified to set multiple default values.
<code>-o, --dir &lt;dir&gt;</code>	Initialize or manage configuration files in <dir> instead of the current directory. If <dir> does not exist, it will be created.
<code>-s, --sort</code>	Sort the entries alphabetically for either file/output format.
<code>-t, --text</code>	Output using the simple text format. Otherwise, the XML format is used by default.
<code>-v, --value &lt;value&gt;</code>	The new value to set for the default key specified with -n. This option must be specified after -n.
<code>--version</code>	Show version information.
<code>&lt;file&gt;...</code>	Names of files to convert. If none are specified, the default names of <code>.defaults</code> (for the -d option), <code>.dmtypes</code> (for the -D option) or <code>.fmtypes</code> (for the -F option) in the current directory are used.

In addition, the following options allow configuration of the XML parser:

<code>--dtdload</code>	Load the external DTD.
<code>--huge</code>	Remove any internal arbitrary parser limits.
<code>--net</code>	Allow network access to load external DTD and entities.
<code>--noent</code>	Resolve entities.
<code>--parser-errors</code>	Emit errors from parser.

<code>--parser-warnings</code>	Emit warnings from parser.
<code>--xinclude</code>	Do XInclude processing.
<code>--xml-catalog &lt;file&gt;</code>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 **.brexmap file**

This file specifies a mapping between BREX structure object rules and `.defaults` and `.dmtypes` files. The path to an object can be written in many different ways in a BREX rule, so the `.brexmap` file allows any project's BREX to be used to generate these files without having to modify the BREX data module itself.

By default, the program will search for a file named `.brexmap` in the current directory and parent directories, but any file can be specified using the `-j` option. If there is no `.brexmap` file and the `-j` option is not specified, a default mapping will be used.

Example of `.brexmap` file:

```
<brexMap>
<dmtypes path="//@infoCode"/>
<default path="//@languageIsoCode" ident="languageIsoCode"/>
<default path="//@countryIsoCode" ident="countryIsoCode"/>
</brexMap>
```

More exact matches can be made by using the attribute `id` on the `<dmtypes>` or `<default>` elements. This overrides the `path` attribute, and will only match a BREX rule with the specified ID.

## 4 **Examples**

### 4.1 **Initialize a new CSDB, using the XML format**

```
$ mkdir mycsdb
$ cd mycsdb
$ slkd-defaults -i
```

### 4.2 **Initialize a new CSDB, using the simple text format**

```
$ mkdir mycsdb
$ cd mycsdb
$ slkd-defaults -ti
```

### 4.3 **Generate a custom-named `.defaults` file**

```
$ slkd-defaults > custom-defaults.xml
```

### 4.4 **Convert a simple text formatted file to XML**

```
$ slkd-defaults -df
```



#### **4.5 Sort entries and output in text format**

```
$ slkd-defaults -dts custom-defaults.txt
```

#### **4.6 Set a default value in the current .defaults file**

```
$ slkd-defaults -df -n issue -v 5.0
```

## s1kd-dmrl

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1      General.....	1
2      Usage.....	1
3      Options.....	1
4      Example.....	2

#### List of tables

1      References.....	1
------------------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

#### 1      General

The **s1kd-dmrl** tool reads S1000D data management lists and creates CSBD objects for the entries specified using the s1kd-new\* tools.

#### 2      Usage

```
s1kd-dmrl [options] <DML>...
```

#### 3      Options

-\$, --issue <issue>	Specify which issue of S1000D to use when creating objects.
-@, --out <dir>	Create new objects in <dir>.
-%, --templates <dir>	Use XML templates in the specified directory instead of the built-in templates of each of the s1kd-new* tools.
-D, --dmtypes <path>	Specify the .dmtypes file name.

-d, --defaults <path>	Specify the .defaults file name.
-F, --fail	Fail on the first error generated by any of the s1kd-new* commands. Normally, errors with individual DMRL entries will be reported but the other entries will still be processed.
-f, --overwrite	Overwrite existing CSDB objects.
-h, -?, --help	Show help/usage message.
-m, --use-remarks	Use the remarks for an entry as the remarks for the new CSDB object.
-N, --omit-issue	Omit issue/in-work numbers from the filenames of created CSDB objects.
-q, --quiet	Do not report errors when any of the CSDB objects already exist.
-s, --commands	Do not create CSDB objects, only output the s1kd-new* commands to create them.
-v, --verbose	Print the filenames of newly created CSDB objects.
--version	Show version information.
<DML>...	One or more S1000D data management lists.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Example

```
$ s1kd-dmrl DML-EX-12345-C-2018-00001_001-00.XML
```

## s1kd-newcom

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 .defaults file.....	3
4 Example.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	s1kd-newdm - Description

### *Description*

#### 1 General

The **s1kd-newcom** tool creates a new S1000D comment with the code and metadata specified.

#### 2 Usage

s1kd-newcom [options]

#### 3 Options

-#, --code <code>

The code of the comment, in the form of  
MODELIDENTCODE-SENDERIDENT-YEAR-SEQ-TYPE.

-\$, --issue <issue>

Specify which issue of S1000D to use. Currently supported  
issues are:

— 5.0 (default)

	– 4.2
	– 4.1
	– 4.0
	– 3.0
	– 2.3
	– 2.2
	– 2.1
	– 2.0
-@, --out <path>	Save the new comment to <path>. If <path> is an existing directory, the comment will be created in it instead of the current directory. Otherwise, the comment will be saved as the filename <path> instead of being automatically named.
-%, --templates <dir>	Use the XML template in the specified directory instead of the built-in template. The template must be named <code>comment.xml</code> inside <dir> and must conform to the default S1000D issue (5.0).
~, --dump-templates <dir>	Dump the built-in XML template to the specified directory.
-b, --brex <BREX>	BREX data module code.
-C, --country <country>	The country ISO code of the new comment.
-c, --security <sec>	The security classification of the new comment.
-d, --defaults <file>	Specify the <code>.defaults</code> file name.
-f, --overwrite	Overwrite existing file.
-h, -?, --help	Show help/usage message.
-I, --date <date>	The issue date of the new comment in the form of YYYY-MM-DD.
-L, --language <lang>	The language ISO code of the new comment.
-m, --remarks <remarks>	Set the remarks for the new comment.
-o, --origname <orig>	The enterprise name of the originator of the comment.
-P, --priority <code>	The priority code of the new comment.
-p, --prompt	Prompt the user for values left unspecified.
-q, --quiet	Do not report an error when the file already exists.
-r, --response <type>	The response type of the new comment.
-t, --title <title>	The title of the new comment.
-v, --verbose	Print the file name of the newly created comment.
-z, --issue-type <type>	The issue type of the new comment.
--version	Show version information.



In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 **.defaults file**

Refer to [S1KDTOOLS-A-07-00-00-00A-040A-D](#) for information on the `.defaults` file which is used by all the `s1kd-new*` commands.

## 4 **Example**

```
$ s1kd-newcom -# EX-12345-2018-00001-Q
```

## s1kd-newddn

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 .defaults file.....	3
4 Example.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	s1kd-newdm - Description

### *Description*

#### 1 General

The **s1kd-newddn** tool creates a new S1000D data dispatch note with the code, metadata, and list of files specified.

#### 2 Usage

```
s1kd-newddn [options] <files>...
```

#### 3 Options

-#, --code <code>

The code of the new data dispatch note, in the form of MODELIDENTCODE-SENDER-RECEIVER-YEAR-SEQUENCE.

-\$, --issue <issue>

Specify which issue of S1000D to use. Currently supported issues are:

	– 5.0 (default)
	– 4.2
	– 4.1
	– 4.0
	– 3.0
	– 2.3
	– 2.2
	– 2.1
	– 2.0
-@, --out <path>	Save the new DDN to <path>. If <path> is an existing directory, the DDN will be created in it instead of the current directory. Otherwise, the DDN will be saved as the filename <path> instead of being automatically named.
-%, --templates <dir>	Use the XML template in the specified directory instead of the built-in template. The template must be named <code>ddn.xml</code> inside <dir> and must conform to the default S1000D issue (5.0).
--, --dump-templates <dir>	Dump the built-in XML template to the specified directory.
-a, --authorization <auth>	Specify the authorization.
-b, --brex <BREX>	BREX data module code.
-d, --defaults <file>	Specify the <code>.defaults</code> file name.
-f, --overwrite	Overwrite existing file.
-h, -?, --help	Show help/usage message.
-l, --date <date>	The issue date of the new DDN in the form of YYYY-MM-DD.
-m, --remarks <remarks>	Set the remarks for the new data dispatch note.
-N, --receiver-country <country>	The receiver's country.
-n, --sender-country <country>	The sender's country.
-o, --sender <name>	The enterprise name of the sender.
-p, --prompt	Prompt the user for values left unspecified.
-q, --quiet	Do not report an error when the file already exists.
-r, --receiver <name>	The enterprise name of the receiver.
-T, --receiver-city <city>	The receiver's city.
-t, --sender-city <city>	The sender's city.
-v, --verbose	Print the file name of the newly created DDN.
--version	Show version information.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 **.defaults file**

Refer to [S1KDTOOLS-A-07-00-00-00A-040A-D](#) for information on the `.defaults` file which is used by all the `s1kd-new*` commands.

## 4 **Example**

```
$ s1kd-newddn -# EX-12345-54321-2018-00001
```

## s1kd-newdm

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 Prompt (-p) option.....	5
3.2 .defaults file.....	5
3.3 .dmtypes file.....	6
3.4 .brexmap file.....	7
3.5 Custom XML templates (-%).....	7
4 Example.....	8

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-30-00-00-00A-040A-D</a>	s1kd-defaults - Description

### Description

#### 1 General

The **s1kd-newdm** tool creates a new S1000D data module with the data module code and other metadata specified.

#### 2 Usage

s1kd-newdm [options]

#### 3 Options

-, --code <DMC>

The data module code of the new data module. The prefix "DMC-" is optional.

	<p>If - is given for the code, a random data module code will be generated. If only a model identification code is given instead (e.g., -# TEST), or the .defaults file specifies a default model identification code, this will be used as part of the random code. The information type of the random code will be 000A-D.</p>
-\$, --issue <issue>	<p>Specify which issue of S1000D to use. Currently supported issues are:</p> <ul style="list-style-type: none"><li>- 5.0 (default)</li><li>- 4.2</li><li>- 4.1</li><li>- 4.0</li><li>- 3.0</li><li>- 2.3</li><li>- 2.2</li><li>- 2.1</li><li>- 2.0</li></ul>
-@, --out <path>	<p>Save the new data module to &lt;path&gt;. If &lt;path&gt; is an existing directory, the data module will be created in it instead of the current directory. Otherwise, the data module will be saved as the filename &lt;path&gt; instead of being automatically named.</p>
-%, --templates <dir>	<p>Use XML templates in the specified directory instead of the built-in templates.</p>
-~, --dump-templates <dir>	<p>Dump the built-in XML templates to the specified directory.</p>
-, --dump-dmtypes-xml	<p>Dumps the built-in default .dmtypes XML. This can be used to quickly set up a starting point for a project's custom info codes, from which info names can be modified and unused codes can be removed to fit the project.</p>
-, --dump-dmtypes	<p>Dumps the simple text form of the built-in default .dmtypes.</p>
-, --no-infoname	<p>Do not include an info name for the new data module.</p>
-a, --act <ACT>	<p>ACT data module code.</p>
-B, --generate-brex-rules	<p>When creating a new BREX data module, use the .defaults and .dmtypes files to add a basic set of context rules.</p>
-b, --brex <BREX>	<p>BREX data module code.</p>
-C, --country <country>	<p>The country ISO code of the new data module.</p>
-c, --security <sec>	<p>The security classification of the new data module.</p>
-D, --dmtypes <dmtypes>	<p>Specify the .dmtypes file name.</p>

-d, --defaults <defaults>	Specify the <code>.defaults</code> file name.
-f, --overwrite	Overwrite existing file.
-h, -?, --help	Show help/usage message.
-l, --date <date>	Issue date of the new data module in the form of YYYY-MM-DD.
-i, --infoname <info>	The info name of the new data module.
-j, --brexmap <map>	Use a custom <code>.brexmap</code> file when using the -B option.
-k, --skill <skill>	The skill level code of the new data module.
-L, --language <language>	The language ISO code of the new data module.
-M, --maintained-sns <SNS>	Determine the tech name from one of the built-in S1000D maintained SNS. Supported SNS: <ul style="list-style-type: none"><li>- Generic</li><li>- Support and training equipment</li><li>- Ordnance</li><li>- General communications</li><li>- Air vehicle, engines and equipment</li><li>- Tactical missiles</li><li>- General surface vehicles</li><li>- General sea vehicles</li></ul> When creating a BREX data module, this SNS will be included as the SNS rules of the new data module. The "maintainedSns" <code>.defaults</code> file key can be used to set one of the above SNS as the default.
-m, --remarks <remarks>	Set remarks for the new data module.
-N, --omit-issue	Omit issue/inwork numbers from filename.
-n, --issno <issue>	The issue number of the new data module.
-O, --origcode <CAGE>	The CAGE code of the originator.
-o, --origname <orig>	The originator enterprise name of the new data module.
-P, --sns-levels <levels>	When determining tech name from an SNS (-S or -M), include the specified number of levels of SNS in the tech name, from 1 (default) to 4. Each level is separated by " - ".  For example, if <levels> is 2, then: <ul style="list-style-type: none"><li>- tech names derived from a subsystem will be formatted as "System - Subsystem"</li><li>- tech names derived from a subsystem will be formatted as "Subsystem - Subsystem"</li></ul>

	<ul style="list-style-type: none"><li>– and tech names derived from an assembly will be formatted as "Subsystem - Assembly".</li></ul>
	<p>If two levels have the same title, then only one will be used. The "snsLevels" .defaults file key can also be set to control this option.</p>
-p, --prompt	Prompts the user for any values left unspecified.
-q, --quiet	Do not report an error when the file already exists.
-R, --rpccode <CAGE>	The CAGE code of the responsible partner company.
-r, --rpcname <RPC>	The responsible partner company enterprise name of the new data module.
-S, --sns <BREX>	Determine the tech name from the SNS rules of a specified BREX data module. This can also be specified in the .defaults file with the key "sns", or the key "brex" if "sns" is not specified.
-s, --schema <schema>	The schema URL.
-T, --type <schema>	The type (schema) of the new data module. Supported schemas:
	<ul style="list-style-type: none"><li>– appliccrossreftable - Applicability cross-reference table</li><li>– brdoc - Business rule document</li><li>– brex - Business rule exchange</li><li>– checklist - Maintenance checklist</li><li>– comrep - Common information repository</li><li>– condcrossreftable - Conditions cross-reference table</li><li>– container - Container</li><li>– crew - Crew/Operator information</li><li>– descript - Descriptive</li><li>– fault - Fault information</li><li>– frontmatter - Front matter</li><li>– ipd - Illustrated parts data</li><li>– learning - Technical training information</li><li>– prdcrossreftable - Product cross-reference table</li><li>– proced - Procedural</li><li>– process - Process</li><li>– sb - Service bulletin</li><li>– schedul - Maintenance planning information</li><li>– scocontent - SCO content information</li></ul>



	– techrep - Technical repository (replaced by comrep in issue 4.1)
	– wrngdata - Wiring data
	– wrngflds - Wiring fields
-t, --techname <tech>	The tech name of the new data module.
-V, --infoname-variant <variant>	The info name variant of the new data module.
-v, --verbose	Print the file name of the newly created data module.
-w, --inwork <inwork>	The inwork number of the new data module.
-z, --issue-type <type>	The issue type of the new data module.
--version	Show version information.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 Prompt (-p) option

If this option is specified, the program will prompt the user to enter values for metadata which was not specified when calling the program. If a piece of metadata has a default value (from the `.defaults` and `.dmtypes` files), it will be displayed in square brackets [] in the prompt, and pressing Enter without typing any value will select this default value.

### 3.2 `.defaults` file

This file sets default values for each piece of metadata. By default, the program will search the current directory and parent directories for a file named `.defaults`, but any file can be specified by using the `-d` option.

All of the `s1kd-new*` commands use the same `.defaults` file format, so this file can contain default values for multiple types of metadata.

Each line consists of the identifier of a piece of metadata and its default value, separated by whitespace. Lines which do not match a piece of metadata are ignored, and may be used as comments. Example:

```
# General
```

```
countryIsoCode          CA
languageIsoCode         en
originator              khzae.net
responsiblePartnerCompany khzae.net
securityClassification  01
```

Alternatively, the `.defaults` file can be written using an XML format, containing a root element `defaults` with child elements `default` which each have an attribute `ident` and an attribute `value`.

```
<?xml version="1.0"?>
<defaults>
<!-- General -->
<default ident="countryIsoCode" value="CA"/>
<default ident="languageIsoCode" value="en"/>
<default ident="originator" value="khzae.net"/>
<default ident="responsiblePartnerCompany" value="khzae.net"/>
<default ident="securityClassification" value="01"/>
</defaults>
```

### 3.3 .dmtypes file

This file sets the default schema and info name for data modules based on their info code. By default, the program will search the current directory and parent directories for a file named `.dmtypes`, but any file can be specified by using the `-D` option.

Each line consists of an info code, a schema identifier, and optionally a default info name.

Example:

```
000    descript
022    brex      Business rules
040    descript  Description
520    proced    Remove procedure
```

Like the `.defaults` file, the `.dmtypes` file may also be written in an XML format, where each child has an attribute `infoCode`, an attribute `schema`, and optionally an attribute `infoName`.

```
<?xml version="1.0">
<dmtypes>
<type infoCode="000" schema="descript"/>
<type infoCode="022" schema="brex" infoName="Business rules"/>
<type infoCode="040" schema="descript" infoName="Description"/>
<type infoCode="520" schema="proced" infoName="Remove procedure"/>
</dmtypes>
```

The info code field can also include an info code variant, item location code, learn code, and learn event code, which allows for more specific default schemas and info names.

Example of info code variants:

```
258A  proced    Other procedure to clean
```

258B proced Other procedure to clean, Clean with air  
258C proced Other procedure to clean, Clean with water

Example of item location codes:

200A-A proced Servicing, while installed  
200A-C proced Servicing, on the bench  
200A-T proced Servicing, training

Example of learn codes:

100A-A-H10A learning Operation: Performance analysis  
100A-A-T5CC learning Operation: Simulation  
100A-A-T80E learning Operation: Assessment

The XML format additionally supports the use of the attribute `infoNameVariant`, for use with S1000D Issue 5.0 and up, allowing extensions of the info name to be encoded separately:

```
<dmtypes>
<type
infoCode="258A"
schema="proced"
infoName="Other procedure to clean"/>
<type
infoCode="258B"
schema="proced"
infoName="Other procedure to clean"
infoNameVariant="Clean with air"/>
<type
infoCode="258C"
schema="proced"
infoName="Other procedure to clean"
infoNameVariant="Clean with water"/>
</dmtypes>
```

Defaults are chosen in the order they are listed in the `.dmtypes` file. An info code which does not specify a variant, item location code, learn code or learn event code, or uses asterisks in their place, matches all possible variants, item location codes, learn codes and learn event codes.

### 3.4 .brexmap file

Refer to [S1KDTOOLS-A-30-00-00-00A-040A-D](#) for a description of the `.brexmap` file.

### 3.5 Custom XML templates (-%)

A minimal set of S1000D templates are built-in to this tool, but customized templates may be used with the `-%` option. This option takes a path to a directory where the custom templates are located. Each template should be named `<schema>.xml`, where `<schema>` is the name of the schema, matching one of the schema names in the `.dmtypes` file or the schema specified with the `-T` option.



The templates must be written to conform to the default S1000D issue of this tool (currently 5.0). They will be automatically transformed when another issue is specified with the `-$` option.

The `templates default` can also be specified in the `.defaults` file to use these custom templates by default.

## **4 Example**

```
$ slkd-newdm -# S1KDTOOLS-A-00-07-00-00A-040A-D
```

## s1kd-newdml

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 .defaults file.....	3
4 Example.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	s1kd-newdml - Description

### *Description*

#### 1

#### **General**

The **s1kd-newdml** tool creates a new S1000D data management list with the code and other metadata specified.

#### 2

#### **Usage**

```
s1kd-newdml [options] [<object>...]
```

#### 3

#### **Options**

-#, --code <code>

The data management list code of the new DML.

-\$, --issue <issue>

Specify which issue of S1000D to use. Currently supported issues are:

— 5.0 (default)

	– 4.2
	– 4.1
	– 4.0
	– 3.0
	– 2.3
	– 2.2
	– 2.1
	– 2.0
-@, --out <path>	Save the new DML to <path>. If <path> is an existing directory, the DML will be created in it instead of the current directory. Otherwise, the DML will be saved as the filename <path> instead of being automatically named.
-%, --templates <dir>	Use the XML template in the specified directory instead of the built-in template. The template must be named <code>dml.xml</code> inside <dir> and must conform to the default S1000D issue (5.0).
--, --dump-templates <dir>	Dump the built-in XML template to the specified directory.
-b, --brex <BREX>	BREX data module code.
-c, --security <sec>	The security classification of the new DML.
-d, --defaults <file>	Specify the <code>.defaults</code> file name.
-f, --overwrite	Overwrite existing file.
-h, -?, --help	Show usage message.
-l, --date <date>	The issue date of the new DML in the form of YYYY-MM-DD.
-i, --info-code <info code>	When creating a DMRL from SNS rules (-S), use the specified info code for each entry. Specify this option multiple times to create multiple data modules for each part of the SNS. <info code> can specify: <ul style="list-style-type: none"><li>– the base info code (e.g., 520)</li><li>– the info code variant (e.g., 520B)</li><li>– the item location code (e.g., 520B-C)</li></ul>
-l, --list	Treat input (stdin or arguments) as lists of CSDB objects to add to the new list.
-m, --remarks <remarks>	Set the remarks for the new data management list.
-N, --omit-issue	Omit the issue/inwork numbers from filename.
-n, --issno <issue>	The issue number of the new DML.
-p, --prompt	Prompts the user for any values left unspecified.
-q, --quiet	Do not report an error when the file already exists.

-R, --rpccode <NCAGE>	Specifies a default responsible partner company enterprise code for entries which do not carry this in their ID STATUS section (ICN, COM, DML).
-r, --rpcname <name>	Specifies a default responsible partner company enterprise name for entries which do not carry this in their IDSTATUS section (ICN, COM, DML).
-S, --sns <SNS>	Create a DMRL using the specified SNS rules.
-v, --verbose	Print the file name of the newly created DML.
-w, --inwork <inwork>	The inwork number of the new DML.
-z, --issue-type <type>	The issue type of the new DML.
--version	Show version information.
<object>...	Any number of CSDB object file names to automatically add to the list.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 .defaults file

Refer to [S1KDTOOLS-A-07-00-00-00A-040A-D](#) for information on the .defaults file which is used by all the s1kd-new\* commands.

## 4 Example

```
$ s1kd-newdml -# EX-12345-C-2018-00001
```

## s1kd-newimf

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1      General.....	1
2      Usage.....	1
3      Options.....	1
3.1    .defaults file.....	3
4      Example.....	3

#### List of tables

1      References.....	1
------------------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	s1kd-newdm - Description

### *Description*

#### 1

##### **General**

The **s1kd-newimf** tool creates a new S1000D ICN metadata file for specified ICN files.

#### 2

##### **Usage**

```
s1kd-newimf [options] <ICNs>...
```

#### 3

##### **Options**

-\$, --issue <issue>

Specify which issue of S1000D to use. Currently supported issues are:

- 5.0 (default)
- 4.2



-@, --out <path>	Save the new IMF to <path>. If <path> is an existing directory, the IMF will be created in it instead of the current directory. Otherwise, the IMF will be saved as the filename <path> instead of being automatically named.
-%, --templates <dir>	Use the XML template in <dir> instead of the built-in template. The template must be named <code>icnmetadata.xml</code> inside <dir> and must conform to the default S1000D issue (5.0).
--, --dump-templates <dir>	Dump the built-in XML template to the specified directory.
-b, --brex <BREX>	BREX data module code.
-c, --security <sec>	The security classification of the new ICN metadata file.
-d, --defaults <file>	Specify the <code>.defaults</code> file name.
-f, --overwrite	Overwrite existing file.
-h, -?, --help	Show help/usage message.
-l, --date <date>	The issue date of the new ICN metadata file in the form of YYYY-MM-DD.
-m, --remarks <remarks>	Set the remarks for the new ICN metadata file.
-n, --issno <issue>	The issue number of the new ICN metadata file.
-O, --origcode <CAGE>	The CAGE code of the originator.
-o, --origname <orig>	The originator enterprise name of the new ICN metadata file.
-p, --prompt	Prompts the user for any values left unspecified.
-q, --quiet	Do not report an error when the file already exists.
-R, --rpccode <CAGE>	The CAGE code of the responsible partner company.
-r, --rpcname <RPC>	The responsible partner company enterprise name of the new ICN metadata file.
-t, --title <title>	The ICN title (if creating multiple ICNs, they will all use this title).
-v, --verbose	Print the file name of the newly created IMF.
-w, --inwork <inwork>	The inwork issue of the new ICN metadata file.
--version	Show version information.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.



--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 **.defaults file**

Refer to [S1KDTOOLS-A-07-00-00-00A-040A-D](#) for information on the `.defaults` file which is used by all the `s1kd-new*` commands.

## 4 **Example**

```
$ s1kd-newimf ICN-EX-00001-001-01.PNG
```

## s1kd-newpm

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 .defaults file.....	3
4 Example.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	s1kd-newdm - Description

### Description

#### 1

#### General

The **s1kd-newpm** tool creates a new S1000D publication module with the publication module code and other metadata specified.

#### 2

#### Usage

```
s1kd-newpm [options] [<DM>...]
```

#### 3

#### Options

-#, --code <PMC>

The publication module code of the new publication module.

-\$, --issue <issue>

Specify which issue of S1000D to use. Currently supported issues are:

— 5.0 (default)

	– 4.2
	– 4.1
	– 4.0
	– 3.0
	– 2.3
	– 2.2
	– 2.1
	– 2.0
-@, --out <path>	Save the new publication module to <path>. If <path> is an existing directory, the publication module will be created in it instead of the current directory. Otherwise, the publication module will be saved as the filename <path> instead of being automatically named.
-%, --templates <dir>	Use the XML template in <dir> instead of the built-in template. The template must be named <code>pm.xml</code> in <dir> and must conform to the default S1000D issue (5.0).
~ , --dump-templates <dir>	Dump the built-in XML template to the specified directory.
-a, --act <ACT>	ACT data module code.
-b, --brex <BREX>	BREX data module code.
-C, --country <country>	The country ISO code of the new publication module.
-c, --security <sec>	The security classification of the new publication module.
-D, --include-date	Include issue date in referenced data modules.
-d, --defaults <file>	Specify the <code>.defaults</code> file name.
-f, --overwrite	Overwrite existing file.
-h, -?, --help	Show help/usage message.
-I, --date <date>	The issue date of the new publication module in the form of YYYY-MM-DD.
-i, --include-issue	Include issue information in referenced data modules.
-L, --language <language>	The language ISO code of the new publication module.
-l, --include-lang	Include language information in referenced data modules.
-m, --remarks <remarks>	Set remarks for the new publication module.
-n, --issno <issue>	The issue number of the new publication module.
-p, --prompt	Prompt the user for any values left unspecified.
-q, --quiet	Do not report an error when the file already exists.
-R, --rpccode <CAGE>	The CAGE code of the responsible partner company.
-r, --rpcname <RPC>	The responsible partner company enterprise name of the new publication module.

-s, --short-title <title>	The short title of the new publication module.
-T, --include-title	Include titles in referenced data modules.
-t, --title <title>	The title of the new publication module.
-v, --verbose	Print the file name of the newly created publication module.
-w, --inwork <inwork>	The inwork number of the new publication module.
-z, --issue-type <type>	The issue type of the new publication module.
--version	Show version information.
<DM>...	Any number of data modules to automatically reference in the new publication module's content.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 .defaults file

Refer to [S1KDTOOLS-A-07-00-00-00A-040A-D](#) for information on the .defaults file which is used by all the s1kd-new\* commands.

## 4 Example

```
$ s1kd-newpm -# EX-12345-00001-00
```

## s1kd-newsmc

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 .defaults file.....	3
4 Example.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	s1kd-newdm - Description

### *Description*

#### 1 General

The **s1kd-newsmc** tool creates a new S1000D SCORM content package with the SCORM content package code and other metadata specified.

#### 2 Usage

```
s1kd-newsmc [options] [<DM>...]
```

#### 3 Options

-#, --code <SMC>

The SCORM content package code of the new SCORM content package.

-\$, --issue <issue>

Specify which issue of S1000D to use. Currently supported issues are:

	<ul style="list-style-type: none"><li>– 5.0 (default)</li><li>– 4.2</li><li>– 4.1</li></ul>
-@, --out <path>	Save the new SCORM content package to <path>. If <path> is an existing directory, the SCORM content package will be created in it instead of the current directory. Otherwise, the SCORM content package will be saved as the filename <path> instead of being automatically named.
-%, --templates <dir>	Use the XML template in <dir> instead of the built-in template. The template must be named <code>scormcontentpackage.xml</code> in <dir> and must conform to the default S1000D issue (5.0).
~ , --dump-templates <dir>	Dump the built-in XML template to the specified directory.
-a, --act <ACT>	ACT data module code.
-b, --brex <BREX>	BREX data module code.
-C, --country <country>	The country ISO code of the new SCORM content package.
-c, --security <sec>	The security classification of the new SCORM content package.
-D, --include-date	Include issue date in referenced data modules.
-d, --defaults <file>	Specify the <code>.defaults</code> file name.
-f, --overwrite	Overwrite existing file.
-h, -?, --help	Show help/usage message.
-I, --date <date>	The issue date of the new SCORM content package in the form of YYYY-MM-DD.
-i, --include-issue	Include issue information in referenced data modules.
-k, --skill <skill>	The skill level code of the new SCORM content package.
-L, --language <language>	The language ISO code of the new SCORM content package.
-l, --include-lang	Include language information in referenced data modules.
-m, --remarks <remarks>	Set remarks for the new SCORM content package.
-n, --issno <issue>	The issue number of the new SCORM content package.
-p, --prompt	Prompt the user for any values left unspecified.
-q, --quiet	Do not report an error when the file already exists.
-R, --rpccode <CAGE>	The CAGE code of the responsible partner company.
-r, --rpcname <RPC>	The responsible partner company enterprise name of the new SCORM content package.
-T, --include-title	Include titles in referenced data modules.

<b>-t, --title &lt;title&gt;</b>	The title of the new SCORM content package.
<b>-v, --verbose</b>	Print the file name of the newly created SCORM content package.
<b>-w, --inwork &lt;inwork&gt;</b>	The inwork number of the new SCORM content package.
<b>-z, --issue-type &lt;type&gt;</b>	The issue type of the new SCORM content package.
<b>--version</b>	Show version information.
<b>&lt;DM&gt;...</b>	Any number of data modules to automatically reference in the new SCORM content package's content.

In addition, the following options allow configuration of the XML parser:

<b>--dtdload</b>	Load the external DTD.
<b>--huge</b>	Remove any internal arbitrary parser limits.
<b>--net</b>	Allow network access to load external DTD and entities.
<b>--noent</b>	Resolve entities.
<b>--parser-errors</b>	Emit errors from parser.
<b>--parser-warnings</b>	Emit warnings from parser.
<b>--xinclude</b>	Do XInclude processing.
<b>--xml-catalog &lt;file&gt;</b>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 **.defaults file**

Refer to [S1KDTOOLS-A-07-00-00-00A-040A-D](#) for information on the `.defaults` file which is used by all the `s1kd-new*` commands.

## 4 **Example**

```
$ s1kd-newsmc -# EX-12345-00001-00
```



## s1kd-newupf

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 .defaults file.....	2
4 Example.....	2

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
<a href="#">S1KDTOOLS-A-07-00-00-00A-040A-D</a>	s1kd-newdm - Description

### Description

#### 1 General

The **s1kd-newupf** tool creates a new S1000D data update file for two specified issues of a CIR data module. Changes to items between the source and target issues of the CIR are recorded in the resulting UPF, along with update instructions.

#### 2 Usage

s1kd-newupf [options] <SOURCE> <TARGET>

#### 3 Options

-\$, --issue <issue>

Specify which issue of S1000D to use. Currently supported issues are:

— 5.0 (default)

	– 4.2
	– 4.1
-@, --out <path>	Save the new update file to <path>. If <path> is an existing directory, the update file will be created in it instead of the current directory. Otherwise, the update file will be saved as the filename <path> instead of being automatically named.
-%, --templates <dir>	Use XML template in the specified directory instead of the built-in template. The template must be named <code>update.xml</code> in the directory <dir>, and must conform to the default S1000D issue of this tool (5.0).
~, --dump-templates <dir>	Dump the built-in XML template to the specified directory.
-d, --defaults <file>	Specify the <code>.defaults</code> file name.
-f, --overwrite	Overwrite existing file.
-h, -?, --help	Show help/usage message.
-q, --quiet	Do not report an error when the file already exists.
-v, --verbose	Print the file name of the newly created data update file.
--version	Show version information.
<SOURCE>	The source (original) issue of the CIR data module.
<TARGET>	The target (updated) issue of the CIR data module.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 .defaults file

Refer to [S1KDTOOLS-A-07-00-00-00A-040A-D](#) for information on the `.defaults` file which is used by all the `s1kd-new*` commands.

## 4 Example

```
$ s1kd-newupf \  
    DMC-EX-A-00-00-00-00A-00GA-D_001-00_EN-CA.XML \  
    \
```



DMC-EX-A-00-00-00-00A-00GA-D\_002-00\_EN-CA.XML

## s1kd-addicn

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1      General.....	1
2      Usage.....	1
3      Options.....	1
4      Example.....	2

#### List of tables

1      References.....	1
------------------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
None	

### *Description*

#### 1      **General**

The **s1kd-addicn** tool adds the required DTD entity and notation declarations to an S1000D module in order to reference an ICN file.

#### 2      **Usage**

```
s1kd-addicn [-o <file>] [-s <src>] [-fh?] <ICN>...
```

#### 3      **Options**

-F, --full-path	Use the whole path given for the ICN file as the SYSTEM ID.
-f, --overwrite	Overwrite source file instead of writing to stdout.
-h, -?, --help	Show help/usage message.
-o, --out <out>	The filename to output to. Default is to write to stdout.

-s, --source <src>	The source module to add the ICN(s) to. Default is to read from stdin.
--version	Show version information.
<ICN>..	Any number of ICN files to add.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Example

```
$ slkd-addicn -fs <DM> ICN-EX-12345-001-01.JPG
```

## s1kd-ls

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
4 Example.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

#### 1 General

The **s1kd-ls** tool searches the current directory or specified directory trees and lists the file names of CSDB objects matching certain criteria.

The files representing the CSDB objects must use either the standard S1000D file naming conventions, or the alternate naming convention supported by these tools using the -N option.

#### 2 Usage

```
s1kd-ls [-0CDGiILlMNnoPRrSUwX7] [-e <cmd>]
        [<object>|<dir> ...]
```

#### 3 Options

- |                                    |  |
|------------------------------------|--|
| -0, --null                         | Output a null-delimited list of CSDB object paths.   |
| -C, -D, -G, -L, -M, -P, -S, -U, -X | List comments, data modules, ICNs, data management lists, ICN metadata files, publication modules, SCORM |

content packages, data update files, and data dispatch notes respectively. If none are specified, -CDGLMPSUX is assumed.

The following long options can also be used for each: --com, --dm, --icn, --dml, --imf, --pm, --smc, --upf, --ddn.

-e, --exec <cmd>

Execute a command for each CSDB object instead of listing them. The string "{}" is replaced by the current CSDB object file name everywhere it occurs in the arguments to the command.

-h, -?, --help

Show the usage message.

-I, --inwork

Show only inwork issues of objects (inwork != 00).

-i, --official

Show only official issues of objects (inwork = 00).

-l, --latest

Show only the latest official/inwork issue of objects.

-N, --omit-issue

Assume that the files being listed do not include the issue info in their filenames, i.e. they were created using the -N option of the s1kd-new\* tools.

-n, --other

List non-S1000D files.

-o, --old

Show only old official/inwork issues of objects.

-R, --read-only

Show only non-writable object files.

-r, --recursive

Recursively descend in to directories.

-w, --writable

Show only writable object files.

-7, --list

Treat input as a list of CSDB objects to process.

--version

Show version information.

<object>|<dir> ...

An optional list of CSDB objects to list or directories to search for CSDB objects in. If none are specified, CSDB objects in the current directory are listed by default.

In addition, the following options allow configuration of the XML parser:

--dtdload

Load the external DTD.

--huge

Remove any internal arbitrary parser limits.

--net

Allow network access to load external DTD and entities.

--noent

Resolve entities.

--parser-errors

Emit errors from parser.

--parser-warnings

Emit warnings from parser.

--xinclude

Do XInclude processing.

--xml-catalog <file>

Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Example

```
$ slkd-ls
DMC-EX-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
DMC-EX-A-00-00-00-00A-040A-D_000-02_EN-CA.XML
DMC-EX-B-00-00-00-00A-040A-D_000-01_EN-CA.XML
ICN-12345-00001-001-01.JPG
ICN-12345-00001-002-01.JPG
PMC-EX-12345-00001-00_000-01_EN-CA.XML

$ slkd-ls -l
DMC-EX-A-00-00-00-00A-040A-D_000-02_EN-CA.XML
DMC-EX-B-00-00-00-00A-040A-D_000-01_EN-CA.XML
ICN-12345-00001-002-01.JPG
PMC-EX-12345-00001-00_000-01_EN-CA.XML

$ slkd-ls -o
DMC-EX-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
ICN-12345-00001-001-01.JPG

$ slkd-ls -D | slkd-metadata -lt -ntechName -ninfoName -nissueDate
Example A      Description      2018-03-20
Example A      Description      2018-03-29
Example B      Description      2018-03-29

$ slkd-ls -Dl -e 'stat --printf="%n %Y\n" {}'
DMC-EX-A-00-00-00-00A-040A-D_000-02_EN-CA.XML 1553738720
DMC-EX-B-00-00-00-00A-040A-D_000-01_EN-CA.XML 1553738751
```



## s1kd-ref

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 .externalpubs file.....	3
4 Examples.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

*Table 1 References*

Data module/Technical publication	Title
None	

### *Description*

- 1 General**

The **s1kd-ref** tool generates the XML for S1000D reference elements using the specified code or filename. When using a filename, it can parse the CSDB object to include the issue, language, and/or title information in the reference.
- 2 Usage**

```
s1kd-ref [-cdfgiLlqRrStuvh?] [-$ <issue>] [-s <src>] [-T <opts>]
        [-x <xpath>] [-3 <file>] [-o <dst>] [<code>|<file> ...]
```
- 3 Options**

<p>-\$, --issue &lt;issue&gt;</p> <p>-c, --content</p>	<p>Output XML for the specified issue of S1000D.</p> <p>When using the -T option, only transform textual references found in the content section of CSDB objects.</p>
--	---

-d, --include-date	Include the issue date in the reference (target must be a file)
-f, --overwrite	Overwrite source data module instead of writing to stdout.
-g, --guess-prefix	Accept references which do not include a standard prefix (e.g., "DMC-", "PMC-") and guess what they are based on their format and, when using the -T option, the XML context in which they occur.
-h, -?, --help	Show the usage message.
-i, --include-issue	Include the issue information in the reference (target must be a file)
-L, --list	Treat input as a list of CSDB objects.
-l, --include-lang	Include the language information in the reference (target must be a file)
-o, --out <dst>	Output to <dst> instead of stdout.
-q, --quiet	Quiet mode. Do not print errors.
-R, --repository-id	Generate a <repositorySourceDmIdent> for a data module.
-r, --add	Add the generated reference to the source data module's refs table and output the modified data module to stdout.
-S, --source-id	Generate a <sourceDmIdent> (for data modules) or <sourcePmIdent> (for publication modules).
-s, --source <src>	Specify a source data module <src> to add references to when using the -r option.
-T, --transform <opts>	Transform textual references into the appropriate XML within text nodes in the XML document(s) specified. The textual references must include the standard prefixes (e.g., "DMC-", "PMC-"), unless the -p option is specified. <opts> is a sequence of characters from "CDEGLPSY", for comment, data module, external publication, ICN, DML, publication module, SCORM content package and CSN references respectively. If "all" is given, then all types of references will be transformed.
-t, --include-title	Include the title in the reference (target must be a file).
-u, --include-url	Include the full URL/filename of the reference with the xlink:href attribute.
-v, --verbose	Verbose output.
-x, --xpath <xpath>	When using the -T option, this specifies which nodes to transform textual references in. By default, only the elements which can contain each type of reference are considered.
-3, --externalpubs <file>	Use a custom .externalpubs file.
--version	Show version information.

`<code>|<file>`

Either a code, including the prefix (DMC, PMC, etc.), or the filename of a CSDB object.

In addition, the following options allow configuration of the XML parser:

<code>--dtdload</code>	Load the external DTD.
<code>--huge</code>	Remove any internal arbitrary parser limits.
<code>--net</code>	Allow network access to load external DTD and entities.
<code>--noent</code>	Resolve entities.
<code>--parser-errors</code>	Emit errors from parser.
<code>--parser-warnings</code>	Emit warnings from parser.
<code>--xinclude</code>	Do XInclude processing.
<code>--xml-catalog &lt;file&gt;</code>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 **.externalpubs file**

The `.externalpubs` file contains definitions of external publication references. This can be used to generate the XML for an external publication reference by specifying the external publication code.

Example of a `.externalpubs` file:

```
<externalPubs>
<externalPubRef>
<externalPubRefIdent>
<externalPubCode>ABC</externalPubCode>
<externalPubTitle>ABC Manual</externalPubTitle>
</externalPubRefIdent>
</externalPubRef>
</externalPubs>
```

## 4 **Examples**

Reference to data module with data module code:

```
$ slkd-ref DMC-EX-A-00-00-00-00A-040A-D
<dmRef>
<dmRefIdent>
<dmCode modelIdentCode="EX" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00" disassyCode="00"
disassyCodeVariant="A" infoCode="040" infoCodeVariant="A"
itemLocationCode="D"/>
</dmRefIdent>
</dmRef>
```

Reference to data module with data module code and issue/language:

```
$ slkd-ref -il DMC-EX-A-00-00-00-00A-040A-D_001-03_EN-CA
<dmRef>
<dmRefIdent>
<dmCode modelIdentCode="EX" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00" disassyCode="00"
disassyCodeVariant="A" infoCode="040" infoCodeVariant="A"
itemLocationCode="D"/>
<issueInfo issueNumber="001" inWork="03"/>
<language languageIsoCode="en" countryIsoCode="CA"/>
</dmRefIdent>
</dmRef>
```

Reference to data module with all information, from a file:

```
$ slkd-ref -dilt DMC-EX-A-00-00-00-00A-040A-D_001-03_EN-CA.XML
<dmRef>
<dmRefIdent>
<dmCode modelIdentCode="EX" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00" disassyCode="00"
disassyCodeVariant="A" infoCode="040" infoCodeVariant="A"
itemLocationCode="D"/>
<issueInfo issueNumber="001" inWork="03"/>
<language languageIsoCode="en" countryIsoCode="CA"/>
</dmRefIdent>
<dmRefAddressItems>
<dmTitle>
<techName>Example</techName>
<infoName>Description</infoName>
</dmTitle>
<issueDate year="2018" month="06" day="25"/>
</dmRefAddressItems>
</dmRef>
```

Reference to a catalog sequence number:

```
$ slkd-ref CSN-EX-A-00-00-00-01A-004A-D
<catalogSeqNumberRef modelIdentCode="EX" systemDiffCode="A"
systemCode="00" subSystemCode="0" subSubSystemCode="0" assyCode="00"
figureNumber="01" figureNumberVariant="A" item="004" itemVariant="A"
itemLocationCode="D"/>
```

Reference to a comment:

```
$ slkd-ref COM-EX-12345-2018-00001-Q
<commentRef>
<commentRefIdent>
<commentCode modelIdentCode="EX" senderIdent="12345"
yearOfDataIssue="2018" seqNumber="00001" commentType="q"/>
</commentRefIdent>
</commentRef>
```

**Reference to a data management list:**

```
$ slkd-ref DML-EX-12345-C-2018-00001
<dmlRef>
<dmlRefIdent>
<dmlCode modelIdentCode="EX" senderIdent="12345" dmlType="c"
yearOfDataIssue="2018" seqNumber="00001"/>
</dmlRefIdent>
</dmlRef>
```

**Reference to an information control number:**

```
$ slkd-ref ICN-EX-A-000000-A-00001-A-001-01
<infoEntityRef infoEntityRefIdent="ICN-EX-A-000000-A-00001-A-001-01"/>
```

**Reference to a publication module:**

```
$ slkd-ref PMC-EX-12345-00001-00
<pmRef>
<pmRefIdent>
<pmCode modelIdentCode="EX" pmIssuer="12345" pmNumber="00001"
pmVolume="00"/>
</pmRefIdent>
</pmRef>
```

**Reference to a SCORM content package:**

```
$ slkd-ref SMC-EX-12345-00001-00
<scormContentPackageRef>
<scormContentPackageRefIdent>
<scormContentPackageCode
modelIdentCode="EX"
scormContentPackageIssuer="12345"
scormContentPackageNumber="00001"
scormContentPackageVolume="00"/>
</scormContentPackageRefIdent>
</scormContentPackageRef>
```

**Source identification for a data module:**

```
$ slkd-ref -S DMC-EX-A-00-00-00-00A-040A-D_001-00_EN-CA.XML
<sourceDmIdent>
<dmCode modelIdentCode="EX" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00" disassyCode="00"
disassyCodeVariant="A" infoCode="040" infoCodeVariant="A"
itemLocationCode="D"/>
<language languageIsoCode="en" countryIsoCode="CA"/>
<issueInfo issueNumber="001" inWork="00"/>
</sourceDmIdent>
```

**Source identification for a publication module:**

```
$ slkd-ref -S PMC-EX-12345-00001-00_001-00_EN-CA.XML
<sourcePmIdent>
<pmCode modelIdentCode="EX" pmIssuer="12345" pmNumber="00001"
pmVolume="00"/>
<language languageIsoCode="en" countryIsoCode="CA"/>
<issueInfo issueNumber="001" inWork="00"/>
</sourcePmIdent>
```

Source identification for a SCORM content package:

```
$ slkd-ref -S SMC-EX-12345-00001-00_001-00_EN-CA.XML
<sourceScormContentPackageIdent>
<scormContentPackageCode
modelIdentCode="EX"
scormContentPackageIssuer="12345"
scormContentPackageNumber="00001"
scormContentPackageVolume="00"/>
<language languageIsoCode="en" countryIsoCode="CA"/>
<issueInfo issueNumber="000" inWork="01"/>
</sourceScormContentPackageIdent>
```

Repository source identification for a CIR data module:

```
$ slkd-ref -R DMC-EX-A-00-00-00-00A-00GA-D_001-00_EN-CA.XML
<repositorySourceDmIdent>
<dmCode modelIdentCode="EX" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00" disassyCode="00"
disassyCodeVariant="A" infoCode="00G" infoCodeVariant="A"
itemLocationCode="D"/>
<language languageIsoCode="en" countryIsoCode="CA"/>
<issueInfo issueNumber="001" inWork="00"/>
</repositorySourceDmIdent>
```

Reference to an external publication:

```
$ slkd-ref ABC
<externalPubRef>
<externalPubRefIdent>
<externalPubCode>ABC</externalPubCode>
</externalPubRefIdent>
</externalPubRef>
```

Reference to an external publication (from the .externalpubs file):

```
$ slkd-ref ABC
<externalPubRef>
<externalPubRefIdent>
<externalPubCode>ABC</externalPubCode>
<externalPubTitle>ABC Manual</externalPubTitle>
</externalPubRefIdent>
```



</externalPubRef>

## s1kd-metadata

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1      General.....	1
2      Usage.....	1
3      Options.....	1
4      Example.....	3

#### List of tables

1      References.....	1
------------------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
None	

### *Description*

#### 1      **General**

The **s1kd-metadata** tool provides a simple way to fetch and change metadata on S1000D CSDB objects.

#### 2      **Usage**

```
s1kd-metadata [options] [<object>...]
```

#### 3      **Options**

- |                  |  |
|------------------|--|
| -0, --null       | Print a null-delimited list of values of the pieces of metadata specified with -n, or all available metadata if -n is not specified.                                       |
| -c, --set <file> | Use <file> to edit metadata files. <file> consists of lines starting with a metadata name, followed by whitespace, followed by the new value for the metadata (the program |



	uses this same format when outputting all metadata if no <name> is specified).
-d, --date-format <fmt>	The format to use when printing dates, such as the "issueDate" or "modified" metadata. <fmt> should conform to the format used by strftime. The default is "%Y-%m-%d".
-E, --editable	When showing all metadata, only list editable items. This is useful when creating a file for use with the -c option.
-e, --exec <cmd>	Execute a command for each CSDB object. The string "{}" is replaced by the current CSDB object file name everywhere it occurs in the arguments to the command.
-F, --format <fmt>	Print a formatted line for each CSDB object. Metadata names surrounded with % (e.g. %issueDate%) will be substituted by the value read from the object.
-f, --overwrite	When editing metadata, overwrite the object. The default is to output the modified object to stdout.
-H, --info	Lists all available metadata with a short description of each. Specify specific metadata to describe with the -n option.
-h, -?, --help	Show help/usage message.
-l, --list	Treat input as a list of object filenames to read or edit metadata on, rather than an object itself.
-m, --matches <regex>	Used after a -w or -W option, this specifies a regular expression to match the value of the given metadata against, instead of a literal value (-v).
-n, --name <name>	The name of the piece of metadata to fetch. This option can be specified multiple times to fetch multiple pieces of metadata. If -n is not specified, all available metadata names are printed with their values. This output can be sent to a text file, edited, and then specified with the -c option as a means of editing metadata in any text editor.
-q, --quiet	Quiet mode. Non-fatal errors such as a missing piece of optional metadata in an object will not be printed to stderr.
-T, --raw	Do not format columns in output.
-t, --tab	Print a tab-delimited list of values of the pieces of metadata specified with -n, or all available metadata if -n is not specified.
-v, --value <value>	When following a -n option, this specifies the new value for that piece of metadata.
	When following a -w or -W option, this specifies the value to compare that piece of metadata to.
	Each -n, -w, or -W can be followed by -v to edit or define conditions on multiple pieces of metadata.

-W, --where-not <name>	Show or edit metadata only on objects where the value of <name> is not equal to the value specified in the following -v option. If no -v option follows, this will show objects which do not have metadata <name> of any value.
-w, --where <name>	Show or edit metadata only on objects where the value of <name> is equal to the value specified in the following -v option. If no -v option follows, this will show objects which have metadata <name> with any value.
--version	Show version information.
<object>...	The object(s) to show/edit metadata on. The default is to read from stdin.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Example

```
$ ls
DMC-S1KDTOOLS-A-09-00-00-00A-040A-D_EN-CA.XML
DMC-S1KDTOOLS-A-0Q-00-00-00A-040A-D_EN-CA.XML

$ DMOD=DMC-S1KDTOOLS-A-09-00-00-00A-040A-D_EN-CA.XML
$ slkd-metadata $DMOD
issueDate                2017-08-14
techName                 slkd-metadata(1) | slkd-tools
responsiblePartnerCompany khzae.net
originator               khzae.net
securityClassification    01
schema                  descript
schemaUrl               http://www.s1000d.org/S1000D_5-0/xml_
schema_flat/descript.xsd
type                    dmodule
applic                  All
brex                    S1000D-F-04-10-0301-00A-022A-D
issueType                new
```



```
languageIsoCode      en
countryIsoCode       CA
issueNumber           001
inWork               00
dmCode               S1KDTOOLS-A-09-00-00-00A-040A-D
```

```
$ slkd-metadata -n techName -v "New title" $DMOD
$ slkd-metadata -n techName $DMOD
New title
```

```
$ slkd-metadata -n techName DMC-*.XML
New title
slkd-aspp(1) | slkd-tools
```

```
$ slkd-metadata -F "%techName% (%issueDate%) %issueType%" DMC-*.XML
New title (2017-08-14) new
slkd-aspp(1) | slkd-tools (2018-03-28) changed
```

```
$ slkd-metadata -F "%techName%" -w subSubSystemCode -v Q DMC-*.XML
slkd-aspp(1) | slkd-tools
```

```
$ slkd-metadata -n path -w subSystemCode -v Q
DMC-S1KDTOOLS-A-0Q-00-00-00A-040A-D_EN-CA.XML
```

```
$ slkd-metadata -n path -W subSystemCode -v Q
DMC-S1KDTOOLS-A-09-00-00-00A-040A-D_EN-CA.XML
```

```
$ slkd-metadata -n path -w subSystemCode -m [0-9]
DMC-S1KDTOOLS-A-09-00-00-00A-040A-D_EN-CA.XML
```

## s1kd-mvref

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1      General.....	1
2      Usage.....	1
3      Options.....	1
4      Example.....	2

#### List of tables

1      References.....	1
------------------------	---

### *References*

*Table 1 References*

Data module/Technical publication	Title
None	

### *Description*

#### 1      **General**

The **s1kd-mvref** tool changes all references to one object (the source object) into references to another object (the target object) in a specified set of objects.

#### 2      **Usage**

```
s1kd-mvref [-d <dir>] [-s <source>] [-t <target>] [-cflqvh?]
[<object>...]
```

#### 3      **Options**

-c, --content	Only move references within the content section of objects.
-d, --dir <dir>	Move references in all objects in the specified directory.
-f, --overwrite	Overwrite updated input objects.
-h, -?, --help	Show help/usage message

-l, --list	Treat input as a list of data module filenames, rather than a data module itself.
-q, --quiet	Quiet mode. Errors are not printed.
-s, --source <source>	The source object.
-t, --target <target>	Change all references to the source object specified with -s into references that point to <target>.
-v, --verbose	Verbose output.
--version	Show version information.
<object>...	Objects to move references in.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Example

```
$ slkd-mvref -f -s <old DM> -t <new DM> DMC-*.XML
```

## s1kd-sns

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1      General.....	1
2      Usage.....	1
3      Options.....	1
4      Example.....	2

#### List of tables

1      References.....	1
------------------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

#### 1      General

The **s1kd-sns** tool can be used to automatically organize data modules in a CSDB in to a directory hierarchy based on a specified SNS structure. It may also be used to simply print an indented text version of an SNS structure.

#### 2      Usage

```
s1kd-sns [-D <dir>] [-d <dir>] [-cmnpsh?] [<BREX> ...]
```

#### 3      Options

-c, --copy	Copy files in to the SNS subfolders instead of linking them.
-D, --srcdir <dir>	The flat directory containing the data modules to organize. By default, the current directory is used.
-d, --outdir <dir>	The root directory of the new SNS structure. By default, the tool will use the name "SNS" in the current directory.

-h, -?, --help	Show usage message.
-m, --move	Move files in to the SNS subfolders instead of linking them.
-n, --only-code	Use only the SNS codes when naming directories. By default, each directory will be named in the form of "snsCode - snsTitle".
-p, --print	Print the SNS structure only.
-s, --symlink	Use symbolic links to organize the SNS instead of the default hard links.
--version	Show version information.
<BREX>	Read the SNS structure from the specified BREX data module. If none is specified, the tool will read from stdin.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Example

```
$ slkd-sns DMC-S1000D-A-08-02-0100-00A-022A-D_EN-US.XML
$ tree SNS
SNS
|_ 00 - Product, General
|   |_ 0 - Product, General
|   |_ 1 - Product, General maintenance
|   |_ 2 - Product, Safety
|
|_ ...
|_ 04 - Worthiness (fit for purpose) limitations
|   |_ 0 - General
|   |_ 1 - Fatigue index calculations
|   |_ 2 - Operating spectrums
|_ 05 - Scheduled/unscheduled maintenance
|   |_ 0 - General
|   |_ 1 - Time limits
|   |_ 2 - Scheduled maintenance check lists
```



...  
|\_ 18 - Vibration and noise analysis and attenuation



## s1kd-upissue

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	2
4 Examples.....	4
4.1 Data module with issue/inwork in filename.....	4
4.2 Data module without issue/inwork in filename.....	4
4.3 Non-XML file with issue/inwork in filename.....	5

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

#### 1 General

The **s1kd-upissue** tool increases the in-work or issue number of an S1000D CSDB object.

Any files using an S1000D-esque naming convention, placing the issue and in-work numbers after the first underscore (\_) character, can also be "upissued". Files which do not contain the appropriate S1000D metadata are simply copied.

#### 2 Usage

```
s1kd-upissue [-045defilmNQqRsuvw^] [-1 <type>] [-2 <type>]  
             [-c <reason> [-H] [-t <urt>]]  
             [-I <date>] [-z <type>] [<file> ...]
```

### 3 Options

-0, --unverified	Set the quality assurance to unverified.
-1, --first-ver <type>	Set first verification type (tabtop, onobject, ttandoo). If the object is second verified and this option is specified without -2 (--second-ver), the second verification will be unset.
-2, --second-ver <type>	Set second verification type (tabtop, onobject, ttandoo). If the object is unverified and this option is specified without -1 (--first-ver), the first verification will be set as the same type as the second verification.
-4, --remove-marks	Remove change markup on elements, but not RFUs, in the upissued object. This is automatically applied if the issue type (-z) is not "changed" or "rinstated-changed".
-5, --print	Print the file names of upissued objects.
-c, --reason <reason>	Add a reason for update to the upissued objects. Multiple RFUs can be added by specifying this option multiple times.
-d, --dry-run	Do not actually create or modify any files.
-e, --erase	Remove old issue file after upissuing.
-f, --overwrite	Overwrite existing upissued CSDB objects.
-H, --highlight	Mark the last specified reason for update (-c) as a highlight.
-h, -?, --help	Show help/usage message.
-l, --date <date>	Specify the issue date to use for the upissued object(s). Otherwise, the current date will be used.
-i, --official	Increase the issue number of the CSDB object. By default, the in-work issue is increased.
-l, --list	Treat input (stdin or arguments) as lists of CSDB objects to upissue, rather than CSDB objects themselves.
-m, --modify	Modify issue-related metadata on objects without incrementing the issue or inwork numbers. The -l and -r options have the opposite effect in this mode. The modified objects are written to stdout by default, and the -f option can be used to change them in-place.
-N, --omit-issue	Omit issue/inwork numbers from filename.
-Q, --keep-qa	Keep quality assurance information from old issue. Normally, when upissuing an official CSDB object to the first in-work issue, the quality assurance is set back to "unverified". Specify this option to indicate the upissue will not affect the contents of the CSDB object, and so does not require it to be re-verified.
-q, --quiet	Quiet mode. Errors are not printed.

-R, --keep-unassoc-marks	Delete only change markup on elements associated with an RFU (by use of the attribute <code>reasonForUpdateRefIds</code> ). Change markup on other elements is ignored.
-r, --(keep remove)-changes	<p>Keep old RFUs and change marks. Normally, when upissuing an official CSDB object to the first in-work issue, any reasons for update are deleted automatically, along with any change markup attributes on elements (when change type is "add" or "modify") or the elements themselves (when change type is "delete"). This option prevents their deletion.</p> <p>In -m mode, this option has the opposite effect, causing the current RFUs and change marks to be removed. The two alternative long option names, --keep-changes and --remove-changes, allow for the intended meaning of this option to be expressed clearly in each mode.</p>
-s, --(keep change)-date	<p>Do not change issue date. Normally, when upissuing to the next inwork or official issue, the issue date is changed to the current date, or the date specified with the -z option. This option will keep the date of the previous inwork or official issue.</p> <p>In -m mode, this option has the opposite effect, causing the date to be changed. The two alternative long option names, --keep-date and --change-date, allow for the intended meaning of this option to be expressed clearly in each mode.</p>
-t, --type <urt>	Set the <code>updateReasonType</code> of the last specified reason for update (-c).
-u, --clean-rfus	Remove RFUs which are not associated with any change markup (by use of the attribute <code>reasonForUpdateRefIds</code> ).
-v, --verbose	Verbose output.
-w, --lock	Make the old issue file read-only after upissuing. Official issues (-i) will also be made read-only when they are created.
-z, --issue-type <type>	<p>Set the issue type of the new issue.</p> <p>If this option is not specified, then the issue type of the new issue will be set as follows:</p> <ul style="list-style-type: none"><li>– if the previous issue is not an official issue (in-work 00), the issue type of the new issue will be the same as the previous issue.</li><li>– if the previous issue is an official issue, the issue type of the new issue will default to "status".</li></ul>
-^, --remove-deleted	Remove elements with change type of "delete". These elements are automatically removed along with all change marks and RFUs when an object is upissued from official to the next inwork issue. This option will remove them when

	upissuing between inwork issues, or when making the object official.
--version	Show version information.
<file>...	Any number of CSDB objects or other files to upissue. If none are specified, the object will be read from stdin and the upissued object will be written to stdout.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4

### Examples

#### 4.1

#### Data module with issue/inwork in filename

```
$ ls
DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_000-01_EN-CA.XML

$ slkd-upissue DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
$ ls
DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_000-02_EN-CA.XML

$ slkd-upissue \
-i DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_000-02_EN-CA.XML
$ ls
DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_000-02_EN-CA.XML
DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_001-00_EN-CA.XML
```

#### 4.2

#### Data module without issue/inwork in filename

```
$ ls
DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_EN-US.XML

$ slkd-metadata DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_EN-CA.XML \
-n issueInfo
```



```
000-01
$ slkd-upissue -N DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_EN-CA.XML
$ slkd-metadata DMC-S1KDTOOLS-A-00-00-00-00A-040A-D_EN-CA.XML \
  -n issueInfo
000-02
```

### **4.3 Non-XML file with issue/inwork in filename**

```
$ ls
TXT-S1KDTOOLS-KHZAE-FOOBAR_000-01_EN-CA.TXT

$ slkd-upissue TXT-S1KDTOOLS-KHZAE-00001_000-01_EN-CA.TXT
$ ls
TXT-S1KDTOOLS-KHZAE-FOOBAR_000-01_EN-CA.TXT
TXT-S1KDTOOLS-KHZAE-FOOBAR_000-02_EN-CA.TXT
```

## s1kd-appcheck

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	2
3 Options.....	2
4 Exit status.....	4
5 Examples.....	4
5.1 Standalone validation.....	4
5.2 Full validation.....	5
5.3 Nested applicability annotations.....	7
5.4 Redundant applicability annotations.....	8
5.5 Duplicate applicability annotations.....	9

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

*Table 1 References*

Data module/Technical publication	Title
None	

### *Description*

#### 1 General

The **s1kd-appcheck** tool validates the applicability of S1000D CSDB objects, detecting potential errors that could occur when the object is filtered.

By default, the tool validates an object against only the product attribute and condition values which are explicitly used within the object. The products check (-t) and full check (-a) modes allow objects to be checked for issues with implicit applicability, that is, product attribute or condition values which are not explicitly used within an object, but may still affect it.

The s1kd-instance and s1kd-validate tools are used by default to perform the actual validation.

## 2 Usage

`s1kd-appcheck [options] [<object>...]`

## 3 Options

- |                                 |  |
|---------------------------------|--|
| <b>-A, --act &lt;file&gt;</b>   | Specify the ACT to read product attributes from, and to use to find the CCT or PCT. This will override the ACT reference within the individual objects being validated.  |
| <b>-a, --all</b>                | Validate objects against all possible combinations of relevant product attribute and condition values as defined in the ACT and CCT. Relevant product attributes and conditions are those that are used by an object with any value.   |
| <b>-b, --brexcheck</b>          | Validate objects with a BREX check (using the <code>s1kd-brexcheck</code> tool) in addition to the schema check.   |
| <b>-C, --cct &lt;file&gt;</b>   | Specify the CCT to read conditions from. This will override the CCT reference within the ACT.  |
| <b>-c, --custom</b>             | Perform a customized check. The default standalone applicability check is disabled. This can then be combined with the <code>-s</code> option, to only check that all product attributes and conditions are defined in the ACT and CCT respectively, and/or the <code>-n</code> option, to only check nested applicability annotations. If neither of these options are specified, no checks will be performed.                                      |
| <b>-D, --duplicate</b>          | Check for duplicate annotations.   |
| <b>-d, --dir &lt;dir&gt;</b>    | The directory to start searching for ACT/CCT/PCT data modules in. By default, the current directory is used.   |
| <b>-e, --exec &lt;cmd&gt;</b>   | The commands used to validate objects. Multiple commands can be used by specifying this option multiple times. The objects will be passed to each command on stdin, and the exit status of the command will be used to determine if the object is valid (with a non-zero exit status indicating it is invalid). This overrides the default commands ( <code>s1kd-validate</code> , and <code>s1kd-brexcheck</code> if <code>-b</code> is specified). |
| <b>-F, --valid-filenames</b>    | Print the filenames of valid objects.  |
| <b>-f, --filenames</b>          | Print the filenames of invalid objects.  |
| <b>-h, -?, --help</b>           | Show help/usage message.   |
| <b>-K, --filter &lt;cmd&gt;</b> | The command used to filter objects prior to validation. The objects will be passed to the command on stdin, and the filters will be supplied as arguments in the form of " <code>-s &lt;ident&gt;:&lt;type&gt;=&lt;value&gt;</code> ". This overrides the default command ( <code>s1kd-instance</code> ).  |
| <b>-k, --args &lt;args&gt;</b>  | The arguments to the filter command when filtering objects prior to validation.  |

-l, --list	Treat input as a list of CSDB objects to validate.
-N, --omit-issue	Assume that the issue/inwork numbers are omitted from object filenames (they were created with the -N option).
-n, --nested	Check that all product attribute and condition values used in nested applicability annotations are subsets of the values used in their parents.
-o, --output-valid	Output valid CSDB objects to stdout.
-P, --pct <file>	Specify the PCT to read product instances from. This will override the PCT reference in the ACT.
-p, --progress	Display a progress bar.
-q, --quiet	Quiet mode. Error messages will not be printed.
-R, --redundant	Check for redundant annotations.
-r, --recursive	Search for the ACT/CCT/PCT recursively.
-s, --strict	Check whether product attributes and conditions used by an object are declared in the ACT and CCT respectively.
-T, --summary	Print a summary of the check after it completes, including statistics on the number of objects that passed/failed the check.
-t, --products	Validate objects against the defined product instances within the PCT.
-v, --verbose	Verbose output. Specify multiple times to increase the verbosity.
-x, --xml	Print an XML report of the check.
~, --dependencies	Check with CCT dependency tests added to assertions which use the dependant values.
^, --remove-deleted	Validate objects with elements that have a change type of "delete" removed.
--version	Show version information.
<object>...	Object(s) to validate.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.



--xml-catalog <file>

Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Exit status

0	The check completed successfully, and all CSDB objects were valid.
1	The check completed successfully, but some CSDB objects were invalid.
2	One or more CSDB objects could not be read.
3	The number of CSDB objects specified exceeded the available memory.

## 5 Examples

### 5.1 Standalone validation

Consider the following data module snippet:

```
<dmodule>
...
<applic>
<displayText>
<simplePara>Version: A or Version: B</simplePara>
</displayText>
<evaluate andOr="or">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="B"/>
</evaluate>
</applic>
...
<referencedApplicGroup>
<applic id="app-VersionB">
<assert applicPropertyIdent="version" applicPropertyType="prodattr"
applicPropertyValues="B"/>
</applic>
</referencedApplicGroup>
...
<levelledPara id="par-0001" applicRefId="app-VersionB">
<title>Features of version B</title>
<para>...</para>
</levelledPara>
```

```
...
<levelledPara>
<title>More information</title>
<para>...</para>
<para>Refer to <internalRef internalRefId="par-0001"/>.</para>
</levelledPara>
...
</dmodule>
```

There are two versions of the product, A and B, and the data module is meant to apply to both.

By itself, the data module is valid:

```
$ slkd-validate -v <DM>
slkd-validate: SUCCESS: <DM> validates against schema <url>
```

Checking it with this tool, however, reveals an issue:

```
$ slkd-appcheck <DM>
slkd-appcheck: ERROR: <DM> is invalid when:
slkd-appcheck: ERROR:   prodattr version = A
```

When the data module is filtered for version A, the first levelled paragraph will be removed, which causes the reference to it in the second levelled paragraph to become broken.

## 5.2 Full validation

Consider the following data module snippet:

```
<dmodule>
...
<applic>
<displayText>
<simplePara>All</simplePara>
</displayText>
</applic>
...
<referencedApplicGroup>
<applic id="app-IcyOrHot">
<evaluate andOr="or">
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="Icy"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="Hot"/>
</applic>
</referencedApplicGroup>
```

```
...
<proceduralStep>
<para>Locate the handle.</para>
</proceduralStep>
<proceduralStep id="stp-0001" applicRefId="app-IcyOrHot">
<para>Put on gloves prior to touching the handle.</para>
</proceduralStep>
<proceduralStep>
<para>Grab the handle and turn it clockwise.</para>
</proceduralStep>
...
<proceduralStep>
<para>Remove the gloves you put on in <internalRef internalRefId="stp-0001"/>.</para>
</proceduralStep>
...
</dmodule>
```

Once again, this data module is valid by itself:

```
$ slkd-validate -v <DM>
slkd-validate: SUCCESS: <DM> validates against schema <url>
```

This time, however, it also initially appears valid when this tool is used:

```
$ slkd-appcheck -v <DM>
slkd-appcheck: SUCCESS: <DM> passed the applicability check.
```

However, now consider this snippet from the CCT:

```
<condCrossRefTable>
...
<condType id="weatherType">
<name>Weather type</name>
<descr>Possible types of weather conditions.</descr>
<enumeration applicPropertyValues="Normal"/>
<enumeration applicPropertyValues="Icy"/>
<enumeration applicPropertyValues="Hot"/>
</condType>
...
<cond id="weather" condTypeRefId="weatherType">
<name>Weather</name>
<descr>The current weather conditions.</descr>
</cond>
...
</condCrossRefTable>
```

There is a third value for the `weather` condition which is not explicitly used within the data module, and therefore will not be validated against in the default standalone check. When `weather` has a value of `Normal`, the cross-reference in the last step in the example above becomes broken.

To catch errors with implicit applicability, the full check (-a) can be used instead, which reads the values to check not from the data module itself, but from the ACT and CCT referenced by the data module:

```
$ slkd-appcheck -a <DM>
slkd-appcheck: ERROR: <DM> is invalid when:
slkd-appcheck: ERROR:    condition weather = Normal
```

This can also be fixed by making the applicability of the data module explicit:

```
<applic>
<displayText>
<simplePara>Weather: Normal or Weather: Icy or
Weather: Hot</simplePara>
</displayText>
<evaluate andOr="or">
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="Normal"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="Icy"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="Hot"/>
</evaluate>
</applic>
```

In which case, the standalone check will now also detect the error:

```
$ slkd-appcheck <DM>
slkd-appcheck: ERROR: <DM> is invalid when:
slkd-appcheck: ERROR:    condition weather = Normal
```

### 5.3 Nested applicability annotations

Consider the following data module snippet:

```
<dmodule>
...
<applic>
<displayText>
<simplePara>Version: A, B</simplePara>
</displayText>
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
```

```
<assert
applicPropertyId="version"
applicPropertyType="prodattr"
applicPropertyValues="B"/>
</applic>
...
<referencedApplicGroup>
<applic id="app-C">
<displayText>
<simplePara>Version: C</simplePara>
</displayText>
<assert
applicPropertyId="version"
applicPropertyType="prodattr"
applicPropertyValues="C"/>
</applic>
</referencedApplicGroup>
...
<proceduralStep>
<para>Step A</para>
</proceduralStep>
<proceduralStep applicRefId="app-C">
<para>Step B</para>
</proceduralStep>
<proceduralStep>
<para>Step C</para>
</proceduralStep>
...
</dmodule>
```

Here, the whole data module is applicable to versions A and B, but an individual step has been made applicable to version C. Normally, this is not reported as an error, since the removal of this step would not cause the data module to become invalid:

```
$ slkd-appcheck -v <DM>
slkd-appcheck: SUCCESS: <DM> passed the applicability check
```

However, the content is essentially useless, since it will never appear. The -n option will report when the applicability of an element is incompatible with the applicability of any parent elements or the whole object:

```
$ slkd-appcheck -n <DM>
slkd-appcheck: ERROR: <DM>: proceduralStep on line 62 is applicable
when prodattr version = C, which is not a subset of the applicability
of the whole object.
```

## 5.4 Redundant applicability annotations

Consider the following data module snippet:

```
<proceduralStep applicRefId="app-A">
```

```
<para>Step A</para>
<figure applicRefId="app-A">
...
</figure>
</proceduralStep>
```

This is technically correct, but the annotation on the figure can be considered redundant, since it has the same applicability as its ancestor, and the applicability of an element is already inherited by all its descendants automatically.

The -R (--redundant) option will report when the applicability of a nested element is redundant:

```
$ slkd-appcheck -R <DM>
slkd-appcheck: ERROR: <DM>: figure on line 85 has the same
applicability as its parent proceduralStep on line 83 (app-A)
```

#### Note

Currently, this check only detects when the exact same annotation (with the same ID) is nested within itself. In the future, this should also detect redundant logic between different nested annotations.

## 5.5 Duplicate applicability annotations

Consider the following data module snippet:

```
<referencedApplicGroup>
<applic id="app-0001">
<assert applicPropertyIdent="version" applicPropertyType="prodattrib" applicProp
</applic>
<applic id="app-0002">
<assert applicPropertyIdent="version" applicPropertyType="prodattrib" applicProp
</referencedApplicGroup>
```

These annotations have duplicate logic, meaning only one is necessary. The -D (--duplicate) option will report when an applicability annotation is a duplicate of another annotation:

```
$ slkd-appcheck -D <DM>
slkd-appcheck: ERROR: <DM>: Annotation on line 47 is a duplicate of annotation
```

## s1kd-brexcheck

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	2
3.1 Business rule severity levels ( .brseveritylevels ) .....	3
3.2 Normal, strict and unstrict SNS check (-S, -St, -Su).....	4
3.3 Object value checking (-c).....	5
3.4 XPath support.....	5
4 Exit status.....	6
5 Example.....	6
6 自行車的車輪.....	7
6.1 輻條.....	7

#### List of tables

1 References.....	1
-------------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

#### 1 General

The **s1kd-brexcheck** tool validates S1000D CSDB objects using the context, SNS, and/or notation rules of one or multiple BREX data modules. All errors are displayed with the <objectUse> message, the line number, and a representation of the invalid XML tree.

#### 2 Usage

```
s1kd-brexcheck [-b <brex>] [-d <dir>] [-I <path>] [-w <severities>]
```

[ -F | -f ] [ -BceLlNnopqrS[tu]sTvX^h? ] [ <object>... ]

### 3 Options

-B, --default-brex	Check each input object against the appropriate built-in S1000D default BREX only. The actual BREX reference of each object is ignored.
-b, --brex <brex>	Check the CSDB objects against this BREX. Multiple BREX data modules can be specified by adding this option multiple times. When no BREX data modules are specified, the BREX data module referenced in <brexDmRef> in the CSDB object is attempted to be used instead.
-c, --values	When a context rule defines values for an object (objectValue), check if the value of each object is within the allowed set of values.
-d, --dir <dir>	Directory to start searching for BREX data modules in. By default, the current directory is used.
-e, --ignore-empty	Ignore check for empty or non-XML documents.
-F, --valid-filenames	Print the filenames of CSDB objects with no BREX/SNS errors.
-f, --filenames	Print the filenames of CSDB objects with BREX/SNS errors.
-h, -?, --help	Show the help/usage message.
-I, --include <path>	Add a search path for BREX data modules. By default, only the current directory is searched.
-L, --list	Treat input as a list of object filenames to check, rather than an object itself.
-I, --layered	Use the layered BREX concept. BREX data modules referenced by other BREX data modules (either specified with -b or referenced by the specified CSDB objects) will also be checked against.
-N, --omit-issue	Assume that the issue/inwork numbers are omitted from object filenames (they were created with the -N option).
-n, --notations	Check notation rules. Any notation names listed in any of the BREX data modules with attribute allowedNotationFlag set to "1" or omitted are considered valid notations. If a notation in a CSDB object is not present or has allowedNotationFlag set to "0", an error will be returned.  For notations not included but not explicitly excluded, the objectUse of the first inclusion rule will be returned with the error. For explicitly excluded notations, the objectUse of the explicit exclusion rule is returned.
-o, --output-valid	Output valid CSDB objects to stdout.



-p, --progress	Display a progress bar.
-q, --quiet	Quiet mode. No errors are printed, they are only indicated via the exit status.
-r, --recursive	Search for BREX data modules recursively.
-S[tu], --sns [--strict --unstrict]	Check SNS rules. The SNS of each specified data module is checked against the combination of all SNS rules of all specified BREX data modules.
-s, --short	Use shortened, single-line messages to report BREX errors instead of multiline indented messages.
-T, --summary	Print a summary of the check after it completes, including statistics on the number of documents that passed/failed the check.
-v, --verbose	Verbose mode. The success or failure of each test is printed explicitly.
-w, --severity-levels <file>	Specify a list of severity levels for business rules.
-x, --xml	Output an XML report.
-^, --remove-deleted	Check the CSDB objects with elements that have a change type of "delete" removed.
--version	Show version information.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 Business rule severity levels ( `.brseveritylevels` )

The attribute `brSeverityLevel` on a BREX rule allows for distinguishing different kinds of errors. The `.brseveritylevels` file contains a list of severity levels, their user-defined type, and optionally if they should not be counted as true errors (causing the tool to return a "failure" status) but merely warnings.

By default, the program will search the current directory and parent directories for a file named `.brseveritylevels` , but any file can be specified by using the `-w` option.

An example of the format of this file is given below:

```
<?xml version="1.0"?>
<brSeverityLevels>
<brSeverityLevel value="brsl01" fail="yes">Error</brSeverityLevel>
<brSeverityLevel value="brsl02" fail="no">Warning</brSeverityLevel>
</brSeverityLevels>
```

When the attribute `fail` has a value of "yes" (or is not included), BREX errors pertaining to rules with the given severity level value will be counted as errors. When it is "no", the errors are still displayed but are not counted as errors in the exit status code of the tool.

### 3.2 Normal, strict and unstrict SNS check (-S, -St, -Su)

There are three modes for SNS checking: normal, strict, and unstrict. The main difference between them is how they handle the optional levels of an SNS description in the BREX.

-St enables **strict** SNS checking. By default, the normal SNS check (-S) will assume optional elements `snsSubSystem`, `snsSubSubSystem`, and `snsAssy` exist with an `snsCode` of "0" ("00" or "0000" for `snsAssy`) when their parent element does not contain any of each. This provides a shorthand, such that

```
<snsSystem>
<snsCode>00</snsCode>
<snsTitle>General</snsTitle>
</snsSystem>
```

is equivalent to

```
<snsSystem>
<snsCode>00</snsCode>
<snsTitle>General</snsTitle>
<snsSubSystem>
<snsCode>0</snsCode>
<snsTitle>General</snsTitle>
<snsSubSubSystem>
<snsCode>0</snsCode>
<snsTitle>General</snsTitle>
<snsAssy>
<snsCode>00</snsCode>
<snsTitle>General</snsTitle>
</snsAssy>
</snsSubSubSystem>
</snsSubSystem>
</snsSystem>
```

Using strict checking will disable this shorthand, and missing optional elements will result in an error.

-Su enables **unstrict** SNS checking. The normal SNS check (-S) shorthand mentioned above only allows SNS codes of "0" to be omitted from the SNS rules. Using unstrict checking, **any** code used will not produce an error when the relevant optional elements are omitted. This means that given the following...

```
<snsSystem>
<snsCode>00</snsCode>
<snsTitle>General</snsTitle>
</snsSystem>
```

...SNS codes of 00-00-0000 through 00-ZZ-ZZZZ are considered valid.

### 3.3 Object value checking (-c)

There are two ways to restrict the allowable values of an object in a BREX rule. One is to use the XPath expression itself. For example, this expression will match any `securityClassification` attribute whose value is neither "01" nor "02", and because the `allowedObjectFlag` is "0", will generate a BREX error if any match is found:

```
<objectPath allowedObjectFlag="0">
//@securityClassification[
. != '01' and
. != '02'
]
</objectPath>
```

However, this method can lead to fairly complex expressions and requires a reversal of logic. The BREX schema provides an alternative method using the element `objectValue`:

```
<structureObjectRule>
<objectPath allowedObjectFlag="2">
//@securityClassification
</objectPath>
<objectValue valueAllowed="01">Unclassified</objectValue>
<objectValue valueAllowed="02">Classified</objectValue>
</structureObjectRule>
```

Specifying the `-c` option will enable checking of these types of rules, and if the value is not within the allowed set a BREX error will be reported. The `valueForm` attribute can be used to specify what kind of notation the `valueAllowed` attribute will contain:

- "single" - A single, exact value.
- "range" - Values given in the S1000D range/set notation, e.g. "a~c" or "a|b|c".
- "pattern" - A regular expression.

The `s1kd-brexcheck` tool supports all three types. If the `valueForm` attribute is omitted, it will assume the value is in the "single" notation.

### 3.4 XPath support

Supported XPath syntax depends on what XPath engine was selected at compile-time:

libxml2 (default)	– XPath 1.0
	– Partial support for EXSLT functions
Saxon (experimental)	– XPath 1.0

- XPath 2.0
- XPath 3.0

Information on which XPath engine is in use can be obtained from the --version option.

If the XPath given for the <objectPath> of a rule is invalid, the rule will be ignored when validating objects. A warning will be printed to stderr, and the XML report will contain an <xpathError> element for each error.

## 4 Exit status

0	Check completed successfully, and no CSDB objects had BREX errors.
1	Check completed successfully, but some CSDB objects had BREX errors.
2	One or more CSDB objects specified could not be read.
3	A referenced BREX data module could not be found.
5	The number of paths or CSDB objects specified exceeded the available memory.

## 5 Example

```
$ DMOD=DMC-EX-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
$ BREX=DMC-S1000D-G-04-10-0301-00A-022A-D_001-00_EN-US.XML
$ cat $DMOD
[...]
<listItem id="stp-0001">
<para>List items shouldn't be used as steps...</para>
</listItem>
[...]
<para>Refer to <internalRef internalRefId="stp-0001"
internalRefTargetType="irrt08"/>.</para>
[...]
$ slkd-brexcheck -b $BREX $DMOD
BREX ERROR: DMC-EX-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
BREX: DMC-S1000D-G-04-10-0301-00A-022A-D_001-00_EN-US.XML
BREX-S1-00052
Only when the reference target is a step can the value of attribute
internalRefTargetType be irrt08 (Chap 3.9.5.2.1.2, Para 2.1).
line 52 (/dmodule[1]/content[1]/description[1]/para[2]/
internalRef[1]):
ELEMENT internalRef
ATTRIBUTE internalRefTargetType
TEXT
content=irrt08
ATTRIBUTE internalRefId
```

TEXT  
content=stp-0001

Example of XML report format for the above:

```
<?xml version="1.0"?>
<brexCheck>
<document path="DMC-EX-A-00-00-00-00A-040A-D_000-01_EN-CA.XML">
<brex path="DMC-S1000D-G-04-10-0301-00A-022A-D_001-00_EN-US.XML">
<error fail="yes">
<brDecisionRef brDecisionIdentNumber="BREX-S1-00052"/>
<objectPath allowedObjectFlag="0">...</objectPath>
<objectUse>Only when the refernce target is a step can the value of
attribute internalRefTargetType be irtt08
(Chap 3.9.5.2.1.2, Para 2.1).</objectUse>
<object line="52"
xpath="/dmodule[1]/content[1]/description[1]/para[2]/internalRef[1]">
<internalRef internalRefId="stp-0001"
internalRefTargetType="irtt08"/>
</object>
</error>
</brex>
</document>
</brexCheck>
```

## 6

### 自行車的車輪

自行車的車輪是一個複雜的結構。整個車輪組件包含以下部分：

- 外胎
- 內胎
- 輻條
- 輻條螺帽
- 氣嘴
- 花鼓

各個部件本身的強度有限，但當它們組裝在一起時，整體結構能夠承受相當大的重量與衝擊。

### 6.1

#### 輻條

輻條從花鼓向外延伸，並相互交錯。輻條螺帽將輻條末端固定在輪圈上，並可用來調整輻條的張力。每一根輻條的張力必須保持一致，以確保車輪的穩定與平衡。

## s1kd-refs

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	2
3 Options.....	2
3.1 .externalpubs file.....	5
3.2 Hotspot matching (-H).....	5
4 Exit status.....	5
5 Examples.....	6
5.1 General.....	6
5.2 CSN references.....	6

#### List of tables

1 References.....	1
-------------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

#### 1 General

The **s1kd-refs** tool lists external references in CSDB objects, optionally matching them to a filename in the CSDB directory hierarchy.

This allows you to:

- obtain a list of dependencies for CSDB objects, such as ICNs, to ensure they are delivered together
- check for references to objects which do not exist in the current CSDB
- update reference metadata, such as titles, from the matched objects

## 2 Usage

```
slkd-refs [-aBCcDEffGHIiKLlmNnoPqRrSsTUuvwXxYZ^h?] [-b <SNS>]
          [-d <dir>] [-e <cmd>] [-J <ns=URL>] [-j <xpath>]
          [-k <pattern>] [-t <fmt>] [-3 <file>] [<object>...]
```

## 3 Options

- |  |  |
|--|--|
| -a, --all  | List all references, both matched and unmatched.   |
| -B, -C, -D, -E, -G, -H, -K, -L, -P, -S, -T, -Y, -Z | List references to IPDs, comments, data modules, external publications, ICNs, hotspots, CSNs, data management lists, publication modules, SCORM content packages, referred fragments, repository source DMs and source objects respectively. If none are specified, -BCDEGHKLPSTYZ is assumed. |
|  | The following long options can also be used for each: --ipd, --com, --dm, --epr, --icn, --hotspot, --csn, --dml, --pm, --smc, --fragment, --repository, --source.  |
| -b, --ipd-sns <SNS>                                | Specify the SNS for non-chapterized IPD data modules, in the form of SYSTEM-SUBSYSTEM-ASSY (for example, "ZD-00-35"). This code is used to resolve non-chapterized CSN references.   |
|  | If "-" is given for <SNS>, then the SNS will be derived from current data module.  |
| -c, --content                                      | List references in the <code>content</code> section of a CSDB object only.   |
| -d, --dir <dir>                                    | Directory to search for matches to references in. By default, the current directory is used.   |
| -e, --exec <cmd>                                   | Execute a command for each referenced CSDB object matched. The string "{}" is replaced by the current CSDB object file name everywhere it occurs in the arguments to the command.  |
| -F, --overwrite                                    | When using the -U or -X options, overwrite the input objects that have been updated or tagged.   |
| -f, --filename                                     | Include the filename of the source object where each reference was found in the output.  |
| -h, -?, --help                                     | Show help/usage message.   |
| -l, --update-issue                                 | Update the issue number, issue date, language, and title of references to that of the latest matched object. This option implies the -U and -i options.  |
| -i, --ignore-issue                                 | Ignore issue info when matching. This will always match the latest issue of an object found, regardless of the issue specified in the reference.   |

<b>-J &lt;ns=URL&gt;</b>	Registers an XML namespace prefix, which can then be used in the hotspot XPath expression (-j). Multiple namespaces can be registered by specifying this option multiple times.
<b>-j &lt;xpath&gt;</b>	Specify a custom XPath expression to use when matching hotspots (-H) in XML-based ICN formats.
<b>-k, --ipd-dcv &lt;pattern&gt;</b>	<p>Specify a pattern used to determine the disassembly code variant for IPD data modules when resolving CSN references.</p> <p>Within the pattern, the following characters have special meaning:</p> <ul style="list-style-type: none"><li>– % - The figure number variant code.</li><li>– ? - A wildcard that matches any single character.</li></ul> <p>The default pattern is "%", which means the disassembly code variant is exactly the same as the figure number variant. Projects that use a 2- or 3-character disassembly code variant must specify a pattern of the appropriate length in order for their IPD DMs to be matched (for example, "%?" or "%??").</p>
<b>-l, --list</b>	Treat input (stdin or arguments) as lists of filenames of CSDB objects to list references in, rather than CSDB objects themselves.
<b>-m, --strict-match</b>	<p>Be more strict when matching codes of CSDB objects to filenames. By default, the name of a file (minus the extension) only needs to start with the code to be matched. When this option is specified, the name must match the code exactly.</p> <p>For example, the code "ABC" will normally match either of the files "ABC.PDF" or "ABC_1.PDF", but when strict matching is enabled, it will only match the former.</p>
<b>-N, --omit-issue</b>	Assume filenames of referenced CSDB objects omit the issue info, i.e. they were created with the -N option to the s1kd-new* tools.
<b>-n, --lineno</b>	Include the filename of the source object where each reference was found, and display the line number where the reference occurs in the source file after its filename.
<b>-o, --output-valid</b>	Output valid CSDB objects to stdout.
<b>-q, --quiet</b>	Quiet mode. Errors are not printed.
<b>-R, --recursively</b>	List references in matched objects recursively.
<b>-r, --recursive</b>	Search for matches to references in directories recursively.
<b>-s, --include-src</b>	Include the source object as a reference. This is helpful when the output of this tool is used to apply some operation to a source object and all its dependencies together.



<b>-t, --format &lt;fmt&gt;</b>	<p>Specify a custom format for printed references. &lt;fmt&gt; is a format string, where the following variables can be given:</p> <ul style="list-style-type: none"><li>– %file% - The filename of the referenced object (nothing is printed if no file is matched).</li><li>– %line% - The line number where the reference occurs in the source.</li><li>– %ref% - The reference. May be a code (if no file is matched), a file name (for objects where a file is matched) or a file name + fragment name.</li><li>– %src% - The source of the reference.</li><li>– %xpath% - The XPath denoting where the reference occurs in the source.</li></ul> <p>For example, <code>-t '%src% (%line%): %ref%'</code> is equivalent to the <code>-n</code> option.</p>
<b>-U, --update</b>	Update the title of matched references from the corresponding object.
<b>-u, --unmatched</b>	Show only unmatched reference errors, or unmatched codes if combined with the <code>-a</code> option.
<b>-v, --verbose</b>	Verbose output. Specify multiple times to increase the verbosity.
<b>-w, --where-used</b>	<p>Instead of listing references contained within specified objects, list places within other objects where the specified objects are referenced.</p> <p>In this case, &lt;object&gt; may also be a code (with the appropriate prefix) instead of an actual file. For example: <code>slkd-refs -w DMC-TEST-A-00-00-00-00A-040A-D</code></p>
<b>-X, --tag-unmatched</b>	Tag unmatched references with the processing instruction <code>&lt;?unmatched?&gt;</code> .
<b>-x, --xml</b>	Output a detailed XML report instead of plain text messages.
<b>-3, --externalpubs &lt;file&gt;</b>	Use a custom .externalpubs file.
<b>-^, --remove-deleted</b>	List references with elements that have a change type of "delete" removed.
<b>--version</b>	Show version information.
<b>&lt;object&gt;...</b>	CSDB object(s) to list references in. If none are specified, the tool will read from stdin.

In addition, the following options allow configuration of the XML parser:

<b>--dtdload</b>	Load the external DTD.
<b>--huge</b>	Remove any internal arbitrary parser limits.

--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 .externalpubs file

The .externalpubs file contains definitions of external publication references. This can be used to update external publication references in CSDB objects with -U.

By default, the tool will search the current directory and parent directories for a file named .externalpubs, but any file can be specified by using the -e option.

Example of a .externalpubs file:

```
<externalPubs>
<externalPubRef>
<externalPubRefIdent>
<externalPubCode>ABC</externalPubCode>
<externalPubTitle>ABC Manual</externalPubTitle>
</externalPubRefIdent>
</externalPubRef>
</externalPubs>
```

External publication references will be updated whether they are matched to a file or not.

### 3.2 Hotspot matching (-H)

Hotspots can be matched in XML-based ICN formats, such as SVG or X3D. By default, matching is based on the APS ID of the hotspot and the following attributes:

SVG	@id
X3D	@DEF

If hotspots are identified in a different way in a project's ICNs, a custom XPath expression can be specified with the -j option. In this XPath expression, the variable \$id represents the hotspot APS ID:

```
$ slkd-refs -H -j "//*[@attr = $id]" <DM>
```

## 4 Exit status

0	No errors, all references were matched.
1	Some references were unmatched.

- 2 The number of objects found in a recursive check (-R) exceeded the available memory.
- 3 stdin did not contain valid XML and not in list mode (-l).
- 4 The non-chapterized SNS specified (-b) is not valid.

## 5 Examples

### 5.1 General

```
$ slkd-refs DMC-EX-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
DMC-EX-A-00-00-00-00A-022A-D_001-00_EN-CA.XML
DMC-EX-A-01-00-00-00A-040A-D_000-01_EN-CA.XML
ICN-12345-00001-001-01.JPG
```

### 5.2 CSN references

These examples are based on the following CSN reference:

```
<catalogSeqNumberRef figureNumber="01" item="004"/>
```

in the following data module:

```
DM=DMC-EX-A-00-00-00-00AA-100A-D_001-00_EN-CA.XML
```

Because the CSN reference is not chapterized, it cannot be matched to an IPD DM without more information:

```
$ slkd-refs -K $DM
Unmatched reference: Fig 01 Item 004
```

The SNS for non-chapterized IPDs can be specified with -b. In this case, the project uses the SNS "ZD-00-35" for their IPDs:

```
$ slkd-refs -K -b ZD-00-35 $DM
Unmatched reference: DMC-EX-A-ZD-00-35-010-941A-D Item 004
```

This project uses a 2-character disassembly code variant, so the figure number variant is not sufficient to resolve the DMC of the referenced IPD data module. The -k option can be used in this case to specify the pattern for the disassembly code variant of IPDs. Since the second character of the disassembly code variant of all IPD DMs in this project is A, the pattern "%A" can be used:

```
$ slkd-refs -K -b ZD-00-35 -k %A $DM
DMC-EX-A-ZD-00-35-010A-941A-D_001-00_EN-CA.XML Item 004
```

# s1kd-repcheck

## Description

### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 Custom XSLT (-X).....	3
4 Exit status.....	4
5 Example.....	5

### List of tables

1	References.....	1
---	-----------------	---

## References

Table 1 References

Data module/Technical publication	Title
None	

## Description

### 1 General

The **s1kd-repcheck** tool validates references to CIR items within S1000D CSDB objects. Any CIR references which cannot be resolved to a specification within a CIR data module will cause the tool to report an error.

### 2 Usage

s1kd-repcheck [options] [<objects>...]

### 3 Options

-A, --all-refs

Validate indirect tool/supply/part CIR references using the element <identNumber>. Normally, only the direct reference elements <toolRef>, <supplyRef> and <partRef> are validated.

-a, --all	In addition to CIR data modules specified with -R or explicitly linked in CIR references, allow CIR references to be resolved against any CIR data modules that were specified as objects to check.
-D, --dump-xslt	Dump the built-in XSLT used to extract CIR references.
-d, --dir <dir>	The directory to start searching for CIR data modules in. By default, the current directory is used.
-F, --valid-filenames	Print the filenames of valid objects.
-f, --filenames	Print the filenames of invalid objects.
-h, --help	Show help/usage message.
-L, --list-refs	List CIR references found in objects instead of validating them.
-l, --list	Treat input as a list of CSDB objects to check.
-N, --omit-issue	Assume that the issue/inwork numbers are omitted from object filenames (they were created with the -N option).
-o, --output-valid	Output valid CSDB objects to stdout.
-p, --progress	Display a progress bar.
-q, --quiet	Quiet mode. Error messages will not be printed.
-R, --cir <CIR>	A CIR to resolve references in CSDB objects against. Multiple CIRs can be specified by using this option multiple times.  If "*" is given for <CIR>, the tool will search for CIR data modules automatically.
-r, --recursive	Search for CIR data modules recursively.
-T, --summary	Print a summary of the check after it completes, including statistics on the number of objects that passed/failed the check.
-t, --type <type>	Validate or list only CIR references of the specified type. The built-in types are: <ul style="list-style-type: none"><li>– acp (Access point)</li><li>– app (Applicability annotation)</li><li>– caut (Caution)</li><li>– cbr (Circuit breaker)</li><li>– cin (Control/Indicator)</li><li>– ent (Enterprise)</li><li>– fin (Functional item)</li><li>– part</li><li>– supply</li><li>– tool</li></ul>

	– warn (Warning)
	– zone
-v, --verbose	Verbose output. Specify multiple times to increase the verbosity.
-X, --xsl <file>	Use custom XSLT to extract CIR references.
-x, --xml	Print an XML report of the check.
-^, --remove-deleted	Validate with elements that have a change type of "delete" removed. CIR data modules with an issue type of "deleted" will also be ignored in the automatic search when this option is specified.
--version	Show version information.
<object>...	Object(s) to check CIR references in.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 Custom XSLT (-X)

What elements are extracted as CIR references for validating, and how they are validated, can be configured through a custom XSLT script specified with the -X (--xsl) option.

The custom XSLT script should add the following attributes to elements which will be validated as CIR references:

type	A name for the type of CIR reference.
name	A descriptive name for the CIR reference that can be used in reports.
test	An XPath expression used to match the corresponding CIR identification element.

The namespace for these attributes must be: `urn:s1kd-tools:s1kd-repcheck`

Example XSLT template to extract functional item references:

```
<xsl:template match="functionalItemRef">
```

```
<xsl:variable name="fin" select="@functionalItemNumber"/>
<xsl:copy>
<xsl:apply-templates select="@*" />
<xsl:attribute name="slkd-repcheck:type">fin</xsl:attribute>
<xsl:attribute name="slkd-repcheck:name">
<xsl:text>Functional item </xsl:text>
<xsl:value-of select="$fin"/>
</xsl:attribute>
<xsl:attribute name="slkd-repcheck:test">
<xsl:text>//functionalItemIdent[@functionalItemNumber='</xsl:text>
<xsl:value-of select="$fin"/>
<xsl:text>']</xsl:text>
</xsl:attribute>
<xsl:apply-templates select="node()" />
</xsl:copy>
</xsl:template>
```

A custom script also allows validating non-standard types of "CIR" references. For example, if a project wants to validate acronyms used in data modules against a central repository of acronyms, this could be done like so:

```
<xsl:template match="acronym">
<xsl:variable name="term" select="acronymTerm"/>
<xsl:copy>
<xsl:apply-templates select="@*" />
<xsl:attribute name="slkd-repcheck:type">acr</xsl:attribute>
<xsl:attribute name="slkd-repcheck:name">
<xsl:text>Acronym </xsl:text>
<xsl:value-of select="$term"/>
</xsl:attribute>
<xsl:attribute name="slkd-repcheck:test">
<xsl:text>//acronym[acronymTerm = '</xsl:text>
<xsl:value-of select="$term"/>
<xsl:text>']</xsl:text>
</xsl:attribute>
<xsl:apply-templates select="node()" />
</xsl:copy>
</xsl:template>
```

As there is no standard "acronym" CIR type, the object containing the repository would need to be specified explicitly with -R.

The built-in XSLT for extracting CIR references can be dumped as a starting point for a custom script by specifying the -D (--dump-xsl) option.

## 4

### Exit status

0	The check completed successfully, and all CIR references were resolved.
---	---

- 1 The check completed successfully, but some CIR references could not be resolved.
- 2 The number of CSDB objects specified exceeded the available memory.

## 5 Example

Part repository:

```
<partRepository>
<partSpec>
<partIdent manufacturerCodeValue="12345" partNumberValue="ABC"/>
<itemIdentData>
<descrForPart>ABC part</descrForPart>
</itemIdentData>
</partSpec>
</partRepository>
```

Part references in a procedure:

```
<spareDescrGroup>
<spareDescr>
<partRef manufacturerCodeValue="12345" partNumberValue="ABC"/>
<reqQuantity>1</reqQuantity>
</spareDescr>
<spareDescr>
<partRef manufacturerCodeValue="12345" partNumberValue="DEF"/>
<reqQuantity>1</reqQuantity>
</spareDescr>
</spareDescrGroup>
```

Command and results:

```
$ slkd-repcheck -R <CIR> ... <DM>
slkd-repcheck: ERROR: <DM> (<line>): Part 12345/DEF not found.
```



# s1kd-validate

## Description

### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 XML catalogs.....	2
4 Exit status.....	3
5 Example.....	3

### List of tables

1 References.....	1
-------------------	---

## References

Table 1 References

Data module/Technical publication	Title
None	

## Description

### 1 General

The **s1kd-validate** tool validates S1000D CSDB objects, checking whether they are valid XML files and if they are valid against their own S1000D schemas.

### 2 Usage

```
s1kd-validate [-s <path>] [-x <URI>] [-F|-f] [-eloqv^h?]
               [<object>...]
```

### 3 Options

-e, --ignore-empty	Ignore validation for empty or non-XML documents.
-F, --valid-filenames	List valid files.

-f, --filenames	List invalid files.
-h, -?, --help	Show help/usage message.
-l, --list	Treat input as a list of object names to validate, rather than an object itself.
-o, --output-valid	Output valid CSDB objects to stdout.
-q, --quiet	Quiet mode. The tool will not output anything to stdout or stderr. Success/failure will only be indicated through the exit status.
-s, --schema <path>	Validate the objects against the specified schema, rather than the one that they reference.
-v, --verbose	Verbose mode. Success/failure will be explicitly reported on top of any errors.
-x, --exclude <URI>	Exclude an XML namespace from the validation. Elements in the namespace specified by <URI> are ignored.
-^, --remove-deleted	Validate with elements that have a change type of "delete" removed.
--version	Show version information.
<object>...	Any number of CSDB objects to validate. If none are specified, input is read from stdin.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 XML catalogs

XML catalogs allow redirecting the canonical URIs of XML schemas and other external resources to local files, so as to avoid the unnecessary overhead of downloading those static resources over the Internet.

Below is an example of a catalog file which maps the S1000D schemas to a local directory:

```
<catalog xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog">
```

```
<rewriteURI
uriStartString="http://www.sl000d.org"
rewritePrefix="/usr/share/slkd/schemas"/>
</catalog>
```

This can be placed in a catalog file automatically loaded by libxml2 (e.g., /etc/xml/catalog) or saved to a file which is then specified in an environment variable used by libxml2 (e.g., XML\_CATALOG\_FILES):

```
$ XML_CATALOG_FILES=catalog.xml slkd-validate <Dms...>
```

Alternatively, the --xml-catalog option may be used:

```
$ slkd-validate --xml-catalog=catalog.xml <Dms>...
```

## 4 Exit status

0	No errors.
1	Some CSDB objects are not well-formed or valid.
2	The number of schemas cached exceeded the available memory.
3	A specified schema could not be read.

## 5 Example

```
$ slkd-validate DMC-EX-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
```

## s1kd-acronyms

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	2
3.1 .acronyms file.....	3
4 Examples.....	4

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

*Table 1 References*

Data module/Technical publication	Title
None	

### *Description*

#### 1 General

The **s1kd-acronyms** tool is used to manage acronyms in S1000D data modules in one of three ways:

- Generate a list of unique acronyms used in all specified data modules.
- Mark up acronyms automatically based on a specified list.
- Remove acronym markup.

#### 2 Usage

```
s1kd-acronyms -h?  
s1kd-acronyms [-dlpqtvx^] [-n <#>] [-o <file>] [-T <types>]  
               [<dmodule>...]  
s1kd-acronyms [-flqv] [-i|-I|-!] [-m|-M <acr>] [-o <file>] [-X <xpath>]
```

```
[<dmodule>...]  
slkd-acronyms [-D|-P] [-flqv] [-o <file>] [<dmodule>...]
```

### 3 Options

-D, --delete	Remove acronym markup, flattening it to the acronym term.
-d, --deflist	Format XML output as an S1000D <definitionList>.
-f, --overwrite	When marking up acronyms with the -m option, overwrite the input data modules instead of writing to stdout.
-h, -?, --help	Show help/usage message.
-I, --always-ask	In interactive mode, show a prompt for all acronyms, not just those with multiple definitions. This can be useful if some occurrences of acronym terms should be ignored.
-i, --interactive	Markup acronyms in interactive mode. If the specified acronyms list contains multiple definitions for a given acronym term, the tool will prompt the user with the context in which the acronym is used and present a list of the definitions for them to choose from.  When not in interactive mode, the first definition found will be used.
-l, --list	Treat input (stdin or arguments) as lists of filenames of data modules to find or markup acronyms in, rather than data modules themselves.
-M, --acronym-list <list>	Like the -m option, but use a custom list of acronyms instead of the default .acronyms file.
-m, --markup	Instead of listing acronyms in the specified data modules, automatically markup acronyms in the data module using the .acronyms file.
-n, --width <#>	Minimum number of spaces after the term in pretty-printed text output.
-o, --out <file>	Output to <file> instead of stdout.
-P, --preformat	Remove acronym markup by preformatting it. The element <acronym> is flattened to the definition, followed by the term in brackets [()]. The element <acronymTerm> is flattened to the term.
-p, --pretty	Pretty print text/XML acronym list output.
-q, --quiet	Quiet mode. Errors are not printed.
-T, --types <types>	Only search for acronyms with an attribute acronymType whose value is contained within the string <types>.
-t, --table	Format XML output as an S1000D <table>.
-v, --verbose	Verbose output.

-X, --select <xpath>	When marking up acronyms with -m/-M, use a custom XPath expression to specify which text nodes to search for acronyms in. By default, this is all text nodes in any element where acronyms are allowed. This must be the path to the text() nodes, not the elements, e.g. //para/text() and not simply //para.
-x, --xml	Use XML output instead of plain text.
-, --defer-choice	Mark where acronyms are found using a <chooseAcronym> element, whose child elements are all possible acronyms matching the term. Another program can then use this as input to actually prompt the user.
-^, --remove-deleted	List acronyms with elements that have a change type of "delete" removed.
--version	Show version information.
<dmodule>...	Data modules to find acronyms in. If none are specified, input is taken from stdin.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1

#### .acronyms file

This file specifies a list of acronyms for a project. By default, the program will search for a file named .acronyms in the current directory and parent directories, but any file can be specified using the -M option.

Example of .acronyms file format:

```
<acronyms>
<acronym acronymType="at01">
<acronymTerm>BREX</acronymTerm>
<acronymDefinition>Business Rules Exchange</acronymDefinition>
</acronym>
<acronym acronymType="at01">
<acronymTerm>SNS</acronymTerm>
```

```
<acronymDefinition>Standard Numbering System</acronymDefinition>
</acronym>
</acronyms>
```

## 4 Examples

List all acronyms used in all data modules:

```
$ slkd-acronyms DMC-*.XML
```

Markup predefined acronyms in a data module:

```
$ slkd-acronyms -mf DMC-EX-A-00-00-00-00A-040A-D_EN-CA.XML
```

Unmarkup acronyms in a data module:

```
$ slkd-acronyms -Df DMC-EX-A-00-00-00-00A-040A-D_EN-CA.XML
```

## s1kd-aspp

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	2
3 Options.....	2
3.1 .disptext file.....	4
4 Examples.....	6
4.1 Generating display text.....	6
4.2 Display text format string (-F).....	7
4.3 Creating presentation applicability statements.....	8
5 Display text rules schema.....	10
5.1 Display text rules.....	10
5.2 Operator rules.....	11
5.3 Default property format.....	11
5.4 Product attributes format.....	11
5.5 Conditions format.....	12
5.6 Condition type format.....	12
5.7 Property format.....	12
5.8 Values.....	13
5.9 Custom value label.....	13

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

**1**

#### General

The **s1kd-aspp** tool has two main functions:



- Generates display text for applicability statements. The text is derived from the logic described by the `assert` and `evaluate` elements.
- Preprocesses "semantic" applicability statements in a data module to produce "presentation" applicability statements which are simpler to parse in an XSLT stylesheet.

"Semantic" applicability statements are those entered by the author to encode the applicability of elements within a data module. "Presentation" applicability statements are those that are actually displayed in page-oriented output, also referred to as the "human-readable" statements.

The applicability in the resulting XML is longer semantically correct, but an XSLT stylesheet can simply place a statement on any element with attribute `applicRefId` without needing to consider inherited applicability statements on elements without the attribute.

## 2 Usage

```
slkd-aspp [options] [<object> ...]
```

## 3 Options

-., --dump-disptext	Dump the built-in .disptext file.
-, --dump-xsl	Dump the built-in XSLT used to generate display text for applicability statements.
-A, --act <ACT>	Add an ACT to use when generating display text for product attributes. Multiple ACT data modules can be used by specifying this option multiple times.
-a, --id <ID>	The ID to use for the inline applicability annotation representing the whole data module's applicability. Default is "app-0000".
-C, --cct <CCT>	Add a CCT to use when generating display text for conditions. Multiple CCT data modules can be used by specifying this option multiple times.
-c, --search	Search for the ACT and CCT referenced by each data module, and add them to the list of ACTs/CCTs to use when generating display text for that data module.
-D, --delete	Remove the display text from all applicability annotations, except those that consist of only display text (and no computer processing part).
-d, --dir <dir>	Directory to start searching for ACT/CCT data modules in. By default, the current directory is used.
-F, --format <fmt>	Use a custom format string to generate display text.
-f, --overwrite	Overwrite input data module(s) rather than outputting to stdout.
-G, --disptext <disptext>	Specify a custom .disptext file.
-g, --generate	Generate display text for applicability statements.

-h, -?, --help	Show help/usage message.
-k, --keep	When generating display text, do not overwrite existing display text on statements, only generate display text for statements which have none.
-l, --list	Treat input (stdin or arguments) as lists of filenames of objects, rather than objects themselves.
-N, --omit-issue	Assume that the filenames for the ACT and CCT do not include issue info, i.e. they were created using the -N option of the s1kd-newdm tool.
-p, --presentation	Preprocess applicability statements to produce "presentation" applicability statements which are simpler to parse in an XSLT stylesheet. The applicability in the resulting XML is no longer semantically correct.
-r, --recursive	Search for ACT/CCT data modules recursively.
-t, --tags <mode>	<p>Add tags before elements containing the display text of the applicability annotation they reference, simulating the typical presentation of applicability annotations within the XML.</p> <p>If &lt;mode&gt; is "pi", the tags are inserted as processing instructions, named "s1kd-aspp". This allows existing tags to be removed automatically before adding new ones.</p> <p>If &lt;mode&gt; is "comment", the tags are inserted as XML comments. Existing comments will not be removed automatically.</p> <p>If &lt;mode&gt; is "remove", tags will be removed without adding new ones. This only applies to the processing instruction tags.</p>
-v, --verbose	Verbose output.
-x, --xsl <XSLT>	Use custom XSLT to generate display text for applicability statements.
--version	Show version information.
<object> ...	The object(s) to preprocess. This can include both individual objects and combined files such as those produced by s1kd-flatten(1).

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.

--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 .disptext file

This file specifies rules for generating display text. It consists of:

- operator rules
- property rules

The `<operators>` element specifies the format of operators used in display text:

and	Text to use for the <code>and</code> operator between assertions. Default is " and ".
or	Text to use for the <code>or</code> operator between assertions. Default is " or ".
openGroup	Text to use to open a group of assertions. Default is "(".
closeGroup	Text to use to close a group of assertions. Default is ")".
set	Text to use between items in a set ( <code>a b c</code> ).
range	Text to use between the start and end of a range ( <code>a~c</code> ).

Each `<property>` element specifies the format used for an individual property. The `<productAttributes>` and `<conditions>` elements specify the default format for product attributes and conditions that are not listed. Alternatively, the `<default>` element specifies the default format for both product attributes and conditions together.

The format is specified using a combination of the following elements:

<code>&lt;name&gt;</code>	Replaced by the name of the property.
<code>&lt;text&gt;</code>	Text that is included as-is.
<code>&lt;values&gt;</code>	Replaced by the values specified for the property in the applicability assertion.

Optionally, `<values>` may contain a list of custom labels for individual values. Any values not included in this list will use their normal label.

By default, the program will search for a file named `.disptext` in the current directory and parent directories, but any file can be specified using the `-G (--disptext)` option.

Example of a `.disptext` file:

```
<disptext>
<operators>
<and> + </and>
```

```
<or>, </or>
<openGroup>[</openGroup>
<closeGroup>]</closeGroup>
<set> or </set>
<range> thru </range>
</operators>
<default>
<name/>
<text>: </text>
<values/>
</default>
<property ident="model" type="prodattr">
<values>
<value match="BRKTRKR">Brook trekker</value>
<value match="MNTSTRM">Mountain storm</value>
</values>
<text> </text>
<name/>
</property>
</disptext>
```

Given the above example, the following display would be generated for each annotation:

Assert annotation:

```
<assert
applicPropertyIdent="model"
applicPropertyType="prodattr"
applicPropertyValues="BRKTRKR" />
```

Human-readable format:

"Brook trekker Model"

Evaluate annotation:

```
<evaluate andOr="or">
<evaluate andOr="and">
<assert
applicPropertyIdent="model"
applicPropertyType="prodattr"
applicPropertyValues="BRKTRKR" />
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="Mk1" />
</evaluate>
<evaluate andOr="and">
<assert
applicPropertyIdent="model"
```

```
applicPropertyType="prodattr"
applicPropertyValues="MNTSTRM"/>
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="Mk9"/>
</evaluate>
</evaluate>
```

Human-readable format:

```
"[Brook trekker Model + Version: Mk9],
[Mountain storm Model + Version: Mk1]"
```

Evaluate annotation:

```
<evaluate andOr="and">
<assert
applicPropertyIdent="model"
applicPropertyType="prodattr"
applicPropertyValues="BRKTRKR|MNTSTRM"/>
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="Mk1~Mk9"/>
</evaluate>
```

Human-readable format:

```
"Brook trekker or Mountain storm Model + Version: Mk1 thru Mk9"
```

## 4 Examples

### 4.1 Generating display text

The built-in XSLT for generating display text follows the guidance in Chap 7.8 of the S1000D 5.0 specification. For example, given the following:

```
<applic>
<assert applicPropertyIdent="prodversion"
applicPropertyType="prodattr" applicPropertyValues="A"/>
</applic>
```

The resulting XML would contain:

```
<applic>
<displayText>
<simplePara>prodversion: A</simplePara>
</displayText>
<assert applicPropertyIdent="prodversion"
applicPropertyType="prodattr" applicPropertyValues="A"/>
</applic>
```

If ACTs or CCTs are supplied which define display names for a property, this will be used instead of the ident. For example, the ACT defines the display name for the "prodversion" product attribute:

```
<productAttribute id="prodversion">
<name>Product version</name>
<displayName>Version</displayName>
<descr>The version of the product.</descr>
<enumeration applicPropertyValues="A|B|C"/>
</productAttribute>
```

When supplied with the -A option:

```
$ slkd-aspp -g -A <ACT> <DM>
```

The resulting XML would instead contain:

```
<applic>
<displayText>
<simplePara>Version: A</simplePara>
<assert applicPropertyIdent="prodversion"
applicPropertyType="prodattr" applicPropertyValues="A"/>
</displayText>
</applic>
```

The methods for generating display text can be changed either via the .disptext file, or by supplying a custom XSLT script with the -x option. The -x option can be used to dump the built-in XSLT as a starting point for a custom script.

## 4.2 Display text format string (-F)

The -F option allows for very simple customizations to generated display text without needing to create a custom .disptext file or XSLT script (-x). The string determines the format of the display text of each <assert> element in the annotation.

The following variables can be used within the format string:

%name%	The name of the property.
%values%	The applicable value(s) of the property.

For example:

```
$ slkd-aspp -g <DM>
...
<applic>
<displayText>
<simplePara>Version: A</simplePara>
</displayText>
<assert applicPropertyIdent="version" applicPropertyType="prodattr"
applicPropertyValues="A"/>
</applic>
```

```
...  
  
$ slkd-aspp -F '%name% = %values%' -g <DM>  
...  
<applic>  
<displayText>  
<simplePara>Version = A</simplePara>  
</displayText>  
<assert applicPropertyIdent="version" applicPropertyType="prodattr"  
applicPropertyValues="A"/>  
</applic>  
...
```

### 4.3 Creating presentation applicability statements

Given the following:

```
<dmodule>  
<identAndStatusSection>  
<dmAddress>...</dmAddress>  
<dmStatus>  
...  
<applic>  
<displayText>  
<simplePara>A or B</simplePara>  
</displayText>  
</applic>  
...  
</dmStatus>  
</identAndStatusSection>  
<content>  
<referencedApplicGroup>  
<applic id="app-B">  
<displayText>  
<simplePara>B</simplePara>  
</displayText>  
</applic>  
</referencedApplicGroup>  
<procedure>  
<preliminaryRqmts>...</preliminaryRqmts>  
<mainProcedure>  
<proceduralStep>  
<para>This step is applicable to A or B.</para>  
</proceduralStep>  
<proceduralStep applicRefId="app-B">  
<para>This step is applicable to B only.</para>  
</proceduralStep>  
<proceduralStep applicRefId="app-B">  
<para>This step is also applicable to B only.</para>  
</proceduralStep>
```

```
<proceduralStep>
<para>This step is also applicable to A or B.</para>
</proceduralStep>
</mainProcedure>
<closeRqmts>...</closeRqmts>
</procedure>
</content>
</dmodule>
```

Applicability statements should be displayed whenever applicability changes:

- 1 This step is applicable to A or B.
- 2 **Applicable to: B**  
This step is applicable to B only.
- 3 This step is also applicable to B only.
- 4 **Applicable to: A or B**  
This step is also applicable to A or B.

There are two parts which are difficult to do in an XSLT stylesheet:

- No statement is shown on Step 3 despite having attribute `applicRefId` because the applicability has not changed since the last statement on Step 2.
- A statement is shown on Step 4 despite not having attribute `applicRefId` because the applicability has changed back to that of the whole data module.

Using the s1kd-aspp tool, the above XML would produce the following output:

```
<dmodule>
<identAndStatusSection>
<dmAddress>...</dmAddress>
<dmStatus>
...
<applic>
<displayText>
<simplePara>A or B</simplePara>
</displayText>
</applic>
...
</dmStatus>
</identAndStatusSection>
<content>
<referencedApplicGroup>
<applic id="app-B">
<displayText>
<simplePara>B</simplePara>
</displayText>
```



```
</applic>
<applic id="app-0000">
  <displayText>
    <simplePara>A or B</simplePara>
  </displayText>
</applic>
</referencedApplicGroup>
<procedure>
  <preliminaryRqmts>...</preliminaryRqmts>
  <mainProcedure>
    <proceduralStep>
      <para>This step is applicable to A or B.</para>
    </proceduralStep>
    <proceduralStep applicRefId="app-B">
      <para>This step is applicable to B only.</para>
    </proceduralStep>
    <proceduralStep>
      <para>This step is also applicable to B only.</para>
    </proceduralStep>
    <proceduralStep applicRefId="app-0000">
      <para>This step is also applicable to A or B.</para>
    </proceduralStep>
  </mainProcedure>
</procedure>
</content>
</dmodule>
```

With attribute `applicRefId` only on those elements where a statement should be shown, and an additional inline applicability to represent the whole data module's applicability. This XML is semantically incorrect but easier for a stylesheet to transform for page-oriented output.

## 5 Display text rules schema

### 5.1 Display text rules

The element `<disptext>` contains all the rules for the formatting of generated display text in applicability annotations.

**Markup element:** `<disptext>`

**Attributes:**

- None

**Child elements:**

- `<operators>`
- `<default>`
- `<productAttributes>`
- `<conditions>`

- <conditionType>
- <property>

## 5.2 Operator rules

The element <operators> defines the format of operators used in applicability display text.

**Markup element:** <operators>

**Attributes:**

- None

**Child elements:**

- <and>, text used for the and operator between assertions in an evaluation.
- <or>, text used for the or operator between assertions in an evaluation.
- <openGroup>, text used to open a group of assertions.
- <closeGroup>, text used to close a group of assertions.
- <set>, text used between items in a set.
- <range>, text used between the start and end of a range.

## 5.3 Default property format

The element <default> defines the default format for all properties which are not matched by a more specific rule.

**Markup element:** <default>

**Attributes:**

- None

**Child elements:**

- <name>, replaced by the name of the property.
- <text>, text that is included as-is.
- <values>, replaced by the values specified for the property in the applicability assertion.

## 5.4 Product attributes format

The element <productAttributes> defines the default format for all product attributes which are not matched by a more specific rule.

**Markup element:** <productAttributes>

**Attributes:**

- None

**Child elements:**

- `<name>`, replaced by the name of the product attribute.
- `<text>`, text that is included as-is.
- `<values>`, replaced by the values specified for the product attribute in the applicability assertion.

## 5.5 Conditions format

The element `<conditions>` defines the default format for all conditions which are not matched by a more specific rule.

**Markup element:** `<conditions>`

**Attributes:**

- None

**Child elements:**

- `<name>`, replaced by the name of the condition.
- `<text>`, text that is included as-is.
- `<values>`, replaced by the values specified for the condition in the applicability assertion.

## 5.6 Condition type format

The element `<conditionType>` defines the format for all conditions of a given type which are not matched by a more specific rule.

**Markup element:** `<conditionType>`

**Attributes:**

- `ident` (M), the ID of the condition type in the CCT.

**Child elements:**

- `<name>`, replaced by the name of the condition.
- `<text>`, text that is included as-is.
- `<values>`, replaced by the values specified for the condition in the applicability assertion.

## 5.7 Property format

The element `<property>` defines the format for a specific property.

**Markup element:** `<property>`

**Attributes:**

- `ident` (M), the ID of the property in the ACT or CCT.
- `type` (M), the type of the property, either "condition" or "prodattr".

**Child elements:**

- `<name>`, replaced by the name of the property.
- `<text>`, text that is included as-is.
- `<values>`, replaced by the values specified for the property in the applicability assertion.

## 5.8 Values

The element `<values>` is replaced by the values specified for a property in an applicability assertion, and may specify custom labels for certain values.

**Markup element:** `<values>`

**Attributes:**

- None

**Child elements:**

- `<value>`

## 5.9 Custom value label

The element `<value>` specifies a custom label for an individual value of a property.

**Markup element:** `<value>`

**Attributes:**

- `match (M)`, the value to apply the custom label for.

**Child elements:**

- None

## s1kd-flatten

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
4 Exit status.....	3
5 Example.....	3

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
None	

### *Description*

#### 1 General

The **s1kd-flatten** tool combines a publication module and the data modules it references in to a single file for use with a publishing system.

Data modules are by default searched for in the current directory using the data module code, language and/or issue info provided in each reference.

#### 2 Usage

```
s1kd-flatten [-d <dir>] [-I <path>] [-cDfimNPpqRruvx] <PM> [<DM>...]
```

#### 3 Options

-c, --containers

Flatten referenced container data modules by copying the references inside the container directly in to the publication

	module. The copied references will also be flattened, unless the -m option is specified.
-D, --remove	Remove unresolved references.
-d, --dir <dir>	Directory to start search in. By default, the current directory is used.
-f, --overwrite	Overwrite input publication module instead of writing to stdout.
-h, -?, --help	Show help/usage message.
-I, --include <path>	Add <path> to the list of directories that the tool will search when resolving references.
-i, --ignore-issue	Always match the latest issue of an object found, regardless of the issue specified in the reference.
-m, --modify	Modify the references in the publication module without flattening them.
-N, --omit-issue	Assume that the files representing the referenced data modules do not include the issue info in their filenames, i.e. they were created using the -N option of the s1kd-new* tools.
-P, --only-pm-refs	Only flatten PM references, leaving DM references alone.
-p, --simple	Instead of the hierarchical PM-based format, use a simpler "flat" format.
-q, --quiet	Quiet mode. Errors are not printed.
-R, --recursively	Recursively flatten referenced publication modules, copying their content in to the "master" publication module.
-r, --recursive	Search directories recursively.
-u, --unique	Remove duplicate references within the PM content.
-v, --verbose	Verbose output. Specify multiple times to increase the verbosity.
-x, --use-xinclude	Use XInclude rather than copying each data module's contents directly inside the publication module. DTD entities in data modules will only be carried over to the final publication when using this option, otherwise they do not carry over when copying the data module.
--version	Show version information.
<DM>...	When using the -p option, the filenames to include can be specified manually as additional arguments instead of searching for them in the current directory. When not using the -p option, additional arguments are ignored.
<PM>	The publication module to flatten.
In addition, the following options allow configuration of the XML parser:	
--dtdload	Load the external DTD.

--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Exit status

0	No errors.
1	The publication module specified is malformed.
2	An encoding error occurred.

## 5 Example

```
$ slkd-flatten -x PMC-EX-12345-00001-00_001-00_EN-CA.XML > Book.xml
```

## s1kd-fmgen

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	2
3.1 .fmtypes file.....	3
3.2 Optional title page elements.....	5
3.3 Multi-pass transforms.....	5
4 Exit status.....	5
5 Example.....	6

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

#### 1

#### General

The **s1kd-fmgen** tool generates the content section for front matter data modules from either a standard publication module, or the combined format of the s1kd-flatten(1) tool. Some front matter types require the use of the combined format, particularly those that list information not directly found in the publication module, such as the highlights (HIGH) type.

#### 2

#### Usage

```
s1kd-fmgen [-D <TYPE>] [-F <FMTPES>] [-I <date>] [-P <PM>]
           [-p <name>=<val> ...] [-t <TYPE>] [-x <XSL>]
           [-,.flqvh?] [<DM>...]
```



### 3 Options

-., --dump-fmtypes-xml	Dump the built-in <code>.fmtypes</code> XML format.
-. , --dump-fmtypes	Dump the built-in <code>.fmtypes</code> simple text format.
-D, --dump-xsl <TYPE>	Dump the built-in XSLT used to generate the specified type of front matter.
-F, --fmtypes <FMTYPES>	Specify a custom <code>.fmtypes</code> file.
-f, --overwrite	Overwrite the specified front matter data module files after generating their content.
-h, -?, --help	Show usage message.
-l, --date <date>	Set the issue date of the generated front matter data modules. This can be a specific date in the form of "YYYY-MM-DD", "-" for the current date, or "pm" to use the issue date of the publication module.
-l, --list	Treat input (stdin or arguments) as lists of front matter data modules to generate content for, rather than data modules themselves. If reading list from stdin, the -P option must be used to specify the publication module.
-P, --pm <PM>	Publication module or s1kd-flatten(1) PM format file to generate contents from. If none is specified, the tool will read from stdin.
-p, --param <name>=<value>	Pass a parameter to the XSLT stylesheets used to generate the front matter content. Multiple parameters can be specified by using this option multiple times.  The following parameters are automatically supplied to any stylesheet, and therefore their names should be considered reserved: <ul style="list-style-type: none"><li>- "type" - The front matter type name (e.g., HIGH) that was matched in the <code>.fmtypes</code> file or specified by the user with the -t option.</li></ul>
-q, --quiet	Quiet mode. Do not print errors.
-t, --type <TYPE>	Generate content for this type of front matter. Supported types are: <ul style="list-style-type: none"><li>- HIGH - Highlights</li><li>- LOA - List of abbreviations</li><li>- LOASD - List of applicable specifications and documentation</li><li>- LOEDM - List of effective data modules</li><li>- LOI - List of illustrations</li><li>- LOS - List of symbols</li></ul>

	<ul style="list-style-type: none"><li>– LOT - List of terms</li><li>– LOTBL - List of tables</li><li>– TOC - Table of contents</li><li>– TP - Title page</li></ul>
-v, --verbose	Verbose output. Specify multiple times to increase the verbosity.
-x, --xsl <XSL>	Use the specified XSLT script to generate the front matter contents instead of the built-in XSLT or the user-configured XSLT from the <code>.fmtypes</code> file.
--version	Show version information.
<DM>...	Front matter data modules to generate content for. If no front matter type can be determined for a data module, it will be ignored.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 .fmtypes file

This file specifies a list of info codes to associate with a particular type of front matter.

Optionally, a path to an XSLT script can be given for each info code, which will be used to generate the front matter instead of the built-in XSLT. The path to an XSLT script will be interpreted relative to the location of the `.fmtypes` file (typically, the top directory of the CSDB). The `-D` option can be used to dump the built-in XSLT for a type of front matter as a starting point for a custom script.

Optionally, in the XML format, the attribute `ignoreDel` may be specified to control whether deleted data modules and elements are ignored when generating front matter contents. These are data modules with an issue type of "deleted" and elements with a change type of "delete". A value of "yes" means deleted content will not be included, while "no" means it will. If this attribute is not specified, then a default value will be used based on the type of front matter. The following types will ignore deleted content by default:

- LOA

- LOASD
- LOI
- LOS
- LOTBL
- TOC
- TP

By default, the program will search for a file named `.fmtypes` in the current directory and parent directories, but any file can be specified using the `-F` option.

Example of simple text format:

```
001      TP
005      LOA
006      LOT
007      LOS
009      TOC
00A      LOA
00S      LOEDM
00U      HIGH      fm/high.xsl
00V      LOASD
00Z      LOTBL
```

Example of XML format:

```
<fmtypes>
<fm infoCode="001" type="TP"/>
<fm infoCode="005" type="LOA"/>
<fm infoCode="006" type="LOT"/>
<fm infoCode="007" type="LOS"/>
<fm infoCode="009" type="TOC"/>
<fm infoCode="00A" type="LOI"/>
<fm infoCode="00S" type="LOEDM"/>
<fm infoCode="00U" type="HIGH" xsl="fm/high.xsl"/>
<fm infoCode="00V" type="LOASD"/>
<fm infoCode="00Z" type="LOTBL"/>
</fmtypes>
```

The info code of each entry in the `.fmtypes` file may also include an info code variant. This allows different transformations to be used based on the variant:

```
<fmtypes>
<fm infoCode="00UA" type="HIGH" xsl="fm/high.xsl"/>
<fm infoCode="00UB" type="HIGH" xsl="fm/high-updates.xsl"/>
<fm infoCode="00U" type="HIGH"/>
</fmtypes>
```

In the example above, a highlights data module (00U) with info code variant A will use an XSL transformation that creates a simple highlights, while a highlights data module with info code

variant B will use an XSL transformation that creates a highlights with update instructions. All other variants will use the built-in XSLT.

Entries are chosen in the order they are listed in the `.fmtypes` file. An info code which does not specify a variant matches all possible variants.

### 3.2 Optional title page elements

When re-generating the front matter content for a title page data module, optional elements which cannot be derived from the publication module (such as the product illustration or bar code) will be copied from the source data module when updating it.

### 3.3 Multi-pass transforms

Rather than a literal XSLT file, the path specified for the `xsl` attribute in the `.fmtypes` file or the `-x (--xsl)` option may be an XProc file which contains a pipeline with multiple stylesheets. This allows for multi-pass transformations.

#### Note

Only a small subset of XProc is supported at this time.

Example:

```
<p:pipeline
xmlns:p="http://www.w3.org/ns/xproc"
xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
version="1.0">
  <p:xslt name="Pass 1">
    <p:input port="stylesheet">
      <p:document href="pass1.xsl"/>
    </p:input>
    <p:with-param name="update-instr" select="true()"/>
  </p:xslt>
  <p:xslt name="Pass 2">
    <p:input port="stylesheet">
      <p:inline>
        <xsl:transform version="1.0">
          ...
        </xsl:transform>
      </p:inline>
    </p:input>
  </p:xslt>
</p:pipeline>
```

## 4 Exit status

0	No errors.
1	The date specified with <code>-I</code> is invalid.
2	No front matter types were specified.
3	An unknown front matter type was specified.



- 4 The resulting front matter content could not be merged in to a data module.
- 5 The stylesheet specified for a type of front matter was invalid.

## 5 Example

Generate the content for a title page front matter data module and overwrite the file:

```
$ slkd-flatten PMC-EX-12345-00001-00_001-00_EN-CA.XML |  
> slkd-fmgen -f DMC-EX-A-00-00-00-00A-001A-D_001-00_EN-CA.XML
```

## s1kd-icncatalog

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	2
3 Options.....	2
4 Examples.....	3
4.1 Resolving ICNs to filenames.....	3
4.2 Alternative ICN formats.....	3
4.3 Reconstructing ICN entity declarations.....	4
4.4 ICN pattern rules.....	4
5 Catalog schema.....	5
5.1 Catalog.....	5
5.2 Notation.....	6
5.3 Media.....	6
5.4 ICN.....	6
5.5 Example ICN catalog.....	7

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
None	

### *Description*

#### 1

#### **General**

The **s1kd-icncatalog** tool is used to manage a catalog of ICNs for a project, and to resolve ICNs using this catalog. Resolving an ICN means placing the actual filename of the ICN in to the SYSTEM ID of the ENTITY declaration within CSDB objects.

## 2 Usage

```
s1kd-icncatalog [options] [<object>...]
```

## 3 Options

-a, --add <ICN>	Add an ICN to the catalog. Follow with the -u and -n options to specify the URI and notation to use for this ICN. The -m option specifies a media group to add the ICN to.
-C, --create	Create a new empty catalog.
-c, --catalog <catalog>	Specify the catalog file to manage or resolve against. By default, the file <code>.icncatalog</code> in the current directory is used. If the current directory does not contain this file, the parent directories will be searched.
-d, --del <ICN>	Delete an ICN from the catalog. The -m option specifies a media group to delete the ICN from.
-f, --overwrite	Overwrite the input CSDB objects when resolving ICNs, or overwrite the catalog file when modifying it. Otherwise, output is written to stdout.
-h, -?, --help	Show help/usage message.
-l, --list	Treat input (stdin or arguments) as lists of filenames of CSDB objects, rather than CSDB objects themselves.
-m, --media <media>	Resolve ICNs for this intended output media. The catalog may contain alternative formats for the same ICN to be used for different output media.
-n, --ndata <notation>	Specify the notation to reference when adding an ICN with the -a option.
-q, --quiet	Quiet mode. Errors are not printed.
-t, --type <type>	Specify the type of catalog entry when adding an ICN with the -a option.
-u, --uri <URI>	Specify the URI when adding an ICN with the -a option.
-v, --verbose	Verbose output.
--version	Show version information.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.

--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4

## Examples

### 4.1

### Resolving ICNs to filenames

A CSDB object may reference an ICN as follows:

```
<!NOTATION png SYSTEM "png">
<!ENTITY ICN-12345-00001-001-01 SYSTEM "ICN-12345-00001-001-01.PNG"
NDATA png>
```

The SYSTEM ID of this ENTITY indicates that the ICN file will be in the same directory relative to the CSDB object. However, the ICN files in this example are located in a separate folder called 'graphics'. Rather than manually updating every ENTITY declaration in every CSDB object, a catalog file can be used to map ICNs to actual filenames:

```
<icnCatalog>
<icn infoEntityIdent="ICN-12345-00001-001-01"
uri="graphics/ICN-12345-00001-001-01.PNG" />
</icnCatalog>
```

Then, using this tool, the ICN can be resolved against the catalog:

```
$ slkd-icncatalog -c <catalog> <object>
```

Producing the following output:

```
<!NOTATION png SYSTEM "png">
<!ENTITY ICN-12345-00001-001-01 SYSTEM
"graphics/ICN-12345-00001-001-01.PNG" NDATA png>
```

### 4.2

### Alternative ICN formats

A catalog can also be used to provide alternative file formats for an ICN depending on the intended output media. For example:

```
<icnCatalog>
<notation name="jpg" systemId="jpg" />
<notation name="svg" systemId="svg" />
<media name="pdf">
<icn infoEntityIdent="ICN-12345-00001-001-01"
uri="ICN-12345-00001-001-01.JPG" notation="jpg" />
</media>
<media name="web">
<icn infoEntityIdent="ICN-12345-00001-001-01"
uri="ICN-12345-00001-001-01.SVG" notation="svg" />
</media>
```



```
</icnCatalog>
```

The -m option allows for specifying which type of media to resolve for:

```
<!NOTATION png SYSTEM "png">
<!ENTITY ICN-12345-00001-001-01 SYSTEM "ICN-12345-00001-001-01.PNG"
NDATA png>
```

```
$ slkd-icncatalog -c <catalog> -m pdf <object>
```

```
<!NOTATION png SYSTEM "png">
<!NOTATION jpg SYSTEM "jpg">
<!ENTITY ICN-12345-00001-001-01 SYSTEM "ICN-12345-00001-001-01.JPG"
NDATA jpg>
```

```
$ slkd-icncatalog -c <catalog> -m web <object>
```

```
<!NOTATION png SYSTEM "png">
<!NOTATION svg SYSTEM "svg">
<!ENTITY ICN-12345-00001-001-01 SYSTEM "ICN-12345-00001-001-01.SVG"
NDATA svg>
```

### 4.3 Reconstructing ICN entity declarations

Some processing, such as XSL transformations, may remove the DTD and external entity declarations as part of parsing an XML CSDB object. A catalog can be used to restore the necessary external entity declarations afterwards. For example:

```
$ xsltproc ex.xsl <object>
```

The resulting XML will not include a DTD or the external entity declarations for the ICNs referenced in the object, so it will not be valid according to the S1000D schema:

```
$ xsltproc ex.xsl <object> | slkd-validate
-:49:element graphic: Schemas validity error: Element 'graphic',
attribute 'infoEntityIdent': 'ICN-12345-00001-001-01' is not a valid
value of the atomic type 'xs:ENTITY'.
```

Passing the result to this tool, with a catalog containing all the ICNs used by the project:

```
$ xsltproc ex.xsl <object> | slkd-icncatalog -c <catalog>
```

will reconstruct the required external entity declarations in the DTD.

#### Note

The s1kd-tools will copy the DTD and external entity declarations automatically when performing transformations, so this is only necessary when using more generic XML tools.

### 4.4 ICN pattern rules

By default, each catalog entry matches a single ICN, but multiple ICNs can be resolved with a single entry by using a pattern rule. An entry with attribute `type="pattern"` specifies a regular expression to use to match ICNs and a template used to construct the resolved URI:

```
<icn
type="pattern"
infoEntityIdent="ICN-({5})-(.*)"
uri="graphics/\1/ICN-\1-\2.PNG"
notation="PNG"/>
```

The above entry would match a series of CAGE-based ICNs, resolving them to a subfolder of 'graphics' based on their CAGE code. Using this entry, the following input:

```
<!DOCTYPE dmodule [
<!NOTATION PNG SYSTEM PNG>
<!ENTITY ICN-12345-00001-001-01
SYSTEM "ICN-12345-00001-001-01"
NDATA PNG>
<!ENTITY ICN-54321-00001-001-01
SYSTEM "ICN-54321-00001-001-01"
NDATA PNG>
]>
```

would be resolved as follows:

```
<!DOCTYPE dmodule [
<!NOTATION PNG SYSTEM PNG>
<!ENTITY ICN-12345-00001-001-01
SYSTEM "graphics/12345/ICN-12345-00001-001-01.PNG"
NDATA PNG>
<!ENTITY ICN-54321-00001-001-01
SYSTEM "graphics/54321/ICN-54321-00001-001-01.PNG"
NDATA PNG>
]>
```

The regular expressions must conform to the extended POSIX regular expression syntax. Backreferences \1 through \9 can be used in the URI template to substitute captured groups.

## 5 Catalog schema

The following describes the schema of an ICN catalog file.

### 5.1 Catalog

**Markup element:** <icnCatalog>

**Attributes:**

- None

**Child elements:**

- <notation>
- <media>
- <icn>

## 5.2 Notation

The element `<notation>` represents a NOTATION declaration.

**Markup element:** `<notation>`

**Attributes:**

- `name`, the NDATA name.
- `publicId`, the optional PUBLIC ID of the notation.
- `systemId`, the optional SYSTEM ID of the notation.

**Child elements:**

- None

## 5.3 Media

The element `<media>` groups a set of alternative ICN formats for a particular output media type.

**Markup element:** `<media>`

**Attributes:**

- `name`, the identifier of the output media.

**Child elements:**

- `<icn>`

## 5.4 ICN

The element `<icn>` maps an ICN to a filename and optionally a notation. When this element occurs as a child of a `<media>` element, it will be used when that output media is specified with the `-m` option. When it occurs as a child of `<icnCatalog>`, it will be used if no media is specified.

**Markup element:** `<icn>`

**Attributes:**

- `type`, the type of ICN entry, with one of the following values:
  - `"single"` (D) - Specifies a single ICN to resolve.
  - `"pattern"` - Specifies a pattern to resolve one or more ICNs.
- `infoEntityIdent`, the ICN, or pattern used to match ICNs.
- `uri`, the filename the ICN will resolve to.
- `notation`, a reference to a previously declared `<notation>` element.

**Child elements:**

- None

## 5.5 Example ICN catalog

```
<icnCatalog>
<notation name="jpg" systemId="jpg"/>
<notation name="png" systemId="png"/>
<notation name="svg" systemId="svg"/>
<media name="pdf">
<icn infoEntityIdent="ICN-12345-00001-001-01"
uri="ICN-12345-00001-001-01.JPG" notation="jpg"/>
</media>
<media name="web">
<icn infoEntityIdent="ICN-12345-00001-001-01"
uri="ICN-12345-00001-001-01.SVG" notation="svg"/>
</media>
<icn infoEntityIdent="ICN-12345-00001-001-01"
uri="ICN-12345-00001-001-01.PNG" notation="png"/>
</icnCatalog>
```

## s1kd-index

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
3.1 .indexflags file.....	2
4 Example.....	2

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

- 1 General**

The **s1kd-index** tool adds index flags to a data module based on a user-defined set of keywords.
- 2 Usage**

```
s1kd-index -h?  
s1kd-index [-I <index>] [-filqv] [<module>...]  
s1kd-index -D [-filqv] [<module>...]
```
- 3 Options**

-D, --delete	Remove the current index flags from a data module.
-f, --overwrite	Overwrite input module(s).

-h, --help	Show help/usage message.
-I, --indexflags <index>	Flag the terms in the specified <index> XML file instead of the default <code>.indexflags</code> file.
-i, --ignore-case	Ignore case when flagging terms.
-l, --list	Treat input (stdin or arguments) as lists of filenames of data modules to add index flags to, rather than data modules themselves.
-q, --quiet	Quiet mode. Errors are not printed.
-v, --verbose	Verbose output.
--version	Show version information.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 **.indexflags file**

This file specifies the list of indexable keywords for the project and their level. By default, the program will search for a file named `.indexflags` in the current directory or parent directories, but any file can be specified using the `-I` option.

Example of `.indexflags` file format:

```
<indexFlags>
<indexFlag indexLevelOne="bicycle"/>
<indexFlag indexLevelOne="bicycle" indexLevelTwo="brake system"/>
</indexFlags>
```

## 4 **Example**

Given the following in a data module:

```
<levelledPara>
<title>General</title>
<para>
```

The `slkd-tools` are a set of small tools for manipulating S1000D XML data.

```
</para>
</levelledPara>
```

And the following .indexflags file:

```
<indexFlags>
<indexFlag indexLevelOne="S1000D"/>
<indexFlag indexLevelTwo="S10000D" indexLevelTwo="slkd-tools"/>
<indexFlag indexLevelOne="data"/>
<indexFlag indexLevelOne="data" indexLevelTwo="XML"/>
</indexFlags>
```

Then the slkd-index command:

```
$ slkd-index <DM>.XML
```

Would result in the following:

```
<levelledPara>
<title>General</title>
<para>
The slkd-tools<indexFlag indexLevelOne="S1000D"
indexLevelTwo="slkd-tools"/> are a set of small tools for
manipulating S1000D<indexFlag indexLevelOne="S1000D"/>
XML<indexFlag indexLevelOne="data" indexLevelTwo="XML"/>
data<indexFlag indexLevelOne="data"/>.
</para>
</levelledPara>
```

## s1kd-instance

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	2
3 Options.....	2
3.1 Identifying the source of an instance.....	9
3.2 Removing/simplifying/pruning applicability annotations.....	9
3.3 Applicability of an instance (-W, -Y, -y).....	13
3.4 Filtering for multiple values of a single property.....	15
3.5 Resolving CIR dependencies with a custom XSLT script (-x).....	16
3.6 Updating instances (-@).....	17
3.7 Reapplying source applicability (-8).....	19
4 Exit status.....	20
5 Examples.....	20

#### List of tables

1	References.....	1
---	-----------------	---

### References

*Table 1 References*

Data module/Technical publication	Title
None	

### Description

#### 1

##### General

The **s1kd-instance** tool produces "instances" of S1000D CSDB objects, derived from "master" (or "source") objects. The tool supports multiple methods of instantiating objects:

- Filtering on user-supplied applicability definitions, so that non-applicable elements and (optionally) unused applicability annotations are removed in the instance. The definitions can be supplied directly or read from a PCT.
- Filtering on skill levels and security classifications to remove sensitive data.



- Using a CIR to produce a standalone instance from a CIR-dependent master.

Any combination of these methods can be used when producing an instance.

The applications for this tool include:

- Delivering customized data modules or publications to different customers.
- Creating customized instances of CSDB objects which are maintained within the CSDB.
- As a backend to filter content or resolve CIR dependencies at runtime in an electronic viewer application.

## 2 Usage

```
slkd-instance [options] [<object>...]
```

## 3 Options

- |                         |   |
|-------------------------|---|
| -A, --simplify          | Simplify inline applicability annotations, and remove annotations which are unambiguously valid or invalid.   |
| -a, --reduce            | Remove applicability annotations which are unambiguously valid or invalid.  |
| -C, --comment <comment> | Add an XML comment to an instance. Useful as another way of identifying an object as an instance aside from the source address or extended code, or giving additional information about a particular instance. By default, the comment is inserted at the top of the document, but this can be customized with the -X option. |
| -c, --code <code>       | Specify a new data module code (DMC) or publication module code (PMC) for the instance.   |
| -D, --dump <CIR>        | Dumps the built-in XSLT used to resolve dependencies for <CIR> CIR type to stdout. This can be used as a starting point for a custom XSLT script to be specified with the -x option.  |

The following types currently have built-in XSLT and can therefore be used as values for <CIR>:

- accessPointRepository
- applicRepository
- cautionRepository
- circuitBreakerRepository
- controlIndicatorRepository
- enterpriseRepository
- functionalItemRepository

	<ul style="list-style-type: none"><li>– illustratedPartsCatalog</li><li>– partRepository</li><li>– supplyRepository</li><li>– toolRepository</li><li>– warningRepository</li><li>– zoneRepository</li></ul>
-d, --dir <dir>	Directory to start searching for referenced objects in. By default, the current directory will be searched. This applies for the ACT and PCT data modules when a product is specified (-p) without specifying the PCT explicitly (-P), or when searching for source objects (-@).
-E, --no-extension	Remove the extension from an instance produced from an already extended object.
-e, --extension <ext>	Specify an extension on the data module code (DME) or publication module code (PME) for the instance.
-F, --flatten-alts	After filtering, "alts" elements containing only one child element will be "flattened" by replacing them with the applicable child element. Alts elements with multiple child elements are left untouched.
-f, --overwrite	Force overwriting of files.  By itself, this will cause the source object(s) to be overwritten instead of being printed to stdout.  When used with the -o or -O options, if a file exists with the same name as the one specified (-o) or automatically generated by the tool (-O), this will force it to be overwritten. Otherwise, a warning will be printed and the existing file will not be overwritten.
-G, --custom-orig <CODE>/<NAME>	Similar to the -g option, but instead of the default enterprise code and name, use the values <CODE> and <NAME>, which are separated by a slash (/). To only include a code, specify <CODE> with no slash. To only include a name, specify <NAME> prefixed by a slash.
-g, --set-orig	Set the originator of the instance. When this option is specified, the code "S1KDI" and the name "s1kd-instance tool" are used by default to identify that the instance was produced by this tool. A different code and name can be specified with the -G option.
-H, --list-properties <method>	Create an XML report of all the applicability properties used in, and product instances relevant to, the specified CSDB objects. <method> determines how to include values and products in the report:

	<ul style="list-style-type: none"> <li>– "standalone" - Only include the values that are explicitly used in the object.</li> <li>– "all" - Include all values and products as defined in the ACT, CCT and PCT.</li> <li>– "applic" - Only include the values and products, as defined in the ACT, CCT and PCT, that are within the applicability of the object.</li> </ul>
-h, -?, --help	Show help/usage message.
-I, --date <date>	Set the issue date of the instance. By default, the issue date is taken from the source. If - is given for <date>, the current date will be used.
-i, --infoname <infoName>	Give the data module instance a different infoName.
-J, --clean-display-text	Remove display text from annotations which are simplified in -A or -9 mode.
-j, --clean-ents	After filtering, remove external entities (such as ICNs) which are no longer used from the resulting instances.
-K, --skill-levels <levels>	Filter the object on the specified skill levels. Elements which are marked with skill levels not contained in the string <levels> are removed in the resulting instance.
-k, --skill <level>	Set the skill level of the instance.
-L, --list	Source is a list of object filenames to create instances of, rather than an object itself.
-l, --language <lang>	Set the language and country of the instance. For example, to create an instance for US English, lang would be "en-US".
-m, --remarks <remarks>	Set the remarks for the instance.
-N, --omit-issue	Omit issue/inwork numbers from automatically generated filenames.
-n, --issue <iss>	Set the issue and inwork numbers of the instance. By default, the issue and inwork number are taken from the source.  When updating an instance (-@), if + is given for <iss>, the updated instance will have the same issue number with an inwork number incremented by one.  Setting the issue of the instance will also set a default issue type: <ul style="list-style-type: none"> <li>– If the issue is 000-01 thru 001-00, the default issue type will be "new".</li> <li>– If the issue is 001-01 and up and the master is not "new", the default issue type will be that of the master.</li> <li>– If the issue is 001-01 and up but the master is "new", the default issue type will be "status".</li> </ul>

-O, --outdir <dir>	<p>A different issue type than the default can be set with the -z (--issue-type) option.</p> <p>Output instance(s) in &lt;dir&gt;, automatically naming them based on:</p> <ul style="list-style-type: none"><li>– the extension specified with -e</li><li>– the code specified with -c</li><li>– The issue info specified with -n</li><li>– the language and country specified with -L</li></ul> <p>If any of the above are not specified, the information is copied from the source object.</p> <p>If &lt;dir&gt; does not exist, it will be created.</p> <p>If a file exists with the same name in the specified directory, a warning will be display and the file will not be overwritten, unless the -f option is specified.</p> <p>When using this option, non-XML files, such as external publications, may be specified as objects. They will be copied to &lt;dir&gt;.</p>
-o, --out <file>	Output instance to file instead of stdout.
-P, --pct <PCT>	PCT file to read product definitions from (-p). If a product is specified but no PCT is given, the tool will attempt to use the ACT reference of each source data module to find the ACT and PCT data modules in the current directory.
-p, --product <product>	The ID or primary key of a product in the specified PCT data module (-P), the PCT referenced by the ACT data module specified with -1, or the PCT data module referenced by the source data module itself. A primary key is given in the same form as the -s option and should match a unique assign of a product instance, e.g., "serialno:prodattr=12345". If the key matches multiple products within the PCT, then the objects will be filtered on the combination of all matching products.
-Q, --resolve-containers	<p>Resolve references to container data modules, selecting the appropriate reference for the specified applicability. If zero or more than one references are applicable, the reference to the container will be left untouched.</p> <p>Additionally, if the object being filtered is itself a container data module, the applicability of the referenced data modules will be copied in to it as inline annotations prior to filtering.</p>
-q, --quiet	Quiet mode. Errors are not printed.

**-R, --cir <CIR> ...**

Use a CIR to resolve external dependencies in the master object, making the instance object standalone. Additional CIRs can be used by specifying the -R option multiple times.

The following CIRs have some built-in support:

- Access points
- Applicability
- Cautions
- Circuit breakers
- Controls/indicators
- Enterprises
- Functional items
- Illustrated parts data
- Parts
- Supplies
- Tools
- Warnings
- Zones

The methods of resolving the dependencies for a CIR can be changed by specifying a custom XSLT script with the -x option. The built-in XSLT used for the above CIR data modules can be dumped with the -D option.

If "" is given for <CIR>, the tool will search for CIR data modules automatically.

**-r, --recursive**

Search for referenced objects recursively. This applies for the ACT and PCT data modules when a product is specified (-p) without specifying the PCT explicitly (-P), when searching for source objects (-@), or when searching for CIR data modules (-R).

**-S, --no-source-ident**

Do not include <sourceDmIdent>/<sourcePmIdent> in the instance.

**-s, --assign <applic>**

An applicability definition in the form of "<ident>:<type>=<value>". Any number of values can be defined by specifying this option multiple times.

**-T, --tag**

Tag non-applicable elements with the processing instruction <?notApplicable?> instead of removing them.

**-t, --techname <techName>**

Give the instance a different techName/pmTitle.

-U, --security-classes <classes>	Filter the object on the specified security classes. Elements marked with security classes not contained in the string <classes> are removed in the resulting instance.
-u, --security <sec>	Set the security classification of the instance. An instance may have a lower security classification than the source if classified information is removed for a particular customer.
-V, --infoname-variant <variant>	Give the instance a different info name variant.
-v, --verbose	Verbose output.
-W, --set-applic	Set the applicability for the whole object, overwriting the current applicability with the user-defined applicability values.
-w, --whole-objects	Check the applicability, skill level, and security classification of the whole object against the user-defined applicability, skill levels, and security classifications. If the whole object is not applicable, then no instance is created.
-X, --comment-xpath <path>	The XPath expression indicating where the comment specified with -C will be inserted. This should be the path to an element where the comment will be inserted as the first child node. By default, this is the top of the document.
-x, --xsl <XSL>	Use a custom XSLT script to resolve CIR dependencies. If this option follows -R, the specified XSLT script will only be used for the last specified CIR. If it precedes any -R, the specified XSLT script will be used for all CIRs that do not override it with a following -x.
-Y, --applic <text>	Update the applicability for the whole object using the user-defined applicability values, and using <text> as the new display text.
-y, --update-applic	Update the applicability for the whole object using the user-defined applicability values.
-Z, --add-required	Fix certain elements automatically after filtering. For example, if all support equipment is removed due to filtering, a <noSupportEquips> element will be inserted automatically.
-z, --issue-type <type>	Set the issue type of the instance.
-1, --act	Specify the ACT to use to find the CCT and/or PCT.
-2, --cct	Specify the CCT to read dependency tests from (--).
-3, --no-repository-ident	Do not include a <repositorySourceDmIdent> in the instance for each CIR.
-4, --flatten-alts-refs	Same as the -F option, but in addition to flattening alts elements, the <code>internalRefTargetType</code> of cross-references to them will be changed to the appropriate type (e.g., "irtt01" for a <figure> in a <figureAlts>). This is specifically useful for S1000D Issue 4.1, where the Default BREX does not allow the standard

	<code>internalRefTargetType</code> values to be used with the <code>alts</code> elements.
<code>-5, --print</code>	When <code>-O</code> is used, print the automatically generated file name of the instance.
<code>-6, --clean-annotations</code>	Remove unused applicability annotations.
<code>-7, --dry-run</code>	Do not actually create or update any instances. This can be combined with options like <code>-5 (--print)</code> or <code>-0 (--print-non-applic)</code> to print information about what objects would/would not be created or updated, but nothing will actually be written out.
<code>-8, --reapply</code>	Automatically reapply the applicability of the source object when filtering.
<code>-9, --prune</code>	Remove only invalid parts of applicability annotations.
<code>-0, --print-non-applic</code>	Print the file names of objects which are not applicable, and therefore no instance for them will be created. Since this would only have an effect in the <code>-w (--whole-objects)</code> mode, that option is implied.
<code>-@, --update-instances</code>	Rather than source objects, the objects specified are existing instances that will be updated.
<code>-%, --read-only</code>	Make instance objects read-only.
<code>-.!, --no-infoname</code>	Do not include an <code>infoName</code> in the instance.
<code>--~, --dependencies</code>	Add dependency tests from the CCT to assertions that use the dependant values.
<code>-^, --remove-deleted</code>	Remove elements with change type of "delete" in the resulting instance. If <code>-w (--whole-objects)</code> is specified, then no instance will be created for objects with an issue type of "deleted".
<code>--version</code>	Show version information.
<code>&lt;object&gt;...</code>	Source CSDB objects to instantiate.

In addition, the following options allow configuration of the XML parser:

<code>--dtdload</code>	Load the external DTD.
<code>--huge</code>	Remove any internal arbitrary parser limits.
<code>--net</code>	Allow network access to load external DTD and entities.
<code>--noent</code>	Resolve entities.
<code>--parser-errors</code>	Emit errors from parser.
<code>--parser-warnings</code>	Emit warnings from parser.
<code>--xinclude</code>	Do XInclude processing.
<code>--xml-catalog &lt;file&gt;</code>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 Identifying the source of an instance

If the identification information (extension, code, issue or language) of an instance differs from that of the source, the resulting data module instance will contain the element `<sourceDmIdent>`, which will contain the identification elements of the source data module used to instantiate it. Publication module instances will contain the element `<sourcePmIdent>` instead.

Additionally, the data module instance will contain an element `<repositorySourceDmIdent>` for each CIR specified with the -R option.

If the -S (--no-source-ident) option is used, neither the `<sourceDmIdent>` or `<sourcePmIdent>` elements are added. If the -3 (--no-repository-ident) option is used, no `<repositorySourceDmIdent>` elements will be added. These options can be useful when this tool is not used to make an "instance" per se, but more generally to make a module based on an existing module.

### 3.2 Removing/simplifying/pruning applicability annotations

By default, filtering on applicability will remove invalid elements from the resulting instance. In some cases, though, it may be desirable to remove redundant applicability annotations on valid elements. The -a (--reduce), -A (--simplify) and -9 (--prune) options provide different methods of doing this.

The -a (--reduce) option will remove applicability annotations (`applicRefId`) from elements which are deemed to be unambiguously valid or invalid (their validity does not rely on applicability values left undefined by the user). The unused occurrences of the corresponding `<applic>` elements are removed as well.

The -A (--simplify) option will do the same as the -a option, but will also attempt to simplify unused parts of applicability annotations. It simplifies an annotation by removing `<assert>` elements determined to be either unambiguously valid or invalid given the user-defined values, and removing unneeded `<evaluate>` elements when they contain only one remaining `<assert>`.

The -9 (--prune) option works similarly to the -A option, except that only invalid parts of applicability annotations are removed.

For example, given the following input:

```
<referencedApplicGroup>
<applic id="app-0001">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
</applic>
<applic id="app-0002">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="B"/>
```



```
</applic>
<applic id="app-0003">
<evaluate andOr="or">
<evaluate andOr="and">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="normal"/>
</evaluate>
<evaluate andOr="and">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="B"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="icy"/>
</evaluate>
</evaluate>
</applic>
</referencedApplicGroup>
<!-- snip -->
<para applicRefId="app-0001">This applies to version A.</para>
<para applicRefId="app-0002">This applies to version B.</para>
<para applicRefId="app-0003">
This applies to version A if the weather is normal, or version B if
the weather is icy.
</para>
```

If this data is filtered for version A, without specifying a value for the weather, and the -a, -A or -9 options are not used, the following will be the result:

```
<referencedApplicGroup>
<applic id="app-0001">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
</applic>
<applic id="app-0002">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="B"/>
```

```
</applic>
<applic id="app-0003">
<evaluate andOr="or">
<evaluate andOr="and">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="normal"/>
</evaluate>
<evaluate andOr="and">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="B"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="icy"/>
</evaluate>
</evaluate>
</applic>
</referencedApplicGroup>
<!-- snip -->
<para applicRefId="app-0001">This applies to version A.</para>
<para applicRefId="app-0003">
This applies to version A if the weather is normal, or version B if
the weather is icy.
</para>
```

The second paragraph is removed, because it only applies to version B.

If the -a option is used, the following would be the result:

```
<referencedApplicGroup>
<applic id="app-0003">
<evaluate andOr="or">
<evaluate andOr="and">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="normal"/>
```

```
</evaluate>
<evaluate andOr="and">
  <assert
    applicPropertyIdent="version"
    applicPropertyType="prodattr"
    applicPropertyValues="B"/>
  <assert
    applicPropertyIdent="weather"
    applicPropertyType="condition"
    applicPropertyValues="icy"/>
</evaluate>
</evaluate>
</applic>
</referencedApplicGroup>
<!-- snip -->
<para>This applies to version A.</para>
<para applicRefId="app-0003">
  This applies to version A if the weather is normal, or version B if
  the weather is icy.
</para>
```

The applicability annotation reference for the first paragraph is removed because, given that the version is A, it must be true. The corresponding applicability annotations, which are no longer referenced, are also removed. The applicability on the third paragraph remains, however, because it is only true if the version is A **and** the weather is normal, and no value has been given for the weather.

If the -A option is used, the following would be the result:

```
<referencedApplicGroup>
  <applic id="app-0003">
    <assert
      applicPropertyIdent="weather"
      applicPropertyType="condition"
      applicPropertyValues="normal"/>
    </applic>
  </referencedApplicGroup>
  <!-- snip -->
  <para>This applies to version A.</para>
  <para applicRefId="app-0003">
    This applies to version A if the weather is normal, or version B if
    the weather is icy.
  </para>
```

The annotation is now simplified to remove resolved assertions. Because the version must be A, any assertions restating this can be removed as redundant, and any portions of the annotation in which the version is **not** A can be removed as invalid. This leaves only the assertion about the weather.

If the -9 option is used, the following would be the result:

```
<referencedApplicGroup>
<applic id="app-0001">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
</applic>
<applic id="app-0003">
<evaluate andOr="and">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="normal"/>
</evaluate>
</applic>
</referencedApplicGroup>
<!-- snip -->
<para applicRefId="app-0001">This applies to version A.</para>
<para applicRefId="app-0003">
This applies to version A if the weather is normal, or version B if
the weather is icy.
</para>
```

The first annotation is kept because it is entirely valid. The third annotation is simplified by removing the invalid assertions, but the valid assertions are preserved.

#### Note

The -A and -9 options may change the **meaning** of certain applicability annotations without changing the **display text**. Display text is always left untouched, so using this option may cause display text to be technically incorrect.

These options are best used when display text will be automatically generated after filtering, such as with the s1kd-aspp tool. The -J option of this tool can be combined with the -k option of the s1kd-aspp tool to only generate display text for annotations which are modified.

### 3.3 Applicability of an instance (-W, -Y, -y)

The applicability of an instance may change as a result of filtering. For example, a source data module which is applicable to two versions of a product may produce two instances which are each only applicable to one version. There are three options which control how the applicability of the whole instance object is updated.

The -W option will create an applicability annotation for the instance using only the user-defined applicability values. This means, for example, that given the following command:

```
$ slkd-instance -s version:prodattr=A -W ...
```

The instance would contain the following annotation:

```
<dmStatus>
<!-- snip -->
<applic>
<assert applicPropertyIdent="version"
applicPropertyType="prodattr" applicPropertyValues="A"/>
</applic>
<!-- snip -->
</dmStatus>
```

regardless of what the applicability of the source object was.

The -y option will create an applicability annotation for the instance by combining the user-defined applicability with the applicability of the source object. For example, given the following annotation in the source object:

```
<dmStatus>
<!-- snip -->
<applic>
<assert applicPropertyIdent="version"
applicPropertyType="prodattr" applicPropertyValues="A"/>
</applic>
<!-- snip -->
</dmStatus>
```

and the following command:

```
$ slkd-instance -s weather:condition=icy -y ...
```

The annotation for the instance would be as follows:

```
<dmStatus>
<!-- snip -->
<applic>
<evaluate andOr="and">
<assert applicPropertyIdent="version"
applicPropertyType="prodattr" applicPropertyValues="A"/>
<assert applicPropertyIdent="weather"
applicPropertyType="condition" applicPropertyValues="icy"/>
</evaluate>
</applic>
<!-- snip -->
</dmStatus>
```

The -Y option by itself works the same as the -y option, but allows custom display text to be set for the annotation. It can also be combined with the -W option to add custom display text to the overwriting annotation:

```
$ slkd-instance -s version:prodattr=A -WY "Version A" ...
```

```
<dmStatus>
<!-- snip -->
<applic>
<displayText>
<simplePara>Version A</simplePara>
</displayText>
<assert applicPropertyIdent="version"
applicPropertyType="prodattr" applicPropertyValues="A"/>
</applic>
<!-- snip -->
</dmStatus>
```

### 3.4 Filtering for multiple values of a single property

Though not usually the case, it is possible to create an instance which is filtered on multiple values of the same applicability property. Given the following:

```
<referencedApplicGroup>
<applic id="apA">
<assert applicPropertyIdent="attr"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
</applic>
<applic id="apB">
<assert applicPropertyIdent="attr"
applicPropertyType="prodattr"
applicPropertyValues="B"/>
</applic>
<applic id="apC">
<assert applicPropertyIdent="attr"
applicPropertyType="prodattr"
applicPropertyValues="C"/>
</applic>
</referencedApplicGroup>
<!-- ... -->
<para applicRefId="apA">Applies to A</para>
<para applicRefId="apB">Applies to B</para>
<para applicRefId="apC">Applies to C</para>
```

filtering can be applied such that the instance will be applicable to both A and C, but not B. This is done by specifying a property multiple times in the applicability definition arguments. For example:

```
$ slkd-instance -A -Y "A or C" -s attr:prodattr=A -s attr:prodattr=C ...
```

This would produce the following in the instance:

```
<dmStatus>
<!-- ... -->
<applic>
<displayText>
```

```
<simplePara>A or C</simplePara>
</displayText>
<evaluate andOr="or">
  <assert applicPropertyIdent="attr"
    applicPropertyType="prodattr"
    applicPropertyValues="A"/>
  <assert applicPropertyIdent="attr"
    applicPropertyType="prodattr"
    applicPropertyValues="C"/>
</evaluate>
</applic>
<!-- ... ->
</dmStatus>
<!-- ... -->
<referencedApplicGroup>
  <applic id="apA">
    <assert applicPropertyIdent="attr"
      applicPropertyType="prodattr"
      applicPropertyValues="A"/>
  </applic>
  <applic id="apC">
    <assert applicPropertyIdent="attr"
      applicPropertyType="prodattr"
      applicPropertyValues="C"/>
  </applic>
</referencedApplicGroup>
<!-- ... -->
<para applicRefId="apA">Applies to A</para>
<para applicRefId="apC">Applies to C</para>
```

### 3.5 Resolving CIR dependencies with a custom XSLT script (-x)

A CIR contains more information about an item than can be captured in a data module's reference to it. If this additional information is required, there are two methods to include it:

- Distribute the CIR with the data module so the extra information can be linked to
- "Flatten" the information to fit in the data module's schema.

A custom XSLT script can be supplied with the -x option, which is then used to resolve the CIR dependencies of the last CIR specified with -R. For example:

```
<xsl:stylesheet
xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
version="1.0">
  <xsl:template match="functionalItemRef">
    <xsl:variable name="fin" select="@functionalItemNumber"/>
    <xsl:variable name="spec" select="//functionalItemSpec[
functionalItemIdent/@functionalItemNumber = $fin]"/>
    <xsl:value-of select="$spec/name"/>
  </xsl:template>
```

```
</xsl:stylesheet>
```

This script would resolve a `functionalItemRef` by "flattening" it to the value of the `name` element obtained from the CIR.

The example CIR would contain a specification like:

```
<functionalItemSpec>
<functionalItemIdent functionalItemNumber="ABC"
functionalItemType="fit01"/>
<name>Hydraulic pump</name>
<functionalItemAlts>
<functionalItem/>
</functionalItemAlts>
</functionalItemSpec>
```

The source data module would contain a reference:

```
<para>
The
<functionalItemRef functionalItemNumber="ABC"/>
is an item in the system.
</para>
```

The command would resemble:

```
$ slkd-instance -R <CIR> -x <custom XSLT> <src>
```

And the resulting XML would be:

```
<para>The Hydraulic pump is an item in the system.</para>
```

The source data module and CIR are combined in to a single XML document which is used as the input to the XSLT script. The root element `mux` contains two `dmodule` elements. The first is the source data module, and the second is the CIR data module specified with the corresponding `-R` option. The CIR data module is first filtered on the defined applicability.

The set of built-in XSLT scripts used to resolve dependencies can be dumped using the `-D` option.

### 3.6 Updating instances (-@)

The `-@` option is used to automatically update instance objects from their source objects.

The tool will use the `<sourceDmIdent>/<sourcePmIdent>` in each instance to find the source object they were derived from, and filter it based on the instance's metadata in order to produce an updated version of the instance. CIRs identified by `<repositorySourceDmIdent>` elements in the instance will also be used to update it.

Only objects which identify a source object will be processed in this mode. All other non-instance objects specified are ignored. The elements `<sourceDmIdent>`, `<sourcePmIdent>` and `<repositorySourceDmIdent>` identify a specific issue of an object that the instance was last updated from, but this is ignored and the latest issue found of a source object will be used instead.



This feature is primarily useful when instances of objects are stored in the CSDB, rather than only being generated during publication or dynamically in a viewer. For example, imagine you have a descriptive data module:

```
DMC-EX-A-00-00-00-00A-040A-D_001-00_EN-CA.XML
```

and you deliver to two customers, C1 and C2. The data module contains information for both:

```
<description>
<para>This text applies to all customers.</para>
<para applicRefId="app-C1">This only applies to Customer 1.</para>
<para applicRefId="app-C2">This only applies to Customer 2.</para>
</description>
```

Neither customer wants to see information that applies only to the other, so you can create two customized instances of this data module, identified with the extended code:

```
DMC-EX-A-00-00-00-00A-040A-D_001-00_EN-CA.XML
DME-12345-C1-EX-A-00-00-00-00A-040A-D_001-00_EN-CA.XML
DME-12345-C2-EX-A-00-00-00-00A-040A-D_001-00_EN-CA.XML
```

Each instance data module identifies the original data module as its source:

```
<sourceDmIdent>
<dmCode modelIdentCode="EX" systemDiffCode="A" systemCode="00"
subSystemCode="0" subSubSystemCode="0" assyCode="00" disassyCode="00"
disassyCodeVariant="A" infoCode="040" infoCodeVariant="A"
itemLocationCode="D"/>
<language languageIsoCode="en" countryIsoCode="CA"/>
<issueInfo issueNumber="001" inWork="00"/>
</sourceDmIdent>
```

and is set to apply only to the correct customer:

```
<dmStatus>
...
<applic>
<assert applicPropertyIdent="customer" applicPropertyType="prodattr"
applicPropertyValues="1"/>
</applic>
...
</dmStatus>
```

#### Note

The assertions in the applicability of an instance must use single values in order to work in this mode. Ranges (~) and sets (!) are not supported.

Now, when a change is made to the master data module, this tool can be used to update these instances automatically:

```
$ slkd-instance -@ -f DME-*.XML
```

### 3.7 Reapplying source applicability (-8)

Normally, filtering is based only on the assertions specified by the user with the -s or -p options. However, in some cases it may be desirable to take the applicability of the source object itself into account, particularly when inline applicability annotations contain redundant assertions. For example:

```
...
<dmStatus ...>
...
<applic>
<displayText>
<simplePara>Version: A</simplePara>
</displayText>
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
</applic>
...
</dmStatus>
...
<referencedApplicGroup>
<applic id="app-0001">
<displayText>
<simplePara>Version: A and Weather: Icy</simplePara>
</displayText>
<evaluate andOr="and">
<assert
applicPropertyIdent="version"
applicPropertyType="prodattr"
applicPropertyValues="A"/>
<assert
applicPropertyIdent="weather"
applicPropertyType="condition"
applicPropertyValues="Icy"/>
</evaluate>
</applic>
...
<para applicRefId="app-0001">
Applies to version A when the weather is icy.
</para>
```

If this data module is filtered with `-a -s weather:condition=Icy`, the annotation shown will not be removed, because the tool cannot fully resolve it, as it is only has a value for the weather condition.

The -8 (--reapply) option will reapply the applicability of each individual object when filtering it. In the example above, the whole data module is applicable to version A, and therefore, when the -8 option is specified, this is added to the user-defined assertions automatically for the given

data module. Now the annotation is fully resolved, and can be removed in accordance with the -a option.

## 4 Exit status

0	No errors.
1	Missing or incomplete argument.
2	Specified file does not exist.
3	Source object for an instance could not be found.
4	Malformed applicability definition.
6	XML was invalid or does not conform to S1000D.
7	Value given for an argument was malformed.
8	Issue date specified with -I is invalid.
9	The number of CIR data modules found when searching exceeded the available memory.

## 5 Examples

Filtering a data module on specified applicability and writing to stdout:

```
$ slkd-instance -s version:prodattr=A <DM>
```

Filtering a data module on a specified product instance and writing to stdout:

```
$ slkd-instance -P <PCT> -p versionA <DM>
```

Filtering a data module on specified skill levels and writing to stdout:

```
$ slkd-instance -k sk01/sk02 <DMs>
```

Filtering data modules for a particular customer and outputting with extended identification:

```
$ slkd-instance -s version:prodattr=A -e 12345-54321 -O . <DMs>
```

Writing out a data module from stdin to a directory with automatic naming:

```
$ xml-transform -s <xsl> <DM> | slkd-instance -SO <dir>
```

## s1kd-neutralize

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
4 Example.....	2

#### List of tables

1	References.....	1
---	-----------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
None	

### *Description*

#### 1 General

Generates neutral metadata for the specified CSDB objects. This includes:

- XLink attributes for references, using the S1000D URN scheme.
- RDF and Dublin Core metadata.

#### 2 Usage

s1kd-neutralize [-o <file>] [-Dflnqvh?] [<object>...]

#### 3 Options

- |                 |   |
|-----------------|---|
| -D, --delete    | Remove neutral metadata from the CSDB object.     |
| -f, --overwrite | Overwrite specified CSDB object(s) automatically. |
| -h, -?, --help  | Show usage message.                               |

-l, --list	Treat input (stdin or arguments) as lists of CSDB objects to neutralize, rather than CSDB objects themselves.
-n, --namespace	Include the IETP namespaces for data module and publication module elements.
-o, --out <file>	Output neutralized CSDB object XML to <file> instead of stdout.
-q, --quiet	Quiet mode. Errors are not printed.
-v, --verbose	Verbose output.
--version	Show version information.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Example

```
$ DMOD=DMC-XLINKTEST-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
$ xmllint --xpath "//description/dmRef" $DMOD
<dmRef>
<dmRefIdent>
<dmCode modelIdentCode="XLINKTEST" systemDiffCode="A"
systemCode="00" subSystemCode="0" subSubSystemCode="0" assyCode="01"
disassyCode="00" disassyCodeVariant="A" infoCode="040"
infoCodeVariant="A" itemLocationCode="D"/>
</dmRefIdent>
<dmRefAddressItems>
<dmTitle>
<techName>XLink test</techName>
<infoName>Referenced data module</infoName>
</dmTitle>
</dmRefAddressItems>
</dmRef>

$ slkd-neutralize $DMOD | xmllint --xpath "//description/dmRef" -
<dmRef xlink:type="simple"
```



```
xlink:href="URN:S1000D:DMC-XLINKTEST-A-00-00-01-00A-040A-D"  
xlink:title="XLink test - Referenced data module">  
[...]  
</dmRef>
```

## s1kd-syncrefs

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 General.....	1
2 Usage.....	1
3 Options.....	1
4 Exit status.....	2
5 Example.....	2

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

1

#### General

The **s1kd-syncrefs** tool copies all external references (dmRef, pmRef, externalPubRef) within the content of a data module and uses them to generate the <refs> element. Each unique reference is copied, sorted, and placed in to the <refs> element. If a <refs> element already exists, it is overwritten.

2

#### Usage

```
s1kd-syncrefs [-dflqvh?] [-o <out>] [<data module>...]
```

3

#### Options

-d, --delete	Delete the <refs> element.
-f, --overwrite	Overwrite the data modules automatically.

<b>-h, -?, --help</b>	Show help/usage message.
<b>-l, --list</b>	Treat input (stdin or arguments) as lists of data modules to synchronize references in, rather than data modules themselves.
<b>-o, --out &lt;out&gt;</b>	The resulting XML is written to <out> instead of stdout.
<b>-q, --quiet</b>	Quiet mode. Errors are not printed.
<b>-v, --verbose</b>	Verbose output.
<b>--version</b>	Show version information.
<b>&lt;data module&gt;...</b>	The data module(s) to synchronize references in. Default is to read from stdin.

In addition, the following options allow configuration of the XML parser:

<b>--dtdload</b>	Load the external DTD.
<b>--huge</b>	Remove any internal arbitrary parser limits.
<b>--net</b>	Allow network access to load external DTD and entities.
<b>--noent</b>	Resolve entities.
<b>--parser-errors</b>	Emit errors from parser.
<b>--parser-warnings</b>	Emit warnings from parser.
<b>--xinclude</b>	Do XInclude processing.
<b>--xml-catalog &lt;file&gt;</b>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

## 4 Exit status

0	No errors.
1	Invalid data module.
2	Number of references in a data module exceeded the available memory.

## 5 Example

```
$ slkd-syncrefs -f DMC-EX-A-00-00-00-00A-040A-D_000-01_EN-CA.XML
```



## s1kd-uom

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	2
1 General.....	2
2 Usage.....	2
3 Options.....	2
3.1 .uom file.....	3
3.2 Conversion formula variables (-e).....	4
3.3 Preformatting UOMs (-p) and the .uomdisplay file.....	4
4 Examples.....	6
4.1 Common units of measure.....	6
4.2 Using a custom formula and format.....	6
5 UOM file schema.....	6
5.1 UOM.....	6
5.2 Conversion rule.....	7
6 UOM display file schema.....	7
6.1 UOM display.....	7
6.2 Quantity value format.....	7
6.3 Group type prefixes.....	8
6.4 Wrap into element.....	8
6.5 Units of measure.....	8
6.6 Display of a unit of measure.....	9
6.7 Currencies.....	9
6.8 Display of a currency.....	9

#### List of tables

1	References.....	1
---	-----------------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

## Description

### 1 General

The **s1kd-uom** tool converts between specified units of measure in quantity data, for example, to automatically localize units of measure in data modules.

### 2 Usage

```
s1kd-uom [-dflqv,.h?] [-D <fmt>] [-F <fmt>]
          [-u <uom> -t <uom> [-e <expr>] [-F <fmt>] ...]
          [-s <name>|-S <path> ...] [-U <path>] [-p <fmt> [-P <path>]]
          [<object>...]
```

### 3 Options

- |                              |   |
|------------------------------|---|
| -D, --duplicate-format <fmt> | Specify a custom format for duplicating quantities (-d). The '%' character acts as a placeholder for the duplicate quantity value. The default format for -d is equivalent to -D ' (% ) '.  |
| -d, --duplicate              | When converting, instead of overwriting the original quantity, include the converted quantity after the original in parenthesis. For example, "200 mm" when converting mm to in would become "200 mm (7.87 in)".  |
| -e, --formula <expr>         | Specify the formula for a conversion, given as an XPath expression.   |
| -F, --format <fmt>           | Specify the format for quantity values. When used before -u, this specifies the default format for all conversions. Otherwise, this specifies the format for each individual conversion. Formats specified for individual conversions override the default format set for all conversions.  |
| -f, --overwrite              | Overwrite input CSDB objects.   |
| -h, -?, --help               | Show help/usage message.  |
| -l, --list                   | Treat input (stdin or arguments) as lists of filenames of CSDB objects to list references in, rather than CSDB objects themselves.  |
| -P, --uomdisplay <path>      | Use a custom .uomdisplay file.  |
| -p, --preformat <fmt>        | Preformat quantity data to the specified decimal format. The built-in formats are: <ul style="list-style-type: none"><li>– SI - comma for decimal separator, space for grouping</li><li>– euro - comma for decimal separator, full-stop for grouping</li><li>– imperial - full-stop for decimal separator, comma for grouping</li></ul> |
| -q, --quiet                  | Quiet mode. Errors are not printed.   |

-S, --set <path>	Apply a set of conversions defined in an XML file.
-s, --preset <name>	Apply a set of predefined conversions. The available presets are: <ul style="list-style-type: none"><li>– SI - convert imperial/US customary units to SI units.</li><li>– imperial - convert SI units to British imperial units.</li><li>– US - convert SI units to US customary units.</li></ul>
-t, --to <uom>	Unit of measure to convert to.
-U, --uom <path>	Use a custom .uom file.
-u, --from <uom>	Unit of measure to convert from.
-v, --verbose	Verbose output.
-, --dump-uom	Dump the default .uom file.
-. , --dump-uomdisplay	Dump the default .uomdisplay file.
--version	Show version information.
<object>	CSDb objects to convert quantities in.

In addition, the following options allow configuration of the XML parser:

--dtdload	Load the external DTD.
--huge	Remove any internal arbitrary parser limits.
--net	Allow network access to load external DTD and entities.
--noent	Resolve entities.
--parser-errors	Emit errors from parser.
--parser-warnings	Emit warnings from parser.
--xinclude	Do XInclude processing.
--xml-catalog <file>	Use an XML catalog when resolving entities. Multiple catalogs may be loaded by specifying this option multiple times.

### 3.1 .uom file

This file contains the rules for converting units of measure. If no specific conversions are given with the -u and -t options, this file also acts as a list of all conversions to perform.

By default, the program will search the current directory and parent directories for a file named .uom, but any file can be specified by using the -U option.

Example of a .uom file:

```
<uom>
<convert from="degF" to="degC" formula="($value - 32) * (5 div 9)"/>
<convert from="in" to="cm" formula="$value * 2.54"/>
```

```
<convert from="lbm" to="kg" formula="$value div 2.205"/>
</uom>
```

The tool contains a default set of rules for common units of measure. This can be used to create a default .uom file by use of the -, option:

```
$ slkd-uom -, > .uom
```

To select only certain common rules when generating a .uom file, the -u and -t options can be used:

```
$ slkd-uom -, -u in -t cm -u degF -t degC > .uom
```

This will generate a .uom file containing rules to convert inches to centimetres, and degrees Fahrenheit to degrees Celsius.

The same file format is used with the -S option to specify a set of conversions to perform. In this case, the attribute formula is optional, as the default formula or the formula in the .uom file will be used if it is not specified.

### 3.2 Conversion formula variables (-e)

When specifying a formula for conversion, the following variables can be used:

\$pi	The constant $\pi$
\$value	The original quantity value

For example, the formula to convert degrees to radians can be given as follows:

```
$value * ($pi div 180)
```

### 3.3 Preformatting UOMs (-p) and the .uomdisplay file

The tool can also convert semantic quantity data to presentation quantity data. The -p option specifies which conventions to use for formatting quantity values. For example:

```
<para>Tighten the
<quantity>
<quantityGroup>
<quantityValue quantityUnitOfMeasure="cm">6.35</quantityValue>
</quantityGroup>
</quantity>
bolt.</para>
```

```
$ slkd-uom -p SI <DM>
```

```
<para>Tighten the 6,35 cm bolt.</para>
```

This can also be combined with UOM conversions:

```
$ slkd-uom -u cm -t in -p imperial <DM>
```

```
<para>Tighten the 2.5 in bolt.</para>
```

Custom formats for values or UOMs can be defined in the `.uomdisplay` file. By default, the tool will search the current directory and parent directories for a file named `.uomdisplay`, but any file can be specified by using the `-P` option.

Example of a `.uomdisplay` file:

```
<uomDisplay>
<format name="custom" decimalSeparator="," groupingSeparator="."/>
<uoms>
<uom name="cm"> cm</uom>
<uom name="cm2"> cm<superScript>2</superScript></uom>
</uoms>
<currencies>
<currency name="CAD">
<prefix>$</prefix>
<postfix> CAD</postfix>
</currency>
<currency name="GBP">
<prefix>£</prefix>
<postfix> GBP</postfix>
</currency>
</currencies>
</uomDisplay>
```

Units of measure and currencies that are not defined will be presented as their name (e.g., "cm2") separated from the value by a space.

More complex UOM display, such as pluralization of units of measure, can be accomplished with embedded XSLT in the `.uomdisplay` file:

```
<uoms
xmlns:xsl="http://www.w3.org/1999/XSL/Transform">
<xsl:variable name="value" select="parent::*"/>
<uom name="in">
<xsl:text> </xsl:text>
<xsl:choose>
<xsl:when test="$value = 1">inch</xsl:when>
<xsl:otherwise>inches</xsl:otherwise>
</xsl:choose>
</uom>
<uom name="ft">
<xsl:text> </xsl:text>
<xsl:choose>
<xsl:when test="$value = 1">foot</xsl:when>
<xsl:otherwise>feet</xsl:otherwise>
</xsl:choose>
</uom>
</uoms>
```

The context for the embedded XSLT is the unit of measure attribute on the value, tolerance or group. XSLT elements in the `<uoms>` element will be processed for all units of measure, while XSLT elements in `<uom>` elements will only apply to an individual unit of measure.

The tool contains a default set of formats and displays. These can be used to create a default `.uomdisplay` file by use of the `-.` option:

```
$ slkd-uom -. > .uomdisplay
```

## 4 Examples

### 4.1 Common units of measure

Input:

```
<quantity>
<quantityGroup>
<quantityValue quantityUnitOfMeasure="cm">15</quantityValue>
</quantityGroup>
</quantity>
```

Command:

```
$ slkd-uom -u cm -t in <DM>
```

Output:

```
<quantity>
<quantityGroup>
<quantityValue quantityUnitOfMeasure="in">5.91</quantityValue>
</quantityGroup>
</quantity>
```

### 4.2 Using a custom formula and format

Input:

```
<quantity
quantityType="qty02"
quantityTypeSpecifics="CAD">10.00</quantity>
```

Command:

```
$ slkd-uom -u CAD -t USD -e '$value div 1.31' -F '0.00'
```

Output:

```
<quantity
quantityType="qty02"
quantityTypeSpecifics="USD">7.36</quantity>
```

## 5 UOM file schema

### 5.1 UOM

Markup element: `<uom>`

**Attributes:**

- `format` (O), the number format for all rules.

**Child elements:**

- `<convert>`

## 5.2 Conversion rule

The element `<convert>` defines a rule to convert one unit of measure to another.

**Markup element:** `<convert>`

**Attributes:**

- `format` (O), the number format for this specific rule.
- `formula` (M), the expression used to convert the quantity value.
- `from` (M), unit of measure to convert from.
- `to` (M), unit of measure to convert to.

**Child elements:**

- None

## 6 UOM display file schema

### 6.1 UOM display

**Markup element:** `<uomDisplay>`

**Attributes:**

- None

**Child elements:**

- `<format>`
- `<groupTypePrefixes>`
- `<wrapInto>`
- `<uoms>`
- `<currencies>`

### 6.2 Quantity value format

**Markup element:** `<format>`

**Attributes:**

- `name` (M), the name of the format
- `decimalSeparator` (M), the decimal separator
- `groupingSeparator` (M), the grouping separator

**Child elements:**

- None

### 6.3 Group type prefixes

The element `<groupTypePrefixes>` specifies prefixes which are added for specific group types.

**Markup element:** `<groupTypePrefixes>`

**Attributes:**

- None

**Child elements:**

- `<nominal>`, text placed before a nominal group.
- `<minimum>`, text placed before a minimum group.
- `<minimumRange>`, text placed before a minimum group that is followed by a maximum group to specify a range.
- `<maximum>`, text placed before a maximum group.
- `<maximumRange>`, text placed before a maximum group that is preceded by a minimum group to specify a range.

### 6.4 Wrap into element

**Markup element:** `<wrapInto>`

**Attributes:**

- None

**Child elements:**

The element `<wrapInto>` contains one child element of any type, which quantities will be wrapped in to after formatting.

### 6.5 Units of measure

**Markup element:** `<uoms>`

**Attributes:**

- None

**Child elements:**

- `<uom>`

The element `<uoms>` may also contain arbitrary XSLT elements which will be processed for all units of measure.



## 6.6 Display of a unit of measure

**Markup element:** `<uom>`

**Attributes:**

- `name` (M), the name of the UOM.

**Child elements:**

The element `<uom>` may contain mixed content, which will be used for the display of the unit of measure. This can include XSLT elements, which allows for handling complex cases of UOM display, such as pluralization.

## 6.7 Currencies

**Markup element:** `<currencies>`

**Attributes:**

- None

**Child elements:**

- `<currency>`

The element `<currencies>` may also contain arbitrary XSLT elements which will be processed for all currencies.

## 6.8 Display of a currency

**Markup element:** `<currency>`

**Attributes:**

- `name` (M), the name of the currency.

**Child elements:**

- `<prefix>`, text placed before the currency value.
- `<postfix>`, text placed after the currency value.

The child elements of `<currency>` may contain mixed content, which will be used for the display of the unit of measure. This can include XSLT elements, which allows for handling complex cases of currency display.



## 艦内通訊系統

### **Description**

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1

#### List of tables

1	References.....	1
---	-----------------	---

### **References**

Table 1 References

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



娛樂系統

**Description**

**Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

**List of tables**

1	References.....	1
---	-----------------	---

**References**

Table 1 References

Data module/Technical publication	Title
None	

**Description**

This is a placeholder for the description content.



## 警報、安全及警示系統

### **Description**

#### **Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

#### **List of tables**

1	References.....	1
---	-----------------	---

### **References**

*Table 1 References*

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



## 一般與火警警報系統

### **Description**

#### **Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

#### **List of tables**

1	References.....	1
---	-----------------	---

### **References**

*Table 1 References*

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



## 滅火系統釋放警報

### **Description**

#### **Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

#### **List of tables**

1	References.....	1
---	-----------------	---

### **References**

*Table 1 References*

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



指示、船令及顯示系統

**Description**

**Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

**List of tables**

1	References.....	1
---	-----------------	---

**References**

Table 1 References

Data module/Technical publication	Title
None	

**Description**

This is a placeholder for the description content.

## 中央時鐘系統

### *Description*

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 功能.....	1
1.1 系統識別區分.....	1
1.2 概述.....	1

#### List of tables

1 References.....	1
-------------------	---

#### List of figures

1 中央時鐘系統架構圖.....	2
------------------	---

### *References*

Table 1 References


Data module/Technical publication	Title
None	

### *Description*

This is a placeholder for the description content.

- 1 功能**  
中央時鐘系統透過主鐘將時間訊號傳送至全艦各子鐘與整合式儀臺管理系統。
- 1.1 系統識別區分**  
重要性: 次要系統(SV), 備便狀態: 第1級系統(I)。
- 1.2 概述**  
中央時鐘系統電力來源為DC 24V來自於B-2D分電箱, 利用整合式艦橋管理系統透過IF-2550將GPS訊號傳送至中央時鐘的主鐘, 主鐘再傳送訊號到各子鐘與整合式儀臺管理系統; 其中, 整合式艦橋系統透過自身的裝備櫃傳送一組NTP訊號至戰情室一子鐘, 系統架構圖如[Fig 1](#)。



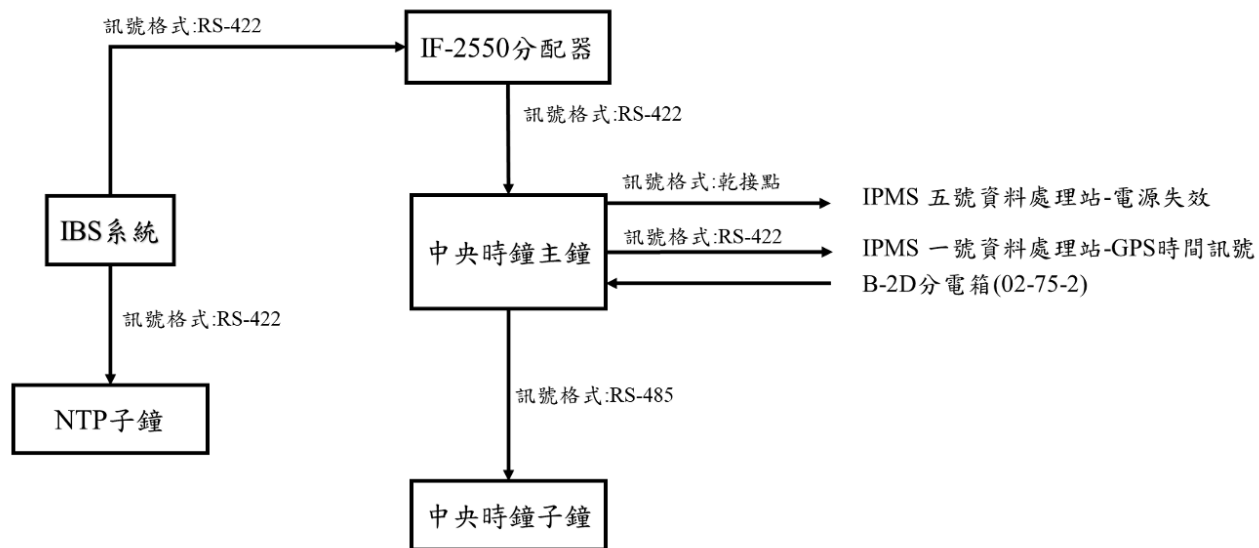

ICN-S1KDTOOLS-A-000000-A-KHZAE-00301-A-001-01

Fig 1 中央時鐘系統架構圖

## 聲力電話系統

### Description

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1
1 功能.....	1
2 概述.....	1
2.1 JA—艦長指揮聲力電話線路.....	2
2.2 JP—武器指揮聲力電話線路.....	2
2.3 1JV—艦船操縱與靠泊聲力電話線路.....	2
2.4 2JV—輪機控制聲力電話線路.....	2
2.5 2JZ—損害管制聲力電話線路.....	2
2.6 1JG—垂直整補聲力電話線路.....	2
2.7 X8J—海上整補聲力電話線路.....	2
2.8 電話系統識別區分.....	2

#### List of tables

1	References.....	1
2	聲力電話線路系統識別區分.....	2

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

#### 1

##### 功能

聲力電話不需要外部提供電源就可以工作，利用發送端聲音音波的能量，推動接收端電話的喇叭產生聲音，完成通訊。

聲力電話在同一系統內，其中任一電話發話時，同一系統內所有電話均可接收到語音訊息，聲力電話系統係由下列獨立之聲力電話線路所組成，作為本艦在操船控制上之主要指揮工具。

#### 2

##### 概述

電話系統分類：各聲力電話系統依其功能予以分類，說明如下：

## 2.1 JA—艦長指揮聲力電話線路

本線路乃是指在平常及備戰狀態下，提供艦長與各部位間之通訊線路，使之掌握戰情，完成指揮。

## 2.2 JP—武器指揮聲力電話線路

本線路乃是指在平常及備戰狀態下，提供兵器長對武器操作與指揮之通訊線路，快速提供指令之傳送，完成指揮。

## 2.3 1JV—艦船操縱與靠泊聲力電話線路

本線路係供艦船在進出港及執行任務時諸如解纜、帶纜、下錨、羅經校對及海上整補等命令下達時通訊。

## 2.4 2JV—輪機控制聲力電話線路

本線路係供輪機長於中央控制室操控台指揮主推進設備及各輔機等輪機裝備運轉情況而設置之通訊線路。

## 2.5 2JZ—損害管制聲力電話線路

本線路係供輪機長於中央控制室操控台於艦艇受損時，與損管間及各修理裝備間相互連絡之通訊線路。

## 2.6 1JG—垂直整補聲力電話線路

本線路係供直升機垂直整補時，控制站與各相關部位相互連絡之通訊線路。

## 2.7 X8J—海上整補聲力電話線路

本線路係供海上受補作業時，控制站與各相關部位相互連絡之通信線路。

## 2.8 電話系統識別區分

聲力電話線路系統識別區分說明如Table 2所示。

Table 2 聲力電話線路系統識別區分

線路名稱	代號	重要性	備用狀態
艦長指揮聲力電話線路	JA	V	1
武器指揮聲力電話線路	JP	V	1
艦船操縱與靠泊聲力電話線路	1JV	V	1
輪機控制聲力電話線路	2JV	V	1
損害管制聲力電話線路	2JZ	V	1
垂直整補聲力電話線路	1JG	SV	3
海上整補電話線路	X8J	SV	3



測試一

**Description**

**Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

**List of tables**

1	References.....	1
---	-----------------	---

**References**

*Table 1 References*

Data module/Technical publication	Title
None	

**Description**

This is a placeholder for the description content.



測試二

**Description**

**Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

**List of tables**

1	References.....	1
---	-----------------	---

**References**

Table 1 References

Data module/Technical publication	Title
None	

**Description**

This is a placeholder for the description content.



測試三

**Description**

**Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

**List of tables**

1	References.....	1
---	-----------------	---

**References**

Table 1 References

Data module/Technical publication	Title
None	

**Description**

This is a placeholder for the description content.

## 多管密封系列

### *Description*

## Table of contents

Page

Description.....	1
References.....	1
Description.....	1

## List of tables

1	References.....	1
---	-----------------	---

## List of figures

1	火焰測試圖.....	2
---	------------	---

### *References*

Table 1 References

Data module/Technical publication	Title
None	

### *Description*

This is a placeholder for the description content.

- 1 NOFIRNO密封系列通過國際海事組織決議案 A. 754 (18) 的束式纜線組測試。尤其在穿導較大量的  
小直徑網路纜線時，可節省許多時間，因為不須將每條纜線都裝上RISE插入套管。穿線板可穿  
過最多25條外徑5-6 mm 緊緊細成最大35mm的網路纜線組。

然後把一個RISE插入套管裝在纜線組上，再插入穿線板。這種束式纜線不能使用氣密及/或水密  
穿線板。NOFIRNO系列通過A-0級、H-0級甚至噴射火焰測試，不受嚴重影響。由於本公司各種系  
列的性能均優異，NOFIRNO密封系列可輕易與RISE和RISE/ULTRA結合，成為所謂的MULTI-ALL-  
MIX系列，將所有種類的管路和纜線穿過單一個導管。

NOFIRNO密封系列為本公司產品系列中最先進的系列。



ICN-S1KDTOOLS-A-000000-A-KHZAE-26309-A-001-01

Fig 1 火焰測試圖





## 產品物理特性

**Description****Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

**List of tables**

1	References.....	1
---	-----------------	---

**List of figures**

1	[ 密封劑圖 ]by仁傑.....	2
---	-------------------	---

**References**

Table 1 References

Data module/Technical publication	Title
None	

**Description**

This is a placeholder for the description content.

- 1 NOFIRNO 為一種容易使用的糊狀複合物，具有均衡的黏性，可朝頂部塗佈。此種密封劑塗佈後，可用濕布或手將之整理平順。由於它黏得非常緊，使用前必須以水將布和雙手潤濕，以免黏到密封劑。

若正確儲藏，保存期限為12個月。由於我們無法控制儲藏，我們只能保證6個月。



## 纜線套管

### Description

Table of contents	Page
Description.....	1
References.....	1
Description.....	1
1 纜線套管.....	1
2 纜線套管.....	2

### List of tables

1	References.....	1
---	-----------------	---

### List of figures

1	填充套管.....	3
---	-----------	---

### References

Table 1 References

Data module/Technical publication	Title
None	

### Description

This is a placeholder for the description content.

- 纜線套管**  
專為多條電纜或管路同時穿過管道或隔板設計，適用於甲板、艙壁、樓層穿透場景。  
  
系統組成簡單：主要由 橡膠插入套管（insert sleeves）+ 密封膠（sealant）兩部分構成。  
  
設計可支援彎曲、傾斜或穿透角度較大的安裝，不影響密封性能。  
  
允許後續增線或移線：可開膠重新導入電纜，再重新填補密封膠即可，無須整體拆除。  
  
擁有防火、防水、防氣體滲透的性能：符合相關國際海事與工業標準。

## 2

### 纜線套管

專為多條電纜或管路同時穿過管道或隔板設計，適用於甲板、艙壁、樓層穿透場景。

系統組成簡單：主要由 橡膠插入套管（insert sleeves）+ 密封膠（sealant）兩部分構成。

設計可支援彎曲、傾斜或穿透角度較大的安裝，不影響密封性能。

允許後續增線或移線：可開膠重新導入電纜，再重新填補密封膠即可，無須整體拆除。

擁有防火、防水、防氣體滲透的性能：符合相關國際海事與工業標準。



ICN-S1KDTOOLS-A-000000-A-KHZAE-29622-A-001-01

Fig 1 填充套管



## 艦内通訊系統

### **Description**

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1

#### List of tables

1	References.....	1
---	-----------------	---

### **References**

Table 1 References

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



## 娛樂系統

### **Description**

#### **Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

#### **List of tables**

1	References.....	1
---	-----------------	---

### **References**

*Table 1 References*

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



警報、安全及警示系統

**Description**

**Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

**List of tables**

1	References.....	1
---	-----------------	---

**References**

Table 1 References

Data module/Technical publication	Title
None	

**Description**

This is a placeholder for the description content.





## 一般與火警警報系統

### **Description**

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1

#### List of tables

1	References.....	1
---	-----------------	---

### **References**

Table 1 References

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



## 滅火系統釋放警報

### **Description**

#### **Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

#### **List of tables**

1	References.....	1
---	-----------------	---

### **References**

Table 1 References

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



## 指示、船令及顯示系統

### **Description**

#### **Table of contents**

Page

Description.....	1
References.....	1
Description.....	1

#### **List of tables**

1	References.....	1
---	-----------------	---

### **References**

Table 1 References

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



## 中央時鐘系統

### **Description**

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1

#### List of tables

1	References.....	1
---	-----------------	---

### **References**

Table 1 References

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.



## 聲力電話系統

### **Description**

#### Table of contents

Page

Description.....	1
References.....	1
Description.....	1

#### List of tables

1	References.....	1
---	-----------------	---

### **References**

Table 1 References

Data module/Technical publication	Title
None	

### **Description**

This is a placeholder for the description content.