

Two journeys the wallet owns: **Add and Prove.**

Getting a document in, and sharing the minimum to prove something. A phone's chooser may decide *which* wallet answers a website — but everything that defines trust happens here, in the wallet.

THE PLATFORM MAY OWN

- Which wallet or document is offered to a website (the chooser sheet).

THE WALLET ALWAYS OWNS


- Authenticating the verifier & its registered purpose
- Consent, and sharing the **minimum**
- Your approval (Face ID / passcode) & building the response
- Recovery, and the durable home for your documents

Both iOS and Android let our wallet participate as a provider — Apple gives the selected provider its **own authorization UI**, and the EU framework keeps **consent and relying-party authentication with the wallet**, not the browser or OS. So consent is a flagship journey, not an afterthought.

JOURNEY • ADD

Add your National ID — as few screens as it takes

Issuer-first, ordinary verbs, no protocol words. We show progress and ask only what's needed; a confident user can move quickly, an unsure one is never stuck. (Horizontal scroll →)

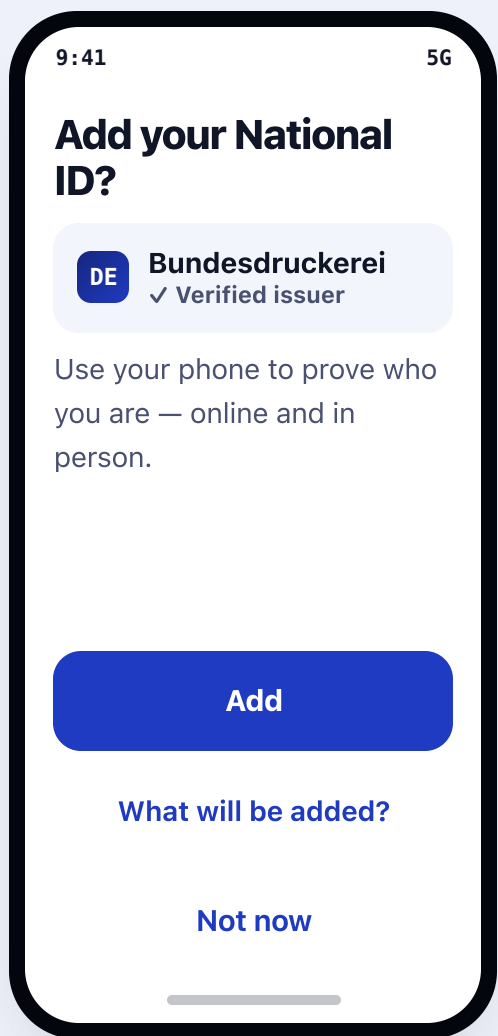


ADD · 1

Meet the offer, issuer first

The authority is named and verified up front. Purpose in one line; the full attribute list is an *optional* "What will be added?" — never an approval wall.

► VoiceOver order & labels

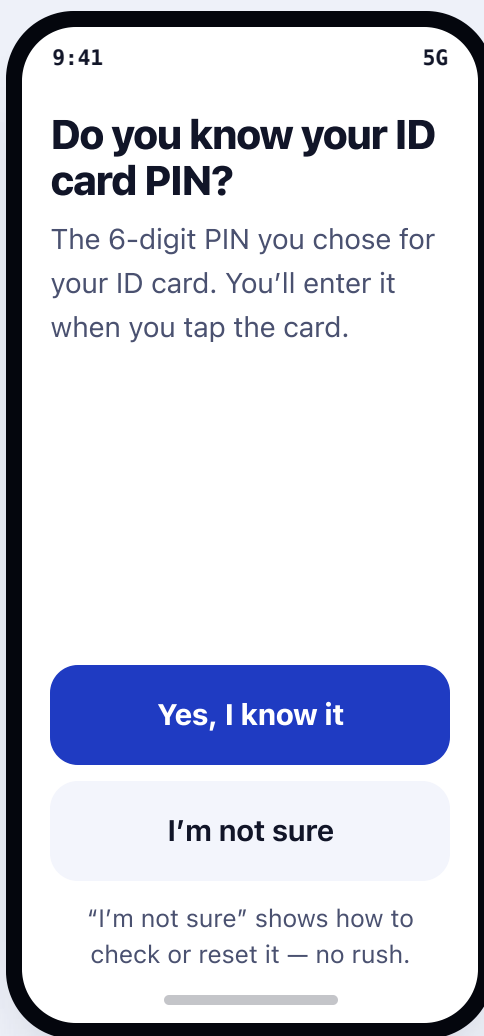


ADD · 2

Ask about the PIN before the tap — calmly

We never assume a known PIN. "I'm not sure" leads to help (reset / transport-PIN), framed as normal, not failure. Transport-PIN, CAN and blocked-PIN detail live in that contextual help, not here.

► VoiceOver order & labels

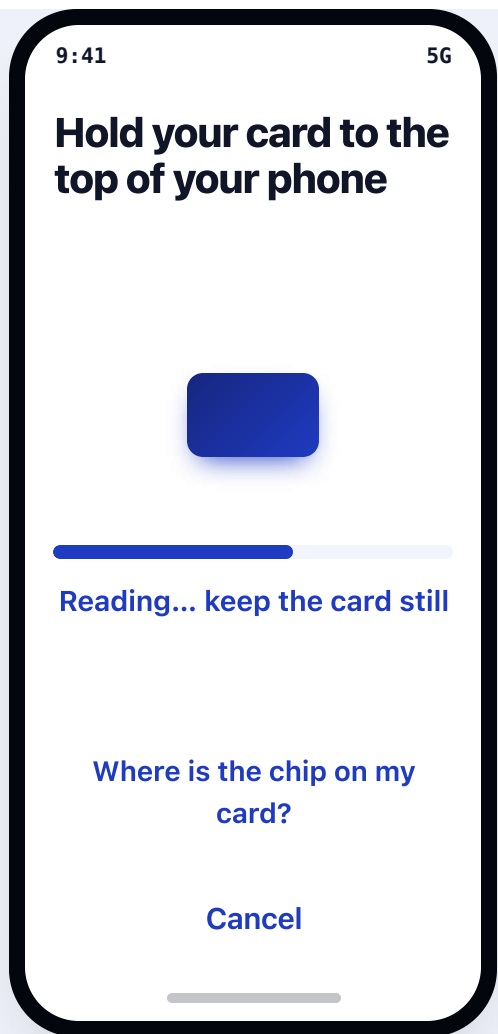


ADD · 3

The tap — guided, and always cancellable

Device-specific placement, live “reading... keep still”, and a “where’s the chip?” hint. Every NFC and network step can be cancelled and resumed; a slip reconnects, it never restarts the whole journey.

► VoiceOver order & labels

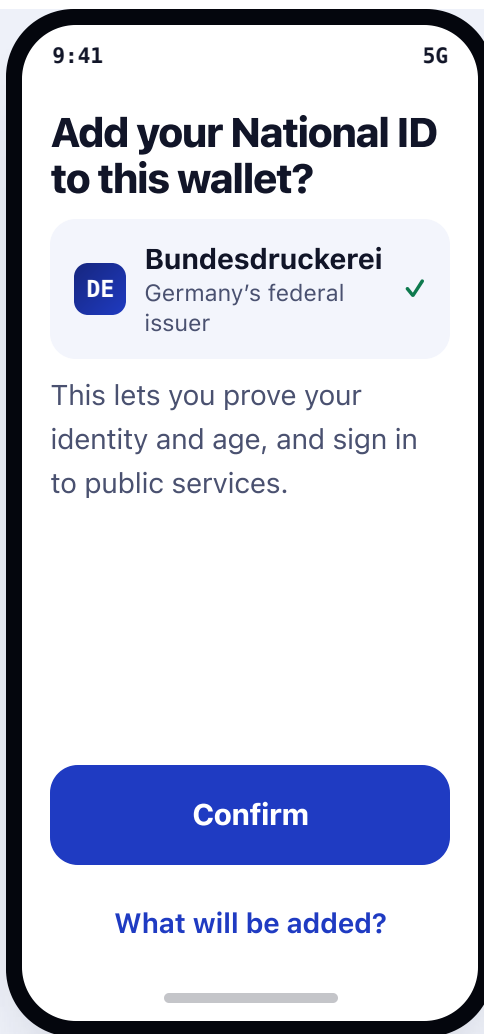


ADD · 4

Confirm by purpose & issuer — not an attribute checklist

We explain what the document is *for* and who stands behind it. The detailed attributes stay behind an optional “What will be added?”, so the primary screen is calm.

► VoiceOver order & labels

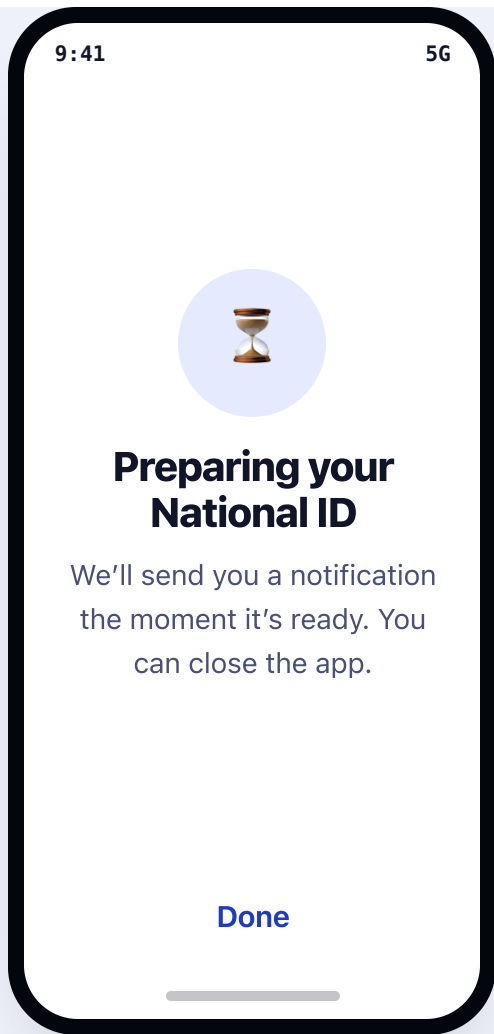


ADD · 5

Preparing is a state, not a spinner

Issuers deliver asynchronously. We say so plainly, let the user leave, and continue on the **home card** (next section) — with a notification when it's ready. No time promises until we've measured the real Ausweis SDK + network + issuer paths.

► VoiceOver order & labels

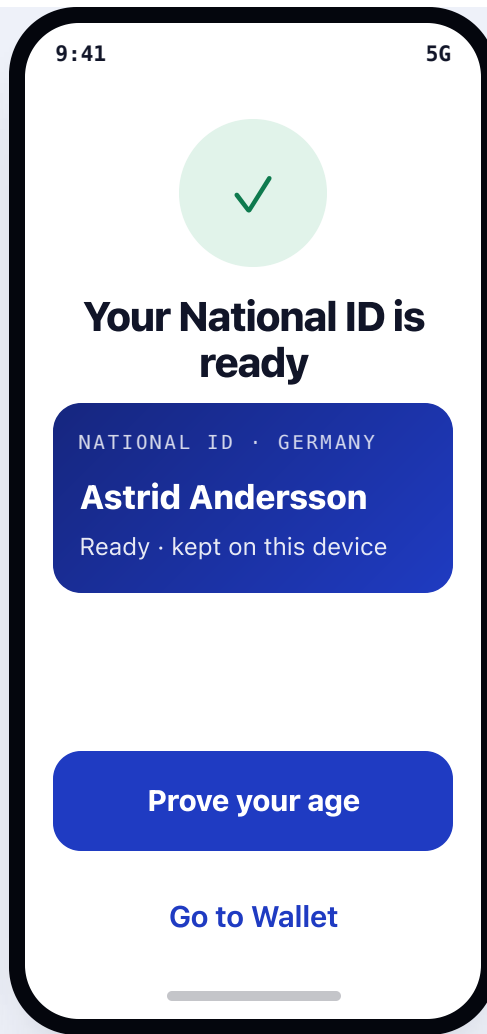

ADD · 6

End on something useful to do


Success leads straight into a real, privacy-preserving action (prove age without revealing name or birth date) — turning a one-time add into an active wallet.

► VoiceOver order & labels

The document lives as a home card

— Preparing, Ready, Needs attention


Issuance status is a persistent card the user can leave and return to, not a page they must not close. The card carries its own action so recovery is one tap away.

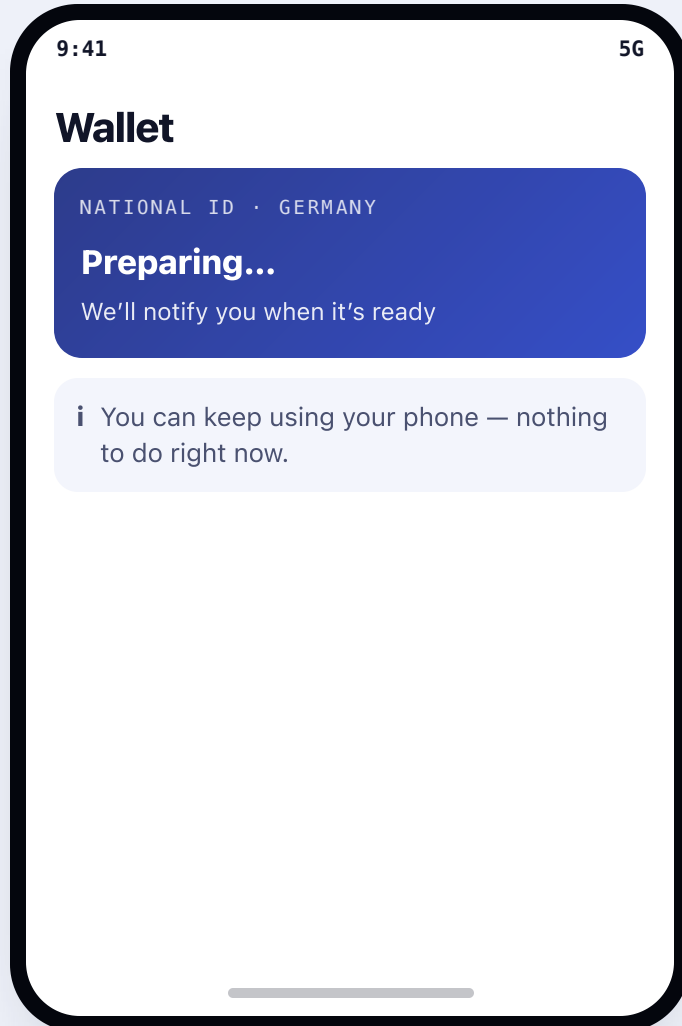

HOME · Preparing

Preparing


Calm, no action needed; survives app close and reboot.

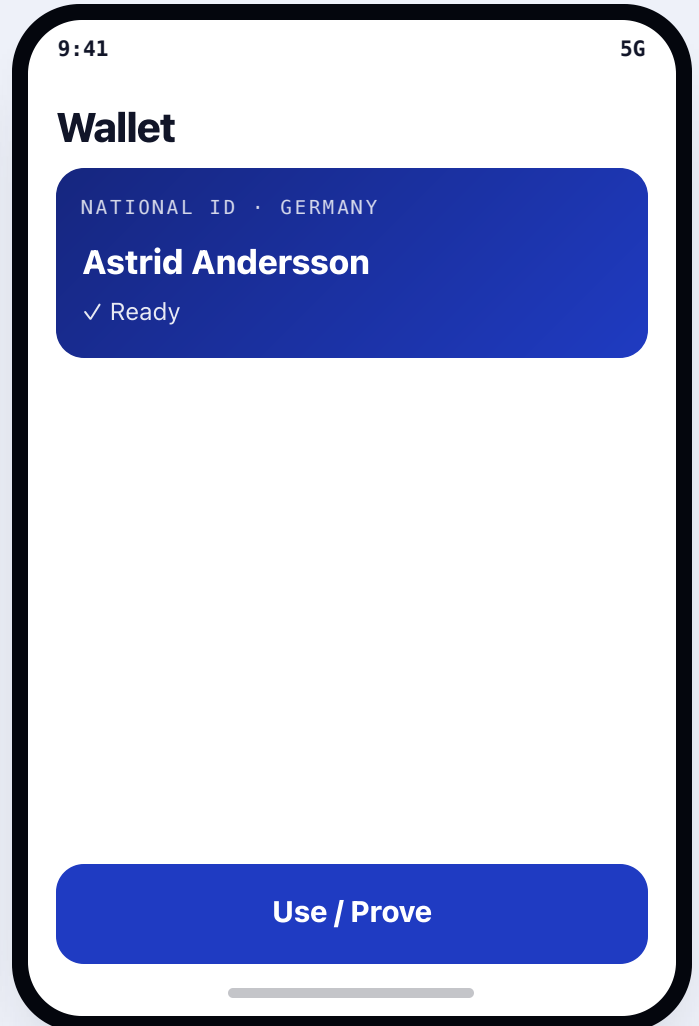

HOME · Ready

Ready

The card is now usable; its primary action is to prove/share.

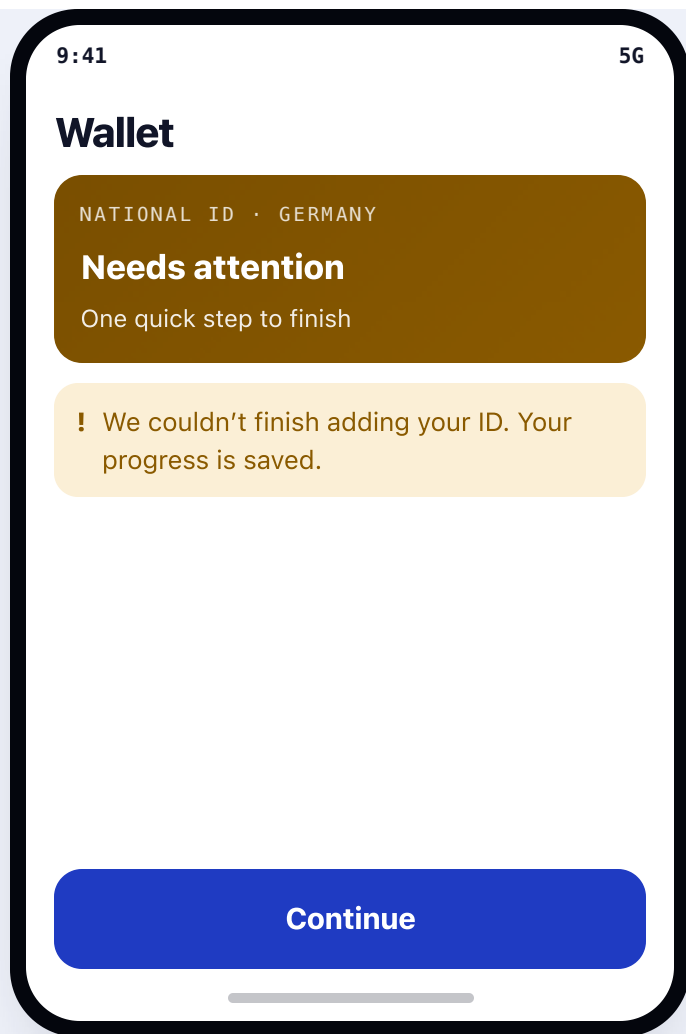

HOME · Needs attention


Needs attention

A recoverable problem, saved progress, one-tap continue — never a dead end.

JOURNEY · PROVE (CONSENT)

Consent is the wallet's — who's asking, what's shared, why, and what isn't

When a website or reader asks, our wallet authenticates the verifier, shows a plain-language request, shares the minimum, and gets the user's approval. This screen is ours to get right — it is not delegated to the browser or OS.

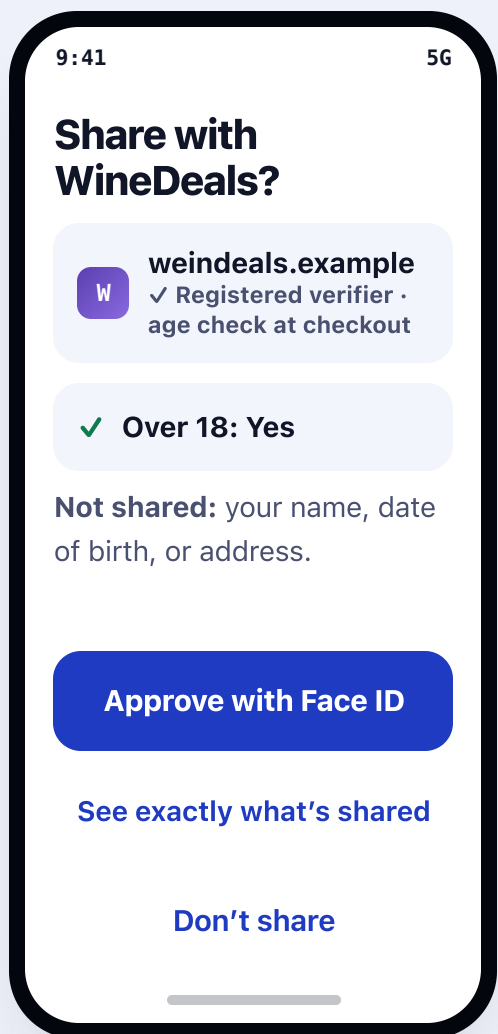

PROVE · 1

Who · what · why · and what is *not* shared

One legible request: the verifier's name + registered purpose, the single answer being shared, and an explicit "Not shared" line. Approval is a deliberate Face ID action. Retention is stated where relevant ("not stored").

► VoiceOver order & labels



PROVE · over-ask

Warn on over-asking — a safety moment


Because the wallet authenticates the verifier against its registration, it can flag a request for more than the declared purpose. Default is "don't share". This is protection a passive OS chooser can't offer.

► VoiceOver order & labels

EVERY PATH THAT ISN'T HAPPY

Errors, interruptions, and coming back later


Each names what happened in plain words and offers one clear recovery. Nothing dead-ends; progress is always saved.

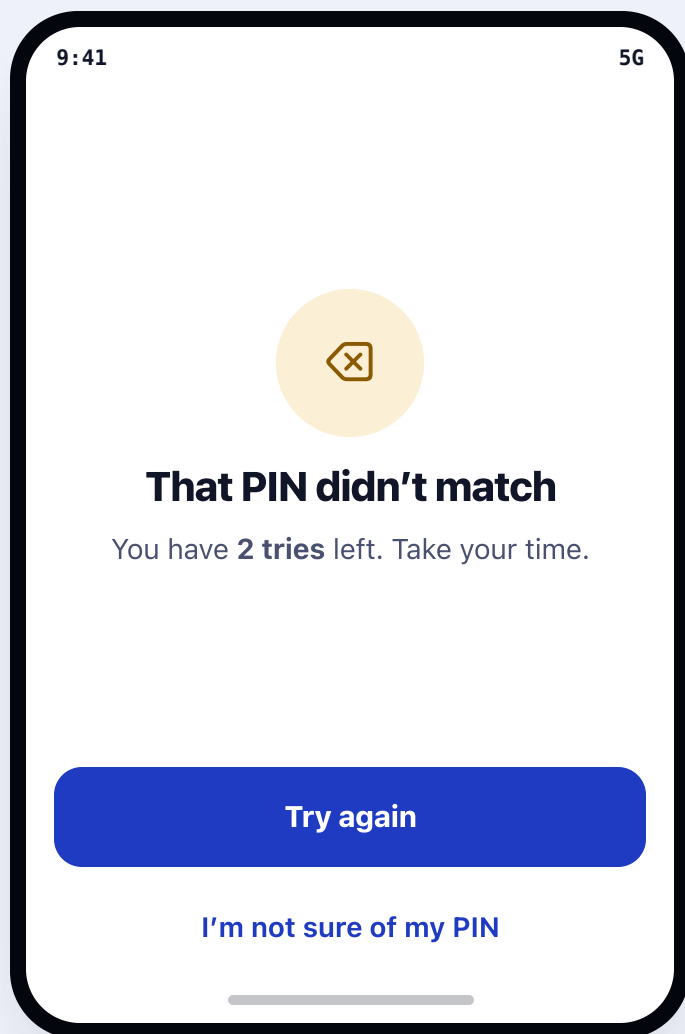

STATE · wrong PIN

Wrong PIN


Attempts remaining shown; help offered before the last try.

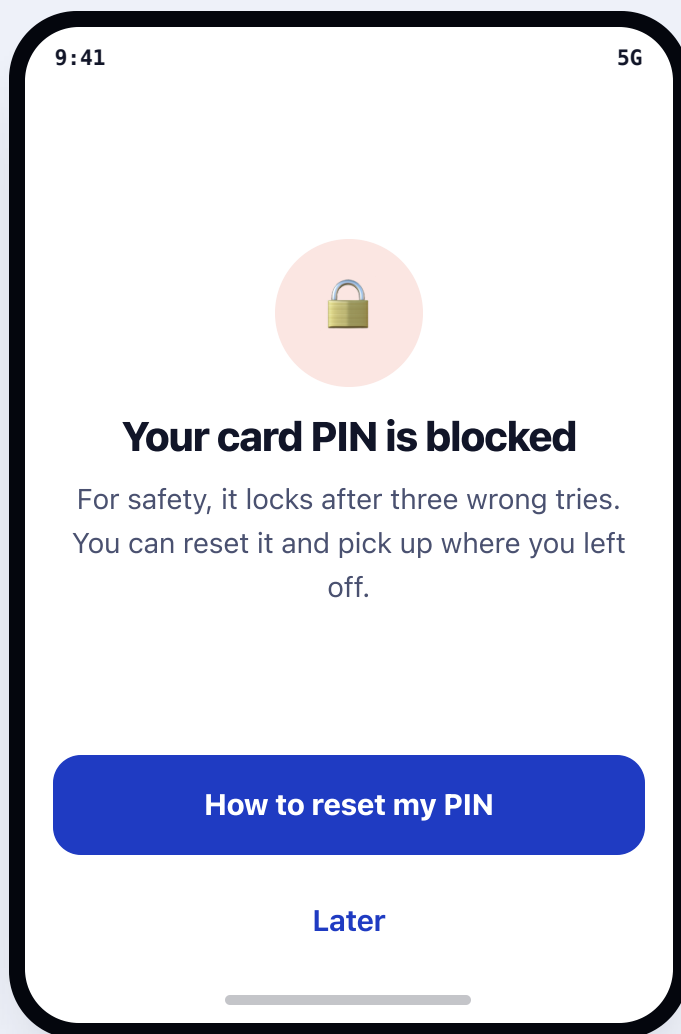

STATE · blocked PIN

Blocked PIN


CAN / reset detail lives here, in context — not on the calm primary screens. Resume after reset.

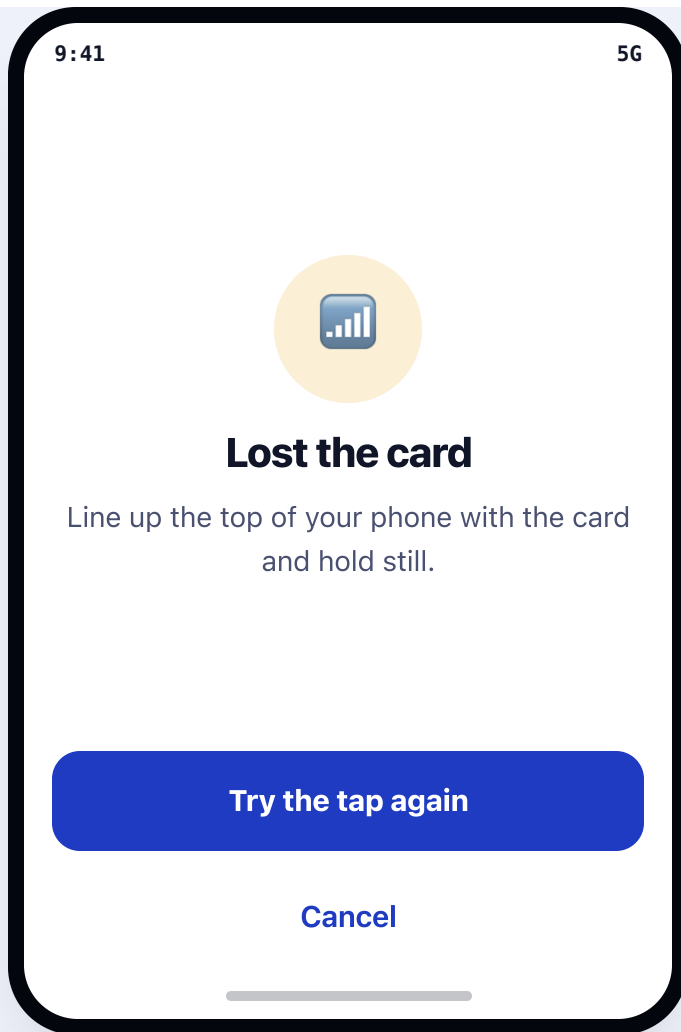

STATE · NFC lost

NFC interrupted


Auto-resume the read; never restart the whole flow. Cancel is always present.

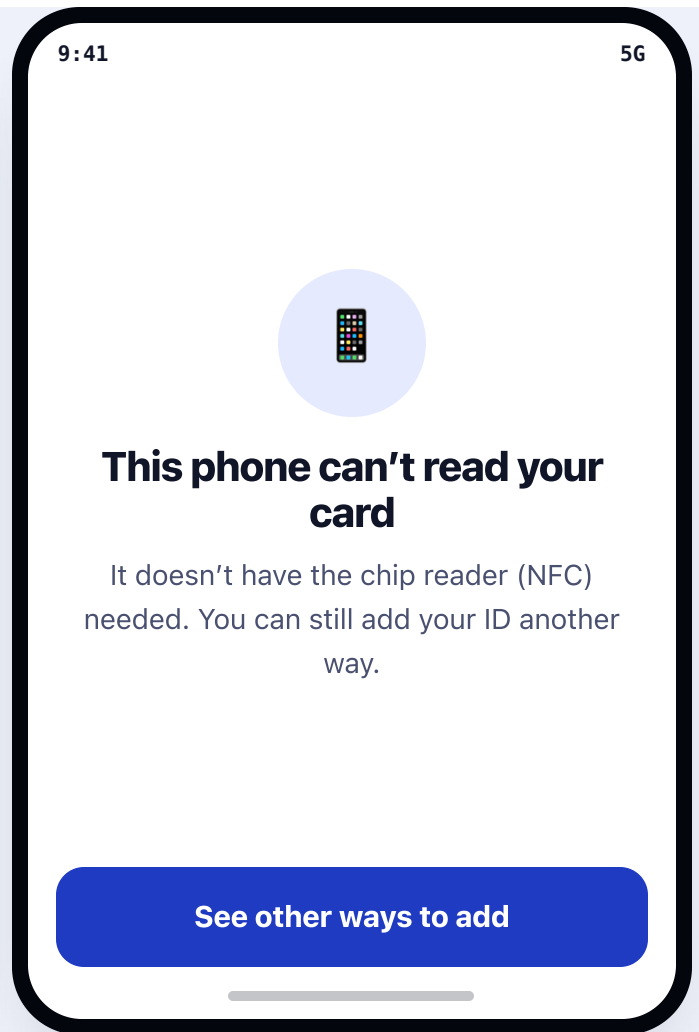

STATE · unsupported device

Unsupported device


Detected before the tap; routed to alternatives, not a blank failure.

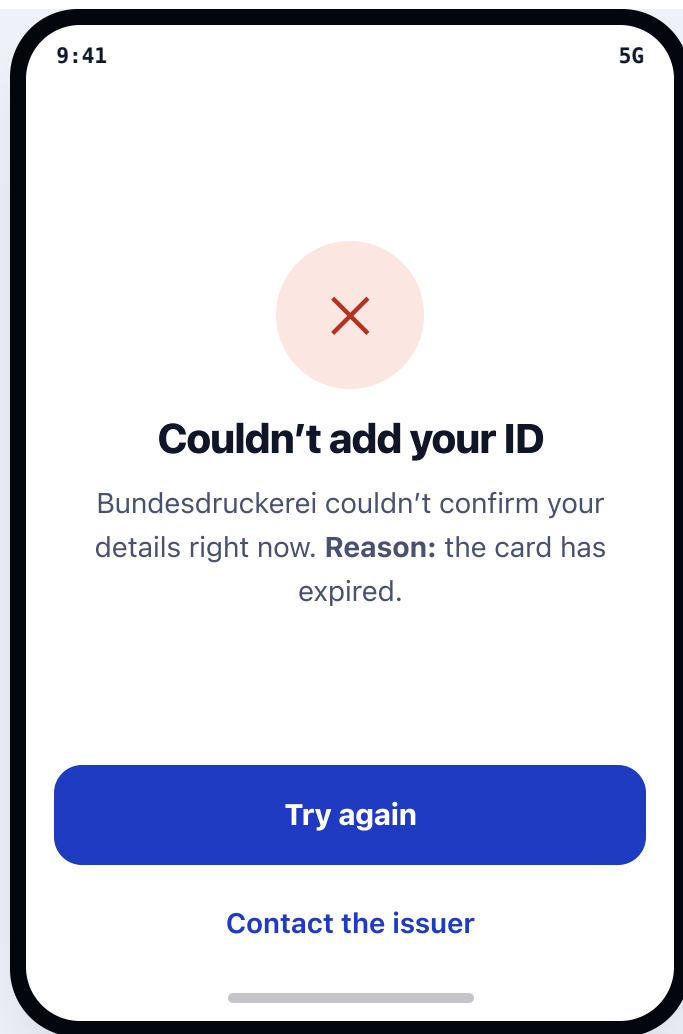

STATE · issuer rejection

Issuer rejection


The exact, human reason from the issuer — plus retry and a real contact path.

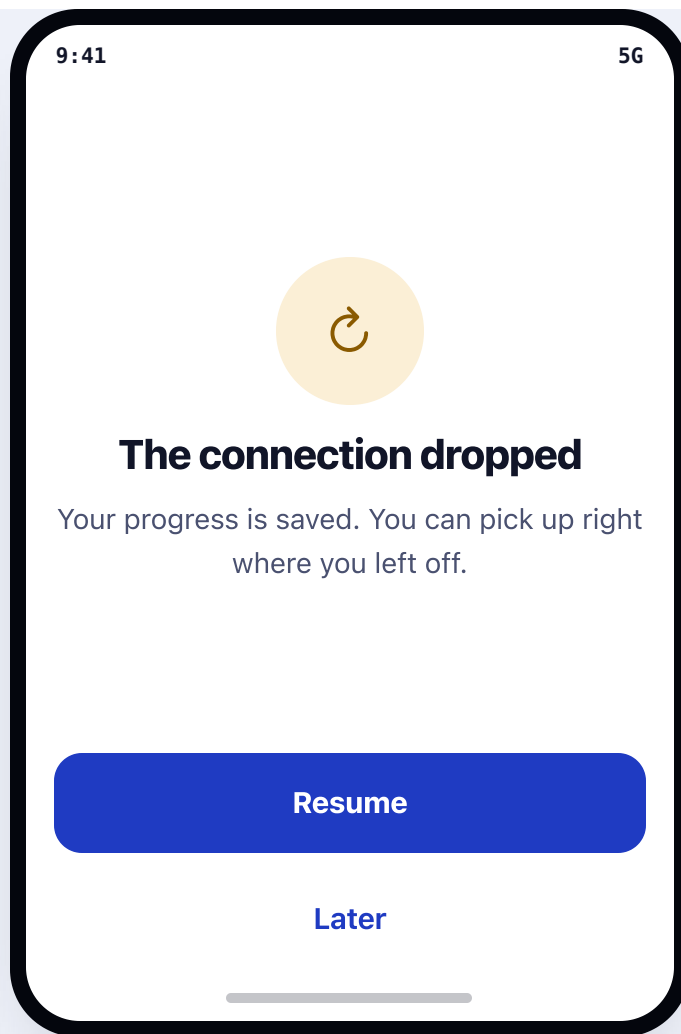

STATE · timeout

Timeout


Saved progress + resume; the same pattern for any network step.

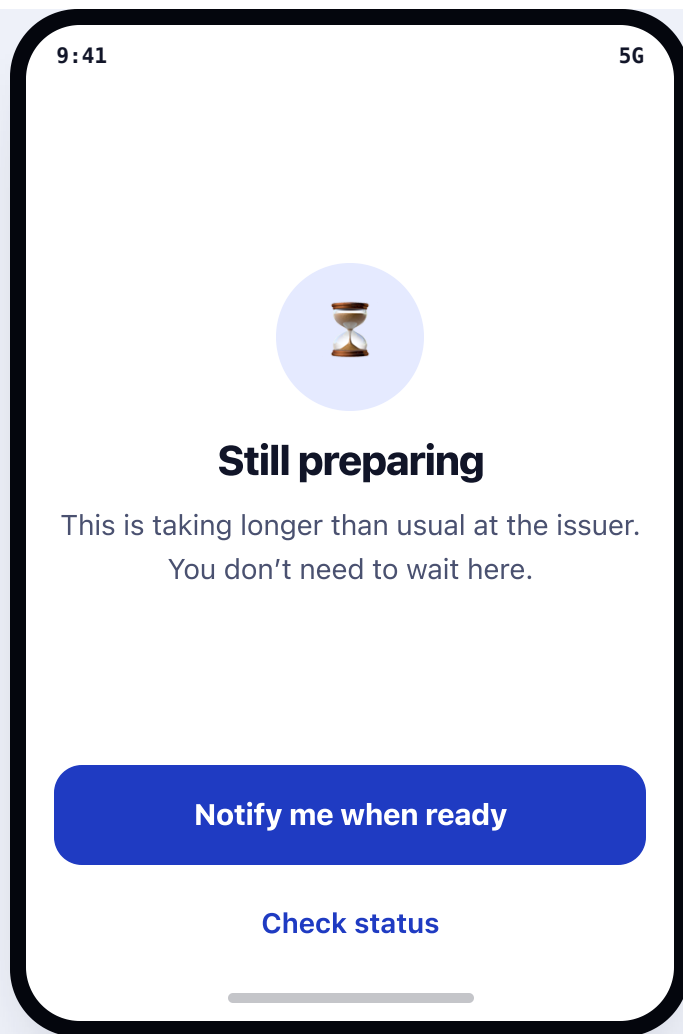

STATE · pending too long

Pending too long

Honest about issuer delay; converts waiting into a notification + status check on the home card.

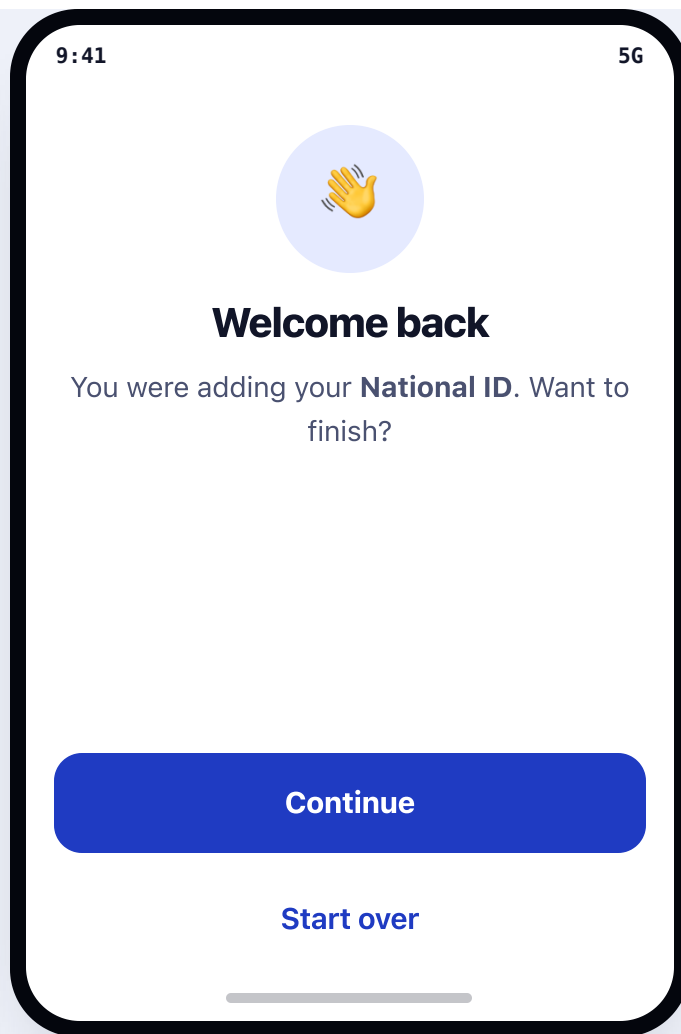

STATE · returning / interrupted

Returning & interrupted session

A resumed session is greeted, not reset; the user chooses to continue or start over.

BUILT TO BE TESTED WITH PEOPLE AGED ~65–85

Accessibility is a design constraint, not a pass at the end

Use the "Aa Large text" toggle at the top to see every screen scale. The rules below are baked into these frames.

What we hold to

- **Large, adjustable type** — the whole prototype honours a large-text setting (toggle above); nothing is pinned to a tiny size.
- **44 pt minimum controls**, full-width primary buttons, generous spacing between tap targets.
- **High contrast** — dark text on light (and the reverse in dark mode); no low-contrast grey for anything a person must read or do.
- **No card-within-card** — flat grouped rows and dividers, so structure is scannable, not nested boxes.
- **Critical instructions stay on screen** — never below the fold; the primary action is always reachable without scrolling.
- **Plain verbs** — Add, Check, Tap, Confirm, Ready; no “PID”, no protocol words, no jargon.
- **Reduced motion** respected; the tap animation is decorative only, with a text status beside it.

VoiceOver & testing

- Every screen has a reading order and spoken labels (expand “VoiceOver order & labels” under each frame).
- Screens announce as a heading first, then context, then actions — so a listener knows where they are before what to do.
- Live regions narrate progress and interruptions (“Reading your card... connection lost, reposition”).
- **Clickable prototype:** this page is intended for moderated sessions — sit beside a participant, let them talk through “Add your National ID” and “Prove your age”, and watch where hesitation happens (the PIN question and the tap are the moments to study).
- **No time claims** shown to users until measured with the real Ausweis SDK, network, issuer, and PIN-recovery paths.

Concept prototype for internal UX direction and moderated user testing — a design proposal, not a shipping product or an official government interface. Issuer names and personal details are illustrative.

Framing grounded in: Android credential-holder integration
(developer.android.com/identity/digital-credentials/credential-holder) · Apple
IdentityDocumentServices provider, with its own authorization UI
(developer.apple.com/documentation/identitydocumentservices) · EUDI ARF Topic F — consent &
relying-party authentication remain with the wallet ([eudi.dev/2.9.0/discussion-topics/f-](https://eudi.dev/2.9.0/discussion-topics/f-digital-credential-api)
[digital-credential-api](https://eudi.dev/2.9.0/discussion-topics/f-digital-credential-api)). Full write-up: [docs/ux/issuance-first-proposal.md](#).