
```
initialize global DropboxAccessToken to
                                       Obfuscated Text " << YOUR ACCESS TOKEN >>> '
initialize global DropboxFolder to
                                 " << YOUR DROPBOX FOLDER >> "
initialize global DropboxFilename to
                                    " << YOUR DROPBOX TEXT FILE "</p>
initialize global accessMode to
                                " read "
when btnInbox .Click
                                                                                btnUpdate . Click
      call getNoteFromDropbox >
                                                                               call updateNoteToDropbox -
do
                                                                          do
                                   get global DropboxFilename -
                                                                                                              " 00 - Inbox.md "
                      pagename
                                                                                                pagename
    to getNoteFromDropbox
                              pagename
      set global accessMode v to
                                    " read
 do
      set TextBox1 ▼ . Text ▼ to
                                      https://content.dropboxapi.com/2/files/download "
      set webSingleNote ▼ . Url ▼ to
      set webSingleNote ▼ . RequestHeaders ▼ to  make a list
                                                                      make a list
                                                                                       Authorization
                                                                                       ioin 🔯
                                                                                                  " Bearer "
                                                                                                  get global DropboxAccessToken -
                                                                                       " Content-Type "
                                                                      make a list
                                                                                        application/octet-stream
                                                                      make a list
                                                                                       " DropBox-API-Arg "
                                                                                                  " {"path": "/ "
                                                                                       ioin 🔯
                                                                                                  get global DropboxFolder -
                                                                                                  " 🕜 "
                                                                                                  get pagename
                                                                                                  " "} "
      call webSingleNote ▼ .Get
```

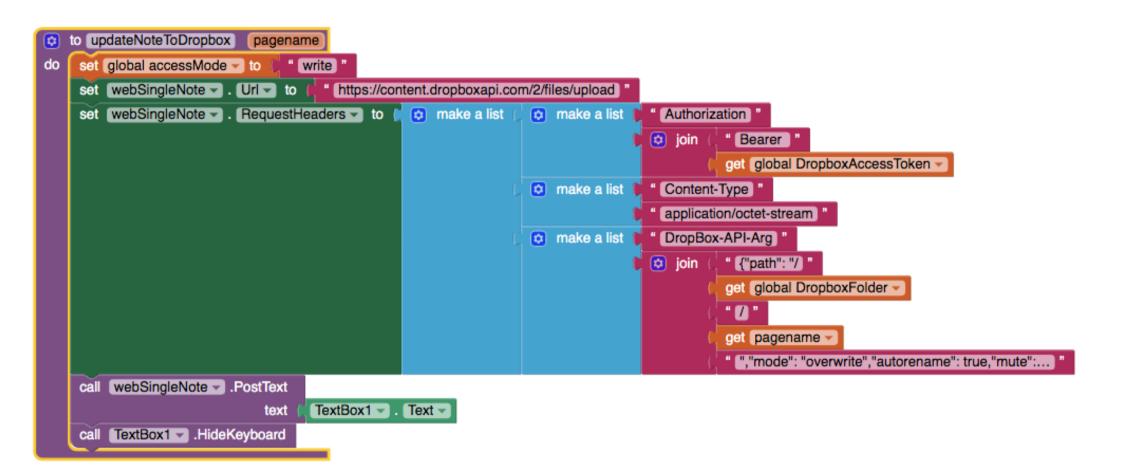

```
webSingleNote ▼ .GotText
when
      responseCode
                     responseType
                                    responseContent
 url
    do
                get responseCode = = = =
                                          200
          🗯 if
    then
                       get global accessMode -
                                                   read "
                                             TextBox1 ▼ . Text ▼ to get responseContent ▼
          then
                     btnUpdate ▼ . Enabled ▼
                                            to true -
                                            Read Inbox Successfully "
                    Result ▼ . Text ▼
                                      to
                                                      Write to Dropbox Successful\n Response Code:
          else
                 set Result . Text
                                           join
                                      to
                                                     get responseCode -
              TextBox1 ▼ .HideKeyboard
    else
                                               ERROR: Write to Dropbox Failed\n Response Code:
              Result -
                        Text ▼ to
                                     join
                                               get responseCode v
```