MLHad: A Machine Learning based Simulation for Hadronization

Ahmed Youssef

In collab. with P. Ilten, T. Menzo, S. Mrenna, M. Szewc, M. Wilkinson, J. Zupan

University of CINCINNATI

1.Motivation

Event generators simulate particle collisions in 3 blocks:

1) *Hard Process* - the initial high energy interaction is calculated perturbatively.

2) *Parton Shower (Evolution)* - this process is perturbatively evolved to the non-perturbative α_s scale.

3) *Hadronization* - quarks and gluons are combined into hadrons via phenomenological models.

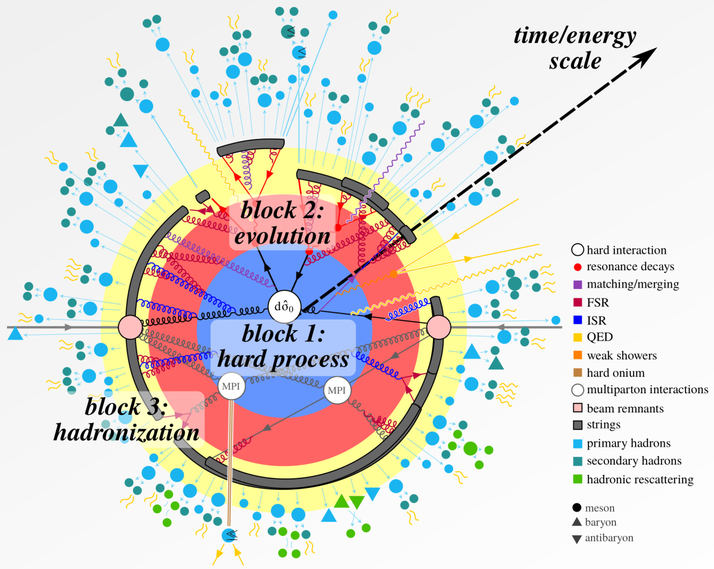

- The first two blocks can be calculated in perturbation theory, but hadronization is inherently non-perturbative and cannot be calculated from first principals..
- The state-of-the-art is to use phenomenological models with tuned parameters, which poorly describe the underlying physics.
- We propose to replace the parametrized model with our data-driven, Machine Learning based model, MLHad.

3. MLHad-Architecture

1) FS generates the flavor compositon of the hadron h_1 and new string end s_2.

2) Generator (G) generates the hadron kinematics p_{h1}.

3) The produced hadron is stored and the string is updated. Step 1 is repeated.

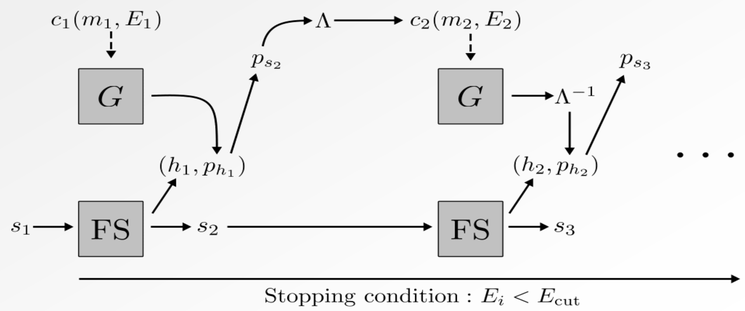

4. Normalizing Flows (NFs) as Generator

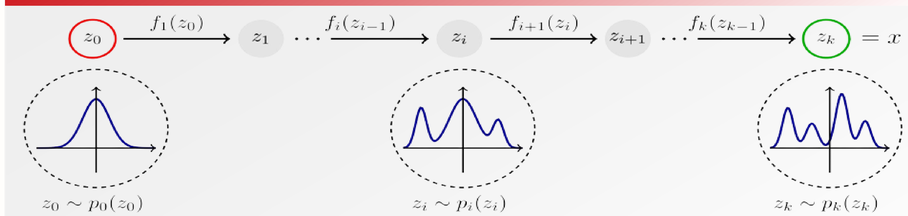

Image taken from https://github.com/janosh/awesome-normalizing-flows

- NFs perform a bijective transformation by sampling a random vector z_0 from a simple (usually gaussian) distribution $p_0(z_0)$.
- The sample is transformed by a bijective mapping $z_0 = f^{-1}(z_k)$ to obtain a data point x from the desired (usually more complicated) distribution

$$p_k(z_k) = p_0(z_0)\left|det\left(\frac{\partial f}{\partial z_0}\right)\right|^{-1}.$$

- Hadron emissions are axial symmetric ➔ Reduces to 2 variables p_z and p_T.
- Input data $\mathbf{x}_i \in [p_z, p_T]$, is conditioned on the initial string Energy and emitted hadron mass $\mathbf{c}_i(m, E)$.

5.Results

Correlation plot between p_z and p_T, for Pythia and MLHad (right)

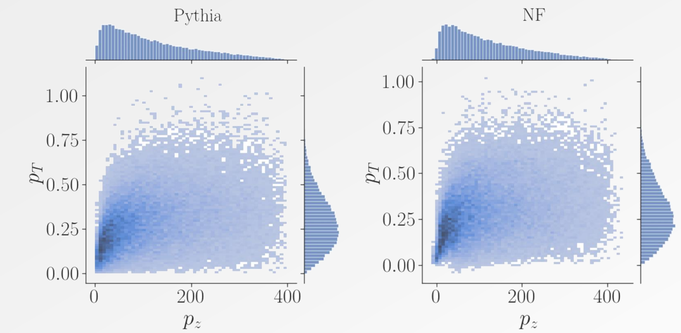

Average number of hadrons produced in a fragmentation chain of as a function of the initial parton energy, MLHad vs Pythia.

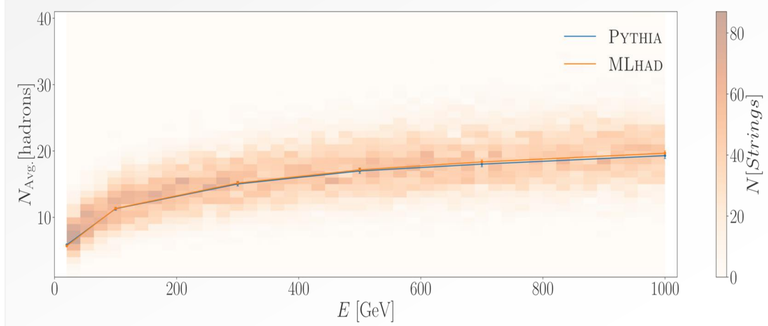

6. Conclusion and Outlook

We presented the MLHad pipeline first in:

- "Modeling hadronization using machine learning," [arXiv:2203.04983]; public code: https://gitlab.com/uchep/mlhad
- MLHad reproduces key features of a simplified Pythia hadronization model.
- It learns correlations between p_z and p_T, while allowing different hadron emission.
- Future work include uncertainty estimation, absent in common hadronzation models, and training on experimental data.

2. Lund String-Model

Currently, two models – the Cluster Model (CM) and Lund String Model (LSM) – are available to describe hadronization. The latter is used in Pythia and we consider a simplified version:

- A QCD color string connects the initial quark-antiquark $q_i\bar{q}_i$ pair, with energy E, carrying the 3 momentum $\pm\mathbf{p}$ and iteratively splits to a hadron composed of $q_i\bar{q}_j$.
- Selection of flavor (FS) and Hadron kinematics are independent until the final stages.

Our model MLHad, uses machine learning to model each step.

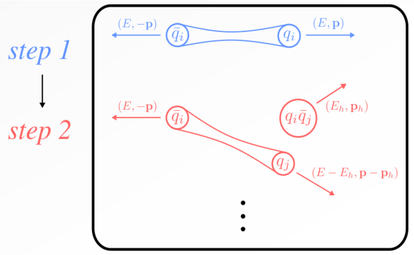

Acknowledgement

AY, JZ, and TM acknowledge support in part by the DOE grant de-sc0011784 and NSF OAC-2103889. PI and MW are supported in part by NSF OAC-2103889. SM is partially supported by the DOE/HEP QuantISED program grant "HEP Machine Learning and Optimization Go Quantum", identification number 0000240323