

TSA6213 SYSTEM ADMINISTRATION & MAINTENANCE

LAB 10


Name	Muhammad Eusoff Aminurrashid Bin Shukri
Student ID	1211112228
Section	SAM1, 1A

BASH Scripting

1. Write a simple bash script using nano. More details below:


- Output: `Hello System Administrator`
- Script Name: `hello.sh` with permission: `rw-r-xr-x`
- Run the script using `./hello.sh` and capture the output.

> nano hello.sh

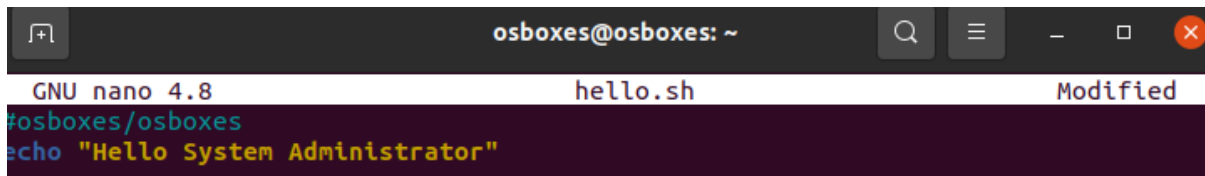A screenshot of a terminal window with the nano text editor open. The title bar shows 'osboxes@osboxes: ~'. The editor shows the file 'hello.sh' with 'GNU nano 4.8' and 'Modified' in the status bar. The content of the file is a single line: `echo "Hello System Administrator"`.


> Ctrl X, Y, Enter

> chmod 755 hello.sh

A terminal screenshot showing the command `osboxes@osboxes:~$ chmod 755 hello.sh` being executed.

> ls -l hello.sh


> ./hello.sh

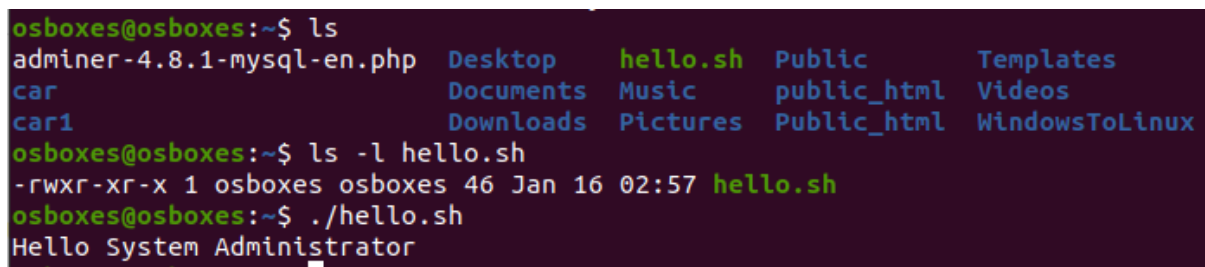A terminal screenshot showing the execution of `ls` and `./hello.sh`. The `ls` command lists files in the home directory, including `hello.sh`. The `ls -l hello.sh` command shows the permissions `-rw-r-xr-x` for `hello.sh`. Finally, running `./hello.sh` outputs `Hello System Administrator`.

2. Write a bash script that reads user input. More details below:

- Script informs user to enter name: `Please type your name...`
- Script reads the input and shows output: `Welcome to SysAdmin Lab : name`
- Save the script as `welcome.sh`, run it using `bash welcome.sh` and capture the screen.

> sudo nano welcome.sh

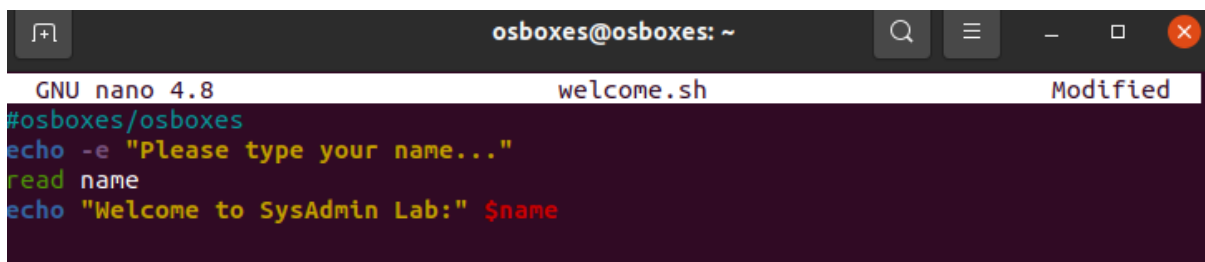
A screenshot of a terminal window with the nano text editor open. The title bar shows 'osboxes@osboxes: ~'. The editor shows the file 'welcome.sh' with 'GNU nano 4.8' and 'Modified' in the status bar. The content of the file is: `echo -e "Please type your name..."`, `read name`, and `echo "Welcome to SysAdmin Lab:" $name`.

> bash welcome.sh

> [insert name]


```
osboxes@osboxes:~$ sudo nano welcome.sh
osboxes@osboxes:~$ bash welcome.sh
Please type your name...
Eusoff
Welcome to SysAdmin Lab: Eusoff
osboxes@osboxes:~$
```

3. Write a bash script the produces an output as below:

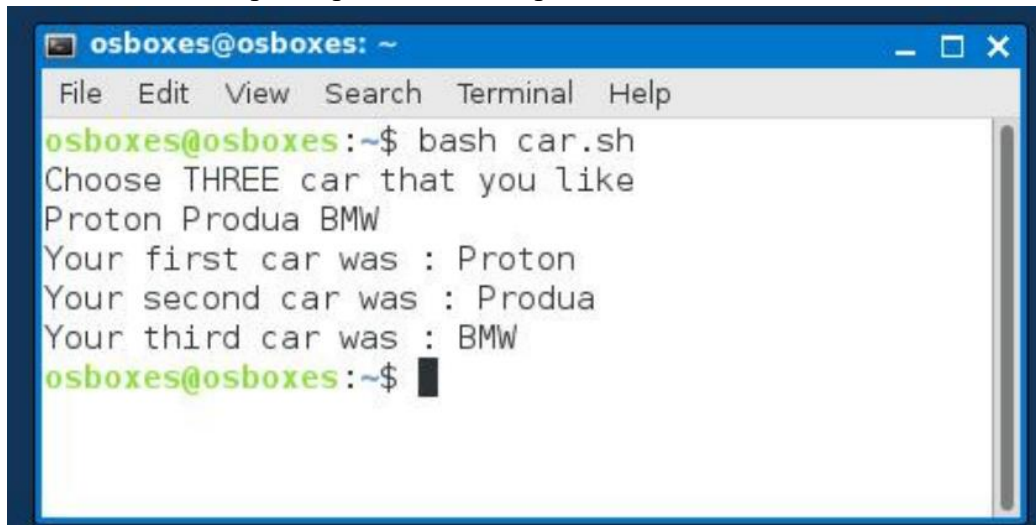


```
osboxes@osboxes: ~  
File Edit View Search Terminal Help  
osboxes@osboxes:~$ bash car.sh  
Choose THREE car that you like  
Proton Produa BMW  
Your first car was : Proton  
Your second car was : Produa  
Your third car was : BMW  
osboxes@osboxes:~$
```

> sudo nano car.sh

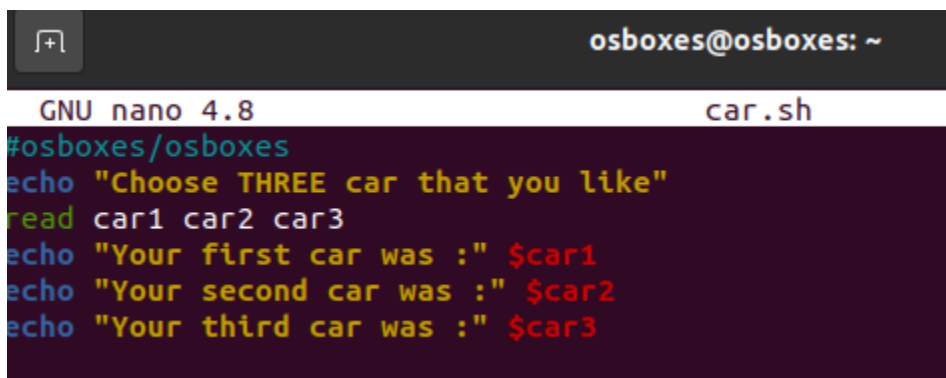

```
osboxes@osboxes: ~  
GNU nano 4.8 car.sh  
#osboxes/osboxes  
echo "Choose THREE car that you like"  
read car1 car2 car3  
echo "Your first car was :" $car1  
echo "Your second car was :" $car2  
echo "Your third car was :" $car3
```

> bash car.sh

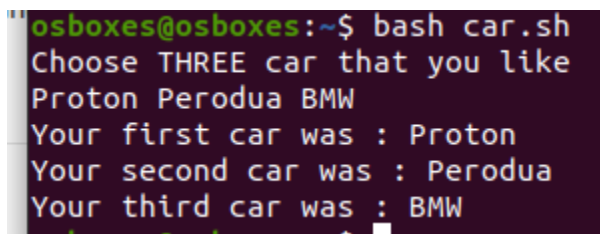

```
osboxes@osboxes:~$ bash car.sh  
Choose THREE car that you like  
Proton Perodua BMW  
Your first car was : Proton  
Your second car was : Perodua  
Your third car was : BMW  
osboxes@osboxes:~$
```

4. Write a script using `for` loop that can produce 10 files: `report-01` to `report-10`. More details below:


- Format: `for x in {ranges}; do command $x ; done`
- Save the script as `loop.sh` and run using `source loop.sh`

> `sudo nano loop.sh`



```
osboxes@osboxes: ~  
GNU nano 4.8 loop.sh  
#osboxes/oxboxes  
for x in {1..10}  
do echo "report-$x"  
done
```

> `bash loop.sh`

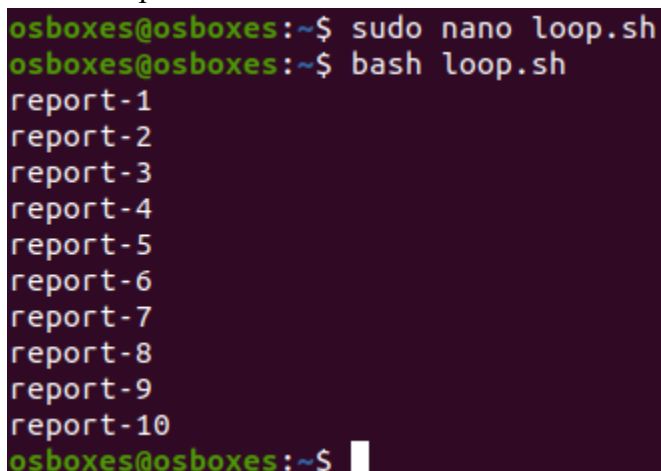

```
osboxes@osboxes:~$ sudo nano loop.sh  
osboxes@osboxes:~$ bash loop.sh  
report-1  
report-2  
report-3  
report-4  
report-5  
report-6  
report-7  
report-8  
report-9  
report-10  
osboxes@osboxes:~$
```