

Thanks for reading!


Want to learn more?

→ check out the complete list of BIPs:
github.com/bitcoin/bips

→ start following the **bitcoin** dev mailing list.
You'll be among the first to hear about new BIPs
and updates to ones in progress

Still want more? Head over to
<https://satsie.dev/bips>
for additional resources

8




PAYJOIN

*A short zine about payjoin:
what it is, why it's cool and how it
works*

@satsie ☆ <https://satsie.dev/zines>
LAST UPDATED: JULY 2024

With payjoin, the receiver also contributes an input. Let's say Bob already has 5 BTC in his wallet and he wants to use that in a payjoin tx. It would look like this:

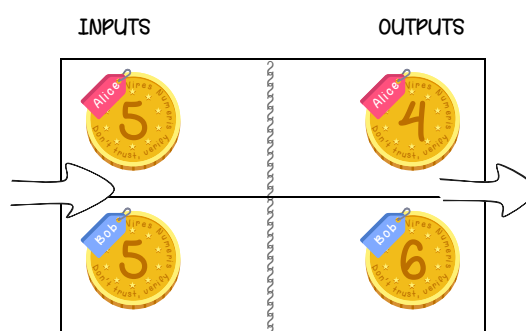


So why is this good? The first benefit is scalability. By definition, payjoin does some tx batching. In both scenarios, Bob ends up with a total of 6 BTC, but there's a slight difference in how it's represented. In the 1st example, he has 1 BTC from Alice and the 5 BTC he already had. With payjoin, he has a single 6 BTC.

Payjoin is a technique for batching **bitcoin** transactions while preserving privacy and blockspace.

Recall that:

1. **bitcoin** uses the UTXO model, and
2. coins (transaction inputs and outputs) can be of any value

Pretend Alice has 5 BTC in her wallet and she sends 1 BTC to Bob. The transaction (tx) looks like this:

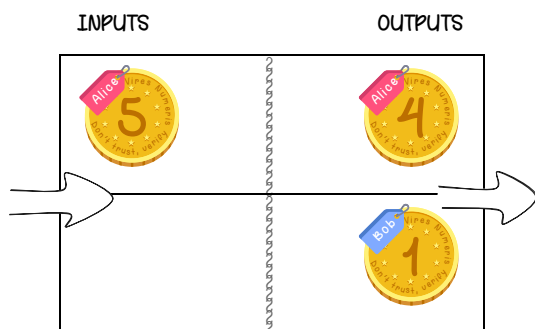

2

7

The way the 1 BTC from Alice was combined with Bob's existing 5 BTC is an example of **coin consolidation**. More coins = more fees, so it's best to minimize the number of coins in your wallet. Instead of using one tx to transfer BTC, and another to consolidate coins, payjoin lets you do both at once, increasing tx throughput! That's not all. What if Bob wants to use the BTC from Alice to pay his friend Charlie? Or maybe he wants to open a Lightning channel? Using a tx for extra stuff like this is called a **tx out-through**. By allowing additional inputs and outputs, payjoin lets you pack more activity into a tx. Alice was already going to send BTC to Bob. Payjoin is just a way to raise the tx throughput and save on fees that would have gone to creating additional txs. It's the simplest way to do transaction batching between two people.

☆ Privacy ☆

Blockchain surveillance uses heuristics to make assumptions about the nature of a tx, including how much BTC was transferred, how much the sender got back as change, and who owns which coins. The most common heuristic for tracking users is the assumption that all inputs belong to the sender.

Payjoin lets senders and receivers work together in a way that breaks one or more of these heuristics. After Alice and Bob used payjoin, the assumption that all inputs came from Alice is no longer true. The tx looks the same as if Alice provided multiple inputs.

In this regard, payjoin instantly brings privacy to on-chain transactions, right at the moment of payment.

4

5