

# **X-CORP**

## **Network Analysis**

***Security Engineering: CSIRT Division***  
**Attack, Defense & Analysis of X-CORP'S Network**

# Table of Contents

---

This document contains the following resources:

01

***Network Topology & Critical Vulnerabilities***

02

***Traffic Profiles***

03

***Normal Activity***

04


***Malicious Activity***

05

***Recommendations***

# Network Topology & Critical Vulnerabilities

# Network Topology – 192.168.1.0/24

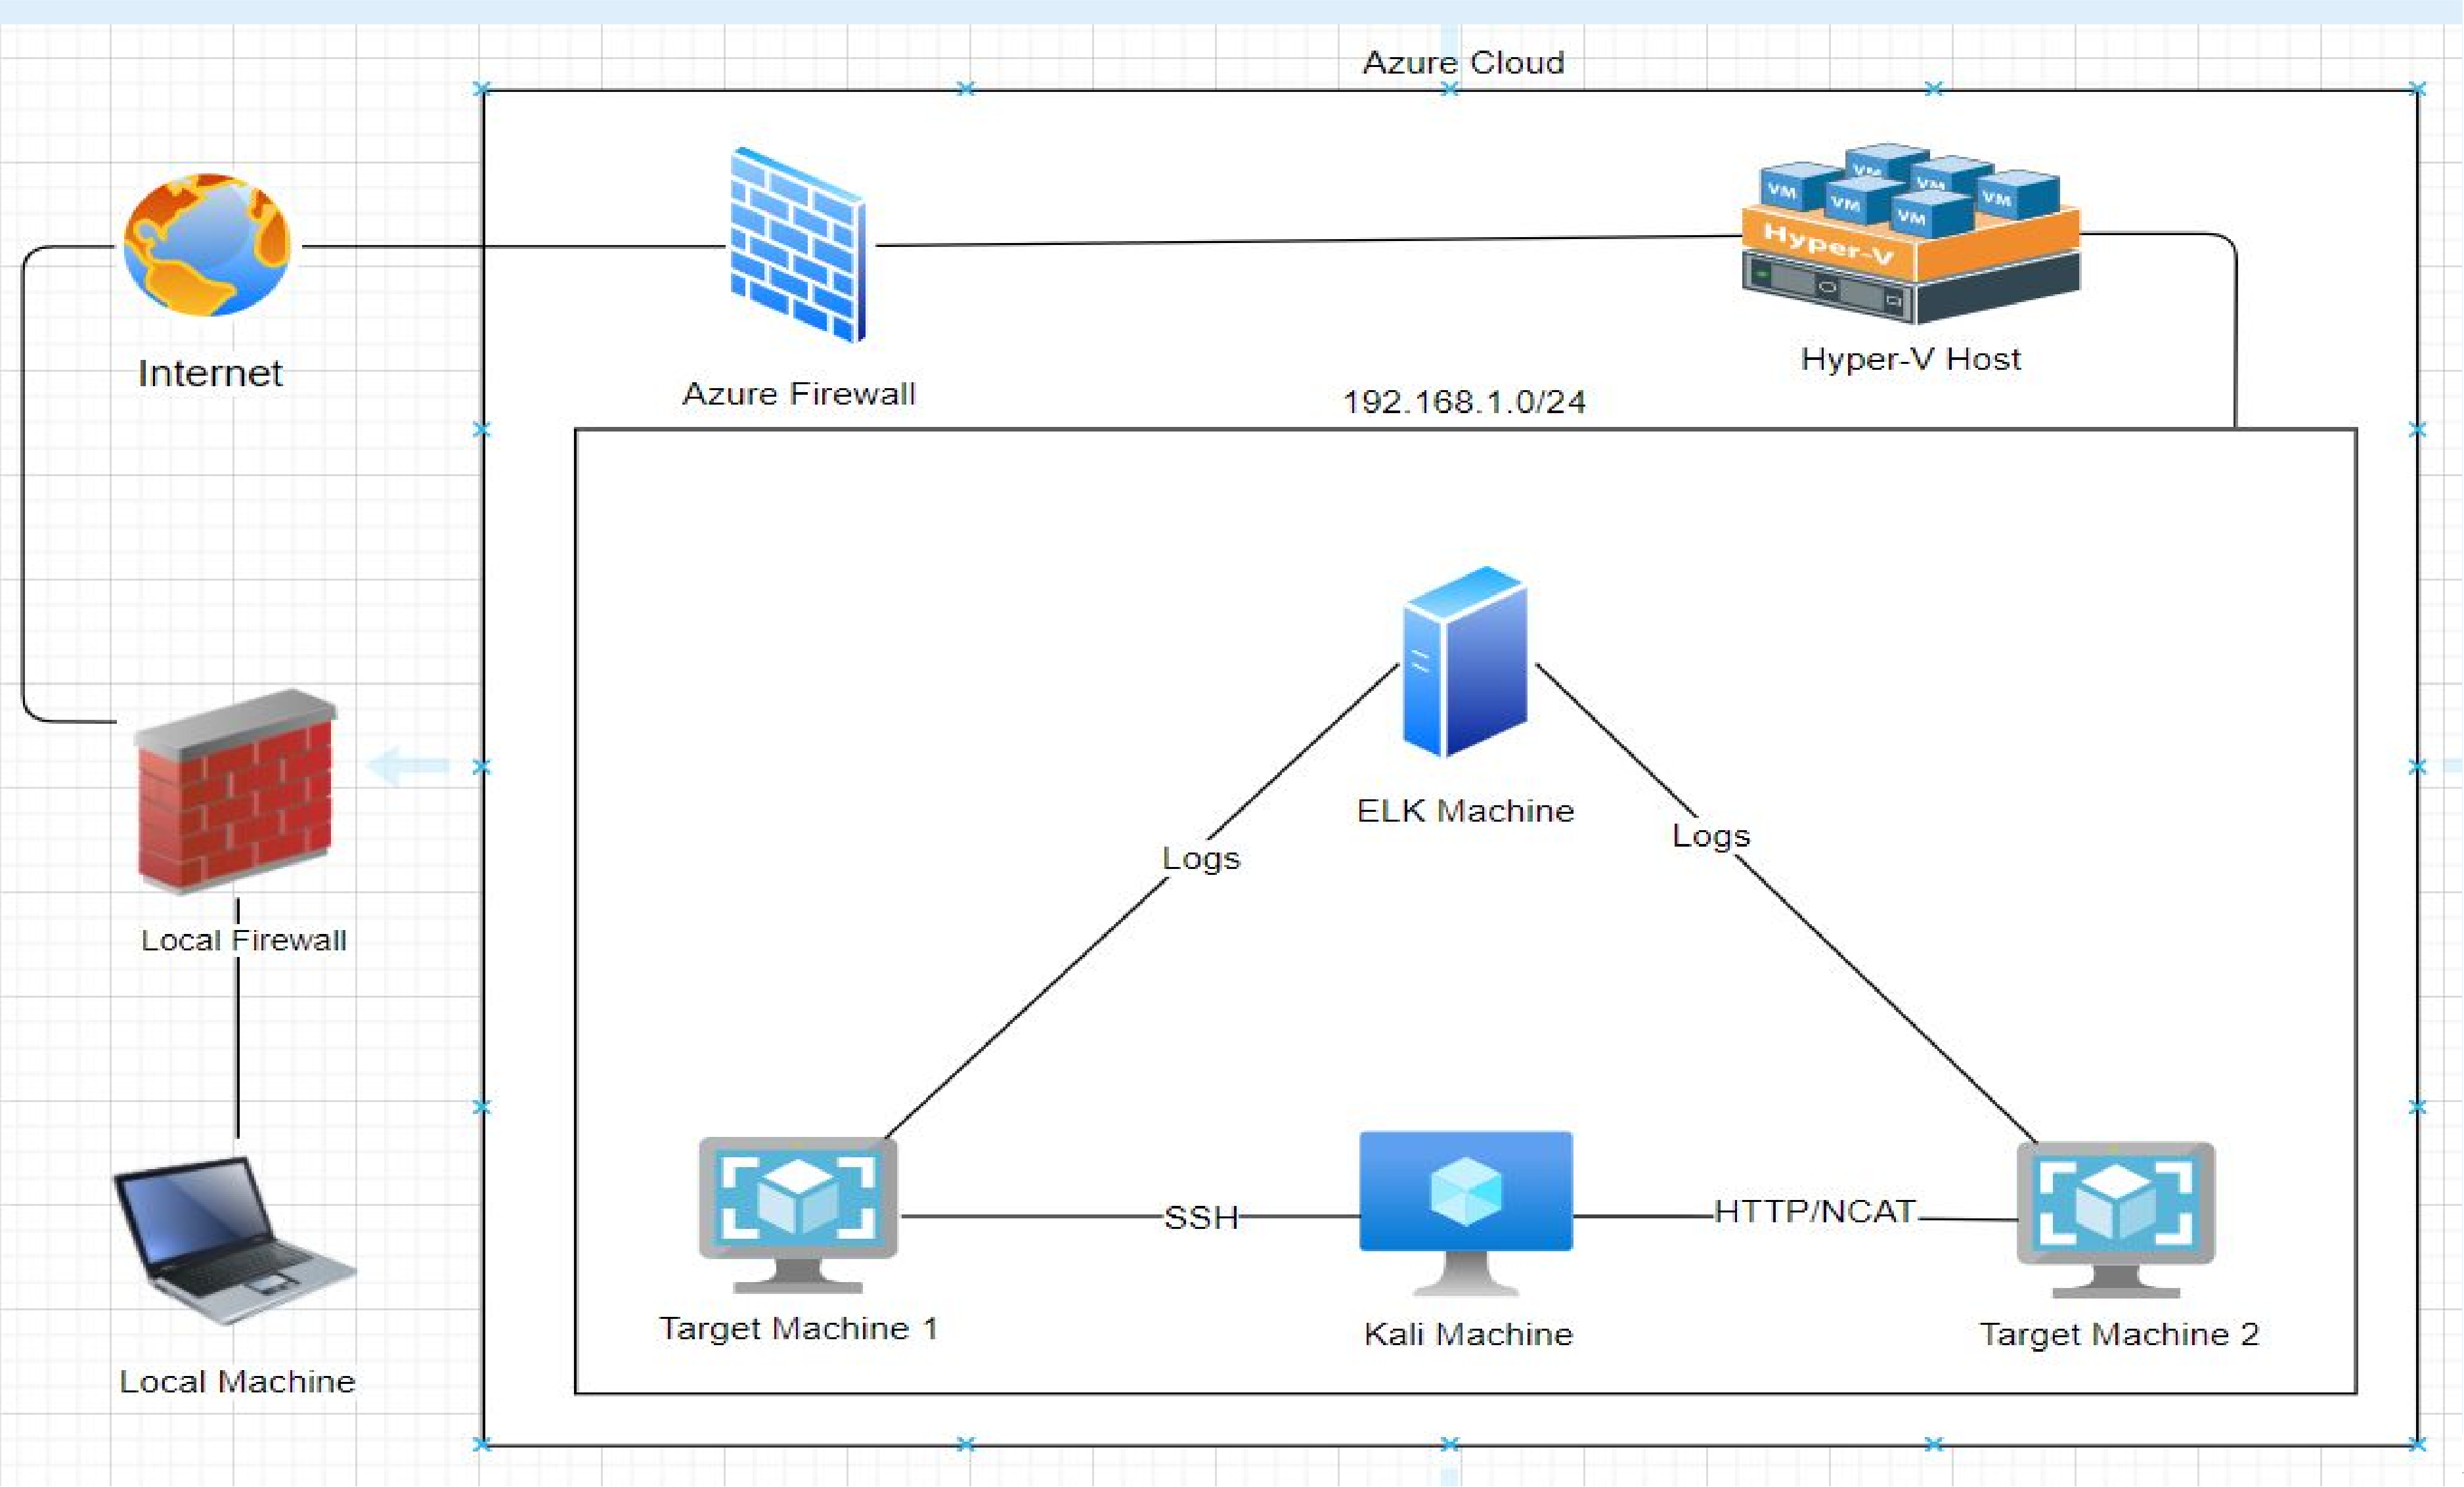


**Network**  
Address Range:  
192.168.1.0/24  
Netmask: 255.255.255.0  
Gateway: 192.168.1.1

**Machines**  
IPv4: 192.168.1.90  
OS: Linux  
Hostname: Kali  
  
IPv4: 192.168.1.110  
OS: Linux  
Hostname: Target 1  
  
IPv4: 192.168.1.115  
OS: Linux  
Hostname: Target 2  
  
IPv4: 192.168.1.100  
OS: Linux  
Hostname: ELK



# Network Topology – 10.6.12.0/24

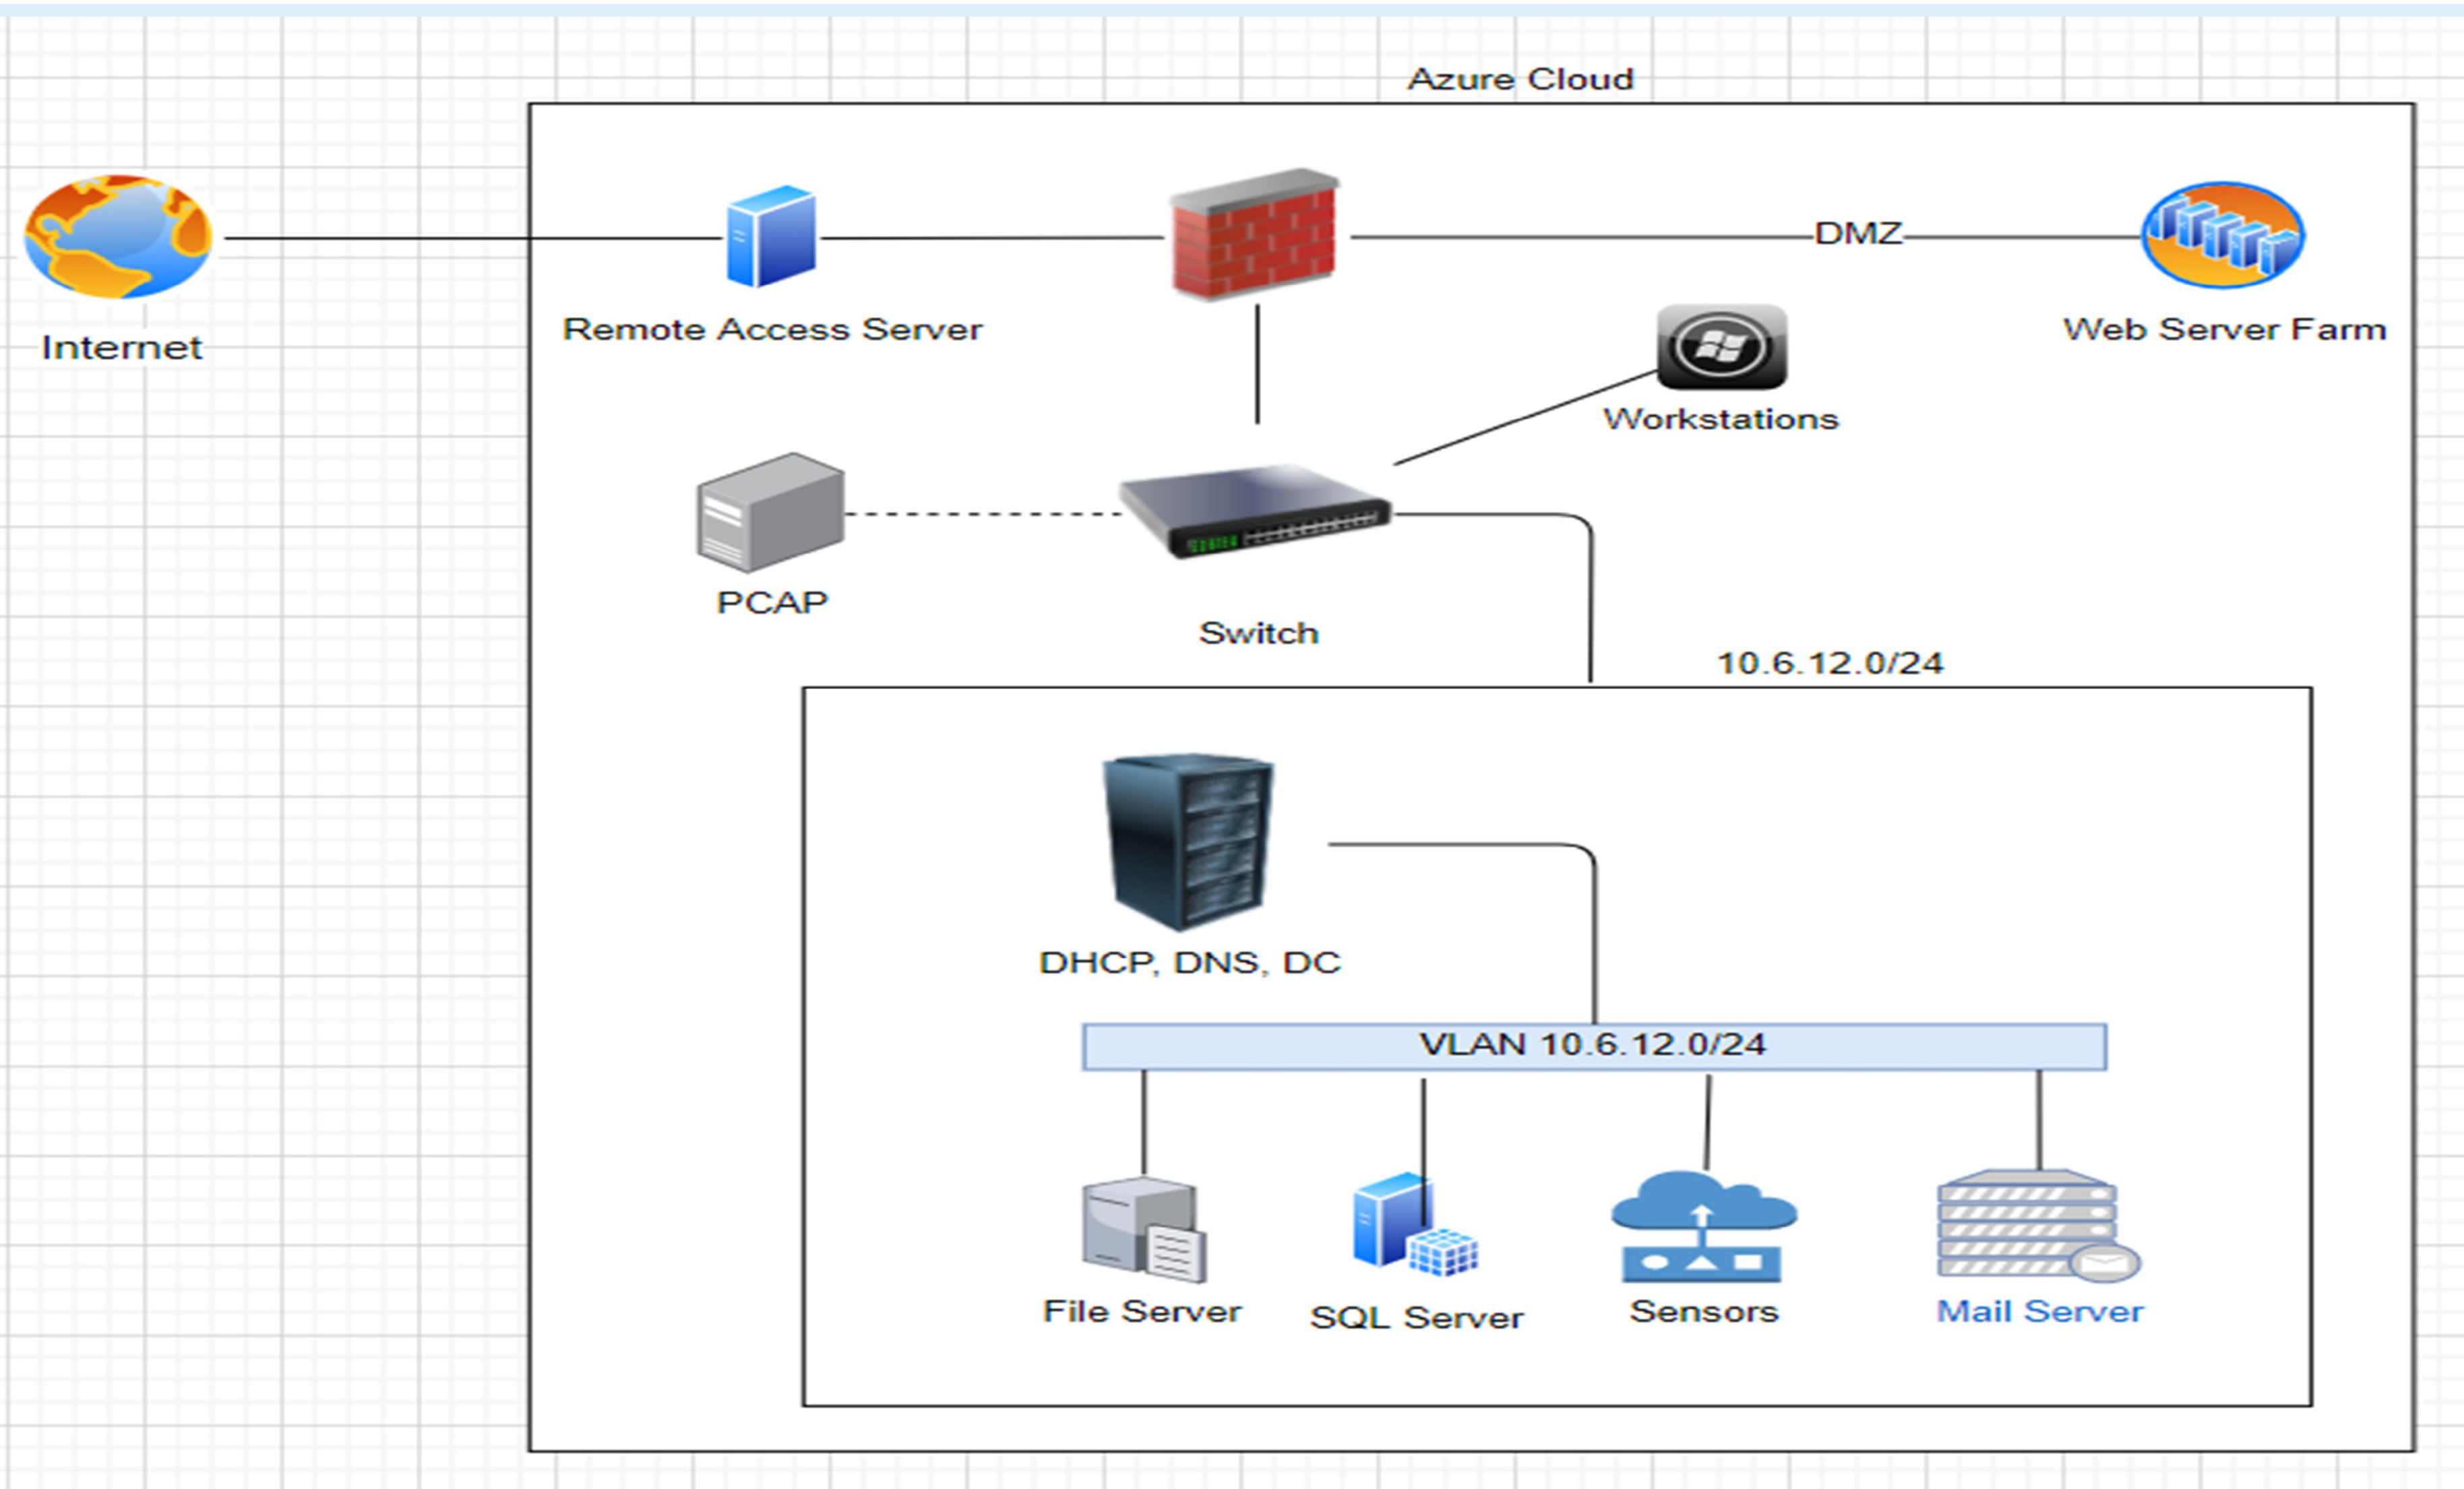

## Network

Address Range:  
10.6.12.0/24  
Netmask: 255.255.255.0  
Gateway: 10.6.12.0.1

## Machines

IPv4: 172.16.4.205  
OS: Windows  
Hostname: ROTTERDAM-PC

IPv4: 10.0.0.201  
OS: Windows  
Hostname: BLANCO-DESKTOP

# Network Topology – Machines & Network

## Network

Address Range:  
192.168.1.0/24 & 10.6.12.0/24  
Netmasks: 255.255.255.0  
Gateways: 192.168.1.1 &  
10.6.12.0.1

## Machines

IPv4: 192.168.1.90  
OS: Linux  
Hostname: Kali

IPv4: 192.168.1.110  
OS: Linux  
Hostname: Target 1

## Machines

IPv4: 192.168.1.115  
OS: Linux  
Hostname: Target 2

IPv4: 192.168.1.100  
OS: Linux  
Hostname: ELK

IPv4: 172.16.4.205  
OS: Windows  
Hostname: ROTTERDAM-PC

IPv4: 10.0.0.201  
OS: Windows  
Hostname: BLANCO-DESKTOP

## Network

Address Range:  
192.168.1.0/24 &  
10.6.12.0/24  
Netmask: 255.255.255.0  
Gateway: 192.168.1.1 &  
10.6.12.0.1

## Machines

IPv4: 172.16.4.205  
OS: Windows  
Hostname: ROTTERDAM-PC

IPv4: 10.0.0.201  
OS: Windows  
Hostname: BLANCO-DESKTOP

# Critical Vulnerabilities: Target 1

Assessment uncovered the following critical vulnerabilities in *Target 1*.

<i>Vulnerability</i>	<i>Description</i>	<i>Impact</i>
Open Web Port (Port 80) CVE-2019-6579	Port 80 is commonly used for web communication and if left open and unsecure, it can allow public access.	Access to web server
Unfiltered SSH Port ( Port 22) CVE-2002-1715	Port 22, also known as the secure shell port, allows a user to remotely connect to another machine via remote command execution.	SSH into target machine
User Enumeration	Web application vulnerability that allows attackers to use bruteforce techniques to validate users on a network.	Enumerate a list of users

# Critical Vulnerabilities: Target 1

Assessment uncovered the following critical vulnerabilities in *Target 1*.

<i>Vulnerability</i>	<i>Description</i>	<i>Impact</i>
Weak User Credentials	Short names, first name, or any simple combinations.	Password is easy to obtain through social engineering
Misconfigured Security Controls	Improper controls are implemented leaving systems vulnerable to exploits.	Allows unauthorized access
Confidential Data Improperly Secured	Confidential data, such as user login information, is easily accessible to the public with no security.	Database server authentication information easily accessible



# Critical Vulnerabilities: Target 2

Assessment uncovered the following critical vulnerabilities in *Target 2*.

<i>Vulnerability</i>	<i>Description</i>	<i>Impact</i>
WordPress XML-RPC DOS	WordPress XML-RPC parsing is susceptible to DOS attacks by executing pingback.ping.	Several affected WordPress installations can launch a botnet level attack
WordPress XML-RPC Ping	Using HTTP POST request smuggling to bypass front-end security controls.	Application's internal layers are targeted
Cloudflare Protection Bypass	Execution of pingback.ping method can be used to bypass DNS level protection.	Target's public IP address revealed

# Critical Vulnerabilities: Network 10.6.12.0/24

Assessment uncovered the following critical vulnerabilities in **10.6.12.0/24**.

<i>Vulnerability</i>	<i>Description</i>	<i>Impact</i>
Trojan Malware	Malicious computer virus.	Malware downloaded locally and infected multiple hosts on network
Unauthorized Domain Setup	Private domain created without authorization.	Private domain created to conduct torrenting, avoid detection, and stream videos
Illegal Torrenting	Downloading & uploading files through a torrent network.	Copyrighted material downloaded

# Traffic Profiles

# Traffic Profile on 192.168.1.0/24

Analysis identified the following characteristics of the traffic on the network:

<i>Feature</i>	<i>Value</i>	<i>Description</i>
Top Talker (192.168.1.90)	Ip.addr==192.168.1.0/24	Machine that sent the most traffic.
Most Common Protocols (HTTP, SSH, TCP, UDP)	Ip.addr==192.168.1.0/24	Most common protocols on the network.
3 Unique IP Addresses (192.168.1.90, 192.168.1.110, 192.168.1.115)	Ip.addr==192.168.1.0/24	Count of observed IP addresses.
Netmask (255.255.255.0)	Ip.addr==192.168.1.0/24	Observed netmask ranges.

# Traffic Profile on 10.6.12.0/24

Analysis identified the following characteristics of the traffic on the network:

<i>Feature</i>	<i>Value</i>	<i>Description</i>
Top Talkers (172.16.4.205), (185.243.115.84), (166.62.11.64)	Ip.addr==10.6.12.0/24	Machines that sent the most traffic.
Most Common Protocols (HTTP, TCP, UDP)	Ip.addr==10.6.12.0/24	Most common protocols on the network.
2 Unique IP Addresses (172.16.4.205 & 185.243.115.84)	Ip.addr==172.16.4.205 and 185.243.115.84	Count of observed IP addresses.
Netmask (255.255.255.0)	Ip.addr==10.6.12.0/24	Observed netmask ranges.
1 Malware Species (Trojan malware)	Ip.addr==10.6.12.203 and http.request.method==GET	Number of malware binaries identified in traffic.



# Behavioral Analysis

---

## ***Purpose of Traffic on the Network***

Users were observed engaging in the following kinds of activity:

### ***“Normal” Activity***

- Employees accessing public KB
- Employees checking emails

### ***Suspicious Activity***

- Enumerating users – WPSCAN
- Executing pingback.ping command
- Accessing authentication logs & back-end DB server files – “wp.config.php” file
- Accessing DB servers and dumping hashes
- Setting up a private Active Directory Domain






Normal Activity

# Normal Behavior – Accessing Public Knowledgebase

---

## Knowledgebase Articles:

- HTTPS to establish a secure connection to Microsoft's website.
- User accessed files on creating private domains.

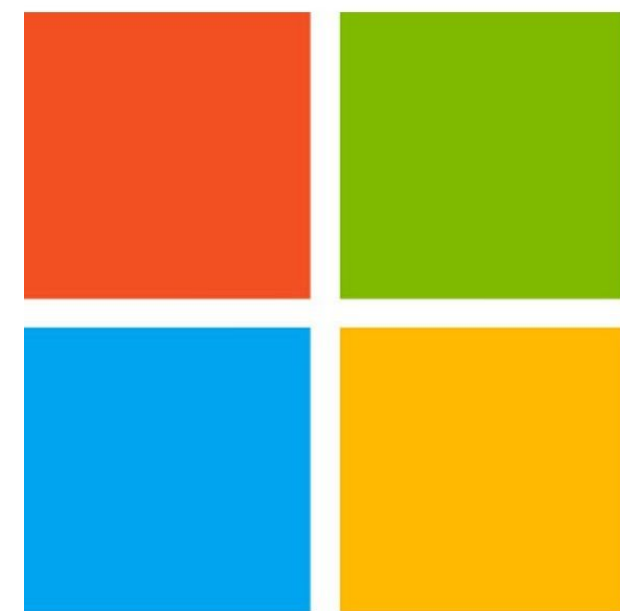

Microsoft

# Normal Behavior – Accessing Google Workspace

---

## Accessing Email:

- HTTPS to establish a secure connection with the Google client
- Users authenticate to access email




# Malicious Activity



# Malicious Behavior – Enumeration


- Excessive HTTP errors (400 errors)
- User ran a WPSCAN to enumerate potential users to target.
  - Enumeration is noisy

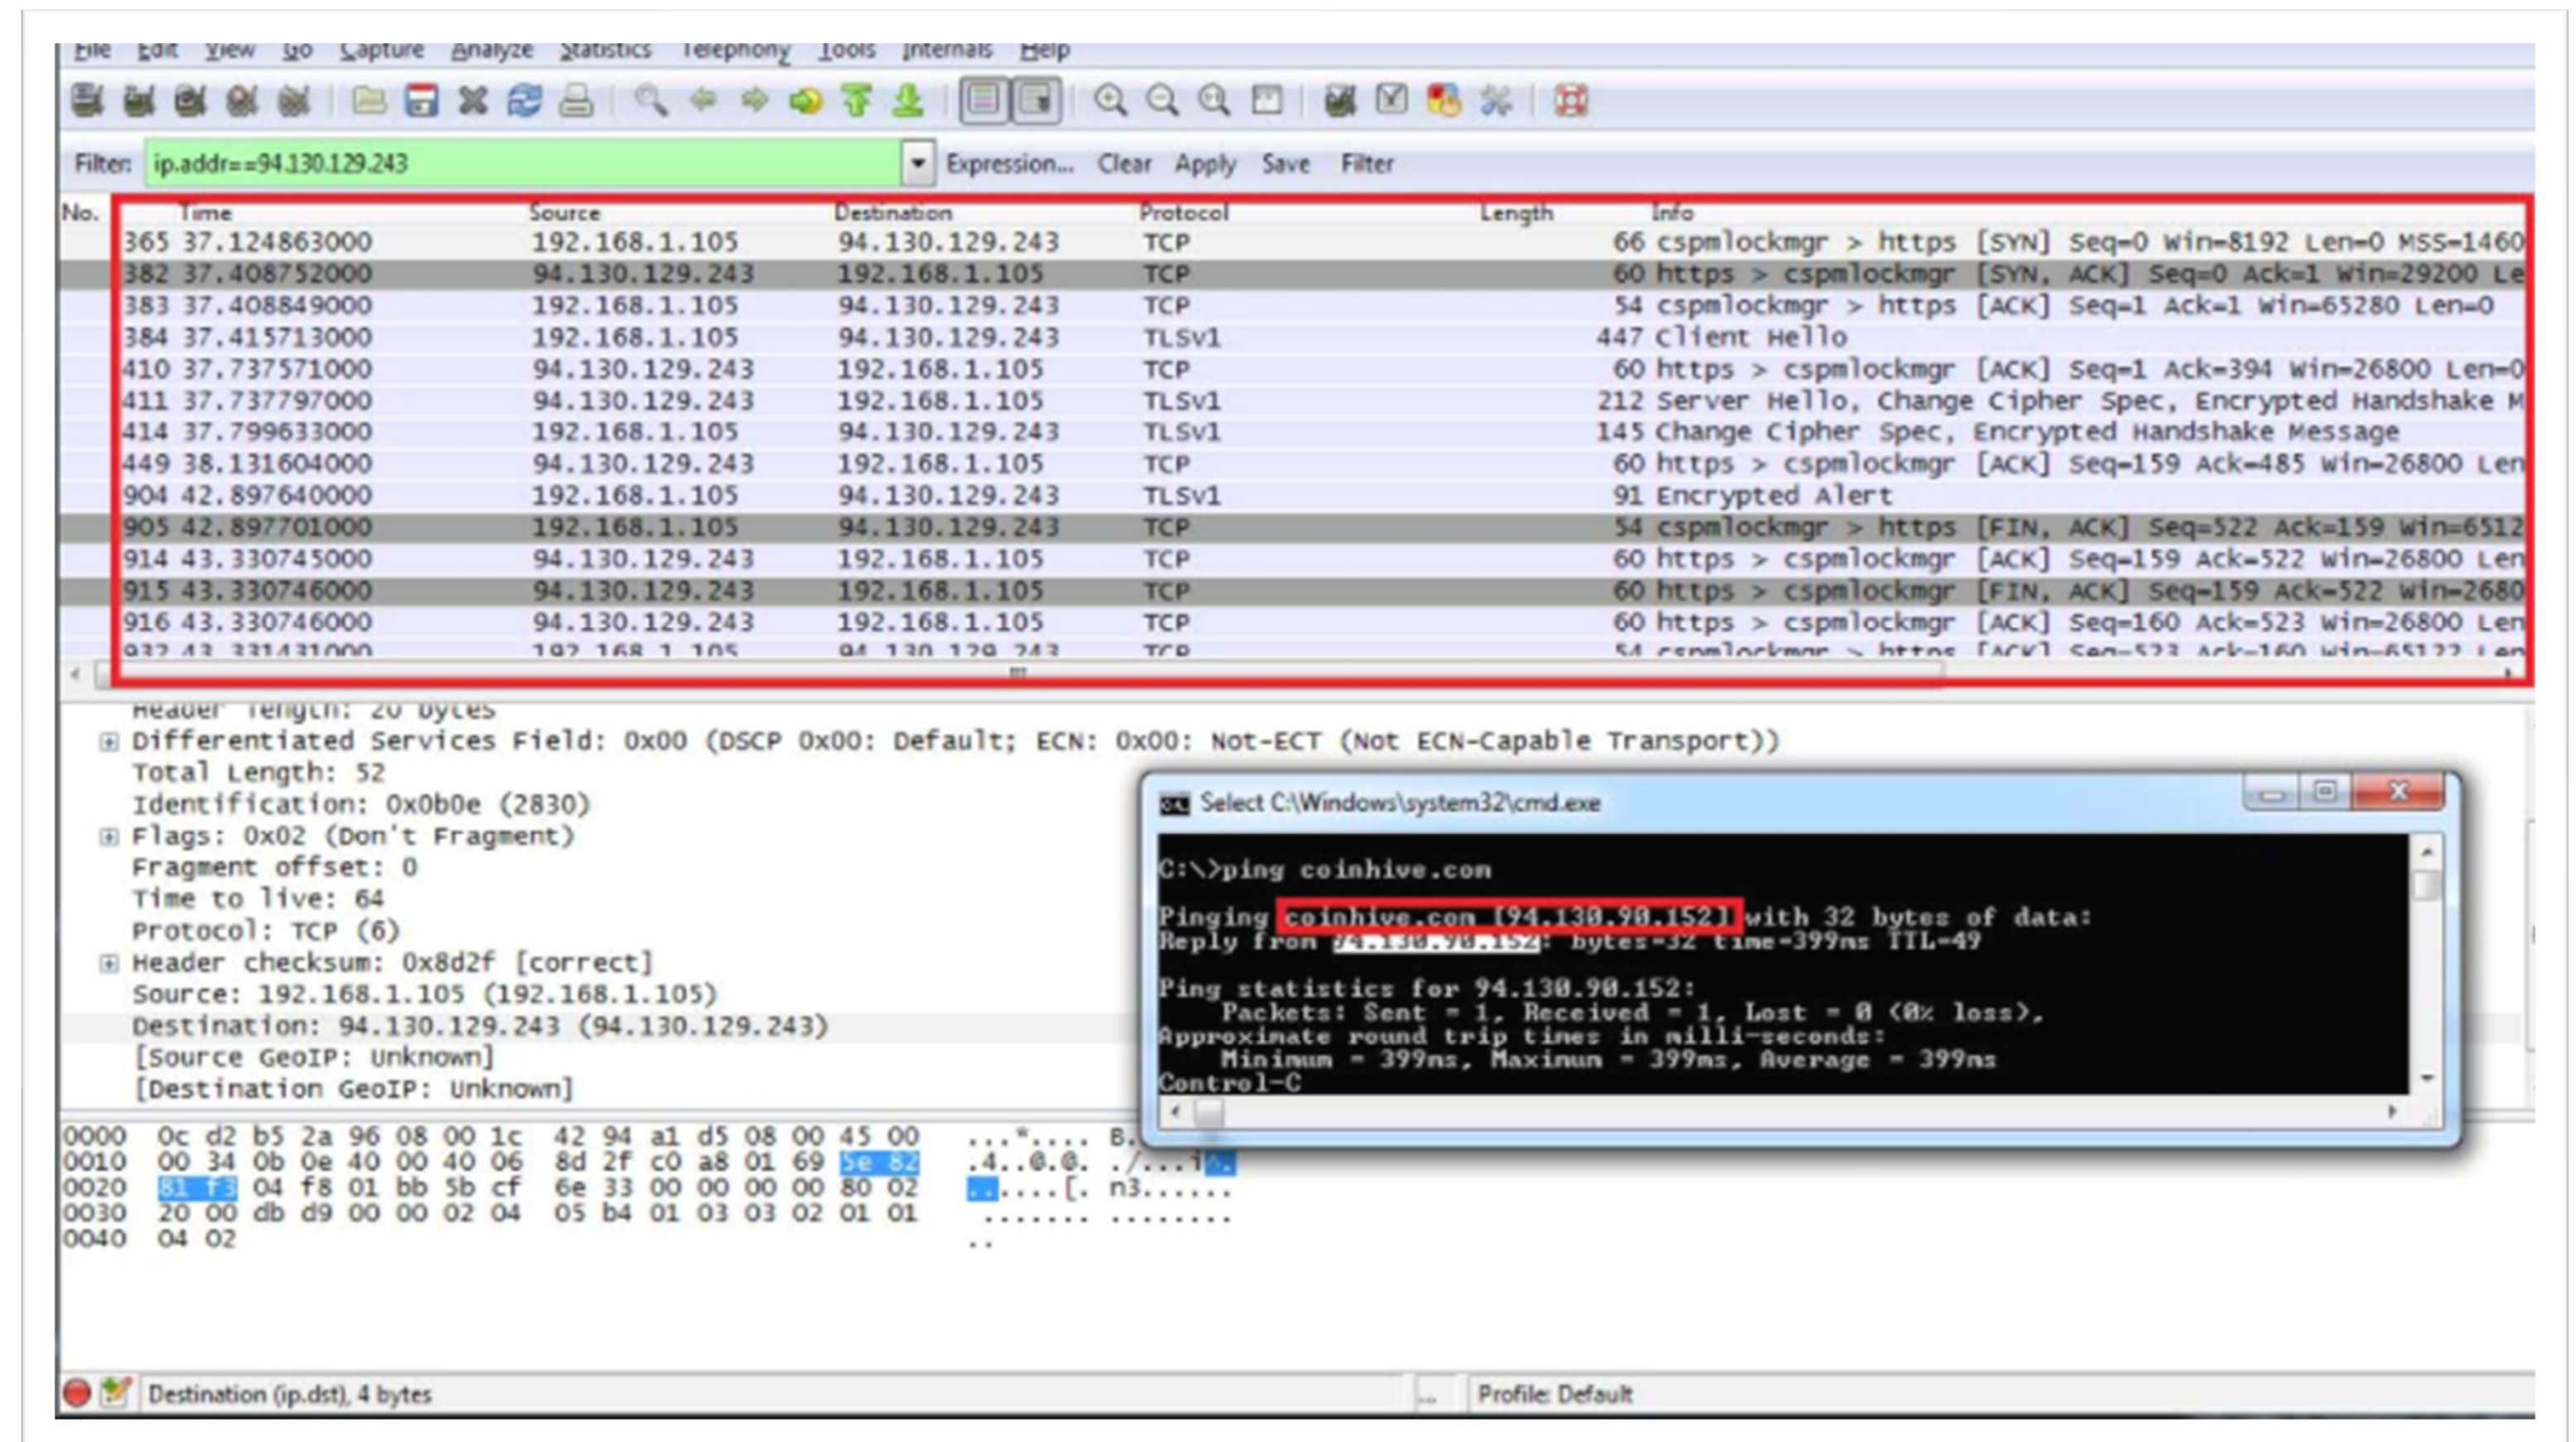



# Malicious Behavior – XML-RPC Ping & DOS

- XML-RPC
  - XML-RPC ping using HTTP POST smuggling to bypass front-end security controls
- Pingback.ping to bypass DNS level protection to launch a Cloudflare attack
  - Allowed for command & control – botnets

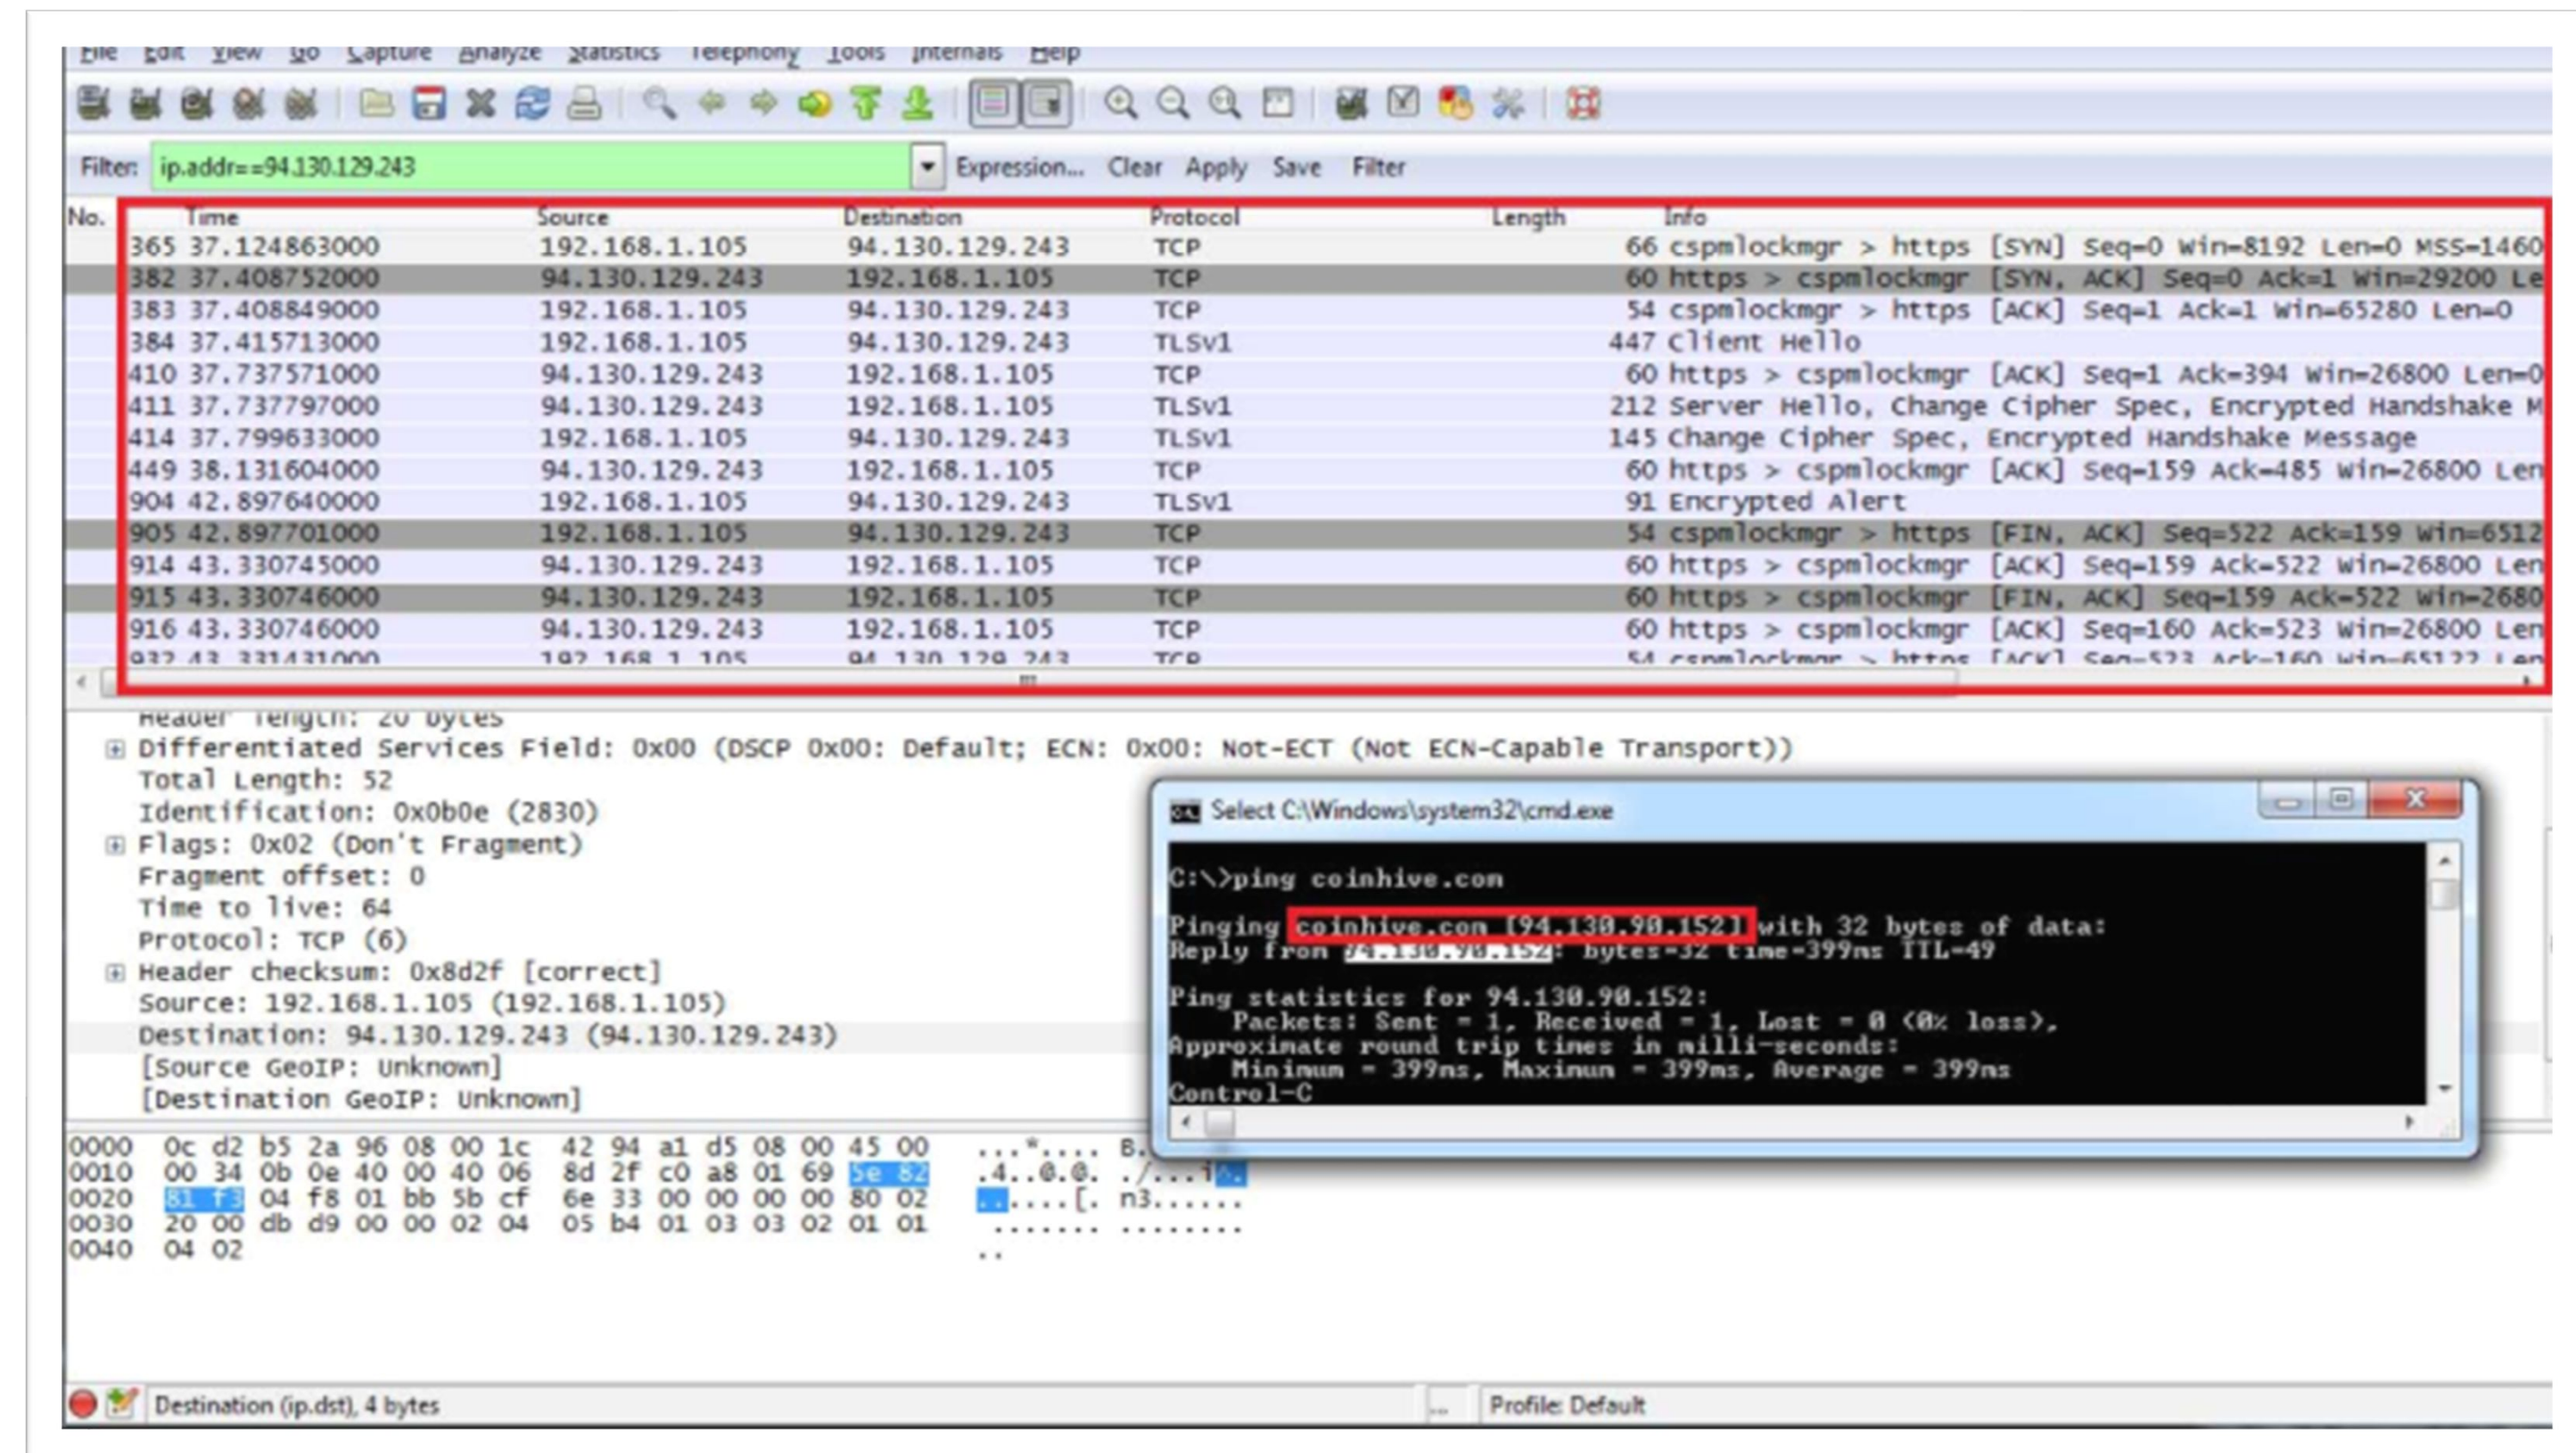



# Malicious Behavior – Unauthorized Access & Dumping Hashes

---

- Improper implementation of security controls allows for exploitation
- Port 22 – unfiltered port allows for remote command execution
- User SSH with Michael's discovered credentials to access SQL server to dump hashes

```
root@Kali:~# ssh michael@192.168.1.110
michael@192.168.1.110's password:


The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
You have new mail.
Last login: Thu Jun  3 11:46:44 2021 from 192.168.1.90
michael@target1:~$ █
```

# Malicious Behavior – Creating a Private Domain

---

- Private domain created on corporate network.
- Users were constantly browsing videos on YouTube
- Trojan Malware downloaded
  - Additional hosts infected
  - Hosts infected:
    - 10.6.12.203
    - 172.16.4.205
    - 185.243.115.84 – suspicious activity detected
    - 166.62.11.64

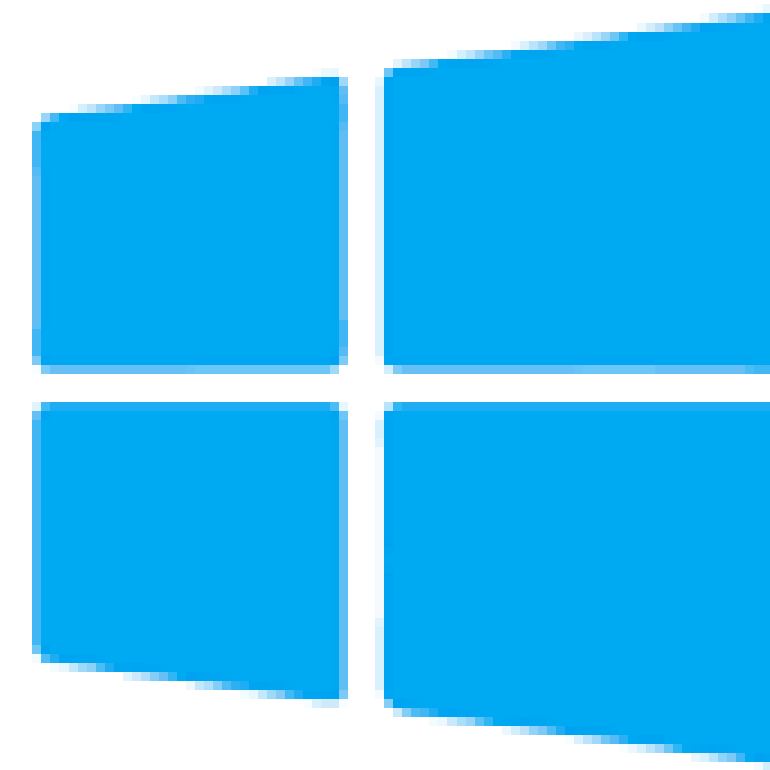

Active Directory

# Malicious Behavior – Illegal Torrenting on Private Domain

---

- Users torrenting on network
  - Downloading copyrighted material
  - User downloaded recipe files
- Copyright Infringement
  - This creates some legal complications







The End