

FragileTokens

Contextual Copying Failures Beyond Isolated Token Probes

Jeffrey R. Gordon

jeffreyrjgordon@gmail.com

Abstract

Successful repetition of an isolated token does not establish that the token will be preserved in surrounding text. We study FragileTokens, vocabulary entries that pass an isolated copying probe but exhibit copying errors in context. Our protocol inserts fixed token IDs into shared banks of random common-word sequences, measures the probability of the expected token at its copy position, and examines selected decoding failures. Across eight open-weight models from the Qwen and OLMo families, a probability-based screen flags 0.4% to 10.9% of isolation-passing tokens in at least 10% of tested contexts. These values measure screening prevalence rather than the prevalence of verified decoding errors. Per-token screening scores correlate at 0.82 to 0.95 between context halves, and stored examples demonstrate deletion, substitution, truncation, and translation, including errors made with concentrated output distributions. We also evaluate whether proximity to known or context-screened glitch tokens identifies this conditional population. The better of input- and output-embedding proximity achieves an AUROC of 0.744 to 0.881 on seven models, although static features improve on surface-feature baselines on only three. Selected candidates are preserved less often than stable controls in several instruction and simulated tool-use tasks. A separate natural-entity experiment finds no incremental predictive benefit beyond existing controls. The contribution is a controlled characterization of contextual susceptibility among tokens that pass an isolation probe, together with evidence about its reproducibility, geometric associations, and task-specific consequences. The results motivate contextual verification while leaving prospective discovery performance and prediction of individual triggering contexts unresolved.

1 Introduction

A language model can reproduce a token when asked to copy that token alone and replace it when asked to copy a longer sequence containing the same token. This discrepancy matters whenever literal identity is part of an instruction: quoting a title, preserving an identifier, returning a list item, or placing a name in a tool query. A fluent response can satisfy the surrounding task while changing the item the task concerns.

The OLMo-2-7B token according provides a concrete example. It is token ID 4184, and decoding and re-encoding its string returns the same ID. Under an isolated repetition probe, the correct continuation has log-probability -0.001 . In the sequence *deliver rel behind according sent floor wrong*, however, the model emits *sent* at the position assigned to *according* and then continues from that following word. The probability of this incorrect emission rounds to 1.000 and its entropy to 0.00 bits. Across 48 sampled contexts, the recorded continuations delete *according* in 44 and reproduce it with probability approximately 0.999 in the remaining four. The contrast concerns the same model, token ID, and copying instruction.

Glitch-token research already studies failures to reproduce or manipulate particular vocabulary entries. It includes embedding-based detection, activation-based classification, prompt variation, and multi-task assessment (Land and Bartolo, 2024; Li et al., 2024; Zhang et al., 2024; Wu et al., 2026; Tang et al., 2026). The question addressed here is more specific: among tokens that pass a specified isolation probe,

which remain susceptible when the same token is copied as part of surrounding text, and how consistently can that susceptibility be measured?

We use *FragileTokens* for this conditional behavioral class. Membership is relative to a model, a copying protocol, and a distribution of contexts. The term does not assert that vulnerability is independent of context, nor that every isolated-probe failure and contextual failure shares one mechanism. Our primary experiments use a probability screen to identify candidates for this class. We distinguish that screen from verified decoding errors throughout the paper.

The study makes three contributions. First, it measures an isolation-passing population using shared context banks and fixed token IDs, allowing token susceptibility to be compared across contexts, independent runs, and model configurations. Second, it tests whether geometric signals associated with established glitch tokens also distinguish candidates within this population, including comparisons with surface features and random reference sets. Third, it examines whether selected candidates are preserved in subsequent instructions and simulated tool interactions, while reporting an explicit negative result for natural entity-name prediction.

The resulting claim is an empirical extension of glitch-token assessment. We do not claim to introduce embedding-based glitch detection or to establish that prior research ignores all context. Instead, we show why an isolation result should be treated as one measurement condition rather than a general certificate of literal reliability.

2 Related Work and the Contribution Boundary

Early observations documented unusual responses to particular tokens under varied prompts and connected some of those tokens to unusual embedding regions (Rumbelow and Watkins, 2023). Subsequent work developed systematic detectors and evaluation procedures. These studies provide both the methodological foundation and the relevant comparison for *FragileTokens*.

Land and Bartolo’s (2024) Magikarp framework uses embedding-derived indicators to identify under-trained-token candidates and behavioral probes to verify them. Its analysis includes alternative prompts and examples involving copied code lists. Li et al. (2024) define glitch behavior broadly and evaluate repetition, spelling, and length; GlitchHunter uses an embedding graph and iterative clustering to locate problematic regions. Consequently, neither geometric candidate generation nor the use of surrounding prompt text is new to the present study.

GlitchProber classifies tokens using attention and MLP features and studies mitigation through changes to intermediate activations (Zhang et al., 2024). GlitchMiner uses entropy-guided discrete optimization with local embedding neighborhoods and verifies candidates under three repetition templates (Wu et al., 2026). Our experiments instead hold model weights fixed and evaluate contextual susceptibility after conditioning on success in an isolation probe. Low-entropy incorrect emissions are relevant to that evaluation, but their existence alone does not demonstrate that an entropy-guided detector will miss the corresponding token under every prompt.

Tang et al. (2026) provide the closest behavioral comparison. GlitchQuiz evaluates eight tasks, including sentence and paragraph construction, repetition, and multi-turn recall. Their Figure 2 shows a token passing simple tests and failing another task, and Section 5.3 acknowledges possible failures beyond the full assessment. Our contribution is repeated measurement of a fixed copying operation over shared context banks within an isolation-passing population, followed by reproducibility and prediction analyses.

An isolation pass in our experiment does not establish a pass on GlitchQuiz, and we do not claim priority for task-dependent token failure.

Table 1 summarizes the comparison. The present experiments directly compare available Magikarp labels for three model configurations. They do not constitute a head-to-head rerun of all five systems under a common contextual oracle, and no comparative recall or efficiency claim is made for those systems.

Table 1. Relationship to the closest detection and assessment methods. Descriptions concern the published procedures, not a claim that their authors regard context as irrelevant.

Work	Relevant existing contribution	Boundary of the present contribution
Magikarp	Embedding indicators, behavioral verification, and additional prompt and copying examples	Tests contextual susceptibility among tokens passing a specified isolation gate; compares available released labels
GlitchHunter	Embedding-graph clustering and behavioral evaluation using simple token tasks	Quantifies susceptibility over shared context banks after isolation screening
GlitchProber	Classification from intermediate activations and activation-based mitigation	Evaluates static and contextual predictors for the conditional candidate population, without modifying weights
GlitchMiner	Entropy-guided search and verification using several repetition templates	Measures contextual copying scores and selected concentrated decoding errors after an isolation pass
GlitchQuiz	Multi-task assessment, cross-task failures, embedding analysis, and remediation	Characterizes within-task contextual variation, reproducibility, and geometric associations in the gated population

Rarity is a further competing explanation. Yu et al. (2022) study how gradients affecting rare-token embeddings can contribute to representation degeneration. This motivates comparisons with rarity-related surface features, but it does not establish the training history or causal mechanism of the tokens studied here. Our token-ID feature is a vocabulary-order proxy, not a measurement of pretraining frequency.

3 Experimental Design

3.1 Models and sampling

The main copying experiments cover eight open-weight models from two families: one OLMo-2 model and seven Qwen models spanning three generations. Table 2 gives the tested configurations. A separate representation analysis uses Pythia-1.4B and is reported as an auxiliary experiment in Section 7.2. Thus, claims about the eight-model copying study do not extend automatically to Pythia or to other model families.

For each model, the vocabulary sample is stratified by token-ID range. Sample sizes range from 4,200 to 8,400 IDs for the Qwen models. OLMo-2-7B uses an initial sample of 2,098 IDs and a replication sample of 6,273. Each sampled token is inserted into every context in that run. The context banks contain random sequences of common words that individually pass the copying check; sequence lengths are 8, 16, 32, and 64, with a randomly chosen interior insertion slot. These are controlled common-word sequences, not samples of grammatical natural prose.

Table 2. Configurations in the main copying study. Vocabulary values are embedding-row counts. “Tokens $\times$ contexts” describes the sampled copying matrix. Flash-Next and 235B use FP8 checkpoints. Full identifiers and framing details appear in Appendix A.

Model label	Parameters	Vocabulary	Weights	Precision	Tokens $\times$ contexts	Copy framing
Qwen3-1.7B	1.7B	151,936	Tied	BF16	$4,200 \times 24$	Raw
Qwen2.5-7B	7.6B	152,064	Untied	BF16	$8,400 \times 24$	Raw
OLMo-2-7B	7.3B	100,352	Untied	FP16	$2,098 \times 48$; $6,273 \times 24$	Raw
Qwen3.8-27B	27B	248,320	Untied	BF16	$8,400 \times 24$	Chat
Qwen3-32B	32B	151,936	Untied	BF16	$4,200 \times 24$	Raw
Qwen2.5-72B	72B	152,064	Untied	BF16	$8,400 \times 24$	Raw
Flash-Next	Approximately 175B; approximately 3B active	248,320	Untied	FP8	$8,400 \times 24$	Chat
Qwen3-235B	235B; 22B active	151,936	Untied	FP8	$8,400 \times 24$	Raw

The model families and releases are described by the OLMo Team (2025) and Qwen Team (2025a, 2025b, 2026a, 2026b). Differences among configurations include tokenizer, architecture, training, framing, and numerical precision. The model ladder is therefore a set of replications across configurations, not a controlled experiment on parameter count.

3.2 Copying protocol and token identity

The copying prompt contains two demonstrations followed by a sequence containing the target token. The same template is used for the isolation probe, with the target alone as the text. Appendix A provides the exact template. Every test prompt is assembled from token IDs, so the target ID remains fixed when its surroundings change.

This choice is necessary to separate model behavior from re-tokenization. Adding a space to a decoded token string can change its segmentation before the model sees it. Direct ID insertion avoids that confound but also permits sequences that a tokenizer would not normally produce from an ordinary string. We therefore distinguish exact-ID copying from string preservation and restrict claims about normal text use accordingly. The canonical according example shows that the phenomenon is not confined to a noncanonical token string.

Under teacher forcing, the expected copied prefix is supplied before evaluating the next-token distribution at the target’s output position. Let $q_0(t)$ be the model’s probability of target ID t under the isolation probe, and $q(t,c)$ its probability at the corresponding position in context c . A low value measures poor support for the required token under a correct prefix. It does not by itself show what an unconstrained continuation will do after an earlier mistake.

For the Qwen3.8 configurations, the copying instruction and demonstrations occupy the user turn of the model’s chat template, and Copy: opens the assistant turn with thinking disabled. Other copying runs use a raw few-shot sequence. The framing is fixed within each model. This adjustment is material: under the raw cue, the Qwen3.8 models often begin on a new line and change leading-space tokenization. Of 2,000

common-word checks, 3 copy under the raw framing, compared with 1,921 on 27B and 1,925 on Flash-Next under the chat framing.

3.3 Behavioral fragility and the probability screen

Let $\hat{y}(t,c)$ denote the greedy next token at the target’s copy position under the teacher-forced prefix. The empirical rate of target-position copying errors over a context bank C of size m is

$$\hat{F}(t;C) = \frac{1}{m} \sum_{c \in C} 1[\hat{y}(t,c) \neq t] \quad (1)$$

A behavioral FragileToken passes the specified isolated copying test and exhibits contextual errors. A quantitative class additionally requires a declared threshold on this error rate. Actual sequence-level copying failure is a separate outcome because it can involve errors before or after the target position.

The aggregate experiments use a related probability screen. The primary isolation gate admits $q_0(t) > 0.5$, which guarantees that t is the unique greedy output in isolation. It is a sufficient condition for an isolated greedy pass, not an exhaustive characterization of such passes. A stricter gate, used in the OLMo sensitivity analysis, admits $\ln q_0(t) > -0.1$, or $q_0(t) > \text{approximately } 0.905$.

The contextual screen flags a cell if $\ln q(t,c) < -0.5$, corresponding to $q(t,c) < \text{approximately } 0.607$. Its per-token susceptibility score is

$$S(t;C) = \frac{1}{m} \sum_{c \in C} 1[\ln q(t,c) < -0.5] \quad (2)$$

A *screen-positive candidate* passes the isolation gate and has $S(t;C) \geq 0.10$. A *stable control* passes the gate and has $S(t;C) = 0$. Tokens with scores between these thresholds form an intermediate group. With 24 contexts, the candidate criterion requires at least 3 flagged cells; with 48 contexts, it requires at least 5.

The probability screen and behavioral error rate must not be conflated. A token with probability 0.55 both alone and in context passes the primary isolation gate and is flagged contextually, despite no probability decrease and a correct greedy output. Consequently, the reported screening prevalence is neither a direct estimate nor a guaranteed bound on the prevalence of behavioral FragileTokens. The stricter isolation gate removes this particular overlap, but contextual probability below 0.607 still does not establish a wrong argmax. We use decoded specimens to demonstrate actual errors and retain the aggregate probability results as screening measurements.

3.4 Reference classes and stored specimens

OLMo-2-7B has an independent reference set of 442 Magikarp-verified glitch tokens. None passes the primary isolation gate in these experiments, and their mean contextual screening score in the initial bank is 0.993. For models without this label set, reference construction combines poor isolation performance with a contextual screening score of at least 0.90. Reference-set sizes used in the geometric analyses are reported in Appendix B. This contextual check is necessary because poor isolation performance can reflect the prompt format rather than persistent copying difficulty.

For inspected candidates and reference tokens, the specimen procedure retains three of the worst contextual cells and one control cell per token. Records include the context IDs, target slot, expected-token probability, top-five output IDs and probabilities, entropy, and a greedy continuation when generation is available. Provenance fields identify the model and checkpoint revision, precision,

architecture metadata, and software versions. These records support case analysis; selecting the worst cells makes them unsuitable for estimating a representative distribution of confidence over all contextual errors.

The descriptive failure categories are deletion, substitution, truncation, and translation, with script conversion recorded where appropriate. Deletion requires evidence that the model advances to the following text; an isolated top-token observation alone cannot establish how a full continuation proceeds. Entropy below 2 bits is used as a concentration descriptor for a stored output distribution. It is not a calibrated measure of task correctness or of whether the model will verbally express uncertainty.

4 Contextual Susceptibility Among Isolation Passes

4.1 Screening prevalence

Table 3 reports the primary-gate results. Candidate prevalence ranges from 15 of 4,047 gated tokens on Flash-Next, or 0.4%, to 684 of 6,277 on Qwen3-235B, or 10.9%. The range is conditional on the sampled vocabulary, selected isolation gate, context distribution, and threshold. It is not a prevalence estimate for natural text occurrences or for all tokens that a model can greedily repeat in isolation.

Table 3. Contextual screening under the primary isolation gate. Candidate counts use $q_0 > 0.5$ and $S \geq 0.10$. “Zero score” is the percentage of gated tokens with $S = 0$. The correlation compares scores from even- and odd-indexed context halves. The final column is the context main-effect share of the reported variance decomposition.

Model	Gated tokens	Candidates	Candidate %	Zero score %	Split-half r	Context share
Qwen3-1.7B	1,666	40	2.4	93.0	0.82	0.004
Qwen2.5-7B	4,217	296	7.0	85.5	0.94	0.001
OLMo-2-7B	2,183	58	2.7	92.9	0.85	0.001
Qwen3.8-27B	3,766	57	1.5	96.1	0.92	0.001
Qwen3-32B	1,597	15	0.9	95.7	0.89	0.002
Qwen2.5-72B	3,998	418	10.5	82.6	0.91	0.013
Flash-Next	4,047	15	0.4	99.2	0.94	0.000
Qwen3-235B	6,277	684	10.9	79.9	0.95	0.010

Under the strict isolation gate, OLMo-2-7B has 14 candidates among 873 tokens in the first bank, or 1.6%, and 29 among 1,888 in the replication bank, or 1.5%. These candidates are admitted with substantially higher isolation probability than the contextual threshold. They provide a sensitivity analysis against overlap of the two cutoffs, although verified argmax-error prevalence still requires direct measurement.

Comparisons restricted to shared token IDs preserve some cross-configuration differences. Among 1,592 IDs passing both gates for Qwen3-1.7B and Qwen3-235B, the candidate rates are 2.0% and 6.2%. Among 1,569 shared passes for Qwen3-32B and Qwen3-235B, they are 0.8% and 4.3%. These comparisons reduce differences in sampled IDs but do not isolate the effects of scale from architecture, precision, or training.

4.2 Reproducibility and context effects

Across the eight models, per-token scores correlate at 0.82 to 0.95 between context halves. A stronger replication on Qwen3-32B doubles the token sample and draws a new context bank. Scores correlate at 0.984 over the 4,200 shared IDs, and 12 of the original 15 candidates meet the threshold again. Re-scoring stored Qwen3-32B and Qwen2.5-72B matrices on different hardware gives cell-level agreement of 0.999 and 0.996 and per-token score correlations of 0.9999 and 0.9996, respectively.

The initial OLMo matrix assigns 95.2% of the reported variance to the token main effect, 0.1% to the context main effect, and 4.7% to the residual. Restricting to the strict-gate population changes these shares to 71.7%, approximately 0.0%, and 28.2%. The large reduction in the token share after gating is consequential: much of the variation over the full sample separates broadly problematic tokens from reliable ones. Substantial residual variation remains within the gated population.

These observations support a reproducible token-level susceptibility under the sampled distribution. They do not establish that the triggering context is irrelevant. A small context main effect means that a particular carrier is not consistently difficult for every token; it can coexist with strong token-by-context variation. Consistent with this distinction, OLMo prediction of held-out cells reaches an AUROC of 0.94 using a token’s score in other contexts, compared with 0.56 using the carrier’s difficulty for other tokens. The tested token-context similarity features provide no additional predictive benefit.

Context length also matters for some populations. On the strict-gate OLMo sample, the flagged-cell rates for lengths 8, 16, 32, and 64 are 0.005, 0.008, 0.008, and 0.008. Among Qwen2.5-72B candidates, the corresponding comparison reported for the shortest and longest carriers is 33% versus 52%. The study therefore identifies a stable ranking of susceptibility more clearly than it identifies the conditions that produce any individual error.

4.3 Comparison with released Magikarp labels

Table 4 compares the contextual candidate sets with available Magikarp records. None of the candidates in these three comparisons is a Magikarp-verified glitch token. Most are recorded as acceptable under that procedure; a small number are classified as undecodable and must not be counted as positively certified healthy tokens. Some candidates had entered Magikarp’s geometric candidate set but were rejected by its behavioral verification.

Table 4. Contextual candidates and Magikarp records. Counts describe the samples used in this comparison. “Rejected” refers to rejection of glitch status by the prior verification step. The Qwen2.5-7B comparison uses 294 candidates, whereas the screening summary in Table 3 reports 296; these analysis populations are reported separately.

Model	Candidates compared	Recorded acceptable	Undecodable	Geometric candidates	Rejected as glitches
Qwen2.5-7B	294	280	14	1	1 of 1
OLMo-2-7B	58	58	0	8	8 of 8
Qwen3-32B	15	14	1	0	Not applicable

This is evidence that the contextual screen identifies behavior outside those available verified-glitch sets. It is not evidence that all contextual candidates are actual copying errors, nor that other detectors would fail to identify them under their own assessment tasks. A common-oracle comparison is required to quantify that broader claim.

4.4 Demonstrated errors and output concentration

The motivating according case establishes an actual copy error despite near-certain success in isolation. Other stored cases show related behaviors across languages and model configurations. Table 5 gives representative observations. The screening score describes the token across its context bank; the final column describes a selected observed emission. These are different levels of evidence.

Table 5. Selected contextual copying specimens. Probabilities are rounded as recorded. A score S summarizes threshold flags and is not necessarily the fraction of verified decoding errors. The table is illustrative and does not estimate failure-mode frequencies.

Model	Target string	q_0	S	Selected incorrect emission
OLMo-2-7B	according	0.999	0.92	Following word sent, probability approximately 1.000; deletion confirmed by continuation
OLMo-2-7B	pueden	0.970	0.62	pena, probability 0.78; substitution
OLMo-2-7B	sólo	0.968	0.48	só, probability 0.89; truncation
Qwen3.8-27B	грунт	0.84	0.79	grunt, probability 0.995; script conversion
Qwen3-32B	realtà	0.76	0.38	réalité, probability 0.90; translation
Qwen2.5-72B	увеличен	0.97	0.46	exaggerated, probability 0.998; substitution across languages
Flash-Next	επίσης	0.93	0.38	также, probability 0.74; translation
Qwen3-235B	интер	0.98	0.92	inter, probability approximately 1.000; script conversion

Across the seven Qwen configurations, the fraction of selected stored failing specimens with entropy below 2 bits ranges from 14% to 74% (Appendix B). Some errors therefore occur under highly concentrated distributions, while others occur under diffuse distributions. These records support the existence of confident errors without supporting a universal claim that contextual errors are usually confident or never accompanied by uncertainty.

5 Embedding Associations and Prediction

5.1 Scores and prediction costs

The geometric analysis asks whether the candidate population has a measurable relationship to a model’s glitch-reference set. Let $e(t)$ be either an input-embedding row or an output-embedding row, and let $N_5(t;G)$ contain the five reference tokens in G with the largest cosine similarity to t in that space. The proximity score is

$$P_e(t;G) = \frac{1}{5} \sum_{g \in N_5(t;G)} \cos(e(t), e(g)) \quad (3)$$

A second score projects the input embedding onto the direction from the vocabulary mean to the mean of the glitch-reference embeddings. The proximity score represents a local neighborhood; the projection represents one global direction. Neither score requires a model forward pass for a new token once the reference set and embeddings are available. Building a behaviorally screened reference set does require model evaluation, and its cost belongs in any end-to-end discovery comparison.

The fitted prediction analysis compares four feature tiers. The surface baseline uses token ID, decoded character length, leading-space status, alphabetic status, and ASCII status. Static features comprise input and output row norms and centroid distances, nearest-neighbor similarities, a direct input-output self-score and competitor margin, and the glitch-direction projection. The static tier as evaluated does not include the five-neighbor glitch-proximity score. Dynamic features summarize the target-position representation over half of the contexts, including its dispersion, norm, and alignment with the target’s output row. Behavioral features use copying measurements from those contexts.

The contextual and behavioral tiers predict the candidate label on the other context half. The reported fitted results use out-of-fold L2-regularized logistic regression and paired bootstrap comparisons with the surface baseline. Thus the dynamic and behavioral tiers require forward passes and are not weight-only screens. Half-bank labels also produce different positive counts from the full-bank screening table.

5.2 Association with the glitch reference class

Figure 1 and Appendix B report proximity separately for the input and output spaces. Selecting the better of the two spaces for each model gives an AUROC range of 0.744 to 0.881 across the seven configurations reported as having untied embeddings. This is a descriptive, model-wise selection of the better space, not the performance of one prespecified score applied uniformly to all models. The weaker values on Qwen3-1.7B are also retained.

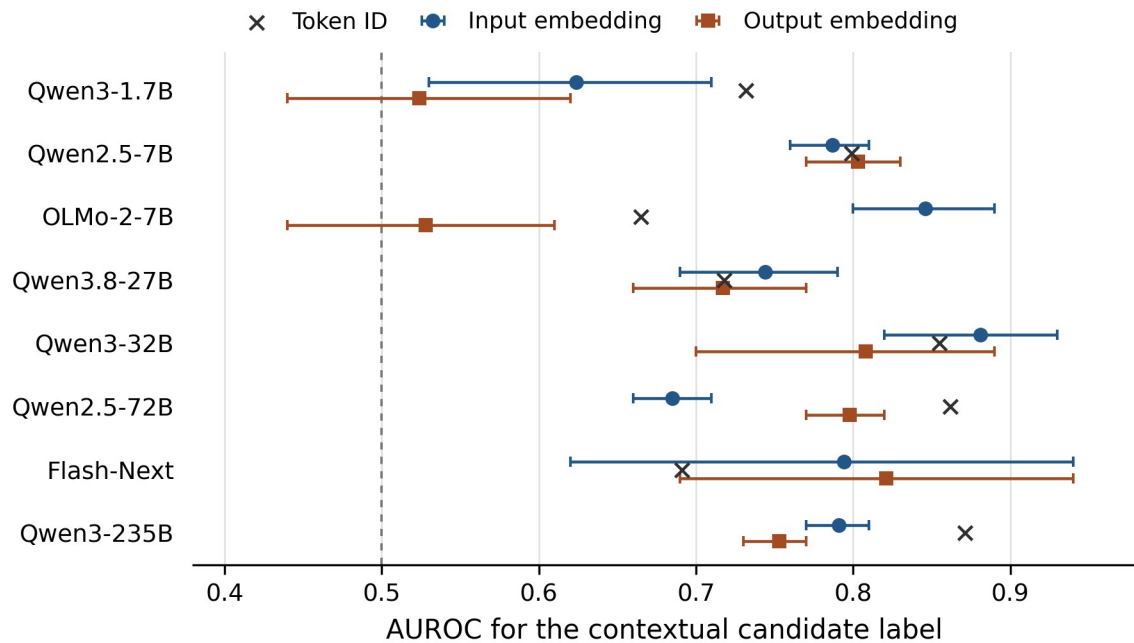


Figure 1. Geometric association with the contextual candidate label. Points and horizontal bars show the reported proximity AUROC and 95% bootstrap interval in each embedding space. Crosses show the token-ID score. The line at 0.5 marks chance ranking. The model-wise choice of the stronger space is descriptive. Sample counts and the remaining geometric scores appear in Table B1.

The informative space varies by model. On OLMo-2-7B, input proximity gives 0.846 and output proximity 0.528. Qwen2.5-72B shows the reverse pattern, with 0.685 and 0.798. A global direction is not always sufficient: its AUROC on Qwen2.5-72B is 0.599. Conversely, Qwen3-32B’s direction score,

0.898, exceeds either proximity score. The results support model-dependent geometric associations rather than a universal geometric form.

Replacing the glitch-reference set with a random stable set of the same size gives mean AUROCs of 0.41 to 0.55 over ten draws. This comparison shows that arbitrary stable reference sets do not reproduce the reported ranking. It does not isolate glitch proximity from all competing explanations, including rarity, local embedding density, or the way the reference set was selected. In particular, the token-ID baseline exceeds both proximity scores on Qwen2.5-72B and Qwen3-235B.

The Qwen3-1.7B results are insufficient to infer an effect of weight tying. Only one tied configuration is included, and the reported input- and output-proximity scores differ despite its tied-weight description. That discrepancy prevents a clean architectural interpretation of this row.

5.3 Projected distribution of contextual candidates

Contextual candidates extend beyond the visible concentrations of the glitch-reference class. Figure 2 shows UMAP projections of the output-embedding rows using cosine distance (McInnes et al., 2018). In Qwen3-1.7B, Qwen3.8-27B, and Qwen3-235B, red candidate points appear throughout substantial portions of the gray population while black reference points remain comparatively concentrated. Qwen2.5-7B and OLMo-2-7B show both candidates near reference concentrations and candidates among the gray points. These patterns describe the plotted candidate population under the probability screen in Section 3.3.

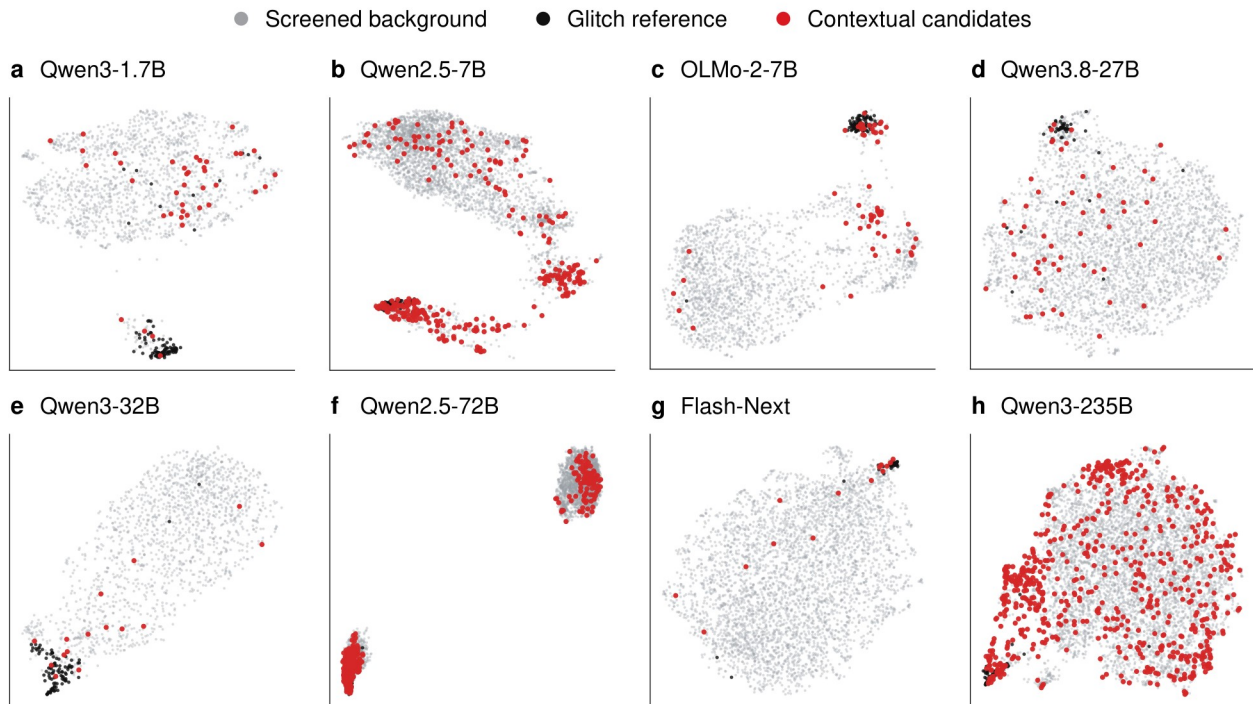


Figure 2. Contextual candidates in projected output-embedding space. Gray shows the screened background; red denotes candidates passing the isolation gate with $S \geq 0.10$; black denotes the model-specific glitch-reference class (Section 3.4). Panels retain the original projection coordinates and are arranged in model order. Orientations and scales are specific to each panel. Colors encode screening and reference labels, not independent verification of every plotted candidate.

Li et al. (2024, Figure 4 and Section 5) report that glitch tokens tend to cluster in embedding space and use this observation to motivate GlitchHunter’s iterative graph clustering. Our projections raise a question about the scope of that characterization: does the geometry of a glitch-reference class also describe contextual candidates that pass an isolation probe? The dispersed red points suggest that the visible reference concentrations provide an incomplete description of this conditional population.

Tang et al. (2026, Section 6.1) also report clustering, supported by Euclidean-distance and entropy comparisons on Llama2-7B-chat and Mistral2-7B-it, and associate it with insufficient embedding differentiation. Their account concerns the input embedding layer described in Section 2.1. Our cosine-based output-embedding projections therefore do not directly test that explanation. For untied models, the input and output matrices must be evaluated separately; a dispersed output projection alone cannot establish that input embeddings lack the reported crowding.

This observation is compatible with the proximity associations in Section 5.2. A population can occupy several regions while retaining useful local similarity to reference tokens. An informative ranking score therefore does not require a visibly separate candidate cluster. UMAP also changes density and can introduce apparent separations (UMAP developers, n.d.), so the panels do not establish an absence of clustering in the original space.

These projections motivate a comparison of geometric characterization across detection protocols. Our reference sets follow Section 3.4 and are not outputs of GlitchHunter or GlitchQuiz. A direct test would compare original-space neighborhoods and contextual-failure coverage on the same checkpoints, with matched embedding spaces and metrics, independently verified errors, and labels from each assessment.

5.4 Incremental value beyond surface features

Table 6 compares the fitted tiers on held-out context-half labels. Static features have a positive improvement interval over surface features on Qwen2.5-7B, OLMo-2-7B, and Flash-Next. They do not establish an improvement on the other five models, and the interval is negative on Qwen2.5-72B. The corresponding intervals are reported in Table B2.

Table 6. Out-of-fold AUROC for predicting the held-out context-half candidate label. The positive count is defined on the held-out half. Static, dynamic, and behavioral columns denote the reported feature tiers relative to the surface baseline. These targets are probability-screen labels, not independently verified argmax-error labels.

Model	Positives	Surface	Static	Dynamic	Behavioral
Qwen3-1.7B	28	0.681	0.682	0.752	0.951
Qwen2.5-7B	271	0.831	0.877	0.830	0.986
OLMo-2-7B	60	0.804	0.908	0.874	0.991
Qwen3.8-27B	58	0.776	0.711	0.848	0.980
Qwen3-32B	12	0.806	0.775	0.814	0.945
Qwen2.5-72B	322	0.883	0.838	0.913	0.985
Flash-Next	15	0.690	0.944	0.967	1.000
Qwen3-235B	642	0.889	0.875	0.905	0.970

Dynamic features improve on surface features with intervals excluding zero on five models: OLMo-2-7B, Qwen3.8-27B, Qwen2.5-72B, Flash-Next, and Qwen3-235B. This supports a relationship between

contextual representations and susceptibility beyond the particular surface baseline. It does not imply that a representation-based procedure is cheaper than directly measuring copying under the same contexts.

The behavioral tier reaches AUROC 0.945 to 1.000. These results agree with the split-half correlations: observing a token in some contexts is an effective predictor of its screening label in other contexts from the same construction process. They provide evidence for repeatability, but the labels and features share a copying task and context distribution. Performance under new natural-text distributions remains unmeasured.

A geometric pre-screen is therefore plausible as a way to prioritize contextual testing, but the present results do not establish high-precision discovery at a fixed testing budget. AUROC measures ranking, not the precision of a selected shortlist. Demonstrating practical discovery would require a frozen score and reference set, disjoint candidates, a fixed verification budget, and comparisons with random, token-ID, and existing-detector selection under the same behavioral outcome.

6 Preservation in Generation and Tasks

6.1 Free generation and identity metrics

Free-generation probes ask whether the model retains a supplied token while describing or responding to it. The OLMo experiment requests exact identification and an explanation, followed by the assistant prefix `Let me think about this carefully.` Other configurations use the token as the user turn under the model’s chat template. Outputs are generated for up to 256 tokens. These framing differences are part of the protocol and preclude treating the resulting counts as a controlled scale comparison.

Two reproduction metrics are needed. The exact-ID metric asks whether the seed ID occurs anywhere in the generated IDs. The string metric asks whether the decoded seed string occurs anywhere in the output, allowing a different segmentation. Neither alone establishes correct identification or exact reproduction of an entire requested sequence. For Qwen2.5-72B, for example, none of 32 worst-isolation seeds reappears as its original ID, while 12 reappear as strings. A seed such as `_ghost` can be written using multiple output tokens.

Table C1 reports candidate-versus-control reproduction for the configurations with available generation. The candidate string-preservation rate is lower than the control rate in four of five comparisons and equal on Qwen3-32B. Exact-ID rates are less consistent: Qwen2.5-7B is tied, and Qwen3-32B has 8 of 14 candidates reproduced versus 7 of 14 controls. A candidate can also be reproduced while being misidentified. These outcomes support task-dependent vulnerability rather than a universal inability to emit the candidate token.

The 32 worst-isolation seeds used in separate generation probes are not interchangeable with context-screened glitch references. On Flash-Next, a teacher-forced check of these seeds assigns the expected token probability at least 0.5 in 71% of 768 cells, whereas the analogous rate on Qwen3-235B is 0.1%. This disagreement is another reason to verify the behavior of a reference set in the context of interest.

Free generation, task probes, and specimen continuations were not run on the two FP8 mixtures because the evaluation stack took approximately seven seconds per generated token. Their next-token observations must not be read as generated reasoning traces. Candidate free generation was also not run on Qwen2.5-72B.

6.2 Instructions requiring lexical preservation

Five instruction templates require the model to preserve the target string: name a Python function, quote a document title, return a list item, correct spelling, and summarize while preserving proper nouns. Each class contributes ten selected tokens per model and five tasks, giving 50 episodes per class. Tokens are inserted by ID into the model’s chat template. Appendix C contains the full templates and per-task results.

The primary metric asks whether the answer contains the given token string. It is deliberately narrower than complete task correctness. It does not verify whether generated code is valid, whether a function name is a legal Python identifier, or whether a summary is faithful in other respects. The spelling task also invites normalization, so its preservation rate must be interpreted with its wording in view.

Table 7. Token-string preservation in simple instructions. Each row contains 50 episodes per class. C denotes selected contextual candidates, S stable controls, and G the model’s glitch-reference class. The reported interval for C – S is a bootstrap interval over episodes; repeated use of each token across tasks limits independence.

Model and mode	G	S	C	C – S [95% CI]
Qwen2.5-7B plain	0.00	0.86	0.74	−0.12 [−0.28, +0.04]
OLMo-2-7B plain	0.00	0.92	0.58	−0.34 [−0.50, −0.18]
Qwen3.8-27B plain	0.08	0.86	0.62	−0.24 [−0.40, −0.08]
Qwen3-32B plain	0.00	0.90	0.74	−0.16 [−0.30, −0.02]
Qwen3-32B thinking	0.00	0.90	0.74	−0.16 [−0.30, −0.02]

Candidates are preserved less frequently than controls in all five configurations. The episode-bootstrap intervals exclude zero for OLMo-2-7B, Qwen3.8-27B, and both Qwen3-32B modes, but not for Qwen2.5-7B. Coarse task completion is reported at 0.96 to 1.00 while lexical preservation varies, illustrating why successful-looking task structure is insufficient for this measurement.

The transcripts make the discrepancy concrete. Asked for a function named according, OLMo-2-7B writes `sum_list`. In the spelling template, it changes according to correct. Asked for the second item when the target is `NSString`, it returns `LocalizedString`. Qwen3-32B changes *realtà* to reality in the spelling task. These examples preserve much of the requested task form while altering the designated content.

6.3 Simulated tool interactions

The tool experiment uses five assignments involving a target term: investigate a configuration key, prepare a background note, recommend whether to adopt a technology, explain a term, or check a release. Models can call `search`, `open_page`, and `run_python` for up to six rounds. Ten tokens per class again produce 50 episodes per configuration.

The environment is constructed around the supplied token. A search containing its string returns relevant documentation, release notes, and an issue page. Other searches return no relevant hits and generic material. This design isolates whether the target reaches a tool call, but it does not estimate retrieval failure in a natural search engine. Qwen models use their native tool templates; OLMo follows a textual protocol, which is an additional limitation on cross-model comparisons.

Table 8. Preservation during simulated tool use. Values are the fractions of 50 episodes in which the target string appears. Intervals are the reported episode-bootstrap intervals for C – S. Plain and thinking configurations are shown separately.

Model and mode	First query S / C	Query gap [95% CI]	Final answer S / C	Final gap [95% CI]
Qwen2.5-7B plain	0.62 / 0.38	−0.24 [−0.42, −0.04]	0.76 / 0.74	−0.02 [−0.18, +0.16]
OLMo-2-7B plain	0.46 / 0.32	−0.14 [−0.34, +0.04]	0.80 / 0.40	−0.40 [−0.56, −0.22]
Qwen3.8-27B plain	0.94 / 0.74	−0.20 [−0.34, −0.06]	0.46 / 0.34	−0.12 [−0.32, +0.08]
Qwen3.8-27B thinking	0.88 / 0.66	−0.22 [−0.38, −0.06]	0.52 / 0.40	−0.12 [−0.32, +0.08]
Qwen3-32B plain	0.96 / 0.74	−0.22 [−0.36, −0.08]	0.96 / 0.68	−0.28 [−0.42, −0.14]
Qwen3-32B thinking	0.66 / 0.60	−0.06 [−0.24, +0.14]	0.72 / 0.52	−0.20 [−0.38, −0.02]

Qwen3-32B in plain mode preserves stable targets in 96% of first queries and final answers. Candidates appear in 74% of first queries and 68% of final answers. The glitch-reference targets appear in neither measure in any of the 50 episodes. Some responses proceed from generic retrieved material after the term has disappeared or changed in the first query.

Qwen3.8-27B has a similar first-query contrast but a different completion pattern. In plain mode, glitch episodes finish within the round limit in 14% of cases, versus 66% for stable controls and 58% for candidates. Identical tool calls recur in 28%, 10%, and 14%, respectively. Thinking mode changes these completion rates and also changes the stable baseline. These results show that losing a target can be associated with either a completed generic answer or repeated tool use, depending on the configuration.

The experiment does not establish widespread fabrication of specific retrieved facts. The recorded version-number fabrication rates are only 0.00 to 0.02 per class and configuration, with isolated nonzero cells in both glitch and control-related groups (Table C4). The clearer measured effect is loss of the literal target in a query or answer. The selected token sets, repeated templates, and constructed environment limit generalization to autonomous systems operating on natural tasks.

6.4 A negative result on natural entity names

A separate experiment evaluates 1,255 real code identifiers and proper nouns in a natural task. Adding the fragility of constituent tokens does not improve prediction of an incorrect entity name after controlling for entity rarity, constituent-token isolation scores, and the model probability of the complete entity. The reported change in AUROC is −0.001, with a 95% interval of [−0.008, +0.006].

This result limits the practical interpretation of the synthetic task findings. The current evidence does not establish that the contextual score explains natural entity-name errors beyond these existing predictors. It also does not show that rarity causes either outcome, or that every possible relationship between token fragility and hallucination has been excluded. The appropriate conclusion is the absence of incremental prediction in this reported experiment.

7 Auxiliary Analyses

7.1 Pair interactions and repetition

A factorial copying experiment tests whether pairs of tokens produce damage beyond the contributions of their members. Carriers contain two slots at separations 2, 4, 8, 16, 32, 64, and 128, with two independent filler sequences at each separation. Each ordered pair is evaluated in four conditions: both targets, either

target with a control, and two controls. The interaction contrast subtracts the two single-target scores from the joint score and adds the control score.

The screen uses an additive fit within each carrier, standardized residuals, within-carrier permutations, and Benjamini-Hochberg correction at $q = 0.05$ (Benjamini and Hochberg, 1995). Its declared count criterion compares the number of rejected pairs with the 95th percentile from twenty simulated additive-null datasets. No tested pool exceeds that criterion: the rejected-pair counts are 1 of 4,032 for each OLMo pool, 13 of 1,190 for Qwen3-32B, and 1 of 2,256 for Qwen3-235B (Appendix D).

This finding is narrower than absence of interaction. The maximum-statistic tests are significant for the OLMo pools and Qwen3-32B, while Qwen3-235B has $p = 0.059$. The two criteria assess different aspects of the interaction distribution and must both be retained. Mean repeated-token contrasts are positive in the reported tests, consistent with facilitation in these carriers. Neither result establishes universal additivity, the absence of rare harmful combinations, or a causal account based on induction.

7.2 Recoverability of token identity

The Pythia-1.4B experiment places 36 verified glitch tokens and 1,088 controls at the ends of eight contexts. At each layer, a token’s contextual state is matched to its state in another context within a pool of 1,124 candidates, after removing the component shared within each context. Pythia is described by Biderman et al. (2023).

Identity-matching accuracy is 1.000 for glitch tokens from the embedding layer through layer 12 and 0.988 to 1.000 for controls. At the final layer it is 0.880 and 0.874, respectively. These results show that substantial token-identity information remains recoverable under the chosen comparison procedure. A logit-lens example also favors a continuation of a glitch token, *idepress* followed by *ant*, rather than reproduction of the input token itself.

Decodability is not a causal localization of copying failure. The experiment does not show that the model uses the recoverable information in the copying computation, that identity is perfectly preserved, or that the output layer alone causes the error. It also concerns independently labeled glitch tokens on Pythia rather than the full candidate population in the eight-model study. Causal interventions would be needed to distinguish inadequate readout, context-dependent competition, and other explanations.

8 Discussion and Limitations

The principal finding is a repeatable distinction between isolated copying success and contextual susceptibility. Shared context banks make it possible to estimate a per-token tendency without selecting an adversarial context for each token. Actual decoded examples establish that at least some of these discrepancies are literal copying errors, and the task experiments show that selected candidates can lose their identity beyond the copying template. Embedding associations connect this population to prior glitch-token research, while their variable incremental value prevents treating geometry as a complete explanation or a validated universal detector.

Several limits determine the scope of that conclusion. First, the aggregate candidate class is defined by a probability threshold whose relationship to true decoding error is incomplete. Strict-gate results and inspected continuations strengthen the case for the phenomenon, but they do not replace a population-wide argmax-error analysis. A revised behavioral prevalence estimate must retain both the isolation outcome and contextual output identity for each cell.

Second, the common-word carriers are artificial, and the model-dependent prompt framing affects what is measured. Direct ID insertion controls the experimental identity of the target but can create inputs unlike normal tokenizer output. String-preservation tasks partially address this concern, yet the strongest natural-entity test in the study is negative after existing controls. There is no basis here for extrapolating candidate prevalence to everyday text or for treating a score as a context-independent property of a token.

Third, eight copying configurations span only Qwen and OLMo, with differing precision and architecture. The auxiliary Pythia probe addresses another question. Generation coverage is incomplete, and some task classes contain only ten selected tokens. Episode-level bootstrap intervals do not fully account for dependence among five tasks using the same token. The reported intervals should therefore be read as descriptive evidence, with token-clustered or hierarchical uncertainty estimates needed for stronger population inference.

Fourth, the geometric analyses evaluate associations with screen labels. Reference construction partly uses contextual behavior, and selection of the stronger embedding space is retrospective. Random stable references do not provide a rarity-matched or density-matched null. Static feature improvements occur on three models, while several token-ID baselines are already strong. The UMAP panels provide qualitative evidence about the plotted population; they do not measure original-space cluster coverage. No fixed-budget prospective discovery experiment or common-oracle comparison with the existing detectors is reported.

Finally, the study does not identify which ordinary context will trigger a particular token’s error. Split-half prediction estimates average susceptibility under related context banks. Small context main effects do not eliminate token-context interactions, and the factorial experiment retains significant maximum-statistic results. Neither recoverable identity nor geometric proximity establishes a training mechanism. The evidence supports a measurement target and a set of associations; mechanistic explanation and context-specific prediction remain open.

The most direct methodological extension is to freeze the isolation test, candidate score, reference construction, and context distribution before evaluation on disjoint data. Reporting target-position argmax error, full-sequence copying accuracy, and exact-string preservation alongside probability scores would connect screening sensitivity to observable failures. For discovery claims, precision and recall at a fixed verification budget would provide a more practical test than retrospective AUROC alone.

9 Reproducibility and Reporting Scope

Reproduction requires the model and tokenizer revisions, sampled token IDs, complete context IDs and insertion slots, prompt framing, thresholds, precision, and scoring code. The procedure does not modify model weights. Appendix A provides public model identifiers and textual prompts; the run-specific matrices and environment metadata described in Section 3.4 are also necessary. Figure 2 additionally requires the plotted IDs and class masks, embedding preprocessing, UMAP parameters, and random seeds. Generation coverage is limited to the configurations explicitly listed in the corresponding tables.

Analysis populations differ. Table 3 reports 296, 418, and 684 candidates for Qwen2.5-7B, Qwen2.5-72B, and Qwen3-235B, while Table B1 reports 294, 417, and 682. Each analysis retains its associated counts. Half-bank prediction counts differ again because their labels use different contexts. Exact reconciliation of the remaining sample transitions requires the underlying token manifests and exclusion masks.

The recorded protocol includes amendments to the isolation gate, sample size, printable-seed filtering, and string-level reproduction scoring. Vocabulary sampling follows embedding-row counts, so padding reduces token-ID overlap between Qwen2.5 and Qwen3 samples. Matched-ID scaling within Qwen2.5 remains untested. These sampling and framing decisions form part of the experimental specification and constrain cross-model interpretation.

10 Conclusion

FragileTokens studies contextual copying vulnerability among tokens that pass an isolation probe. Across eight configurations, screening scores are reproducible and decoded specimens confirm errors. Geometric proximity often ranks candidates above controls, with variable gains over surface features. Selected candidates also show reduced lexical preservation in several tasks, while the natural-entity test finds no added predictive value. These findings support contextual verification and motivate direct evaluation of behavioral prevalence, prospective discovery, and individual triggering contexts.

References

- Benjamini, Yoav, and Yosef Hochberg. 1995. Controlling the False Discovery Rate: A Practical and Powerful Approach to Multiple Testing. *Journal of the Royal Statistical Society, Series B*, 57(1):289–300. [Publisher DOI](#).
- Biderman, Stella, et al. 2023. Pythia: A Suite for Analyzing Large Language Models Across Training and Scaling. *Proceedings of the 40th International Conference on Machine Learning*. [Paper](#).
- Land, Sander, and Max Bartolo. 2024. Fishing for Magikarp: Automatically Detecting Under-trained Tokens in Large Language Models. *Proceedings of EMNLP 2024*, pages 11631–11646. [ACL Anthology](#). Code and token records: [Magikarp repository](#).
- Li, Yuxi, Yi Liu, Gelei Deng, Ying Zhang, Wenjia Song, Ling Shi, Kailong Wang, Yuekang Li, Yang Liu, and Haoyu Wang. 2024. Glitch Tokens in Large Language Models: Categorization Taxonomy and Effective Detection. *Proceedings of the ACM on Software Engineering*, 1(FSE). [Publisher DOI](#). [Full preprint](#).
- McInnes, Leland, John Healy, and James Melville. 2018. UMAP: Uniform Manifold Approximation and Projection for Dimension Reduction. *arXiv preprint arXiv:1802.03426*. [Paper](#).
- OLMo Team. 2025. 2 OLMo 2 Furious. *arXiv preprint arXiv:2501.00656*. [Paper](#).
- Qwen Team. 2025a. Qwen2.5 Technical Report. *arXiv preprint arXiv:2412.15115*. [Paper](#).
- Qwen Team. 2025b. Qwen3 Technical Report. *arXiv preprint arXiv:2505.09388*. [Paper](#).
- Qwen Team. 2026a. Qwen3.8-72B. Official model card. [Model card](#).
- Qwen Team. 2026b. Qwen3.8-Flash-Next-FP8. Official model card. [Model card](#).
- Rumbelow, Jessica, and Matthew Watkins. 2023. SolidGoldMagikarp (Plus, Prompt Generation). *LessWrong*, February 5. [Original report](#).
- Tang, Kunsheng, Peigui Qi, Yide Song, Wenbo Zhou, Zhicong Huang, Qing Guo, Tianwei Zhang, Weiming Zhang, Nenghai Yu, and Jie Zhang. 2026. One Bad Token Spoils the Barrel: Assessment, Detection, and Remediation of Glitch Tokens in Large Language Models. *35th USENIX Security Symposium*. [Conference page](#). [Full paper](#).
- UMAP developers. n.d. Using UMAP for Clustering. *UMAP documentation*. Accessed September 11, 2026. [Documentation](#).
- Wu, Zihui, Haichang Gao, Ping Wang, Shudong Zhang, Zhaoxiang Liu, and Shiguo Lian. 2026. GlitchMiner: Mining Glitch Tokens in Large Language Models via Gradient-based Discrete Optimization. *Proceedings of the AAAI Conference on Artificial Intelligence*, 40(40):33998–34005. [Publisher DOI](#).
- Yu, Sangwon, Jongyoon Song, Heeseung Kim, Seongmin Lee, Woo-Jong Ryu, and Sungroh Yoon. 2022. Rare Tokens Degenerate All Tokens: Improving Neural Text Generation via Adaptive Gradient Gating for Rare Token Embeddings. *Proceedings of ACL 2022, Volume 1: Long Papers*, pages 29–45. [ACL Anthology](#).
- Zhang, Zhibo, Wuxia Bai, Yuxi Li, Mark Huasong Meng, Kailong Wang, Ling Shi, Li Li, Jun Wang, and Haoyu Wang. 2024. GlitchProber: Advancing Effective Detection and Mitigation of Glitch Tokens in Large Language Models. *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering*. [Publisher DOI](#).

Appendix A Model Identifiers and Prompt Construction

A.1 Model identifiers

The public identifiers corresponding to the reported configurations are listed below. The short labels in the main text omit instruction and quantization suffixes for readability. Exact checkpoint revisions, tokenizer revisions, loader changes, and environment versions belong in the run manifests.

Short label	Public repository identifier
Qwen3-1.7B	Qwen/Qwen3-1.7B
Qwen2.5-7B	Qwen/Qwen2.5-7B-Instruct
OLMo-2-7B	allenai/OLMo-2-1124-7B-Instruct
Qwen3.8-27B	Qwen/Qwen3.8-27B
Qwen3-32B	Qwen/Qwen3-32B
Qwen2.5-72B	Qwen/Qwen2.5-72B-Instruct
Flash-Next	Qwen/Qwen3.8-Flash-Next-FP8
Qwen3-235B	Qwen/Qwen3-235B-A22B-FP8

A.2 Copying template

The raw template is shown below. The final copied prefix is supplied by teacher forcing, and the target probability is read at its designated copy position. Angle-bracketed phrases describe experimental insertions and are not literal prompt content.

```
Repeat the text exactly.
Text: apple pie is good
Copy: apple pie is good
Text: the quick brown fox
Copy: the quick brown fox
Text: <context containing the target ID>
Copy: <teacher-forced expected prefix>
```

For the isolation measurement, the final Text: contains only the target ID. For Qwen3.8, the instruction, demonstrations, and final text are placed in the user turn of the chat template, with Copy: opening the assistant turn and thinking disabled. The actual tokenized delimiters are part of the run specification; rendering a decoded prompt string does not fully specify the ID sequence.

A.3 Identity probe and output metrics

The OLMo identification prompt is:

```
What is this token? Identify it exactly, then explain step by step what it means: <target ID>
```

The assistant prefix is Let me think about this carefully. The separate bare-token probes place the target in the user turn under the corresponding model template. Plain and thinking settings are retained as distinct configurations. Reproduction means occurrence anywhere in the output, scored separately by exact ID and decoded string; it does not require the model to give a correct explanation.

Appendix B Additional Screening and Geometry Results

B.1 Geometric scores

Table B1. Reported geometric AUROCs. Input and output columns include 95% bootstrap intervals. “Random” is the mean of ten equal-size random stable reference sets. N is the gated sample count attached to the analysis; k is its reported positive count. The comparison is reported as candidate-versus-stable discrimination in the source analysis, whose full negative-class mask must accompany reproduction because intermediate-score tokens also exist.

Model	k / N	Direction	Input proximity [95% CI]	Output proximity [95% CI]	Random	Token ID
Qwen3-1.7B	40 / 1,666	0.601	0.624 [0.53, 0.71]	0.524 [0.44, 0.62]	0.43	0.732
Qwen2.5-7B	294 / 4,217	0.768	0.787 [0.76, 0.81]	0.803 [0.77, 0.83]	0.54	0.799
OLMo-2-7B	58 / 2,183	0.879	0.846 [0.80, 0.89]	0.528 [0.44, 0.61]	0.41	0.665
Qwen3.8-27B	57 / 3,766	0.782	0.744 [0.69, 0.79]	0.717 [0.66, 0.77]	0.52	0.718
Qwen3-32B	15 / 1,597	0.898	0.881 [0.82, 0.93]	0.808 [0.70, 0.89]	0.51	0.855
Qwen2.5-72B	417 / 3,998	0.599	0.685 [0.66, 0.71]	0.798 [0.77, 0.82]	0.51	0.862
Flash-Next	15 / 4,047	0.839	0.794 [0.62, 0.94]	0.821 [0.69, 0.94]	0.55	0.691
Qwen3-235B	682 / 6,277	0.740	0.791 [0.77, 0.81]	0.753 [0.73, 0.77]	0.46	0.871

The geometric tables report reference-set sizes of 100 for Qwen3-1.7B, Qwen2.5-7B, Qwen3-32B, Qwen2.5-72B, and Qwen3-235B; 442 for OLMo-2-7B; 50 for Qwen3.8-27B; and 36 for Flash-Next. A separate diagnostic asks how many of the 100 worst isolation tokens meet $S \geq 0.90$. It reports 65 for Qwen3-1.7B, 43 for OLMo-2-7B, 50 for Qwen3.8-27B, 78 for Qwen3-32B, 72 for Qwen2.5-72B, and 36 for Flash-Next. These counts describe different reported selection operations and are not sufficient by themselves to reconstruct every geometric reference set.

On OLMo, the direction score from an independently labeled reference set and a context-screened label-free reference both yield AUROC 0.879. Using the unfiltered worst 100 isolation tokens instead yields 0.642. Reference construction is therefore an empirical component of the method, not an interchangeable implementation detail.

B.2 Incremental prediction intervals

Table B2. Paired-bootstrap differences from the surface-feature baseline. Values and intervals are retained at their reported precision. Small discrepancies between these differences and subtraction of the rounded AUROCs in Table 6 are not resolved by the available summary statistics.

Model	Static difference [95% CI]	Dynamic difference [95% CI]
Qwen3-1.7B	+0.000 [−0.107, +0.110]	+0.068 [−0.062, +0.198]
Qwen2.5-7B	+0.046 [+0.027, +0.066]	−0.001 [−0.023, +0.024]
OLMo-2-7B	+0.105 [+0.052, +0.160]	+0.070 [+0.015, +0.127]
Qwen3.8-27B	−0.066 [−0.157, +0.024]	+0.073 [+0.028, +0.118]
Qwen3-32B	−0.032 [−0.176, +0.123]	+0.007 [−0.163, +0.190]
Qwen2.5-72B	−0.044 [−0.070, −0.019]	+0.029 [+0.016, +0.044]
Flash-Next	+0.256 [+0.092, +0.420]	+0.280 [+0.145, +0.434]
Qwen3-235B	−0.014 [−0.031, +0.003]	+0.016 [+0.003, +0.030]

The strict-gate OLMo prediction analysis has 28 positive half-bank labels. Its static AUROC is 0.911 versus 0.711 for surface features, with a reported difference of +0.202 and interval [+0.096, +0.320]. This is a sensitivity analysis on a different gated population.

B.3 Concentration of selected specimens

Table B3. Entropy of selected stored failing specimens. The selection retains worst cells and is not a random sample of all flags or errors. Values describe the distribution at the target position; no corresponding summary is supplied for OLMo.

Model	Entropy below 2 bits (%)	Median entropy (bits)
Qwen3-1.7B	74	1.14
Qwen2.5-7B	14	7.16
Qwen3.8-27B	57	1.79
Qwen3-32B	39	2.95
Qwen2.5-72B	59	1.02
Flash-Next	16	5.31
Qwen3-235B	62	1.43

Appendix C Generation and Task Protocols

C.1 Candidate reproduction in free generation

Table C1. Candidate and control reproduction in available plain-mode runs. Exact-ID and string occurrence are different metrics. Qwen3-1.7B has 31 candidates and Qwen3-32B has 14 after the reported seed filtering. The OLMo candidate run uses the bare-token framing and is distinct from the separate instructed-identification experiment.

Model	Candidate exact ID	Candidate string	Control exact ID	Control string
Qwen3-1.7B	12 / 31	26 / 31	16 / 31	30 / 31
Qwen2.5-7B	21 / 32	26 / 32	21 / 32	30 / 32
OLMo-2-7B	6 / 32	19 / 32	20 / 32	29 / 32
Qwen3.8-27B	7 / 32	27 / 32	10 / 32	32 / 32
Qwen3-32B	8 / 14	13 / 14	7 / 14	13 / 14

In OLMo’s separate instructed-identification run, exact-ID reproduction is 0 of 32 verified glitch tokens, 17 of 32 controls, and 11 of 32 candidates. The different prompt changes the count and must remain part of its interpretation. The reported trajectory comparison does not show increasing entropy relative to controls: the glitch-control entropy difference is +0.27 bits at step 8 and −0.29 bits at step 255. Centered final-state pairwise cosine also approaches zero for both groups, providing no evidence for a single shared final-state attractor under that measurement.

Table C2. Reproduction of worst-isolation seeds and controls. These seeds are selected by isolation performance, with a printable-string filter, rather than necessarily being the geometric reference class. String reproduction was logged for only eight seeds and eight controls on Qwen3-1.7B and in the indicated OLMo run.

Model and mode	Worst exact ID	Worst string	Control exact ID	Control string
Qwen3-1.7B plain	0 / 32	1 / 8	14 / 32	8 / 8

Model and mode	Worst exact ID	Worst string	Control exact ID	Control string
Qwen3-1.7B thinking	0 / 32	1 / 8	16 / 32	8 / 8
Qwen2.5-7B plain	0 / 32	1 / 32	17 / 32	32 / 32
OLMo-2-7B plain	0 / 32	0 / 8	17 / 32	7 / 8
Qwen3.8-27B plain	5 / 32	19 / 32	11 / 32	32 / 32
Qwen3.8-27B thinking	6 / 32	22 / 32	17 / 32	32 / 32
Qwen3-32B plain	0 / 32	0 / 32	17 / 32	29 / 32
Qwen3-32B thinking	0 / 32	0 / 32	23 / 32	32 / 32
Qwen2.5-72B plain	0 / 32	12 / 32	14 / 32	27 / 32

C.2 Simple instruction templates

In each template, <token> is replaced by the target token ID, not by re-tokenizing an interpolated string.

Function naming. Write a Python function whose name is exactly <token> and which returns the sum of a list of numbers. Output only the code.

Title quotation. Quote the title of the document exactly, in double quotes, and write nothing else.
Document title: Notes on <token> and related matters. Body: This document collects observations made during the review.

List retrieval. Here is a list of items: 1. lantern 2. <token> 3. harbour 4. compass. What is the second item? Answer with the item only.

Spelling correction. Correct any spelling mistakes in the sentence below and return the corrected sentence. If there are none, return it unchanged. Sentence: We agreed to file the <token> form before Friday.

Summary. Summarize the following in one sentence that keeps every proper noun exactly as written.
Text: The committee met on Tuesday. <token> presented the budget, which was approved without changes, and the next meeting was scheduled for May.

Table C3. Preservation by simple task. Every cell gives G / S / C, with ten episodes for each class. The source templates ask for exact naming in some tasks but permit correction in the spelling task, so task-specific comparisons are essential.

Task	Qwen2.5-7B	OLMo-2-7B	Qwen3.8-27B	Qwen3-32B plain	Qwen3-32B thinking
Function	0.0 / 0.9 / 0.5	0.0 / 1.0 / 0.6	0.0 / 1.0 / 0.7	0.0 / 1.0 / 0.8	0.0 / 1.0 / 0.7
Spelling	0.0 / 0.7 / 0.6	0.0 / 0.8 / 0.1	0.0 / 0.4 / 0.0	0.0 / 0.6 / 0.4	0.0 / 0.6 / 0.6
List item	0.0 / 1.0 / 0.9	0.0 / 0.9 / 0.6	0.0 / 1.0 / 0.7	0.0 / 1.0 / 0.8	0.0 / 0.9 / 0.8
Title	0.0 / 0.9 / 0.9	0.0 / 1.0 / 1.0	0.4 / 1.0 / 0.9	0.0 / 1.0 / 0.8	0.0 / 1.0 / 0.7
Summary	0.0 / 0.8 / 0.8	0.0 / 0.9 / 0.6	0.0 / 0.9 / 0.8	0.0 / 0.9 / 0.9	0.0 / 1.0 / 0.9

C.3 Tool assignment templates

Configuration. A user reports that the configuration key <token> is being ignored by our service when it is set through an environment variable. Investigate with the tools (search the documentation, read the relevant page, run a quick check) and recommend a fix in two or three sentences.

Background. Prepare a short background note on the term <token> for a colleague who has never encountered it. Use the tools to find a definition and two concrete facts, cite the page you used, and keep the note under 80 words.

Adoption. We are considering adopting <token> in our stack. Gather evidence with the tools and give a recommendation (adopt, trial, or avoid) with two reasons.

Meaning. Look up the term <token> with the tools, then explain to an English-speaking reader what it means, where it comes from, and give one example sentence that uses it.

Release. Check whether the most recent release of <token> changed its default configuration. Use the tools to find the release notes, then answer yes or no with one sentence of justification.

The mock environment returns three relevant hits when the search query contains the supplied target string: documentation, release notes describing version 2.4.1, and an open issue. Other searches receive no relevant hits and generic pages. Pages can be opened, and the mock library check returns its version. These are experimental resources, not claims about actual libraries associated with the sampled strings.

Table C4. Additional simulated tool outcomes. Cells give G / S / C. “Finished” means a final answer within six rounds; “Repeated” means an identical tool call recurred; “Version” means a version number was stated without a tool retrieval supporting one. Multiple tool calls can occur in a round.

Model and mode	Finished	Repeated	Version	Mean tool calls
Qwen2.5-7B plain	1.00 / 0.98 / 1.00	0.00 / 0.00 / 0.00	0.00 / 0.00 / 0.00	1.06 / 1.26 / 1.08
OLMo-2-7B plain	1.00 / 1.00 / 1.00	0.04 / 0.00 / 0.00	0.00 / 0.00 / 0.02	1.92 / 1.86 / 1.78
Qwen3.8-27B plain	0.14 / 0.66 / 0.58	0.28 / 0.10 / 0.14	0.00 / 0.00 / 0.00	8.06 / 5.06 / 5.74
Qwen3.8-27B thinking	0.52 / 0.76 / 0.68	0.10 / 0.10 / 0.02	0.02 / 0.02 / 0.00	8.40 / 6.28 / 7.02
Qwen3-32B plain	1.00 / 1.00 / 1.00	0.00 / 0.00 / 0.00	0.00 / 0.00 / 0.00	1.24 / 1.04 / 1.06
Qwen3-32B thinking	1.00 / 1.00 / 1.00	0.00 / 0.00 / 0.00	0.02 / 0.00 / 0.00	1.40 / 1.34 / 1.28

For the glitch class, the first-query preservation rate is 0.02 in both Qwen3.8-27B modes and 0.00 in the other four configurations. Final-answer preservation is 0.02 for Qwen3.8-27B plain and 0.00 elsewhere. These rates quantify lexical inclusion; they do not by themselves grade the truth of an answer.

Appendix D Factorial Interaction Results

Let $L(a,b;c)$ be the copy score for a carrier c containing targets a and b , and let a_0 and b_0 be the corresponding controls. The reported factorial contrast is

$$I(a,b;c) = L(a,b;c) - L(a,b_0;c) - L(a_0,b;c) + L(a_0,b_0;c) \quad (4)$$

Positive values indicate better joint copying support than the additive contrast predicts. Ordered off-diagonal pairs are evaluated separately from repeated-token cases. The reliable and intermittent groups

are selected from isolation performance and should not be equated automatically with the candidate and stable classes of Section 3.

Table D1. Interaction-screen outcomes. The count-null threshold is the 95th percentile of rejections in twenty simulated datasets. Maximum-statistic and repetition p values are separate tests. Values originally reported as 0.000 are displayed as <0.001 to avoid implying an exact zero probability; the underlying permutation resolution is required for more precise reporting.

Model and pool	Rejected / tested	Count-null threshold	Maximum-statistic p	Repeated-token contrast
OLMo, 64 reliable	1 / 4,032	4.1	0.035	+0.0066; p < 0.001
OLMo, 32 reliable and 32 intermittent	1 / 4,032	14.1	0.005	Not reported
Qwen3-32B, 11 reliable and 24 intermittent	13 / 1,190	14.1	<0.001	+0.0095; p = 0.012
Qwen3-235B, 24 reliable and 24 intermittent	1 / 2,256	20.0	0.059	+0.07 to +0.28 across separations; p < 0.001

Table D2. Mean joint copy score and interaction by ordered pair type. R denotes reliable and I intermittent. These means summarize the mixed pools; positive mean interactions do not rule out negative individual interactions.

Model	Pair type	Pairs	Joint log-probability	Mean interaction
OLMo-2-7B	R × R	992	−0.027	+0.0011
OLMo-2-7B	R × I	1,024	−0.146	+0.0030
OLMo-2-7B	I × R	1,024	−0.195	+0.0033
OLMo-2-7B	I × I	992	−0.313	+0.0076
Qwen3-32B	R × R	110	−0.013	+0.0011
Qwen3-32B	R × I	264	−0.042	+0.0031
Qwen3-32B	I × R	264	−0.053	+0.0034
Qwen3-32B	I × I	552	−0.077	+0.0091
Qwen3-235B	R × R	552	−0.062	+0.014
Qwen3-235B	R × I	576	−0.749	+0.083
Qwen3-235B	I × R	576	−0.565	+0.008
Qwen3-235B	I × I	552	−1.273	+0.056

The repeated-token OLMo contrast is reported as +0.005 at separation 2 and +0.018 at separation 128. In the mixed-pool carrier failures, five OLMo tokens account for 47% of failing carriers and five Qwen3-32B tokens for 57%. This concentration motivates token-level susceptibility as a useful summary, while failures that do not recur across filler sequences also demonstrate the limits of interpreting that summary as context independence.