

AEROSPIKE

---

## Key-value Operations

---

## Goals

This module describes how to use Key-value operations. At the end of this module you will be able to code in C#, PHP, Java or Go to:

- Connect and Disconnect from an Aerospike cluster
- Perform Write operations
- Perform Read operations
- Apply advanced key-value techniques
- Correctly handle errors



## Connecting to a Cluster

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

3

## Connecting to a Cluster

Connecting to a Cluster is similar to connecting to other database technologies, the **difference** is you are connecting to a Cluster, not a server

At the start of your process

- create a client instance **once**,
- Supplying one or more **node addresses**.

The node addresses are used by the Client to **discover ALL the nodes** in the Cluster.



```
// C# connection to a cluster
string asServerIP = "172.16.159.152";
int asServerPort = 3000;
AerospikeClient client = new AerospikeClient(asServerIP,
                                             asServerPort);

// Go connection to a cluster
client, err := NewClient("54.163.76.64", 3000)

// Java connection using multiple nodes
Host[] hosts = new Host[] {
    new Host("a.host", 3000),
    new Host("another.host", 3000),
    new Host("and.another.host", 3000)
};

AerospikeClient client =
    new AerospikeClient(new ClientPolicy(), hosts);

/* PHP connection using multiple nodes */
$config = array("hosts" => array(
    array("addr" => $HOST_ADDR,
          "port" => $HOST_PORT));
$client = new Aerospike($config, false);
if (!$client->isConnected()) {
    echo standard_fail($client);
    ...
    exit(2);
}
```

< AEROSPIKE >

© 2014 Aerospike. All rights reserved. Confidential

4

## Connecting

Connecting to a Cluster is similar to connecting to other database technologies. You do not connect to a specific server. The first step is to create a `AerospikeClient` object specifying the IP address and port of one or more nodes in the cluster.

### Initial nodes

You can specify a single node to connect to using the IP address and port when creating a new `AerospikeClient` object. The client will make initial contact to the specified node then discover all the nodes in the cluster. The best practice is to specify several nodes in the cluster when creating the client. The client will iterate through the array of nodes until it successfully connects to a node. Then through that node, the client will discover the other nodes in the cluster.

The client creates a maintenance thread which periodically pings nodes for the current state of the cluster.

### Thread Safe

The `AerospikeClient` instance is thread-safe and can be used concurrently. Each get/set call is a blocking, synchronous network call to Aerospike. Connections are cached with a connection pool for each server node.

## Disconnecting

At the **end of the process**, disconnect the Client instance from the cluster by calling close method. The close method will:

- Close sockets
- Free object references
- Terminates the client monitor thread
- Remove the client thread pool



```
// C# Close  
client.Close();  
  
// Java Close  
client.close();  
  
// Go Close  
defer client.Close()  
  
/* PHP Close */  
$client->close();
```

<EROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

5

## Cleanup

When all transactions are finished and the application is ready to have a clean shutdown, call the close method to remove the resources held by the client instance. The client instance is no longer usable once close has been called.

The close() function will:

- Close socket connections to every node in the cluster
- Free object references used by the Client instance
- Terminate the monitor thread
- Terminate threads in the thread pool and remove the pool.

Close should be called at the end of your process.

## Client Policy

An optional ClientPolicy modifies Aerospike's default behavior when connecting to a cluster.

ClientPolicy Attributes:


- Connection timeout
- Fail if not connected
- Max Socket Idle
- Max Threads

```
// C# connection with a Client Policy
ClientPolicy cPolicy = new ClientPolicy();
cPolicy.maxThreads = 200; //200 threads
cPolicy.maxSocketIdle = 3; // 3 seconds
AerospikeClient client = new AerospikeClient(cPolicy,
    "172.16.159.152", 3000);
```



```
// Java connection with Client policy
ClientPolicy clientPolicy = new ClientPolicy();
clientPolicy.maxThreads = 200; //200 threads
clientPolicy.maxSocketIdle = 3; // 3 seconds
AerospikeClient client = new AerospikeClient(clientPolicy,
    "a.host", 3000);
```

**Recommendation:** Use the defaults



©2014 Aerospike. All rights reserved. Confidential

6

## Client Policy

A Client Policy is container object/structure for attributes used in creating a connection to an Aerospike cluster. It modifies the default behavior when a Client instance connects to a cluster.

### Recommendation

The default values for connecting to Aerospike have been established through extensive testing, and they will probably meet your needs. Start with the defaults and only change these attributes on consultation with Aerospike support.

| Attribute             | Type    | Description   |
|-----------------------|---------|---|
| Timeout               | Integer | Initial host connection timeout in milliseconds. The timeout when opening a connection to the server host for the first time. |
| Fail if not connected | Boolean | Throws an exception if host connection fails  |
| Max Socket Idle       | Integer | Maximum socket idle in seconds.   |
| Max Threads           | Integer | Maximum number concurrent threads using synchronous methods in the client instance.   |



## Key

Each key-value operation uses one or more keys. A **Key** is a **structure** containing:

- Namespace (database) - String representing the Namespace name
- Set (table) – String representing the Set name, if omitted records will be in the “null” Set
- Key – The value of the primary key  
OR
- Digest – 20 byte hash of the key value



```
// C#           // Go
new Key("test", "users", username);   key, _ := NewKey("test", "users", username)

// Java          // PHP
new Key("test", "users", username);   $key = $this->client->initKey('test', 'users', $username);
```

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

8

## Key

A Key is an object or structure that consists of a:

- Namespace
- Set – this is optional, if omitted the record is stored in the null Set
- The value of the primary key
- Digest

The Set name is mapped to an entry in a bit map in the primary index.

## Digest

The primary key value is hashed with the RIPEMD160 algorithm to produce a 20 byte (160 bit) digest. RIPEMD160 always produces a 20 byte digest regardless of the size of key. By default, Aerospike does not store the key on the server.

Some operations (see scan, query, aggregate, etc.) return a Key object(or structure). This object does not, by default contain the original key, it contains the 20 byte digest.

You can use the digest in a Key object in place of the primary key value for most operations.

## Write a Record

With the **put** operation, you can write:

- Multiple bins (columns)
- A Single Bin
- Delete a Bin
- A Time-to-Live (TTL)
- Timeout



```
// Java write
WritePolicy wPolicy = new WritePolicy();
wPolicy.recordExistsAction = RecordExistsAction.UPDATE;
wPolicy.expiration = 5; // Time To live of 5 seconds

Key key = new Key("test", "users", username);
Bin bin1 = new Bin("username", username);
Bin bin2 = new Bin("password", null);

client.put(wPolicy, key, bin1, bin2);

// Go Write record
wPolicy := NewWritePolicy(0, 0) // generation, expiration
wPolicy.RecordExistsAction = UPDATE

key, _ := NewKey("test", "users", username)
bin1 := NewBin("username", username)
bin2 := NewBin("password", password)

err := client.PutBins(wPolicy, key, bin1, bin2)
panicOnError(err)

// PHP Write Record
$bins = array('username' => $username);
$bins['password'] = $password;
$key = $this->client->initKey('test', 'users', $username);
$status = $this->client->put($key, $bins);
```

<EROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

9

## Write a Record

The put operation writes a record. You need to identify the record in the database via a key. A key can be a string, integer or blob.

The Set and Bins will be created automatically if they do not exist.

### Write Values

One or more bins can be updated in the record by a Bin or an array of Bins to the put() call.

### Delete Bin (column)

To delete a bin, simply set the bin value to be NULL:

### Default behavior

- Create the record if the record doesn't exist.
- Update bin values in the record if the bins already exist.
- Add the bins if they do not exist.
- If the record already has bins, keep them in the record

### WritePolicy

The policy specifies the transaction's re-transmission policy, timeout interval, record expiration, and what to do if the record already exists. Instantiating the policy initializes client defaults

To change the write behavior through the write policy object. For example: Only write if the record does not already exist or completely replace a record, ONLY if it exists

### Write Record with Time-to-live (TTL)

It is possible to specify a time-to-live value for a record on a write. The expiration units are seconds.

```
writePolicy.expiration = 2; // 2 seconds
```

If a 0 is specified, then the default time-to-live specified on the server side will be applied each time a record is updated. If a -1 is specified, then the record will never be expired.

### Replica Writes

Write to replicas are controlled in the Namespace configuration and not on a per operation basis.

## Add

The **add** operation increments an integer Bin by a specific value. You can supply a negative value to decrement. An integer Bin is 8 bytes unsigned.

Use case: Counters

```
// C# Add  
Key userKey = new Key("test", "users", "user1234");  
Bin counter = new Bin("tweetcount", 1);  
client.Add(null, userKey, counter);  
  
// Java add  
WritePolicy wPolicy = new WritePolicy();  
Key key = new Key("test", "users", username);  
Bin counter = new Bin("tweetcount", 1);  
client.add(wPolicy, key, counter);  
  
// PHP add  
$this->client->add(null, $key, $bin);
```



© 2014 Aerospike. All rights reserved. Confidential

10

## Add

The **Add** operation increments, or decrements an integer Bin value(only) by the amount specified. An integer Bin is 8 bytes unsigned.

To decrement, you supply a negative value.

One or more Bin parameters are passed to the operation and all increments/decrements are atomic in the operation on the specified record.

The write policy specifies the transaction timeout, record expiration and how the transaction is handled when the record already exists.

## Counters

Many applications require a counter, these are simple to implement in Aerospike.

In the section “Techniques” we cover:

- How to avoid frequent updates and hot keys
- Counter increment and read (Atomic)

## Append - Prepend

The **append/prepend** operations work on String or byte arrays (BLOB) bins. The **append** operation adds a string/byte array to the end of the bin value. The **prepend** operation adds a string/byte array to the start of the bin value.

If the bin does not exist, it will be created.



```
// C# Append  
Key userKey = new Key("test", "users", "user1234");  
Bin bin2 = new Bin("greet", "world");  
client.Append(null, userKey, bin2);
```

```
// Java append  
WritePolicy wPolicy = new WritePolicy();  
Key key = new Key("test", "users", "user1234");  
Bin bin2 = new Bin("greet", "world");  
client.append(wPolicy, key, bin2);
```

```
// C# Prepend  
Key userKey = new Key("test", "users", "user1234");  
Bin bin2 = new Bin("greet", "hello ");  
client.Prepend(null, userKey, bin2);
```

```
// Java prepend  
WritePolicy wPolicy = new WritePolicy();  
Key key = new Key("test", "users", "user1234");  
Bin bin2 = new Bin("greet", "hello ");  
client.prepend(wPolicy, key, bin2);
```

<EROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

11

### Append

The **append** operation adds a string to the end of a string bin value, the prepend operation adds the value to the start of the value.

One or more Bin parameters are passed to the operation and the all appends/prepends are atomic in the operation on the specified record.

The **write policy** specifies the transaction timeout, record expiration and how the transaction is handled when the record already exists.

If the bin does not exists, it will be created.


Note: If you append a String to an Integer Bin you will get an error.

## Touch

The **touch** operation resets one, or more, records' time to expiration default configured in the namespace. The defaults can be changed using a WritePolicy.

A multi-record operation is **not** atomic.

```
// C# Touch  
Key userKey = new Key("test", "users", "user1234");  
Key userKey2 = new Key("test", "users", "user1235");  
client.Touch(null, userKey, userKey2);  
  
// Java touch  
WritePolicy wPolicy = new WritePolicy();  
Key key = new Key("test", "users", username);  
client.touch(wPolicy, key);  
  
// PHP touch  
$key = $this->client->initKey('test', 'users', $username);  
$status = $this->client->touch($key, 500);
```

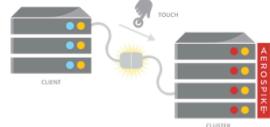

© 2014 Aerospike. All rights reserved. Confidential

12

## Touch

The **touch** operation resets one, or more, records' time to expiration to the policy's expiration or the Namespace default if a policy is omitted.

Providing more than one Key will allow you to “touch” many records in one operation.

**Note:** Multi-record touch operation is **not** atomic.

## Delete

The **delete** operation deletes the entire record from the database.

```
// C# Delete record.  
WritePolicy wPolicy = new WritePolicy();  
Key key = new Key("test", "users", username);  
client.Delete(wPolicy, key);  
  
// Java Delete record.  
WritePolicy wPolicy = new WritePolicy();  
Key key = new Key("test", "users", username);  
client.delete(wPolicy, key);  
  
// PHP delete  
$key = $this->client->initKey('test', 'users', $username);  
$this->client->remove($key);
```



© 2014 Aerospike. All rights reserved. Confidential

13

## Delete

When a record is deleted, the index entries in the primary index, and any secondary indexes, are removed. At some future time, the automatic defragment process (thread) will remove the record from the storage layer when it defragments the storage block where the record is located.


This has the unusual side effect that a deleted record can be “resurrected” on a server restart if the server is configured to load data when it starts.

## Delete ...

Deleting a record **removes** the entries from the indexes only. Very fast

The **background defragmentation** will physically delete the record at a **future** time.

**Note:** Aerospike does not “tombstone” deleted records.

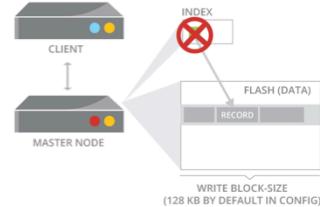

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

14

### Deleting a record in Flash

Deleting a record **removes** the entries from the indexes only. Very fast

The background defragmentation will physically delete the record at a **future** time.

The process:

1. Client finds Master Node from partition map.
2. Client makes delete request to Master Node.
3. Master node removes the entry
4. from index(es)
5. Master Node coordinates deletion with replica nodes (not shown).
6. Master Node returns success to client.
7. Data is eventually deleted from flash by defragmentation.

**Note:** Aerospike does not tombstone deleted records. If a server is restarted AND data is reloaded from storage, there is potential for “deleted” records to be “resurrected”. This only occurs if the defragmentation task has not processed a storage block containing the deleted record.

## WritePolicy

A [WritePolicy](#) modifies the behavior of a write operation. If omitted, default values will be used.

WritePolicy attributes:

- Timeout
- Expiration
- Generation
- Generation policy
- Record exists action
- Commit level

```
// C# write policy
WritePolicy wPolicy = new WritePolicy();
wPolicy.recordExistsAction = RecordExistsAction.UPDATE;
wPolicy.timeout = 50; // 50 milliseconds

// PHP write policy
$status = $db->put($key, $new_bin, 0,
array(Aerospike::OPT_POLICY_GEN=>array(Aerospike::POLICY_GEN_EQ,
$currrent_gen)));

// Java write policy
WritePolicy wPolicy = new WritePolicy();
wPolicy.recordExistsAction = RecordExistsAction.UPDATE;
wPolicy.timeout = 50; // 50 milliseconds
```

The WritePolicy is quite powerful. We will cover how to use these attributes in detail.



<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

15

## WritePolicy


WritePolicy extends Policy and therefore has the same attributes, plus it has attributes specific for Write operations. A WritePolicy is optional and, if omitted, default values will be used. You can use a WritePolicy as many times as you like.

| Attribute            | Type        | Description   |
|----------------------|-------------|---|
| Timeout              | Integer     | In milliseconds. Default is no timeout (0) - This actually means the server default timeout.  |
| Expiration           | Integer     | Record expiration is also known as time to live (TTL), It is the number of seconds a record will live before being removed by the server.<br>Expiration values: <ul style="list-style-type: none"><li>• -1: Never expire.</li><li>• 0: Default to namespace configuration variable "default-ttl" on the server.</li><li>• &gt; 0: Actual expiration in seconds.</li></ul> |
| Generation           | Integer     | Expected generation. Generation is the number of times a record has been modified (including creation) on the server. If a write operation is creating a record, the expected generation would be 0.  |
| Generation policy    | Enumeration | Qualify how to handle record writes based on record generation. The default (NONE) indicates that the generation is not used to restrict writes.<br>Values: NONE, EXPECT_GEN_EQUAL, EXPECT_GEN_GT, DUPLICATE  |
| Record exists action | Enumeration | Qualify how to handle writes where the record already exists.<br>Values: CREATE_ONLY, REPLACE, REPLACE_ONLY, UPDATE_ONLY  |

## Generation Policy – WritePolicy

A **record generation** indicates how many times the record has been written and is **incremented** on each write.

- **NONE**
  - Do not use a record generation to restrict writes. (Default)
- **EXPECT\_GEN\_EQUAL**
  - Update/delete record if expected generation is equal to server generation.  
Otherwise, fail.

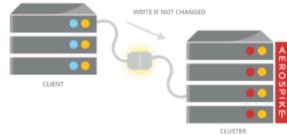

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

16

### Generation Policy

Aerospike uses multi-version concurrency control. The record generation indicates how many times the record has been written and is incremented on each write.

The **generation policy** is a field in the **write policy**. Valid values are:


- **NONE** - Do not use record generation to restrict writes. (**DEFAULT**)
- **EXPECT\_GEN\_EQUAL** - Update/delete record if expected generation is equal to server generation.  
Otherwise, fail.

A generation policy is commonly used in a read-modify-write pattern where the generation policy is set to EXPECT\_GEN\_EQUAL. The write operation will expect the record generation to be equal to the value read previously, this would indicate that the record has not been written by another operation.

## Record Exists – WritePolicy

The RecordsExistsAction specifies the action to take when writing to a Record that **already exists**.

- UPDATE
  - Create or update a record
- UPDATE\_ONLY
  - Update record only. Fail if record does not exist.
- REPLACE
  - Create or replace record. Delete previous Bins.
- REPLACE\_ONLY
  - Replace record only. Fail if record does not exist.
- CREATE\_ONLY
  - Create only. Fail if record exists.

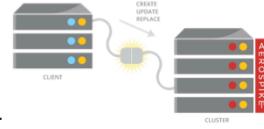

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

17

### Record Exists

The RecordsExistsAction specifies the action to take when writing to a Record that already exists.

The valid policy values are:

- Update: Create or update a Record
- Update\_Only: update Record only. Fail if Record does not exist.
- Replace: Create or replace Record. Delete previous Bins.
- Replace\_Only: Replace Record only. Fail if Record does not exist.
- Create\_Only: Create only. Fail if Record exists.

| Value        | Description   |
|--------------|---|
| UPDATE       | Create or update record. Merge write command bins with existing bins.   |
| UPDATE_ONLY  | Update record only. Fail if the record does not exist. Merge write command bins with existing bins. This is like SQL UPDATE ... |
| REPLACE      | Create or replace record. Delete existing bins not referenced by write command bins.  |
| REPLACE_ONLY | Replace record only. Fail if record does not exist. Delete existing bins not referenced by write command bins.                  |
| CREATE_ONLY  | Create only and fail if record exists. This is like SQL INSERT ...  |

#### Note:

Replacing a whole record has significantly better **storage** performance than replacing a subset of Bins in a record.


When you know that you are replacing, please use the REPLACE flag.

## Deleting a Bin

In a **put** operation, you can delete one or more Bins by setting the Bin value as null:

```
// C# delete a bin
WritePolicy wPolicy = new WritePolicy();
Bin bin1 = Bin.asList("shoe-size"); // Set bin value to null to drop bin.
client.Put(wPolicy, key, bin1);

// Java delete a bin
WritePolicy wPolicy = new WritePolicy();
Key key = new Key("test", "users", username);
Bin bin1 = Bin.asList("shoe-size"); // Set bin value to null to drop bin.
client.put(wPolicy, key, bin1);
```



<EROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

18

## Deleting a Bin

To delete one or more Bins in an operation, set the Bin value to null.

**Note:** Deleting Bins has a similar storage cost of writing Bins in a Record.



AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

19

## Read a Record

The **get** operation returns a Record (row).

You can read:

- All bins (columns)
- Specific bins

A **Record** consists of:


- Generation
- Expiration
- Bins

```
// C#
Key userKey = new Key("test", "users", username);
Record record = client.Get(null, userKey);

// PHP
$status = $db->get($key, $record);
if ($status == Aerospike::OK) {
    ...

// Java read specific bins
Key key = new Key("test", "users", userName);
Record record = this.client.get(null, key,
    "username",
    "password",
    "gender",
    "region");

// Java get header data
Key key = new Key("test", "users", userName);
Record record = this.client.getHeader(null, key);
```

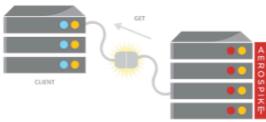

© 2014 Aerospike. All rights reserved. Confidential

20

## Read a Record

The read operation allows you to:

- Read all Bins in a Record. Remember – a Bin is like a column.
- Read specified Bins in a Record.
- Read only the Generation and Expiration of a record.

Each of the methods returns a Record, which contains Expiration, Generation, and Bins of the record.

### Read All Bins of a Record

To read all the Bins of a Record, call the `get()` method without a list of Bins. This will read the entire Record, including Generation and Expiration from the database, and return a Record Object.

### Read Specific Bins of a Record

To read specific bins of a Record, call the `get()` method and specify the names of the Bins to be returned.

### Record


A Record consists of:

- Expiration - the date record will expire, in seconds from Jan 01 2010 00:00:00 GMT
- Generation – a count of the modifications to the record.
- Bins – A map/dictionary of requested name/value bins.
- \*Duplicates - List of all duplicate Records (if any) for a given key. Duplicates are only created when the server configuration option "allow-versions" is true (default is false) and client `RecordExistsAction.DUPLICATE` policy flag is set and there is a Generation error. Almost always null.

## Exists

The **exists** operation is a light weight alternative to reading a Record to check if it exists.

**Note:** The Record could “not exist” shortly after the operation.

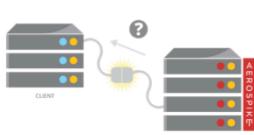

```
// C# Exists  
Key userKey = new Key("test", "users", "user1234");  
bool recordKeyExists = client.Exists(null, userKey);  
  
// Java exists  
Key key = new Key("test", "users", username);  
boolean itsHere = client.exists(policy, key);  
  
// PHP exists  
$status = $db->exists($key, $metadata);  
if ($status == Aerospike::OK) {  
    ...  
}
```

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

21

## Exists


This operation is a light weight alternative to reading the Record. It checks the existence of a Record and returns a Boolean.

The Exists operation does not hold a lock, it tests existence at the time you call it. Checking to see if a Record exists and then reading it (if true) is not a sensible approach. Why? Because another client instance could have successfully deleted the Record between your exists and read operations.

## Batch reads

The **batch** operation allows you to read many Records in one operation

- Array of Keys
- Records returned in the same order as the Keys

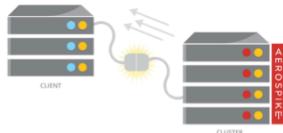

```
// C# batch
Key[] keys = new Key[tweetCount];
for (int i = 0; i < keys.Length; i++)
{
    keys[i] = new Key("test", "tweets",
        (username + ":" + (i + 1)));
}
Record[] records = client.Get(null, keys);

// Java batch
Key[] keys = new Key[27];
for (int i = 0; i < keys.length; i++) {
    keys[i] = new Key("test", "tweets",
        (username + ":" + (i + 1)));
}
Record[] records = client.get(null, keys);

// PHP batch
$keys = array($key1, $key2, $key3, $key4);
$res = $db->getMany($keys, $records);
```

© 2014 Aerospike. All rights reserved. Confidential

22

### Batch Reads

In addition to reading single Record each time, it is also possible to read multiple Records from the cluster in one operation.

Internal to the client, the operation will group the keys based on which Aerospike Server node is best to handle the request, and uses a thread pool to handle the requests to all nodes concurrently. All network requests are combined efficiently and sockets are reused.

After all the nodes have returned the Record data, the Records will be return to the caller.

The array of Records returned is in the same order as the Keys passed in. If a Record is not found on the database, the array entry will be NULL.

This is not an atomic operation, Records are read as they are found.

## Read Policy


When executing a Read operation, you can *optionally* supply a **Policy** object to the method. If omitted, default values will be used.

- Policy

- Timeout
- Maximum retries
- Sleep between retries

```
// C# write policy
Policy policy = new Policy();
policy.timeout = 50; // 50 milliseconds
```

```
// Java policy
Policy policy = new Policy();
policy.timeout = 50; // 50 milliseconds
```



AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

23

## Policies

Policies are container objects/structures for transaction policy attributes used in all database operation calls. A Read Policy object can be optionally on each Read operation, to modify default values.


| Attribute             | Type     | Description  |
|-----------------------|----------|--|
| Timeout               | Integer  | Transaction timeout in milliseconds  |
| Max retries           | Integer  | Maximum number of retries before aborting the current transaction.                             |
| Sleep between retries | Integer  | Milliseconds to sleep between retries if a transaction fails and the timeout was not exceeded. |
| Priority              | Constant | Priority of request relative to other transactions.<br>DEFAULT, LOW, MEDIUM, HIGH              |

NOTE: Timeout trumps retries. If your timeout is 10ms, number of retries is 3 and sleep between retries is 5ms, you will timeout before the 3<sup>rd</sup> retry.

## Scan

The **Scan** operation, similar to a table scan, returns all Records in a specified namespace and, optionally, a Set.

```
// Java Scan
client.scanAll(null, "test", "tweets", new ScanCallback() {
    @Override
    public void scanCallback(Key key, Record record)
        throws AerospikeException {
        System.out.println(record.getValue("tweet"));
    }, "tweet");
// C# Scan
client.ScanAll(null, "test", "tweets",
    scanTweetsCallback, "tweet");
public void scanTweetsCallback(Key key, Record record)
{
    Console.WriteLine(record.GetValue("tweet"));
}
// PHP Scan
$status = $db->scan("test", "users", function ($record) {
    echo "\nName: " . $record['bins'][name]
    . "\nEmail:" . $record['bins'][email];
});
```



© 2014 Aerospike. All rights reserved. Confidential

24

### Scan Records

The Scan operation provides the ability to read all Records in a specified Namespace and, optionally, a Set. First, the Scan Policy is initialized. in the Policy Object, If **concurrent nodes = true**, the Scan will query nodes for Records in parallel using threads. Otherwise, Scan will query each node one at a time in sequence. If **include bin data** is set in the policy object, specified Bins (all bins by default) will be returned with each Record.

If an exception is thrown, parallel Scan threads to other nodes will also be terminated and the exception will be propagated back through the initiating Scan call.

Scan returns Records to the user defined callback. Multiple threads will likely be calling your Scan callback in parallel. Therefore, your Scan callback implementation should be thread safe.

## Scan Policy

A [ScanPolicy](#) can optionally be supplied to modify the Scan operation. Along with all the attributes of Policy, it contains additional attributes that define the properties of the Scan. These are:

- Concurrent nodes – Default: true
- Fail on cluster change – Default: false
- Include bin data – Default: true
- Maximum concurrent nodes – Default: All nodes in the cluster

```
// C# Scan policy
ScanPolicy policy = new ScanPolicy();
policy.concurrentNodes = true;
policy.includeBinData = true;
client.ScanAll(policy, . . .);

// Java Scan policy
ScanPolicy policy = new ScanPolicy();
policy.concurrentNodes = true;
policy.includeBinData = true;
client.scanAll(policy, . . .);
```

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

25

## Scan Policy

Used to control the optional parameters in a scan operation

- Concurrent nodes – Issue scan requests in parallel, the default is true
- Fail on cluster change – Terminate scan if cluster is adding or removing a node, the default is false
- Include bin data - Indicates if bin data is retrieved. If false, only record digests are retrieved. The default is true.
- Maximum concurrent node – The maximum number of concurrent requests to server nodes, the default is all nodes in the cluster. This is only valid when **Concurrent nodes** is true.



## Key-value Techniques

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

26


## Read Modify Write (CAS)

A common usage pattern is to do Read-Modify-Write of a record (or [Check-and-Set](#)).

Example: modify a JSON document in the client

This involves:

- Reading the Record.
- Modifying the Record at the application.
- Set the WritePolicy to be [EXPECT\\_GEN\\_EQUAL](#).
- Write the modified data with the generation previous Read.



```
// Java read-modify-write
WritePolicy wPolicy = new WritePolicy();
wPolicy.generationPolicy = GenerationPolicy.EXPECT_GEN_EQUAL;
wPolicy.generation = 1406;

Key key = new Key("test", "users", username);
Bin bin1 = new Bin("username", username);
Bin bin2 = new Bin("password", password);

client.put(wPolicy, key, bin1, bin2);
```

<EROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

27

### Read-Modify-Write

A common usage pattern is to do Read-Modify-Write of a record (or Check-and-Set). This involves:

- Reading the Record.
- Modifying the Record in the application.
- Set the WritePolicy to be [EXPECT\\_GEN\\_EQUAL](#).
- Write the modified data with the generation previous Read.

If the generation number of the record in the cluster the same, the Write will proceed. If the generation number is different, the Record has been written by another request and the Write will fail. The data in your application is now stale and you will need to re-read the Record.


## Hot Keys

Hot keys are records that are **frequently** accessed

- How hot is hot?
- Queue for a Record
- Result code 14 – KEY\_BUSY
- Configuration sets queue size
  - transaction-pending-limit
  - Default: 20

### How to **mitigate** Hot Keys

- Use RAM namespace
- Use multiple Records
  - Batch read
  - Aggregate in client



<http://www.iamontheinet.com/2014/12/02/achieving-high-throughput-for-specific-data-access-pattern>

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

28

## Hot Keys

A hot key is a Record that is frequently accessed by a large number of (almost) concurrent requests. This is often occurs with a counter that counts every action, request, click, etc.

How hot is hot? – Depending on the hardware you can have a single key with over 100K tps, and depending on the operation.

If the number of requests exceeds the queue size for a key, the client well receive the result code 14 indicating that the key is busy.

The size of the queue is controlled by the configuration setting transaction-pending-limit, located in the **Service** stanza of the Aerospike configuration file. The default value is 20. This means that 20 concurrent requests will be accepted before the client would be returned **KEY\_BUSY**

### How to Mitigate Hot Keys

Put high Hot Keys in a RAM namespace.

Separate high frequency hot key counters in to separate records e.g. - Instead of a single counter for every click on a URL, have N counters segmented by a demographic (location, age group, favorite color, etc.) and stored in separate Keys. Aggregate the value in your application by using a Batch read.

## Operate

### Multiple operations on the same Record

- Update and Select in one operation
- Read and Write operations
- Read operations are done last
- Example: add to a counter and read the value



```
// C# Operate
client.Operate(policy, userKey,
    Operation.Put(new Bin("tweetcount", 153)),
    Operation.Put(new Bin("lasttweeted", 1406755079L)));

// PHP Operate
$operations = array(
    array("op" => Aerospike::OPERATOR_WRITE,
        "bin" => "Occupation",
        "val" => "Doctor of Freudian Circuit Analysis"),
    array("op" => Aerospike::OPERATOR_INCR,
        "bin" => "patients_cured", "val" => 4),
    array("op" => Aerospike::OPERATOR_READ,
        "bin" => "Occupation"),
    array("op" => Aerospike::OPERATOR_READ,
        "bin" => "patients_cured"));
$res = $db->operate($key, $operations, $returned);

// Java operate
WritePolicy wPolicy = new WritePolicy();
Key key = new Key("test", "users", username);
client.operate(wPolicy, key,
    Operation.put(new Bin("tweetcount", 153)),
    Operation.put(new Bin("lasttweeted", 1406755079L)));
```

**AEROSPIKE**

© 2014 Aerospike. All rights reserved. Confidential

29

### Multiple Operations on a Record

The Client API provides a way to perform multiple operations on a record within a single transaction. This feature also allows the bins of a Record to be modified and read back to the client within a single transaction, i.e. it allows an application to perform an atomic modification that returns the result.

It is like an **Update** and a **Select** in one atomic operation. You package a set of operations into the request, the 'write' operations are done first, then the read operations. The record is returned to the client at the end of the operation.

The following are the operations which can be performed using the C# or Java client API.

| Operation   | Description  | Conditions                                   |
|-------------|--|--|
| Write       | Write a value to a bin.  |  |
| Read        | Read the value of a Bin  |  |
| read_header | Read only the meta-data (generation and time-to-live) of the record. |  |
| Add         | Add an integer to the existing value of a bin.                       | Existing value must be integer.              |
| Append      | Append string to the existing value of a bin.                        | Existing value must be string.               |
| Prepend     | Prepend string to the existing value of a bin.                       | Existing value must be string.               |
| Touch       | Rewrite the same record  | Generation and Time-to-live will be updated. |

## List, Maps and JSON

**Lists** and **Maps** (Dictionaries) are supported in most modern languages. The Client API translates the language types to the database type of List or Map respectively.

**JSON** is either a List containing Lists and Maps, or a Map containing Lists and Maps. JSON is easily stored in a Bin Type of:

- List
- Map

```
// Java JSON example  
Bin bin7 = Bin.asList("interests", new JSONObject(...));
```



**AEROSPIKE**

© 2014 Aerospike. All rights reserved. Confidential

30

### Lists, Maps and JSON

Aerospike supports the database native times of List and Map. Lists and Maps can contain other Lists and Maps, so you can store complex objects in a single Bin and read or write the whole object from the client API.

Because the List or Map is stored in a database native format, you can, for example, write it in C# and read it in Python. Also, the database native type can be manipulated by User Defined Functions (UDFs).

### JSON

A JSON object is either a Map(Dictionary) containing Lists and Maps, or a List containing Lists and Maps. This means that a JSON object can easily be stored in either a List or a Map in a database native way.

## Single Bin

A namespace can be configured, and optimized, for a **single Bin record**.

- No Bin management overhead
- Integer – stored in Index for free (data-in-index)

Operations

- Add
- Append

Cannot be used with a secondary index



< AEROSPIKE >

© 2014 Aerospike. All rights reserved. Confidential

31

## Single Bin

A namespace can be configured for a single Bin record as apposed to a multi-Bin record. This simplifies the storage and record management parts of Aerospike and can provide some performance gains. There is no processing or storage overhead for Bin names and values.

Single bin namespaces (like all namespaces) need a cluster wide restart, after they are defined, to take effect – so PLAN AHEAD!

### Integer single Bin namespaces

You can define a single bin namespace in RAM where the integer Bin can be stored in the Primary index. This is not only very fast, but there is no other RAM requirement other than the index entry it's self.



## Errors and Result Codes

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

32

## Error Handling

### AerospikeException

contains:

- A ResultCode
  - A Message
- Functions return a Result Code

```
// Java error handling
try {
    ...
} catch (AerospikeException e) {
    System.out.println("EXCEPTION - Message: "
        + e.getMessage());
    System.out.println("EXCEPTION - Result code: "
        + e.getResultCode());
}

// C# error handling
try {
    ...
}
catch (AerospikeException e)
{
    Console.WriteLine("EXCEPTION - Message: "
        + e.Message);
}

// PHP error handling
if ($status == Aerospike::OK) {
    echo success();
} else {
    echo standard_fail($db);
}
```

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

33

## Error Handling

If an error occurs as a result of the database operation, an `AerospikeException` is thrown.

An `AerospikeException` has a `ResultCode` field, which describes the exact cause of the error given by the Aerospike Server; and human readable message describing the error.

There can also be conditions where an error occur on the client side, and a sub-classed `AerospikeException` is thrown. Examples of such conditions include:

- `AerospikeException.Connection` - Exception thrown when client can't connect to the server.
- `AerospikeException.Timeout` - Exception thrown when database request expires before completing.

## General result codes

These are the most common result/error codes you will see as a developer:

- KEY\_NOT\_FOUND\_ERROR
- GENERATION\_ERROR
- KEY\_EXISTS\_ERROR
- BIN\_EXISTS
- TIMEOUT
- BIN\_TYPE\_ERROR
- KEY\_BUSY
- BIN\_NOT\_FOUND
- KEY\_MISMATCH

A full list is included in the notes

| Code | Symbolic name        | Description  |
|------|----------------------|--|
| 0    | OK                   | Operation was successful.  |
| 1    | SERVER_ERROR         | Unknown error in the server. Contact Aerospike support.                        |
| 2    | KEY_NOT_FOUND        | On retrieving, touching or replacing a record that doesn't exist.              |
| 3    | GENERATION_ERROR     | On modifying a record with unexpected generation.                              |
| 4    | PARAMETER_ERROR      | Bad parameter(s) were passed in database operation call.                       |
| 5    | KEY_EXISTS_ERROR     | On create-only (write unique) operations on a record that already exists.      |
| 6    | BIN_EXISTS_ERROR     | On create-only (write unique) operations on a bin that already exists.         |
| 7    | CLUSTER_KEY_MISMATCH | Expected cluster ID was not received – Cluster is changing during a Scan       |
| 8    | SERVER_MEM_ERROR     | Server has run out of memory.  |
| 9    | TIMEOUT              | Client or server has timed out.  |
| 10   | NO_XDS               | XDR product is not available.  |
| 11   | SERVER_NOT_AVAILABLE | Server is not accepting requests.  |
| 12   | BIN_TYPE_ERROR       | Operation is not supported with configured bin type (single-bin or multi-bin). |
| 13   | RECORD_TOO_BIG       | Record size exceeds limit.   |
| 14   | KEY_BUSY             | Too many concurrent operations on the same record.                             |
| 15   | SCAN_ABORT           | Scan aborted by server.  |
| 16   | UNSUPPORTED_FEATURE  | Unsupported Server Feature (e.g. Scan + UDF).                                  |
| 17   | BIN_NOT_FOUND        | Specified bin name does not exist in record.                                   |
| 18   | DEVICE_OVERLOAD      | The server node's storage device(s) can't keep up with the write load.         |
| 19   | KEY_MISMATCH         | Key type mismatch. – Digest collision – never been seen                        |
| 100  | UDF_BAD_RESPONSE     | A user defined function returned an error code.                                |



## Lab: Key-value Operations

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

35

## Objective

After successful completion of this Lab module you will have:

- Connected to a cluster
- Write and read records using simple and complex values
- Used advanced key-value techniques

## Lab Overview

The lab exercises add functionality to a simple Twitter-like console application (tweetaspire) using Aerospike as the database.

In this Lab, we will focus on key-value operations and techniques. You will add code to:

- Create users and Tweets
- Read all the Tweets for a user
- Use an advance Key-value feature

The exercises shell is located in your cloned GitHub directory  
`~/exercises/Key-valueOperations/<language>`

**Make sure you have your server up and you know its IP address**

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

37

On your USB stick, or your unzipped directory, you will find the following directories:


- Answers
- Exercise
- Notes

In the exercise directory, select the subdirectory for your programming language:

- C#
- Java
- Go
- PHP
- Node

The exercises for this module are in the Key-valueOperations directory and you will find a Project/Solution/Codebase that is partly complete. Your tasks is to complete the code as outlined in each exercise.

**Make sure you have your server up and you know its IP address**

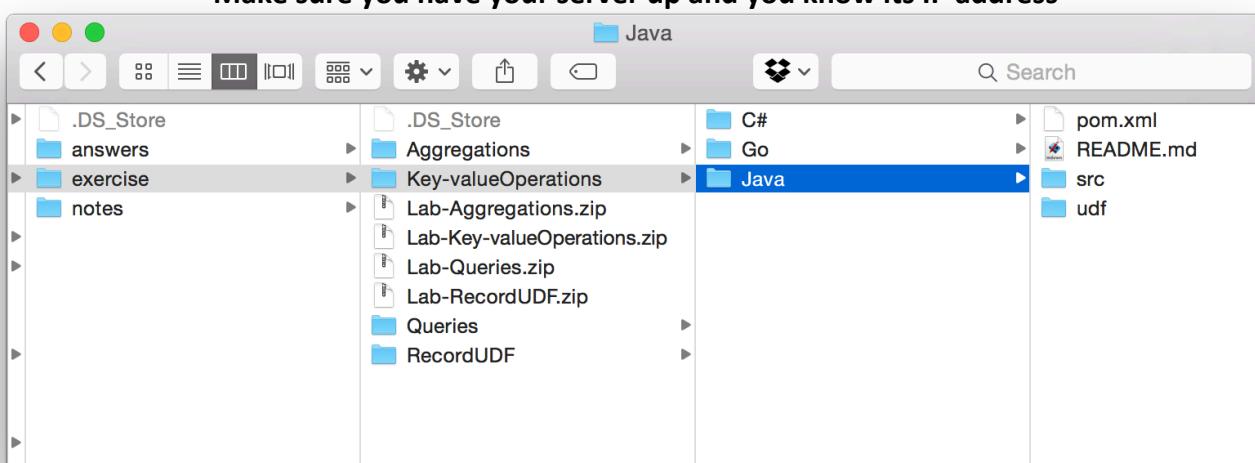


## Tweetaspire Data Model

### Users

- Namespace: test, Set: users, Key: <username>
- Bins:
  - username – String
  - password - String (For simplicity password is stored in plain-text)
  - gender - String (Valid values are 'm' or 'f')
  - region - String (Valid values are: 'n' (North), 's' (South), 'e' (East), 'w' (West) -- to keep data entry to minimal we just store the first letter)
  - lasttweeted - int (Stores epoch timestamp of the last/most recent tweet) -- Default to 0
  - tweetcount - int (Stores total number of tweets for the user) -- Default to 0
  - interests - Array of interests

### Tweets

- Namespace: test, Set: tweets, Key: <username:<counter>>
- Bins:
  - tweet – string
  - ts - int (Stores epoch timestamp of the tweet)
  - username - string

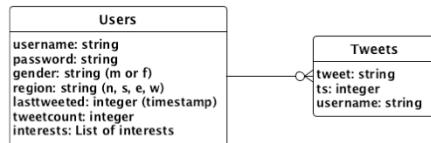

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

38

### Users

Namespace: test, Set: users, Key: <username>

| Bin name    | Type    | Comment  |
|-------------|---------|--|
| username    | String  |  |
| password    | String  | For simplicity password is stored in plain-text  |
| region      | String  | Valid values are: 'n' (North), 's' (South), 'e' (East), 'w' (West) -- to keep data entry to minimal we just store the first letter |
| lasttweeted | Integer | Stores epoch timestamp of the last/most recent tweet -- Default to 0   |
| tweetcount  | Integer | Stores total number of tweets for the user -- Default 0  |
| Interests   | List    | A list of interests  |

### Tweets

Namespace: test, Set: tweets, Key: <username:<counter>>

| Bin name | Type    | Comment                             |
|----------|---------|-------------------------------------|
| tweet    | String  | Tweet text                          |
| ts       | Integer | Stores epoch timestamp of the tweet |
| username | String  | User name of the tweeter            |



## Java Exercises

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

39

## Exercise 1 – Java: Connect & Disconnect

Locate Program Class in the Maven project

1. Create an instance of AerospikeClient with one initial IP address. Ensure that this connection is created only once
2. Add code to disconnect from the cluster. Ensure that this code is executed only once

```
// TODO: Create new AerospikeClient instance
```



AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

40

In this exercise you will connect to a Cluster by creating an AerospikeClient instance, passing a single IP address and port to the constructor. The IP address and port should be to a node in your own cluster.

Ensure that you only create one client instance at the start of the program. The AerospikeClient is thread safe and creates a pool of worker threads, this means you DO NOT need to create your own connection or thread pool.

1. In the constructor for the class Program, add code similar to this;

```
// Establish a connection to Aerospike cluster
this.client = new AerospikeClient("192.168.1.15", 3000);
```

**Make sure you have your server up and you know its IP address**

2. At the end of method work(), add code, similar to this, to disconnect from the cluster. This should only be done once. After close() is called, the client instance cannot be used.

```
if (client != null && client.isConnected()) {
    // Close Aerospike server connection
    client.close();
}
```

## Exercise 2 – Java: Write Records

Create a User Record and Tweet Record

Locate UserService and TweetService classes in the Maven project

1. Create a User Record – In UserService.createUser()
  1. Create an instance of WritePolicy
  2. Create Key and Bin instances for the User Record
  3. Write User Record
2. Create a Tweet Record – In TweetService.createTweet()
  1. Create an instance of WritePolicy
  2. Create Key and Bin instances for the Tweet Record
  3. Write Tweet Record
  4. Update Tweet count and last Tweeted timestamp in the User Record

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

41

Create a User Record. In UserService.createUser(), add code similar to this:

1. Create a WritePolicy

```
// Write record  
WritePolicy wPolicy = new WritePolicy();  
wPolicy.recordExistsAction = RecordExistsAction.UPDATE;
```

2. Create Key and Bin instances

```
Key key = new Key("test", "users", username);  
Bin bin1 = new Bin("username", username);  
Bin bin2 = new Bin("password", password);  
Bin bin3 = new Bin("gender", gender);  
Bin bin4 = new Bin("region", region);  
Bin bin5 = new Bin("lasttweeted", 0);  
Bin bin6 = new Bin("tweetcount", 0);  
Bin bin7 = Bin.asList("interests",  
    Arrays.asList(interests.split(",")));
```

3. Write a user record using the Key and Bins

```
client.put(wPolicy, key, bin1, bin2, bin3, bin4,  
    bin5, bin6, bin7);
```

Create a Tweet Record. In TweetService.createTweet(), add code similar to this:

1. Read user record

```
// Check if username exists  
userKey = new Key("test", "users", username);  
userRecord = client.get(null, userKey);
```

2. Create a WritePolicy

```
WritePolicy wPolicy = new WritePolicy();  
wPolicy.recordExistsAction = RecordExistsAction.UPDATE;
```

3. Create Key and Bin instances

```
tweetKey = new Key("test", "tweets", username + ":"  
    + nextTweetCount);  
Bin bin1 = new Bin("tweet", tweet);  
Bin bin2 = new Bin("ts", ts);  
Bin bin3 = new Bin("username", username);
```

4. Write a tweet record using the Key and Bins

```
client.put(wPolicy, tweetKey, bin1, bin2, bin3);  
console.printf("\nINFO: Tweet record created!\n");
```

5. Update the user record with tweet count

```
// Update tweet count and last tweet'd timestamp in the user  
// record  
long ts = getTimeStamp();  
updateUser(client, userKey, wPolicy, ts, nextTweetCount);
```

## Exercise 2 ...Cont.– Java: Read Records

Create a User Record, Tweet Record and then a Read User Record

Locate UserService and TweetService classes in the Maven project

1. Read User record – In UserService.getUser()
  1. Read User Record
  2. Output User Record to the console

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

42

Read a User Record. In UserService.getUser(), add code, similar to this, to:

1. Read a User record
2. Output the User record to the console

```
// Check if username exists
userKey = new Key("test", "users", username);
userRecord = client.get(null, userKey);
if (userRecord != null) {
    console.printf("\nINFO: User record read successfully! Here are the details:\n");
    console.printf("username: " + userRecord.getValue("username") + "\n");
    console.printf("password: " + userRecord.getValue("password") + "\n");
    console.printf("gender: " + userRecord.getValue("gender") + "\n");
    console.printf("region: " + userRecord.getValue("region") + "\n");
    console.printf("tweetcount: " + userRecord.getValue("tweetcount") + "\n");
    console.printf("interests: " + userRecord.getValue("interests") + "\n");
} else {
    console.printf("ERROR: User record not found!\n");
}
```

### Exercise 3 – Java: Batch Read

Batch Read Tweets for a given user

Locate UserService class in the Maven project

1. In UserService.batch GetUserTweets()
  1. Read User Record
  2. Determine how many Tweets the user has
  3. Create an array of Tweet Key instances -- keys[tweetCount]
  4. Initiate Batch Read operation
  5. Output Tweets to the console

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

43

Read all the tweets for a given user. In UserService.batch GetUserTweets(), add code similar to this:

1. Read a user record

```
userKey = new Key("test", "users", username);
userRecord = client.get(null, userKey);
```

2. Get the tweet count

```
// Get how many tweets the user has
int tweetCount = (Integer) userRecord.getValue("tweetcount");

// Create an array of keys so we can initiate batch read
// operation
Key[] keys = new Key[tweetCount];
for (int i = 0; i < keys.length; i++) {
    keys[i] = new Key("test", "tweets",
                      (username + ":" + (i + 1)));
}
console.printf("\nHere's " + username + "'s tweet(s):\n");
```

3. Create a “list” of tweet keys
4. Perform a Batch operation to read all the tweets

```
// Initiate batch read operation
if (keys.length > 0){
    Record[] records = client.get(new Policy(), keys);
    for (int j = 0; j < records.length; j++) {
        console.printf(records[j].getValue("tweet").toString() + "\n");
    }
}
```

5. Then print out the tweets

## Exercise 4 – Java: Scan

Scan all tweets for all users

Locate TweetService class in the Maven project

1. In TweetService.scanAllTweetsForAllUsers()
  1. Create an instance of ScanPolicy
  2. Set policy parameters (optional)
  3. Initiate scan operation that invokes callback for outputting tweets to the console

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

44

Scan all the tweets for all users – warning – there could be a large result set.

In the TweetService.scanAllTweetsForAllUsers(), add code similar to this:

1. Create a ScanPolicy

```
// Java Scan
ScanPolicy policy = new ScanPolicy();
policy.concurrentNodes = true;
policy.priority = Priority.LOW;
policy.includeBinData = true;
```
2. Set policy parameters
3. Perform a Scan operation and process the results

```
client.scanAll(policy, "test", "tweets", new ScanCallback() {

    public void scanCallback(Key key, Record record)
        throws AerospikeException {
        console.printf(record.getValue("tweet") + "\n");
    }
}, "tweet");
```

## Exercise 5 – Java: Read-modify-write

Update the User record with a new password ONLY if the User record is un-modified.

Locate UserService class in the Maven project

1. In UserService.updatePasswordUsingCAS()
  1. Create a WritePolicy
  2. Set WritePolicy.generation to the value read from the User record.
  3. Set WritePolicy.generationPolicy to EXPECT\_GEN\_EQUAL
  4. Update the User record with the new password using the GenerationPolicy

Update the User record with a new password ONLY if the User record is un-modified  
In UserService.updatePasswordUsingCAS(), add code similar to this:

1. Create a WritePolicy
2. Set WritePolicy.generation to the value read from the User record.
3. Set WritePolicy.generationPolicy to EXPECT\_GEN\_EQUAL
4. Update the User record with the new password using the GenerationPolicy

```
// Check if username exists
userKey = new Key("test", "users", username);
userRecord = client.get(null, userKey);
if (userRecord != null)
{
    // Get new password
    String password;
    console.printf("Enter new password for " + username + ":");
    password = console.readLine();

    WritePolicy writePolicy = new WritePolicy();
    // record generation
    writePolicy.generation = userRecord.generation;
    writePolicy.generationPolicy = GenerationPolicy.EXPECT_GEN_EQUAL;
    // password Bin
    passwordBin = new Bin("password", Value.get(password));
    client.put(writePolicy, userKey, passwordBin);

    console.printf("\nINFO: The password has been set to: " + password);
}
```

## Exercise 6 – Java: Operate

Update Tweet count and timestamp and examine the new Tweet count

Locate TweetService class in the Maven project

1. In TweetService.updateUser()
  1. Comment out code added in Exercise 2 for updating tweet count and timestamp
  2. Uncomment line updateUserUsingOperate(client, userKey, policy, ts, tweetCount);
  3. In updateUserUsingOperate(client, userKey, policy, ts, tweetCount)
    1. Initiate operate passing in policy, user record key, .add operation incrementing tweet count, .put operation updating timestamp and .get operation to read the user record
    2. Output updated Tweet count to console



© 2014 Aerospike. All rights reserved. Confidential

46

Aerospike can perform multiple operations on a record in one transaction. Update the tweet count and timestamp in a user record and read the new tweet count.

In TweetService.updateUser()

1. Comment out the code added in exercise 2

2. Uncomment the line:

```
// TODO: Update tweet count and last tweeted timestamp in the user record using Operate  
// Exercise 6  
// updateUserUsingOperate(client, userKey, policy, ts);
```

3. In TweetService.updateUserUsingOperate() , add code similar to this:

```
Record record = client.operate(policy, userKey,  
    Operation.add(new Bin("tweetcount", 1)),  
    Operation.put(new Bin("lasttweeted", ts)),  
    Operation.get());
```

A

## PHP Exercises

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

47

## Exercise 1 – PHP: Connect & Disconnect

Locate Program Class in PHP project

1. Create an instance of Aerospike with one initial IP address. Ensure that this connection is created only once
2. Add code to disconnect from the cluster. Ensure that this code is executed only once

```
// @todo create a config array describing the Aerospike cluster  
// @todo: create an instance of Aerospike named $client
```



```
// @todo close the connection to the Aerospike cluster
```



<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

48

In this exercise you will connect to a Cluster by creating an Aerospike instance, passing a \$config structure to the constructor, that has a single IP address and port. These should be to a node in your own cluster.

Ensure that you only create one client instance at the start of the program. The Aerospike is thread safe and creates a pool of worker threads, this means you DO NOT need to create your own connection or thread pool.

1. In the constructor for the class Program, add code similar to this;

```
$config = array("hosts" => array(array("addr" => $HOST_ADDR,  
                                         "port" => $HOST_PORT)));  
$client = new Aerospike($config, false);  
if (!$client->isConnected()) {  
    echo standard_fail($client);  
    echo colorize("Connection to Aerospike cluster failed!  
Please check the server settings and try again!\n", 'red',  
true);  
    exit(2);  
}
```

**Make sure you have your server up and you know its IP address**

2. At the end of the program, add code, similar to this, to disconnect from the cluster. This should only be done once. After close() is called, the client instance cannot be used.

```
$client->close();
```

## Exercise 2 – PHP: Write User Record

### Create a User Record

Locate UserService class in PHP project

1. Create a User Record – In UserService.createUser()
  1. Create an instance of WritePolicy
  2. Create Key and Bin instances for the User Record
  3. Write User Record

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

49

Create a User Record. In UserService.createUser(), add code similar to this:

1. Create an Array of Bin values from the user input

```
// Get username
echo colorize("Enter username (or hit Return to skip): ");
$username = trim(readline());
if ($username == '') return;
$bins = array('username' => $username);
// Get password
echo colorize("Enter password for $username: ");
$bins['password'] = trim(readline());
// Get gender
echo colorize("Select gender (f or m) for $username: ");
$bins['gender'] = substr(trim(readline()), 0, 1);
// Get region
echo colorize("Select region (north, south, east or west) for $username: ");
$bins['region'] = substr(trim(readline()), 0, 1);
// Get interests
echo colorize("Enter comma-separated interests for $username: ");
$bins['interests'] = explode(',', trim(readline()));
echo colorize("Creating user record >", 'black', true);
$key = $this->getUserKey($username);
if ($this->annotate) display_code(__FILE__, __LINE__, 6);
$status = $this->client->put($key, $bins);
if ($status !== Aerospike::OK) {
    // throwing an \Aerospike\Training\Exception
    echo fail();
    throw new Exception($this->client, "Failed to create user $username");
}
```

2. Create a Key

3. Write a user record using the Key and Bins

4. Check result code for errors

## Exercise 2 – PHP: Write Tweet Record

### Create a Tweet Record

Locate TweetService classe in PHP project

1. Create a Tweet Record – In TweetService.createTweet()
  1. Create Key and Bin instances for the Tweet Record
  2. Write Tweet Record
  3. Update Tweet count and last Tweeted timestamp in the User Record

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

50

Create a Tweet Record. In TweetService.createTweet(), add code similar to this:

1. Read user record

```
// Check if username exists
$record = $this->getUser($username);
$ubins = $record['bins'];
$tweet_count = isset($ubins['tweetcount']) ? $ubins['tweetcount'] : 0;
$tweet_count++;
```

2. Create Key and Bin instances

```
$bins = array();
// Get a tweet
echo colorize("Enter tweet for $username: ");
$bins['tweet'] = trim(readline());
$bins['ts'] = time() * 1000;
$bins['username'] = $username;
echo colorize("Creating tweet record >", 'black', true);
```

3. Write a tweet record using the Key and Bins

```
$key = $this->getTweetKey($username, $tweet_count);
$status = $this->client->put($key, $bins);
if ($status !== Aerospike::OK) {
    // throwing an \Aerospike\Training\Exception
    echo fail();
    throw new Exception($this->client, "Failed to create the tweet");
}
echo success();
return $this->updateUser($username, $bins['ts'], $tweet_count);
```

4. Update the user record with tweet count

## Exercise 2 PHP: Read Records

Read User Record

Locate BaseService class in PHP project

1. Read User record – In BaseService.getUser()
  1. Read User Record

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

51

Read a User Record. In BaseService.getUser(), add code, similar to this, to:

```
if ($username == '') {
    // Get username
    echo colorize("Enter username (or hit Return to skip): ");
    $username = trim(readline());
}
if ($username != '') {
    $key = $this->getUserKey($username);
    if ($this->annotate) display_code(__FILE__, __LINE__, 6);
    $status = $this->client->get($key, $record);
    if ($status !== Aerospike::OK) {
        // throwing an \Aerospike\Training\Exception
        throw new Exception($this->client, "Failed to get the user
$username");
    }
    return $record;
} else {
    throw new \Exception("Invalid input provided for username in
UserService::getUser()");
}
```

### Exercise 3 – PHP: Batch Read

Batch Read Tweets for a given user

Locate TweetService class in PHP project

1. In TweetService.batchGetTweets()
  1. Read User Record
  2. Determine how many Tweets the user has
  3. Create an array of Tweet Key instances
  4. Initiate Batch Read operation
  5. Output Tweets to the console

Read all the tweets for a given user. In TweetService.batchGetTweets(), add code similar to this:

1. Read a user record
2. Get the tweet count
3. Create a “list” of tweet keys
4. Perform a Batch operation to read all the tweets
5. Then print out the tweets

```
$record = $this->getUser($username, array('tweetcount'));
$tweet_count = intval($record['bins']['tweetcount']);
if ($this->annotate) display_code(__FILE__, __LINE__, 4);
$keys = array();
for ($i = 1; $i <= $tweet_count; $i++) {
    $keys[] = $this->getTweetKey($username, $i);
}
echo colorize("Batch-reading the user's tweets >", 'black',
true);
if ($this->annotate) display_code(__FILE__, __LINE__, 6);
$status = $this->client->getMany($keys, $records);
if ($status !== Aerospike::OK) {
    echo fail();
    // throwing an \Aerospike\Training\Exception
    throw new Exception($this->client, "Failed to batch-read the
    tweets for $username");
}
echo success();
echo colorize("Here are $username's tweets:\n", 'blue', true);
foreach ($records as $record) {
    echo colorize($record['bins']['tweet'], 'black')."\n";
}
```

## Exercise 4 – PHP: Scan

Scan all tweets for all users

Locate TweetService class in the PHP project

1. In TweetService.scanAllTweets()
  1. Initiate scan operation that invokes callback for outputting tweets to the console



© 2014 Aerospike. All rights reserved. Confidential

53

Scan all the tweets for all users – warning – there could be a large result set.

In the TweetService.scanAllTweets(), add code similar to this:

1. Perform a Scan operation
2. process the results

```
$status = $this->client->scan('test', 'tweets', function
($record) {
    var_dump($record['bins']['tweet']);
}, array('tweet'));
if ($status !== Aerospike::OK) {
    // throwing an \Aerospike\Training\Exception
    throw new Exception($this->client, "Failed to scan
test.tweets");
}
```

## Exercise 5 – PHP: Read-modify-write

Update the User record with a new password ONLY if the User record is un-modified.

Locate UserService class in the PHP project

1. In UserService.updatePasswordUsingCAS()
  1. Create a Write policy array
  2. Set Write policy generation to the value read from the User record.
  3. Set Write policy's generation policy to POLICY\_GEN\_EQ
  4. Update the User record with the new password using the Write policy array

Update the User record with a new password ONLY if the User record is un-modified

In UserService.updatePasswordUsingCAS(), add code similar to this:

1. Create a Write policy array
2. Set Write policy generation to the value read from the User record.
3. Set Write policy's generation policy to POLICY\_GEN\_EQ
4. Update the User record with the new password using the Generation count from the meta data

```
$key = $this->getUserKey($username);
if ($this->annotate) display_code(__FILE__, __LINE__, 1);
$status = $this->client->exists($key, $metadata);
if ($status !== Aerospike::OK) {
    // throwing an \Aerospike\Training\Exception
    echo fail();
    throw new Exception($this->client, "Failed to retrieve
metadata for the record");
}
echo success();
var_dump($metadata);


echo colorize("Updating the user's password if the generation
matches >", 'black', true);
if ($this->annotate) display_code(__FILE__, __LINE__, 4);
$bins = array('password' => $new_password);
$policy = array(Aerospike::OPT_POLICY_GEN =>
    array(Aerospike::POLICY_GEN_EQ, $metadata['generation']));
$status = $this->client->put($key, $bins, $metadata['ttl'],
$policy);
if ($status !== Aerospike::OK) {
    // throwing an \Aerospike\Training\Exception
    echo fail();
    throw new Exception($this->client, "Writing with
POLICY_GEN_EQ failed due to generation mismatch");
}
```

## Exercise 6 – PHP: Operate

Update Tweet count and timestamp and examine the new Tweet count

Locate TweetService class in the PHP project

1. In TweetService.updateUser()
  1. Remove the code added in Exercise 2 for updating tweet count and timestamp
  2. Use Operate command to update the user record, passing in policy, user record key, .add operation incrementing tweet count, .put operation updating timestamp and .get operation to read the user record
  3. Output updated Tweet count to console



© 2014 Aerospike. All rights reserved. Confidential

55

Aerospike can perform multiple operations on a record in one transaction. Update the tweet count and timestamp in a user record and read the new tweet count.

In TweetService.updateUser()

1. Delete the code added in Exercise 2

A

## C# Exercises

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential


56

## Exercise 1 – C#: Connect & Disconnect

Locate Program Class in AerospikeTraining Solution

1. Create an instance of AerospikeClient with one initial IP address.  
Ensure that this connection is created only once
2. Add code to disconnect from the cluster. Ensure that this code is  
executed only once

```
// TODO: Create new AerospikeClient instance
```



<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

57

In this exercise you will connect to a Cluster by creating an AerospikeClient instance, passing a single IP address and port to the constructor. The IP address and port should be to a node in your own cluster.

Ensure that you only create one client instance at the start of the program. The AerospikeClient is thread safe and creates a pool of worker threads, this means you DO NOT need to create your own connection or thread pool.

1. In the Main() method for the class Program, add code similar to this;

```
// Specify IP of one of the nodes in the cluster
string asServerIP = "172.16.159.206";
// Specify Port that the node is listening on
int asServerPort = 3000;
// Establish connection
client = new AerospikeClient(asServerIP, asServerPort);
```

**Make sure you have your server up and you know its IP address**

2. At the end of Main() method, add code, similar to this, to disconnect from the cluster. This should only be done once. After close() is called, the client instance cannot be used.

```
if (client != null && client.Connected)
{
    // Close Aerospike server connection
    client.Close();
}
```

## Exercise 2 – C#: Write Records

Create a User Record and Tweet Record

Locate UserService and TweetService classes in AerospikeTraining Solution

1. Create a User Record – In UserService.createUser()
  1. Create an instance of WritePolicy
  2. Create Key and Bin instances for the User Record
  3. Write User Record
2. Create a Tweet Record – In TweetService.createTweet()
  1. Create an instance of WritePolicy
  2. Create Key and Bin instances for the Tweet Record
  3. Write Tweet Record
  4. Update Tweet count and last Tweeted timestamp in the User Record

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

58

Create a User Record. In UserService.createUser(), add code similar to this:

1. Create a WritePolicy

```
// Write record  
WritePolicy wPolicy = new WritePolicy();  
wPolicy.recordExistsAction = RecordExistsAction.UPDATE;
```

2. Create Key and Bin instances

```
Key key = new Key("test", "users", username);  
Bin bin1 = new Bin("username", username);  
Bin bin2 = new Bin("password", password);  
Bin bin3 = new Bin("gender", gender);  
Bin bin4 = new Bin("region", region);  
Bin bin5 = new Bin("lasttweeted", 0);  
Bin bin6 = new Bin("tweetcount", 0);  
Bin bin7 = Bin.asList("interests",  
    interests.Split(',').ToList<object>());
```

3. Write a user record using the Key and Bins

```
client.Put(wPolicy, key, bin1, bin2, bin3,  
    bin4, bin5, bin6, bin7);
```

Create a Tweet Record. In TweetService.createTweet(), add code similar to this:

1. Read User record

```
userRecord = client.Get(null, new Key("test", "tweets", username));
```

2. Create a WritePolicy

```
WritePolicy wPolicy = new WritePolicy();  
wPolicy.recordExistsAction = RecordExistsAction.UPDATE;
```

3. Create Key and Bin instances

```
long ts = getTimeStamp();  
tweetKey = new Key("test", "tweets", username + ":"  
    + nextTweetCount);  
Bin bin1 = new Bin("tweet", tweet);  
Bin bin2 = new Bin("ts", ts);  
Bin bin3 = new Bin("username", username);
```

4. Write a tweet record using the Key and Bins

```
client.Put(wPolicy, tweetKey, bin1, bin2, bin3);  
Console.WriteLine("\nINFO: Tweet record created!");
```

5. Update the user record with tweet count

```
// Update tweet count and last tweet'd timestamp  
// in the user record  
updateUser(client, userKey, wPolicy, ts, nextTweetCount);
```

## Exercise 2 ...Cont.- C#: Read Records

### Read User Record

Locate UserService and TweetService classes in AerospikeTraining Solution

1. Read User record – In UserService.getUser()
  1. Read User Record
  2. Output User Record to the console

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

59

Read a User Record. In UserService.getUser(), add code, similar to this, to:

1. Read a User record
2. Output the User record to the console

```
// Check if username exists
userKey = new Key("test", "users", username);
userRecord = client.Get(null, userKey);
if (userRecord != null)
{
    Console.WriteLine("\nINFO: User record read successfully! Here are the details:\n");
    Console.WriteLine("username: " + userRecord.GetValue("username"));
    Console.WriteLine("password: " + userRecord.GetValue("password"));
    Console.WriteLine("gender: " + userRecord.GetValue("gender"));
    Console.WriteLine("region: " + userRecord.GetValue("region"));
    Console.WriteLine("tweetcount: " + userRecord.GetValue("tweetcount"));
    List<object> interests = (List<object>) userRecord.GetValue("interests");
    Console.WriteLine("interests: " + interests.Aggregate((x, y) => x + "," + y));
}
else
{
    Console.WriteLine("ERROR: User record not found!");
}
```

### Exercise 3 – C#: Batch Read

Batch Read tweets for a given user

Locate UserService class in AerospikeTraining Solution

1. In UserService.batch GetUser Tweets()

1. Read User Record
2. Determine how many tweets the user has
3. Create an array of tweet Key instances -- keys[tweetCount]
4. Initiate Batch Read operation
5. Output tweets to the console

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

60

Read all the tweets for a given user. In UserService.batch GetUser Tweets(), add code similar to this:

1. Read a user record

```
userKey = new Key("test", "users", username);
userRecord = client.Get(null, userKey);
```

2. Get the tweet count

```
// Get how many tweets the user has
int tweetCount = int.Parse(userRecord.GetValue("tweetcount").ToString());
```

3. Create a “list” of tweet keys

```
// Create an array of keys so we can initiate batch read operation
Key[] keys = new Key[tweetCount];
for (int i = 0; i < keys.Length; i++)
{
    keys[i] = new Key("test", "tweets", (username + ":" + (i + 1)));
}
Console.WriteLine("\nHere's " + username + "'s tweet(s):\n");
```

4. Perform a Batch operation to read all the tweets

```
// Initiate batch read operation
Record[] records = client.Get(null, keys);
for (int j = 0; j < records.Length; j++)
{
```

5. Then print out the tweets

```
    Console.WriteLine(records[j].GetValue("tweet"));
}
```

## Exercise 4 – C#: Scan

Scan all Tweets for all users

Locate TweetService class in AerospikeTraining Solution

1. In TweetService.scanAllTweetsForAllUsers()
  1. Create an instance of ScanPolicy
  2. Set policy parameters (optional)
  3. Initiate scan operation that invokes callback for outputting Tweets to the console
  4. Create a call back method TweetService.scanTweetsCallback() and print results



© 2014 Aerospike. All rights reserved. Confidential

61

Scan all the tweets for all users – warning – there could be a large result set.

In the TweetService.scanAllTweetsForAllUsers(), add code similar to this:

1. Create a ScanPolicy
2. Set policy parameters
3. Perform a Scan operation
4. Create a call back method TweetService.scanTweetsCallback() and print the results

```
ScanPolicy policy = new ScanPolicy();
policy.concurrentNodes = true;
policy.priority = Priority.LOW;
policy.includeBinData = true;

client.ScanAll(policy, "test", "tweets", scanTweetsCallback, "tweet");
```

```
public void scanTweetsCallback(Key key, Record record)
{
    Console.WriteLine(record.GetValue("tweet"));
} //scanTweetsCallback
```

## Exercise 5 – C#: Read-modify-write

Update the User record with a new password ONLY if the User record is un-modified

Locate UserService class in AerospikeTraining Solution

1. In UserService.updatePasswordUsingCAS()
  1. Create a WritePolicy
  2. Set WritePolicy.generation to the value read from the User record.
  3. Set WritePolicy.generationPolicy to EXPECT\_GEN\_EQUAL
  4. Update the User record with the new password using the GenerationPolicy

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

62

Update the User record with a new password ONLY if the User record is un-modified

In UserService.updatePasswordUsingCAS(), add code similar to this:

1. Create a WritePolicy
2. Set WritePolicy.generation to the value read from the User record.
3. Set WritePolicy.generationPolicy to EXPECT\_GEN\_EQUAL
4. Update the User record with the new password using the GenerationPolicy

```
// Check if username exists
userKey = new Key("test", "users", username);
userRecord = client.Get(null, userKey);
if (userRecord != null)
{
    // Get new password
    string password;
    Console.WriteLine("Enter new password for " + username + ":");
    password = Console.ReadLine();

    WritePolicy writePolicy = new WritePolicy();
    // record generation
    writePolicy.generation = userRecord.generation;
    writePolicy.generationPolicy = GenerationPolicy.EXPECT_GEN_EQUAL;
    // password Bin
    passwordBin = new Bin("password", password);
    client.Put(writePolicy, userKey, passwordBin);

    Console.WriteLine("\nINFO: The password has been set to: " + password);
}
```

## Exercise 6 – C#: Operate

Update Tweet count and timestamp and examine the new Tweet count

Locate TweetService class in AerospikeTraining Solution

1. In TweetService.updateUser()
  1. Comment out code added in Exercise 2 for updating tweet count and timestamp
  2. Uncomment line updateUserUsingOperate(client, userKey, policy, ts, tweetCount);
  3. In updateUserUsingOperate(client, userKey, policy, ts, tweetCount)
    1. Initiate operate passing in policy, user record key, .add operation incrementing tweet count, .put operation updating timestamp and .get operation to read the user record
    2. Output updated Tweet count to console



© 2014 Aerospike. All rights reserved. Confidential

63

Aerospike can perform multiple operations on a record in one transaction. Update the tweet count and timestamp in a user record and read the new tweet count.

In TweetService.updateUser()

1. Comment out the code added in exercise 2

2. Uncomment the line:

```
// TODO: Update tweet count and last tweeted timestamp in the user record using Operate  
// Exercise 6  
// updateUserUsingOperate(client, userKey, policy, ts);
```

3. In TweetService.updateUserUsingOperate() , add code similar to this:

```
Record record = client.Operate(policy, userKey,  
    Operation.Add(new Bin("tweetcount", 1)),  
    Operation.Put(new Bin("lasttweeted", ts)),  
    Operation.Get());  
Console.WriteLine("INFO: The tweet count now is: " + record.GetValue("tweetcount"));
```



## Node.js Exercises

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

64

## Exercise 1 – Node.js: Connect & Disconnect

Locate app.js

1. Create an instance of aerospike.client with one initial IP address. Ensure that this connection is created only once.
2. Add code to disconnect from the cluster. Ensure that this code is executed only once.

```
// TODO: Create new AerospikeClient instance
```



<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

65

In this exercise you will connect to a Cluster by creating an Aerospike client instance, passing a single IP address and port to the constructor. The IP address and port should be to a node in your own cluster.

Ensure that you only create one client instance at the start of the program. The Aerospike client is thread safe and creates a pool of worker threads, this means you DO NOT need to create your own connection or thread pool.

1. In app.js add code similar to this;

```
// Connect to the Aerospike Cluster
var client = aerospike.client({
    hosts: [ { addr: '172.16.159.172', port: 3000 } ]
}).connect(function(response) {
    // Check for errors
    if ( response.code == aerospike.status.AEROSPIKE_OK ) {
        // Connection succeeded
        console.log("Connection to the Aerospike cluster succeeded!");
    }
    else {
        // Connection failed
        console.log("Connection to the Aerospike cluster failed. Please check cluster IP and Port
settings and try again.");
        process.exit(0);
    }
});
```

**Make sure you have your server up and you know its IP address**

2. Add a `process.on` exit function and call `close()` to disconnect from the cluster. This should only be done once. After `close()` is called, the client instance cannot be used.

```
// Setup tear down
process.on('exit', function() {
    if (client != null) {
        client.close();
        // console.log("Connection to Aerospike cluster closed!");
    }
});
```

## Exercise 2 – Node.js: Write Records

Create a User Record and Tweet Record

Locate user\_service.js

1. Create a User Record – In exports.createUser
  1. Create Key and Bin instances for the User Record
  2. Write User Record

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

66

Create a User Record. In exports.createUser, add code similar to this:

1. Create Key and Bin instances

```
var key = {
  ns: "test",
  set: "users",
  key: answers.username
};

var bins = {
  username: answers.username,
  password: answers.password,
  gender: answers.gender,
  region: answers.region,
  lasttweeted: 0,
  tweetcount: 0,
  interests: answers.interests.split(",")
};

client.put(key, bins, function(err, rec, meta) {
  // Check for errors
  if (err.code === 0) {
    console.log("INFO: User record created!");

    // Create tweet record
    tweet_service.createTweet(client);
  }
  else {
    console.log("ERROR: User record not created!");
    console.log(err);
  }
});
```

2. Write a user record using the Key and Bins

## Exercise 2 – ..Cont Node.js: Write Records..

Create a User Record and Tweet Record

Locate tweet\_service.js

1. Create a Tweet Record – In export.createTweet
  1. Create Key and Bin instances for the Tweet Record
  2. Write Tweet Record
  3. Update tweet count and last tweeted timestamp in the User Record

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

67

Create a Tweet Record. In exports.createTweet add code similar to this:

1. Create Key and Bin instances

```
// Write Tweet record
var tweet_key = {
  ns: "test",
  set: "tweets",
  key: userrecord.username + ":" + tweet_count
};

var bins = {
  username: userrecord.username,
  tweet: answer.tweet,
  ts: ts
};
```

2. Write a tweet record using the Key and Bins

```
client.put(tweet_key, bins, function(err, tweetrecord, meta) {
  // Check for errors
  if (err.code === 0) {
    console.log("INFO: Tweet record created!");
```

3. Update the user record with tweet count

```
// Update tweetcount and last tweet'd timestamp in the user record
updateUser(client, user_key, ts, tweet_count);
}

else {
  console.log("ERROR: Tweet record not created!");
  console.log("",err);
}
```

## Exercise 2 ...Cont.– Node.js: Read Records

Read User Record

Locate user\_service.js

1. Read User record – In exports.getUser()
  1. Read User Record
  2. Output User Record to the console

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

68

Read a User Record. In exports.getUser, add code, similar to this, to:

1. Read a User record
2. Output the User record to the console

```
// Read User record
var key = {
    ns: "test",
    set: "users",
    key: answer.username
};

client.get(key, function(err, rec, meta) {
    // Check for errors
    if (err.code === 0) {
        console.log("INFO: User record read successfully! Here are the details:");
        console.log("username: " + rec.username);
        console.log("password: " + rec.password);
        console.log("gender: " + rec.gender);
        console.log("region: " + rec.region);
        console.log("tweetcount: " + rec.tweetcount);
        console.log("lasttweeted: " + rec.lasttweeted);
        console.log("interests: " + rec.interests);
    }
    else {
        console.log("ERROR: User record not found!");
    }
});
```

## Exercise 3 – Go: Batch Read

Batch Read tweets for a given user

Locate tweetaspire.go

1. In Batch GetUser Tweets()
  1. Read User Record
  2. Determine how many tweets the user has
  3. Create an array of tweet Key instances -- keys[tweetCount]
  4. Initiate Batch Read operation
  5. Output tweets to the console

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

69

Read all the tweets for a given user. In Batch GetUser Tweets(), add code similar to this:

1. Read a user record

```
userKey, _ := NewKey("test", "users", username)
userRecord, err := client.Get(nil, userKey)
panicOnErr(err)
```

2. Get the tweet count

```
if userRecord != nil {
    // Get how many tweets the user has
    tweetCount := userRecord.Bins["tweetcount"].(int)

    // Create an array of keys so we can initiate batch read
    // operation
    keys := make([]*Key, tweetCount)
```

3. Create a “list” of tweet keys

```
for i := 0; i < len(keys); i++ {
    keyString, _ := fmt.Sprintf("%s:%d", username, i+1)
    key, _ := NewKey("test", "tweets", keyString)
    keys[i] = key
}
```

```
fmt.Printf("\nHere's %s's tweet(s):\n", username)
```

4. Perform a Batch operation to read all the tweets

```
// Initiate batch read operation
if len(keys) > 0 {
```

```
    records, err := client.BatchGet(NewPolicy(), keys)
    panicOnErr(err)
```

```
    for _, element := range records {
        fmt.Println(element.Bins["tweet"])
    }
}
```

5. Then print out the tweets

```
}
```

## Exercise 4 – Node.js: Scan

Scan all tweets for all users

Locate tweet\_service.js

1. In exports.scanAllTweetsForAllUsers
  1. Create an instance of query
  2. Execute the query
  3. Process the stream and Print the results

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

70

Scan all the tweets for all users – warning – there could be a large result set.

In the function exports.scanAllTweetsForAllUsers, add code similar to this:

1. Create a instance of a query      `var query = client.query('test', 'tweets');`
2. Execute the query      `var stream = query.execute();`
3. Process the stream and print the results  
`stream.on('data', function(record){  
 console.log(record.bins.tweet);  
});  
stream.on('error', function(err){  
 console.log('ERROR: Scan All Tweets For All Users failed: ',err);  
});  
stream.on('end', function(){  
 // console.log('INFO: Scan All Tweets For All Users completed!');  
});`

## Exercise 5 – Node.js: Read-modify-write

Update the User record with a new password ONLY if the User record is un-modified

Locate user\_service.js

1. In the function exports.updatePasswordUsingCAS
  1. Create metadata containing the generation to the value read from the User record.
  2. Create a Write policy using aerospike.policy
  3. Set writePolicy.gen to aerospike.policy.get.EQ
  4. Update the User record with the new password using the writePolicy

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

71

Update the User record with a new password ONLY if the User record is un-modified  
In exports.updatePasswordUsingCAS, add code similar to this:

1. Create metadata containing the generation to the value read from the User record.
2. Create a Write policy using aerospike.policy
3. Set writePolicy.gen to aerospike.policy.get.EQ
4. Update the User record with the new password using the writePolicy


```
// Set the generation count to the current one from the user record.  
// Then, setting writePolicy.gen to aerospike.policy.gen.EQ will ensure we don't have a 'dirty-  
read' when updating user's password  
var metadata = {  
    gen: meta.gen  
}  
  
var writePolicy = aerospike.policy;  
writePolicy.key = aerospike.policy.key.SEND;  
writePolicy.retry = aerospike.policy.retry.NONE;  
writePolicy.exists = aerospike.policy.exists.IGNORE;  
writePolicy.commitLevel = aerospike.policy.commitLevel.ALL;  
// Setting writePolicy.gen to aerospike.policy.gen.EQ will ensure we don't have a 'dirty-read'  
// when updating user's password  
writePolicy.gen = aerospike.policy.gen.EQ;  
  
var bin = {  
    password: answer2.password  
};  
  
client.put(key, bin, metadata, writePolicy, function(err, rec) {  
    // Check for errors  
    if ( err.code === 0 ) {  
        console.log("INFO: User password updated successfully!");  
    }  
    else {  
        console.log("ERROR: User password update failed:\n", err);  
    }  
});
```

## Exercise 6 – Node.js: Operate

Update Tweet count and timestamp and examine the new Tweet count

Locate tweet\_service.js

1. In the function updateUserUsingOperate
  1. In updateUserUsingOperate(client, userKey, policy, ts, tweetCount)
    1. Initiate operate passing in policy, user record key, .add operation incrementing tweet count, .put operation updating timestamp and .get operation to read the user record
    2. Output updated tweet count to console



© 2014 Aerospike. All rights reserved. Confidential

72

Aerospike can perform multiple operations on a record in one transaction. Update the tweet count and timestamp in a user record and read the new tweet count.

In updateUser

1. Comment out the code added in exercise 2

2. Uncomment the line:

```
// TODO: Update tweet count and last tweeted timestamp in the user record using operate
// Exercise 6
// console.log("TODO: Update tweet count and last tweeted timestamp in the user record using
// operate");
// updateUserUsingOperate(client, user_key, ts);
```

- 3.

In updateUserUsingOperate , add code similar to this:

```
// Update User record
var operator = aerospike.operator;
var operations = [operator.incr('tweetcount', 1),operator.write('lasttweeted',
ts),operator.read('tweetcount')];
client.operate(user_key, operations, function(err, bins, metadata, key) {
    // Check for errors
    if (err.code === 0) {
        console.log("INFO: The tweet count now is: " + bins.tweetcount);
    }
    else {
        console.log("ERROR: User record not updated!");
        console.log(err);
    }
});
```

## Summary

You have learned how to:

- Connect to Cluster
- Write and Read Records
- Batch Read Records
- Read-Modify-Write
- Operate
- Handle errors correctly

A

Go Exercises

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

74

## Exercise 1 – Go: Connect & Disconnect

Locate tweetaspire.go

1. Create an instance of AerospikeClient with one initial IP address. Ensure that this connection is created only once.
2. Add code to disconnect from the cluster. Ensure that this code is executed only once.

```
// TODO: Create new AerospikeClient instance
```



<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

75

In this exercise you will connect to a Cluster by creating an AerospikeClient instance, passing a single IP address and port to the constructor. The IP address and port should be to a node in your own cluster.

Ensure that you only create one client instance at the start of the program. The AerospikeClient is thread safe and creates a pool of worker threads, this means you DO NOT need to create your own connection or thread pool.

1. In the main() function add code similar to this;

```
fmt.Println("INFO: Connecting to Aerospike cluster...")
// Establish connection to Aerospike server
client, err := NewClient("54.90.203.181", 3000)
panicOnErr(err)
```

**Make sure you have your server up and you know its IP address**

2. Add a “defer” and call Close() to disconnect from the cluster. This should only be done once. After close() is called, the client instance cannot be used.

```
defer client.Close()
```

## Exercise 2 – Go: Write Records

Create a User Record and Tweet Record

Locate tweetaspire.go

1. Create a User Record – In CreateUser()
  1. Create an instance of WritePolicy
  2. Create Key and Bin instances for the User Record
  3. Write User Record
2. Create a Tweet Record – In CreateTweet()
  1. Create an instance of WritePolicy
  2. Create Key and Bin instances for the Tweet Record
  3. Write Tweet Record
  4. Update tweet count and last tweeted timestamp in the User Record

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

76

Create a User Record. In CreateUser(),  
add code similar to this:

1. Create a WritePolicy

```
// Write record
wPolicy := NewWritePolicy(0, 0) // generation = 0, expiration = 0
wPolicy.RecordExistsAction = UPDATE
```

2. Create Key and Bin instances

```
key, _ := NewKey("test", "users", username)
bin1 := NewBin("username", username)
bin2 := NewBin("password", password)
bin3 := NewBin("gender", gender)
bin4 := NewBin("region", region)
bin5 := NewBin("lasttweeted", 0)
bin6 := NewBin("tweetcount", 0)
arr := strings.Split(interests, ",")
bin7 := NewBin("interests", arr)
```

3. Write a user record using the Key and Bins

```
err := client.PutBins(wPolicy, key, bin1, bin2, bin3,
                      bin4, bin5, bin6, bin7)
panicOnError(err)
```

Create a Tweet Record. In CreateTweet(),  
add code similar to this:

1. Create a WritePolicy

```
// Write record
wPolicy := NewWritePolicy(0, 0) // generation = 0, expiration = 0
wPolicy.RecordExistsAction = UPDATE
// Create timestamp to store along with the tweet so we can
// query, index and report on it
timestamp := getTimeStamp()
```

2. Create Key and Bin instances

```
keyString := fmt.Sprintf("%s:%d", username, tweetCount)
tweetKey, _ := NewKey("test", "tweets", keyString)
bin1 := NewBin("tweet", tweet)
bin2 := NewBin("ts", timestamp)
bin3 := NewBin("username", username)
```

3. Write a tweet record using the Key and Bins

```
err := client.PutBins(wPolicy, tweetKey, bin1, bin2, bin3)
panicOnError(err)
fmt.Printf("\nINFO: Tweet record created! with key: %s, %v, %v, %v\n",
          keyString, bin1, bin2, bin3)
```

4. Update the user record with tweet count

```
// Update tweet count and last tweet'd timestamp in the user record
updateUser(client, userKey, nil, timestamp, tweetCount)
```

## Exercise 2 ...Cont.– Go: Read Records

Read User Record

Locate tweetaspire.go

1. Read User record – In GetUser()
  1. Read User Record
  2. Output User Record to the console

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

77

Read a User Record. In GetUser(), add code, similar to this, to:

1. Read a User record
2. Output the User record to the console

```
// Check if username exists
userKey, _ := NewKey("test", "users", username)
userRecord, err := client.Get(nil, userKey)
panicOnError(err)
if userRecord != nil {
    fmt.Printf("\nINFO: User record read successfully! Here are the details:\n")
    fmt.Printf("username: %s\n", userRecord.Bins["username"].(string))
    fmt.Printf("password: %s\n", userRecord.Bins["password"].(string))
    fmt.Printf("gender: %s\n", userRecord.Bins["gender"].(string))
    fmt.Printf("region: %s\n", userRecord.Bins["region"].(string))
    fmt.Printf("tweetcount: %d\n", userRecord.Bins["tweetcount"].(int))
    fmt.Printf("interests: %v\n", userRecord.Bins["interests"])
} else {
    fmt.Printf("ERROR: User record not found!\n")
}
```

## Exercise 3 – Go: Batch Read

Batch Read tweets for a given user

Locate tweetaspire.go

1. In Batch GetUser Tweets()
  1. Read User Record
  2. Determine how many tweets the user has
  3. Create an array of tweet Key instances -- keys[tweetCount]
  4. Initiate Batch Read operation
  5. Output tweets to the console

<AEROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

78

Read all the tweets for a given user. In Batch GetUser Tweets(), add code similar to this:

1. Read a user record

```
userKey, _ := NewKey("test", "users", username)
userRecord, err := client.Get(nil, userKey)
panicOnErr(err)
```

2. Get the tweet count

```
if userRecord != nil {
    // Get how many tweets the user has
    tweetCount := userRecord.Bins["tweetcount"].(int)

    // Create an array of keys so we can initiate batch read
    // operation
    keys := make([]*Key, tweetCount)
```

3. Create a “list” of tweet keys

```
for i := 0; i < len(keys); i++ {
    keyString, _ := fmt.Sprintf("%s:%d", username, i+1)
    key, _ := NewKey("test", "tweets", keyString)
    keys[i] = key
}
```

```
fmt.Printf("\nHere's %s's tweet(s):\n", username)
```

4. Perform a Batch operation to read all the tweets

```
// Initiate batch read operation
if len(keys) > 0 {
```

```
    records, err := client.BatchGet(NewPolicy(), keys)
    panicOnErr(err)
```

```
    for _, element := range records {
```

```
        fmt.Println(element.Bins["tweet"])
    }
}
```

5. Then print out the tweets


```
}
```

## Exercise 4 – Go: Scan

Scan all tweets for all users

Locate tweetaspire.go

1. In ScanAllTweetsForAllUsers()
  1. Create an instance of ScanPolicy
  2. Set policy parameters (optional)
  3. Initiate scan operation that invokes callback for outputting tweets to the console
  4. Print results



© 2014 Aerospike. All rights reserved. Confidential

79

Scan all the tweets for all users – warning – there could be a large result set.

In the ScanAllTweetsForAllUsers(), add code similar to this:

1. Create a ScanPolicy
2. Set policy parameters
3. Perform a Scan operation
4. Print the results

```
policy := NewScanPolicy()
policy.ConcurrentNodes = true
policy.Priority = LOW
policy.IncludeBinData = true

records, err := client.ScanAll(policy, "test", "tweets", "tweet")
panicOnError(err)

for element := range records.Records {
    fmt.Println(element.Bins["tweet"])
}
```

## Exercise 5 – Go: Read-modify-write

Update the User record with a new password ONLY if the User record is un-modified

Locate tweetaspire.go

1. In UpdatePasswordUsingCAS()
  1. Create a WritePolicy
  2. Set WritePolicy.generation to the value read from the User record.
  3. Set WritePolicy.generationPolicy to EXPECT\_GEN\_EQUAL
  4. Update the User record with the new password using the GenerationPolicy

<EROSPIKE>

© 2014 Aerospike. All rights reserved. Confidential

80

Update the User record with a new password ONLY if the User record is un-modified

In UpdatePasswordUsingCAS(), add code similar to this:

1. Create a WritePolicy
2. Set WritePolicy.generation to the value read from the User record.
3. Set WritePolicy.generationPolicy to EXPECT\_GEN\_EQUAL
4. Update the User record with the new password using the GenerationPolicy

```
// Check if username exists
userKey, _ := NewKey("test", "users", username)
userRecord, err := client.Get(nil, userKey)
panicOnError(err)
if err == nil {
    // Get new password
    var password string
    fmt.Println("Enter new password for %s:", username)
    fmt.Scanf("%s", &password)

    writePolicy := NewWritePolicy(0, 0) // generation = 0, expiration = 0
    // record generation
    writePolicy.Generation = userRecord.Generation
    writePolicy.GenerationPolicy = EXPECT_GEN_EQUAL
    // password Bin
    passwordBin := NewBin("password", password)
    err = client.PutBins(writePolicy, userKey, passwordBin)
    panicOnError(err)
    fmt.Printf("\nINFO: The password has been set to: %s", password)
} else {
    fmt.Printf("ERROR: User record not found!")
}
```

## Exercise 6 – Go: Operate

Update Tweet count and timestamp and examine the new Tweet count

Locate tweetaspire.go

1. In updateUser()
  1. Comment out code added in Exercise 2 for updating tweet count and timestamp
  2. Uncomment line updateUserUsingOperate(client, userKey, policy, ts, tweetCount);
  3. In updateUserUsingOperate(client, userKey, policy, ts, tweetCount)
    1. Initiate operate passing in policy, user record key, .add operation incrementing tweet count, .put operation updating timestamp and .get operation to read the user record
    2. Output updated tweet count to console

AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

81

Aerospike can perform multiple operations on a record in one transaction. Update the tweet count and timestamp in a user record and read the new tweet count.

In updateUser()

1. Comment out the code added in exercise 2

2. Uncomment the line:

```
// TODO: Update tweet count and last tweeted timestamp in the user record using Operate  
// Exercise 6  
// updateUserUsingOperate(client, userKey, policy, ts);
```

3. In updateUserUsingOperate() , add code similar to this:

```
record, err := client.Operate(policy, userKey,  
    AddOp(NewBin("tweetcount", 1)),  
    PutOp(NewBin("lasttweeted", timestamp)),  
    GetOp())  
panicOnError(err)  
  
fmt.Printf("\nINFO: The tweet count now is: %d\n",  
    record.Bins["tweetcount"])
```

## Summary

You have learned how to:

- Connect to Cluster
- Write and Read Records
- Batch Read Records
- Read-Modify-Write
- Operate
- Handle errors correctly



AEROSPIKE

© 2014 Aerospike. All rights reserved. Confidential

83