

On the effect of magnetized plasma upon the properties of antennas/Notes and thoughts

T.H. Oswald, MSc

9. Oktober 2006

INHALTSVERZEICHNIS

<i>Teil I Principles</i>	1
1. <i>Introduction</i>	2
1.1 What does an antenna receive ?	2
1.2 Transmitting antennas	2
2. <i>Basic parameters</i>	3
2.1 Range of the Debye length	3
2.2 Is a relativistic treatment necessary ?	3
2.3 Why kinetic theory ?	3
2.4 Plasma Parameter	4
2.5 Plasma frequency	4
2.6 Variation of the plasma parameters of the solar system, ignoring the influence of the planets	5
3. <i>Modeling the antenna</i>	14
4. <i>Thermal noise spectroscopy</i>	15
<i>Teil II Magnetohydrodynamic effects</i>	17
5. <i>MHD basics</i>	18
5.1 Basic equations	18
5.1.1 Force Density	18
5.1.2 The energy equation	18
5.1.3 System of equations	19
5.1.4 Basic equation according to [<i>Baumjohann and Treumann(1999)</i>]	20
5.1.5 Basic equation according to [<i>Landau and Lifschitz(1967)</i>]	23
5.1.6 Possible simplifications	23
5.1.7 Validity of MHD	27
<i>Teil III Kinetic effects</i>	28
6. <i>Basics of the kinetic plasma theory</i>	29
6.1 Exact phase space	29
6.2 The average Distribution function	29
6.3 The Liouville theorem	30
6.4 The macroscopic observables	31
6.5 Maxwell equations	32

<i>Teil IV Plasma Waves</i>	33
7. <i>MHD waves</i>	34
7.1 Linearized perturbation theory	34
7.1.1 Equations	34
7.1.2 Harmonic solution	37
7.2 Langmuir waves	44
8. <i>Kinetic plasma waves</i>	47
8.1 Electrostatic waves	47
8.1.1 Landau damping	50
8.1.2 Two fluid instability	54
8.1.3 Cyclotron maser Instability	54
8.1.4 Qualitative physical description of Landau damping	57
9. <i>Wave zoology</i>	58
9.1 MHD waves	58
9.2 Kinetic waves	58
<i>Teil V EM waves in plasma</i>	60
10. <i>Frequency dispersion characteristics</i>	61
10.1 General	61
10.2 The Maxwell equations in Matter	62
10.3 The Boundary Conditions	62
10.4 Dielectric tensor	62
10.4.1 Cold plasma approximation	62
10.4.2 The Stix notation	64
10.4.3 the general dispersion relation	65
10.4.4 Hot plasma	67
10.5 The dyadic Green's function	67
10.5.1 Vacuum case	70
10.5.2 Isotropic case	74
10.5.3 Anisotropic case	74
10.6 Permeability	79
10.7 Nonlocal response	80
<i>Teil VI A body moving through plasma</i>	81
11. <i>Potential of S/C surface</i>	82
12. <i>The basic equations</i>	83
<i>Teil VII Covariant description</i>	84
13. <i>The basic equations</i>	85

<i>Teil VIII Ideen</i>	86
<i>14. Referenzen</i>	88
<i>Teil IX Quantum mechanical description</i>	90
<i>Teil X Solid State effects</i>	91
<i>Teil XI Bepi Colombo</i>	92
<i>15. Parameters at and in the Hermean magnetosphere</i>	93
<i>16. What to do</i>	96
<i>Appendix A</i>	97

ZUSAMMENFASSUNG

Dies sind die lustigen Gedanken von Thomas Oswald, über sein Dissertationsthema: Antennen in Plasma. Dieses Dokument ist in keinster Weise dazu bestimmt, von anderen gelesen zu werden. Das heisst, wenn Sie *nicht* den Namen Thomas Oswald tragen, und auch ausschliessen können, jemals so geheissen zu haben bevor irgendetwas fürchterliches passiert ist (Gedächtnisverlust, Identitätswechsel nach einer Scheidung,...), dann verhalten Sie sich bitten dementsprechend: Wenn es sich um eine Kopie handelt, vernichten Sie diese, wenn Sie irgendwie an das Original gekommen sind, melden Sie sich bitte unverzüglich der Polizei.

If You are unable to understand the paragraph, written in German language, You are almost certainly the wrong person to hold this document in hand. Please, jump out of the window immediately, or do whatever You want, but *do not read the document*. After a second thought, You won't understand it, anyway, so do what You like.

Teil I

PRINCIPLES

1. INTRODUCTION

1.1 What does an antenna receive ?

In magnetized plasma, the reciprocity theorem doesn't work, so we have to look at receiving and transmitting properties separate. Here are the receiving antennas.

The antenna does not receive EM waves, but measures E fields. So it receives any E field fluctuating in the frequency range of the receiver. The basic antenna equation is

$$V(t) = \mathbf{h}_{eff} \cdot \mathbf{E} \quad (1.1)$$

where, due to the linearity of Maxwell's equations, the electric field is the sum of the fields of all waves w , electromagnetic and electrostatic:

$$V = \sum_w \mathbf{h}_{eff,w} \cdot \mathbf{E}_w \quad (1.2)$$

For harmonic waves

$$V = \sum_w \mathbf{h}_{eff,w} \cdot \mathbf{E}_{0,w} e^{i(\mathbf{k}_w \cdot \mathbf{r} - \omega_w t)} \quad (1.3)$$

Using the respective dispersion relation, one can remove ω from the exponent.

$$V = \sum_w \mathbf{h}_{eff,w} \cdot \mathbf{E}_{0,w} e^{ik(\omega)(\frac{\mathbf{k}_w}{k} \cdot \mathbf{r} - t)} \quad (1.4)$$

1.2 Transmitting antennas

2. BASIC PARAMETERS

2.1 Range of the Debye length

According to (??), the Debye length is

$$\lambda_D = \sqrt{\frac{k_b T \varepsilon_0}{2e^2 n_0}} \quad (2.1)$$

where k_b is the Boltzmann Konstante, T is the temperature of the plasma component, n_0 is the number density and e is the charge. The range of the parameters is tabulated in table 2.1.

Hence the Debye length of interest can have a range of $10^{-1} - 10^3$ meters.

2.2 Is a relativistic treatment necessary ?

When postulating a Boltzmann distribution of electron velocity, the equation for the root mean square speed is

$$v_{rms} = \sqrt{\frac{2k_b T}{m}} \quad (2.2)$$

Hence, the temperature, where a relativistic treatment has to be used is in the order of magnitude of

$$T_{rel} = \frac{mc^2}{3k_b} \sim 2 \cdot 10^9 K \quad (2.3)$$

Since the upper temperature is about $10^8 K$, it seems that a relativistic treatment is not necessary.

2.3 Why kinetic theory ?

- Inclusion of the electric field is vital, so the displacement current must be included: No ideal MHD

Tab. 2.1: Range of basic plasma parameters

	k_b	ε_0	T	n_0/m^{-3}	e
electrons	$1.38 \cdot 10^{-23}$	$8.85 \cdot 10^{-12}$	$10^3 - 10^8$	$10^3 - 10^{10}$	$-1.60 \cdot 10^{-19}$
ions	$1.38 \cdot 10^{-23}$	$8.85 \cdot 10^{-12}$	0	0	$1.60 \cdot 10^{-19}$

- The MDH can be found by integrating over the velocity distribution. This works only as long as the distribution is almost always Maxwellian. When talking about disturbances due to radiation, the distribution function may change at a short timescale.
-

2.4 Plasma Parameter

According to table 2.1 and the result of a previous section, the plasma parameter

$$\Lambda = n_e \lambda_D^3 \quad (2.4)$$

is in the range of $10^7 - 10^9$, so the requirement for an ionized gas to be called plasma, is satisfied throughout the range.

2.5 Plasma frequency

When neglecting any form of damping effect, the equation of motion of an electron near a proton is

$$m \frac{d^2 \mathbf{r}}{dt^2} = -e \mathbf{E} \quad (2.5)$$

When using a 1D approximation, we can write

$$m \frac{d^2 r}{dt^2} = -e E \quad (2.6)$$

Further is

$$\nabla \cdot \mathbf{E} = \frac{\rho_e}{\epsilon_0} = \frac{n_e e}{\epsilon_0} \quad (2.7)$$

In 1 dimension, the divergence is

$$\nabla \cdot \mathbf{E} = \frac{\partial}{\partial r} E \quad (2.8)$$

$$\rightarrow E = \frac{n_e e r}{\epsilon_0} \quad (2.9)$$

Substituting in equation (2.10), we get

$$\frac{d^2 r}{dt^2} = -\frac{n_e e^2}{m \epsilon_0} r \quad (2.10)$$

The solution of this equation is

$$\omega_p = \sqrt{\frac{n_e e^2}{m \epsilon_0}} \quad (2.11)$$

This entity is called the plasma circular frequency. The plasma frequency is

$$f_p = \sqrt{\frac{1}{2\pi} \frac{n_e e^2}{m \epsilon_0}} \quad (2.12)$$

2.6 Variation of the plasma parameters of the solar system, ignoring the influence of the planets

The main components of space plasma in the solar system are electrons, H^+ ions (95-97%) and He^{++} ions (3-4.5%). The solar wind speed varies from 300-2000 km/s. The electron and ion proton density can be modeled with a one-over-r-squared-law in the simplest case, since $nvr^2 = \text{const}$ must be true (see [Rucker(2003)]). The mean electron temperature is $1.5 \cdot 10^5$, the mean temperature of the protons $4 \cdot 10^4$ [Rucker(2003)]. According to equation 2.2, the rootmeansquarespeed is about $2 \cdot 10^6 \text{ms}^{-1}$. Figure 2.1 shows the electron/proton number densities.

Figure 2.2 shows the Debye length of electrons and protons in the interplanetary plasma. Unfortunately, the Debye length makes no physical sense, to my opinion. I produced the graphs by inserting the kinetic temperatures into the equation. That is why we get two different Debye lengths. It makes no sense to give two different scale length for the minimum where quasineutrality exists, for the different components of the same plasma. The reason for this discrepancy is that the thermodynamic temperature would be the right choice for the equation. The thermodynamic temperature is only defined for a medium that is in a state of equilibrium. This is not the case for a plasma, because the components are never in equilibrium. Therefore, the entity of Debye length has, to my opinion, no physical meaning.

Figure 2.3 shows the range of the plasma parameter. It is always greater than 1.

A typical value for the interplanetary magnetic field (IMF) is 4-5 nT at 1 AU. The equation for the magnitude of the magnetic induction of Sun in nano tesla, as a function of distance in AUs, on the solar equatorial plane is

$$B = \frac{5}{r^3} \quad (2.13)$$

Figure 2.4 shows its variation with distance from the sun.

Figures 2.5 and 2.6 show ω_p , while 2.7 shows f_p .

A typical value for the collision frequency in the solar wind is 10^{-5}Hz . When using equation 5.73, the range of the conductivity is shown in figure 2.8.

The plasma beta is the relation of kinetic to magnetic pressure (2.9).

$$\beta = \frac{nkT}{\frac{B^2}{2\mu_0}} \quad (2.14)$$

The speed of sound can be computed as

$$v_s = \sqrt{\gamma \frac{p}{\rho}} = \sqrt{\gamma \frac{nk(T_e + T_p)}{nm}} = \sqrt{\gamma \frac{k(T_e + T_p)}{m}} \approx 50 \text{km s}^{-1} \quad (2.15)$$

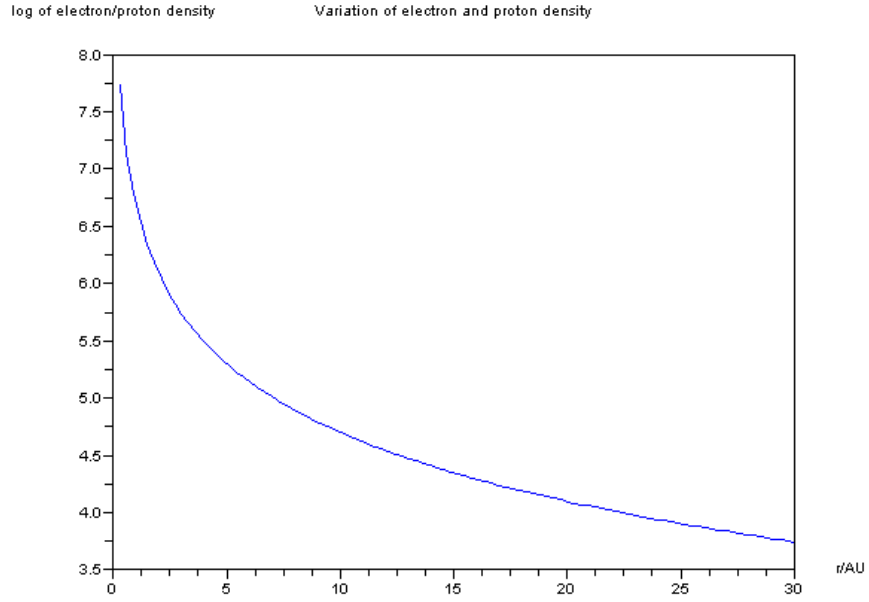


Fig. 2.1: Logarithmic plot of Electron or proton number density

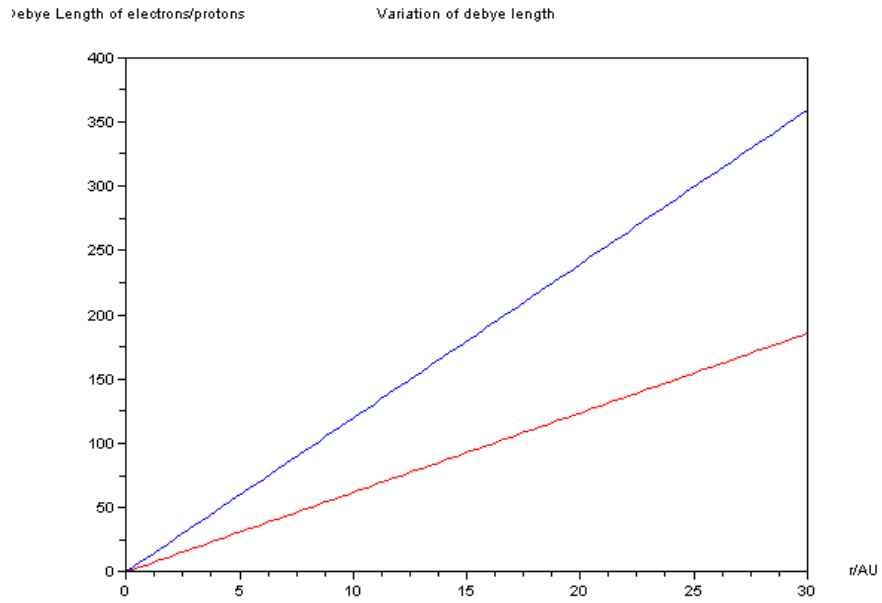


Fig. 2.2: Debye length of electrons (blue) and protons (red)

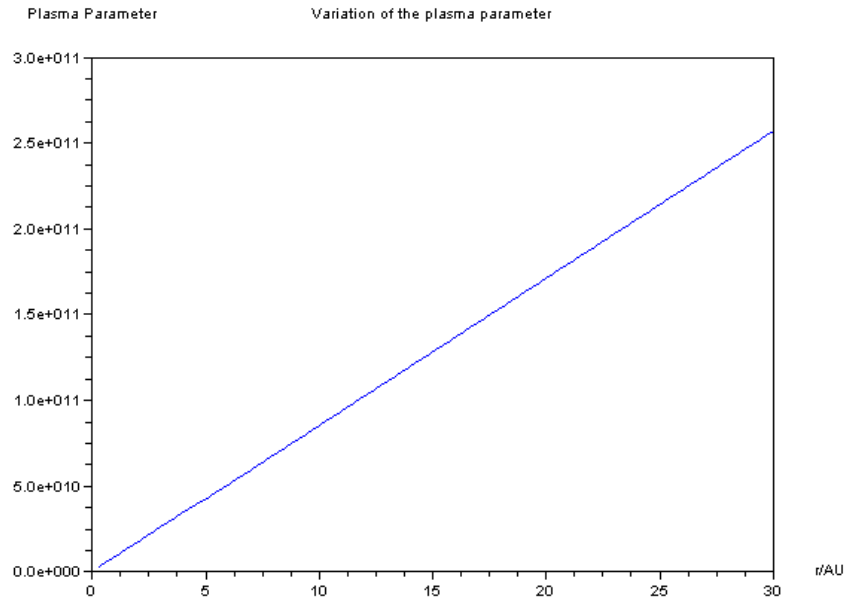


Fig. 2.3: Plasma parameter

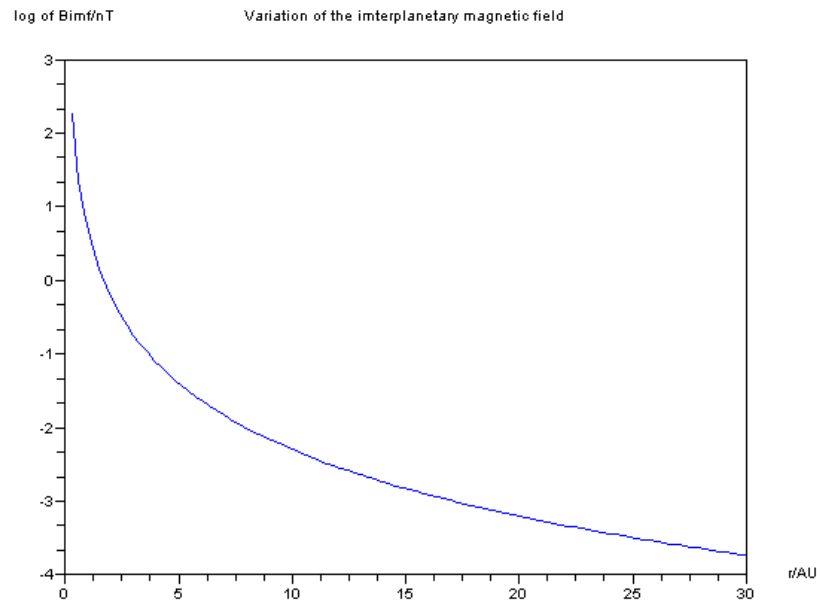


Fig. 2.4: Logarithmic plot of Interplanetary magnetic field

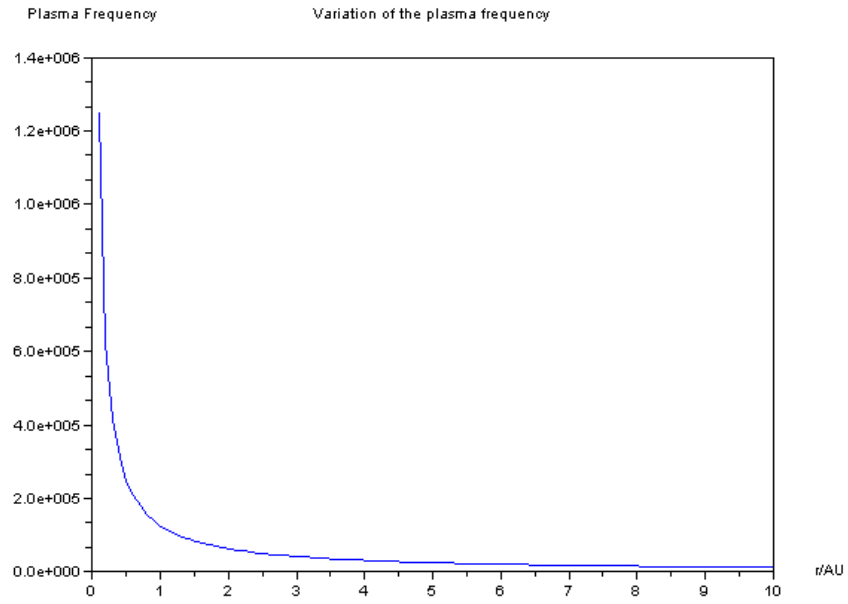


Fig. 2.5: Plasma Frequency

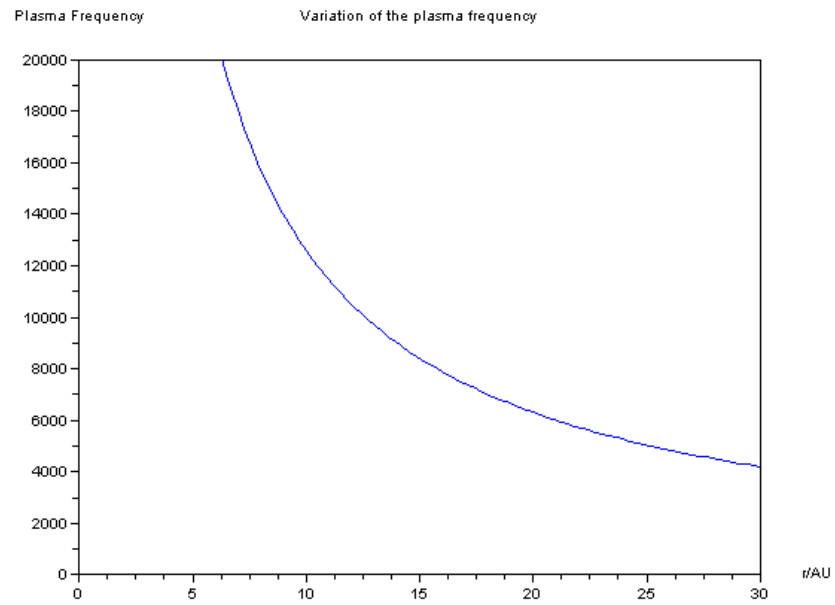
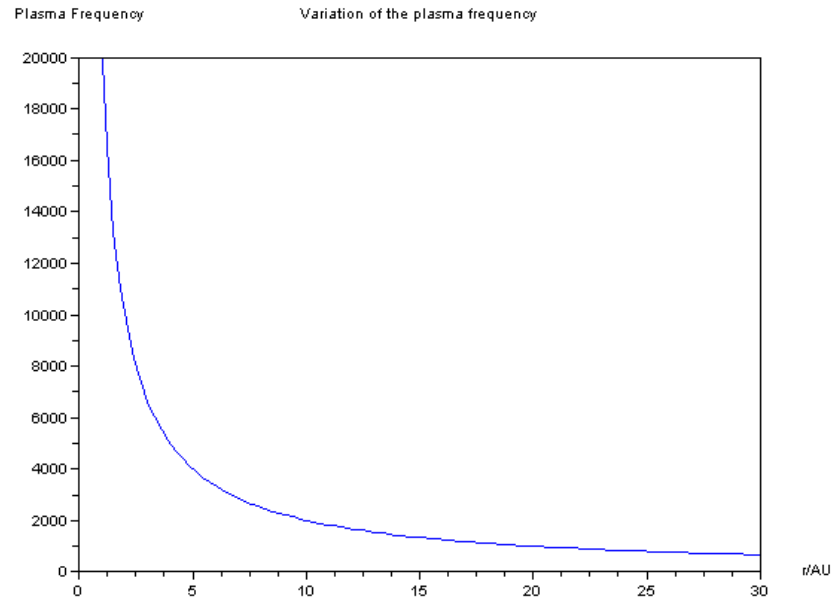
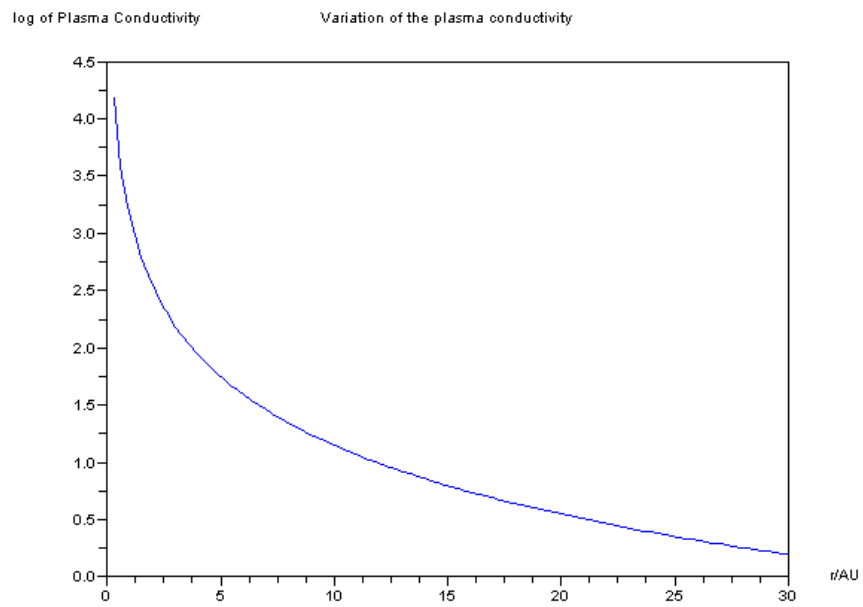


Fig. 2.6: Plasma Frequency

*Fig. 2.7: Plasma Frequency**Fig. 2.8: Logarithmic plot of the Plasma Conductivity*

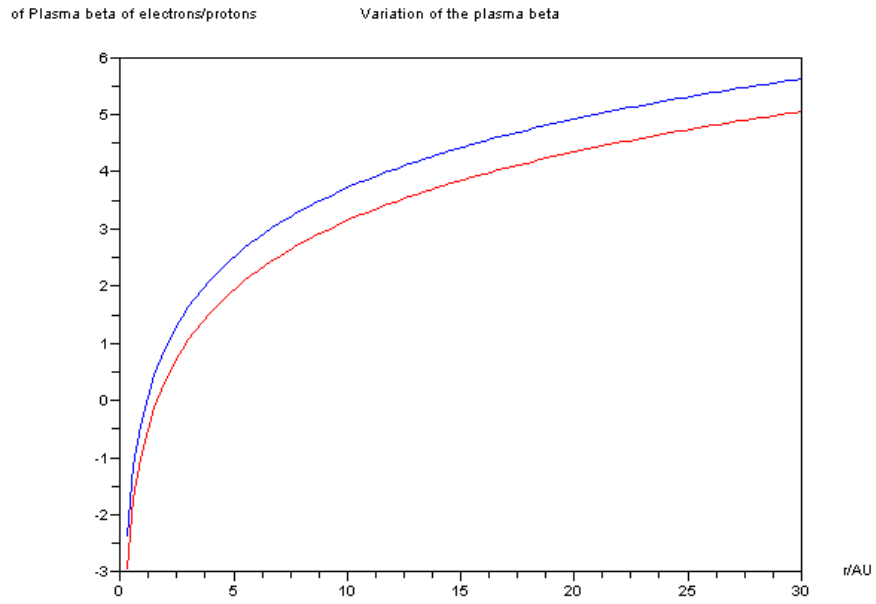


Fig. 2.9: Logarithmic plot of the Plasma Beta

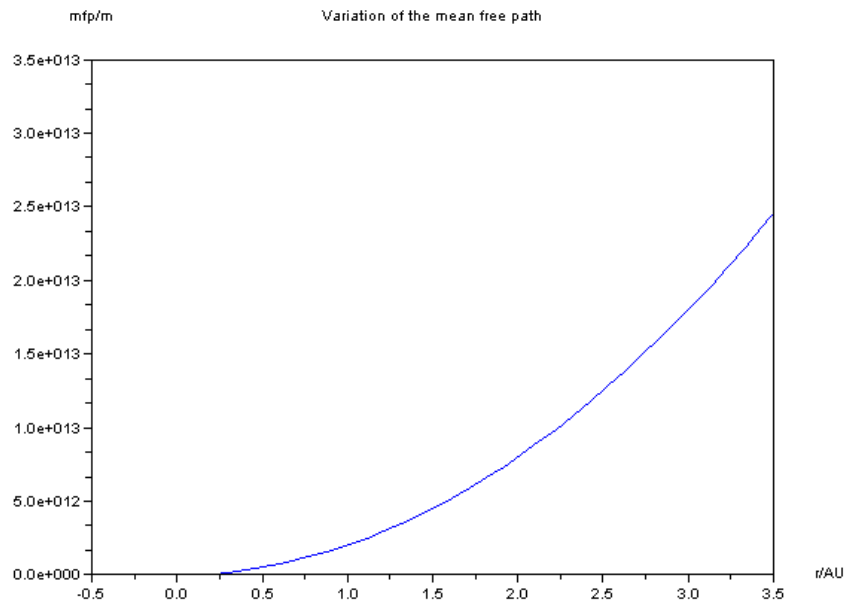


Fig. 2.10: Mean free path

where m is the proton mass. Since the number density cancels, the speed of sound is independent from the distance from the Sun.

The mean free path is

$$\lambda_f = \frac{1}{n\sigma_{eff}} \quad (2.16)$$

where $\sigma_{eff} \approx 10^{-19}m^2$ is the effective cross section of the particles. The result is in figures 2.10-2.12.

The cyclotron radius has a dimension of

$$r_c = \frac{mv}{eB} \sin\alpha \quad (2.17)$$

where α is the pitch angle. The cyclotron frequency is

$$\omega_c = \frac{eB}{m} \quad (2.18)$$

See figures 2.13 and 2.14.

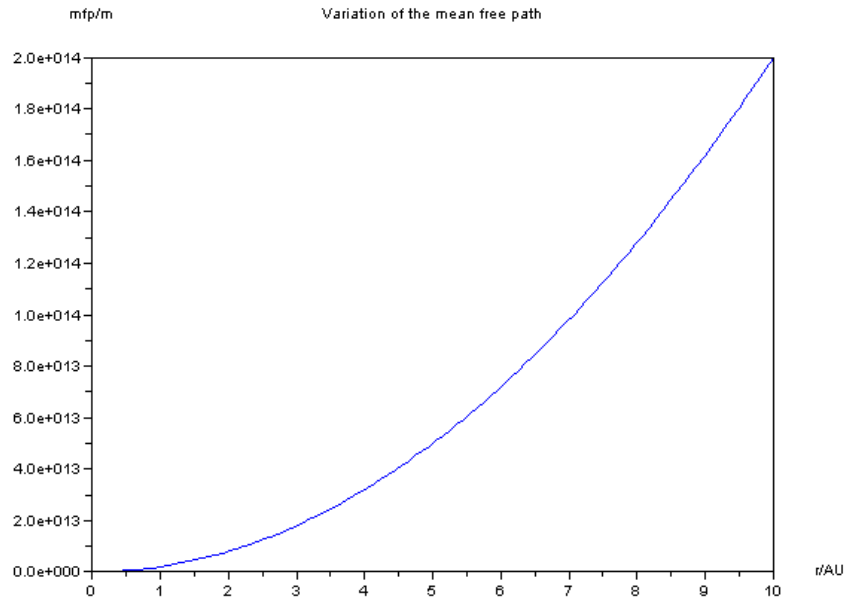


Fig. 2.11: Mean free path

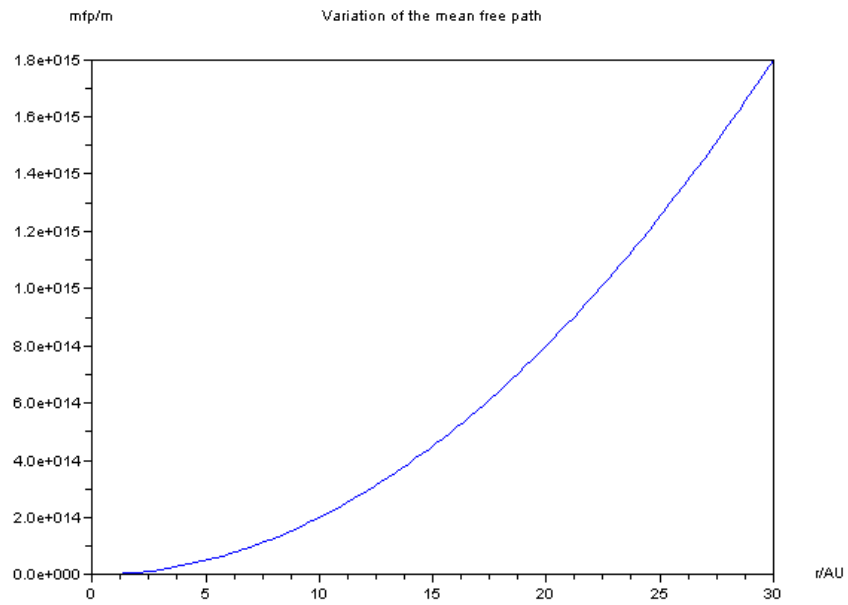


Fig. 2.12: Mean free path

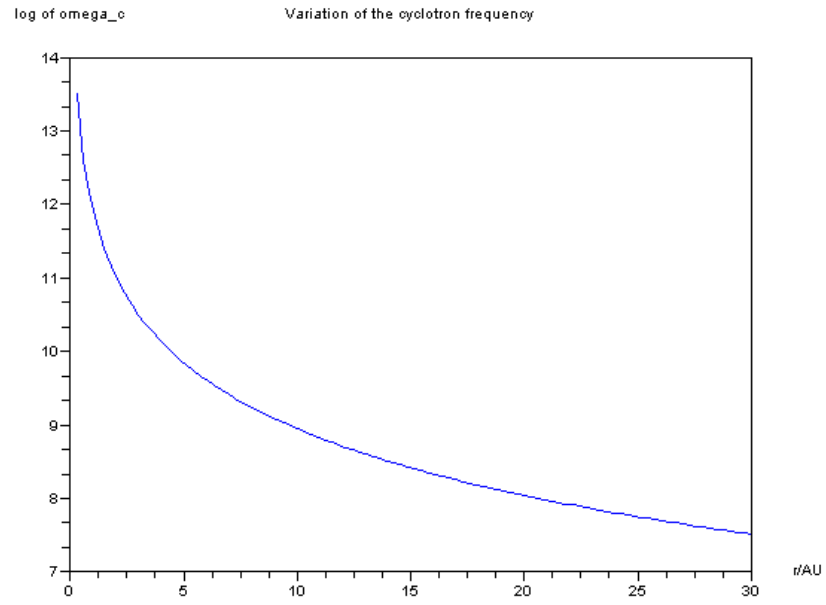


Fig. 2.13: Logarithmic plot of the Cyclotron frequency for electrons

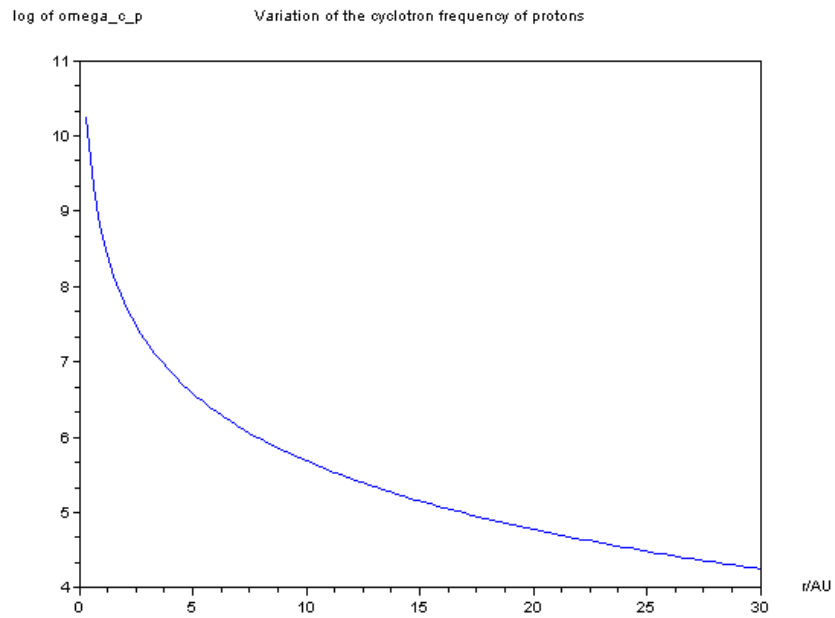


Fig. 2.14: Logarithmic plot of the Cyclotron frequency for protons

3. MODELING THE ANTENNA

The antennas used in space vehicles such as stereo or bepi colombo can be modeled as simple antenna elements (monopoles, dipoles, loops, spheres) in an infinite medium. In the second instance the model can be refined using a wiregrid that comprises many basic elements.

4. THERMAL NOISE SPECTROSCOPY

[*Meyer-Vernet et al.(1998)* *Meyer-Vernet, Hoang, Issautier, Maksimovic, Manning, and Moncuquet*]

Thermal noise spectroscopy is a technique for finding the basic parameters of plasma by analyzing the electrostatic field spectrum measured by antennas. When the plasma frequency is higher than the cyclotron frequency, thermal motion excites Langmuir waves that are dependent of the velocity distribution function. The dispersion relations can be seen at (7.195) and (8.27). The spectrum is cut off at ω_p and has a peak just above. The cutoff bears information about the plasma density, the spectrum level about the temperature. The form of the peak reveals information about the supra thermal electrons. Figure 4.1 shows an example and also one of the problems with thermal noise. Its intensity is normally higher than the intensity of many received radio emissions (a type 2 burst in this example).

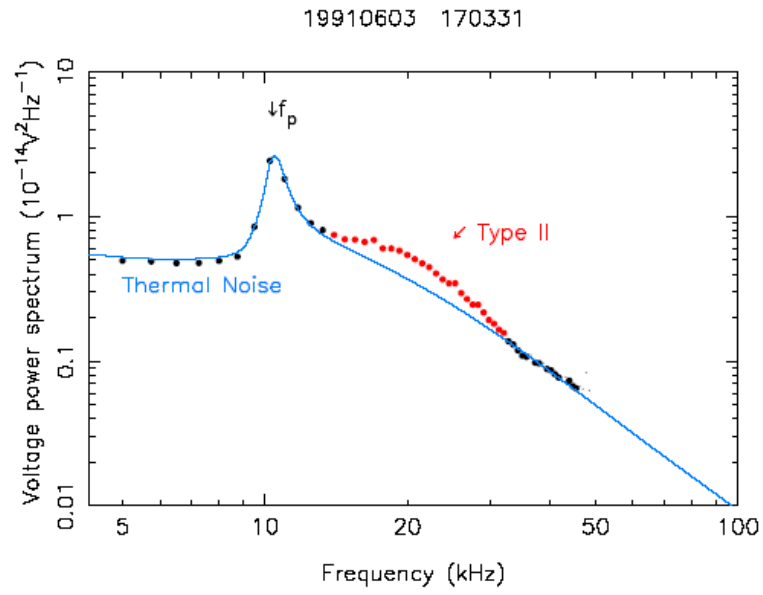


Fig. 4.1: Thermal noise spectrum

Teil II

MAGNETOHYDRODYNAMIC EFFECTS

5. MHD BASICS

5.1 Basic equations

5.1.1 Force Density

The force on a particle is

$$F = q\mathbf{E} + q\mathbf{v} \times \mathbf{B} = q\mathbf{E} + \mathbf{I} \times \mathbf{B} \quad (5.1)$$

where \mathbf{I} is the current. Dividing by the volume gives the force density

$$f = \rho_e \mathbf{E} + \mathbf{j} \times \mathbf{B} \quad (5.2)$$

ρ_e is the charge density, \mathbf{j} the current density. The magnetic term is dominant, so often the first term is neglected. If the conductivity is taken to approach infinity, no electric fields can sustain, so the first term is zero.

5.1.2 The energy equation

Ohms law

$$\mathbf{j} = \sigma(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \quad (5.3)$$

dotted on the left by the current density

$$j^2 = \sigma(\mathbf{j} \cdot \mathbf{E} + \mathbf{j} \cdot \mathbf{v} \times \mathbf{B}) \quad (5.4)$$

Using one of the Maxwell equations

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} + \varepsilon_0 \frac{\partial \mathbf{E}}{\partial t} \quad (5.5)$$

gives

$$j^2 = \sigma \left(\left(\frac{1}{\mu_0} \nabla \times \mathbf{B} \right) \cdot \mathbf{E} + \mathbf{j} \cdot \mathbf{v} \times \mathbf{B} \right) \quad (5.6)$$

when the displacement current is ignored. Using further

$$\nabla \cdot (\mathbf{E} \times \mathbf{B}) = \mathbf{B} \cdot (\nabla \times \mathbf{E}) - \mathbf{E} \cdot (\nabla \times \mathbf{B}) \quad (5.7)$$

and

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (5.8)$$

we get

$$\frac{j^2}{\sigma} + \frac{1}{\mu_0} \nabla \cdot (\mathbf{E} \times \mathbf{B}) = -\frac{1}{\mu_0} \mathbf{B} \cdot \frac{\partial \mathbf{B}}{\partial t} + \mathbf{j} \cdot (\mathbf{v} \times \mathbf{B}) \quad (5.9)$$

or

$$\frac{j^2}{\sigma} + \nabla \cdot \mathbf{S} = -\frac{1}{\mu_0} \frac{\partial \mathbf{B}^2}{\partial t} + \mathbf{j} \cdot (\mathbf{v} \times \mathbf{B}) \quad (5.10)$$

when introducing the Poynting vector

$$\mathbf{S} = \mathbf{E} \times \mathbf{H}^*$$

In different form:

$$-\frac{1}{\mu_0} \frac{\partial \mathbf{B}^2}{\partial t} = \frac{j^2}{\sigma} + \nabla \cdot \mathbf{S} + \mathbf{v} \cdot (\mathbf{j} \times \mathbf{B}) \quad (5.11)$$

The variation of magnetic field energy per time is equal to the negative of the sum of the joule heating, the Poynting flux and the work done to the system by the force density.

5.1.3 System of equations

$$\nabla \cdot \mathbf{E} = \frac{\rho_e}{\varepsilon_0} \quad (5.12)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (5.13)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (5.14)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} + \varepsilon_0 \frac{\partial \mathbf{E}}{\partial t} \quad (5.15)$$

$$\mathbf{j} = \sigma(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \quad (5.16)$$

$$P = P(\rho, T) \quad (5.17)$$

$$\frac{d}{dt} \left(\frac{p}{\rho^\gamma} \right) = 0 \quad (5.18)$$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{v}) \quad (5.19)$$

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P + \rho_e \mathbf{E} + \mathbf{j} \times \mathbf{B} + \rho \mathbf{g} + \rho \nu \nabla^2 \mathbf{v} \quad (5.20)$$

That are 17 equations with 20 unknown parameters: $\mathbf{B}, \mathbf{E}, \mathbf{j}, \mathbf{v}, \mathbf{g}, \sigma, \rho, \rho_e, \nu$ and T .

An equivalent representation of the continuity eq. is

$$\frac{\partial n}{\partial t} = -\nabla \cdot (n \mathbf{v}) \quad (5.21)$$

5.1.4 Basic equation according to [Baumjohann and Treumann(1999)]

Momentum equation

An other version of the momentum equation can be derived by dividing (5.20) by the mass of a particle.

$$n \frac{\partial \mathbf{v}}{\partial t} + n(\mathbf{v} \cdot \nabla) \mathbf{v} = -\frac{1}{m} \nabla P + \frac{en}{m} \mathbf{E} + \frac{1}{m} \mathbf{j} \times \mathbf{B} + n\mathbf{g} + n\nu \nabla^2 \mathbf{v} \quad (5.22)$$

Then we can modify the first two terms and draw n into the differential.

$$n \frac{\partial \mathbf{v}}{\partial t} + n(\mathbf{v} \cdot \nabla) \mathbf{v} = \frac{\partial n\mathbf{v}}{\partial t} - \mathbf{v} \frac{\partial n}{\partial t} + n(\mathbf{v} \cdot \nabla) \mathbf{v} \quad (5.23)$$

$$= \frac{\partial n\mathbf{v}}{\partial t} + \mathbf{v} \nabla \cdot (n\mathbf{v}) + n(\mathbf{v} \cdot \nabla) \mathbf{v} \quad (5.24)$$

$$= \frac{\partial n\mathbf{v}}{\partial t} + \mathbf{v} \nabla \cdot (n\mathbf{v}) + n \nabla \cdot (\mathbf{v}\mathbf{v}) - n\mathbf{v}(\nabla \cdot \mathbf{v}) \quad (5.25)$$

$$= \frac{\partial n\mathbf{v}}{\partial t} + \mathbf{v}\mathbf{v} \nabla n + n\mathbf{v}(\nabla \cdot \mathbf{v}) + n \nabla \cdot (\mathbf{v}\mathbf{v}) - n\mathbf{v}(\nabla \cdot \mathbf{v}) \quad (5.26)$$

$$= \frac{\partial n\mathbf{v}}{\partial t} + \mathbf{v}\mathbf{v} \nabla n + n \nabla \cdot (\mathbf{v}\mathbf{v}) \quad (5.27)$$

$$= \frac{\partial n\mathbf{v}}{\partial t} + \nabla \cdot (n\mathbf{v}\mathbf{v}) \quad (5.28)$$

To get (5.24), I used the continuity equation. So the momentum equation becomes

$$\frac{\partial n\mathbf{v}}{\partial t} + \nabla \cdot (n\mathbf{v}\mathbf{v}) = -\frac{1}{m} \nabla P + \frac{en}{m} \mathbf{E} + \frac{1}{m} \mathbf{j} \times \mathbf{B} + n\mathbf{g} + n\nu \nabla^2 \mathbf{v} \quad (5.29)$$

This equation can be directly derived from the Vlasov equation by taking the second moment. When employing the pressure tensor to model an anisotropic pressure, it becomes

$$\frac{\partial n\mathbf{v}}{\partial t} + \nabla \cdot (n\mathbf{v}\mathbf{v}) = -\frac{1}{m} \nabla \cdot \mathbf{P} + \frac{en}{m} \mathbf{E} + \frac{1}{m} \mathbf{j} \times \mathbf{B} + n\mathbf{g} + n\nu \nabla^2 \mathbf{v} \quad (5.30)$$

When using the equation with the pressure tensor, another equation is needed, namely the energy equation. It can be derived by taking the second moment of the Vlasov equation.

Energy equation

$$\frac{3}{2}nk \left(\frac{\partial T}{\partial t} + \mathbf{v} \cdot \nabla T \right) + P \nabla \cdot \mathbf{v} = -\nabla \cdot \mathbf{q} - (\mathbf{P}' \cdot \nabla) \cdot \mathbf{v} \quad (5.31)$$

\mathbf{q} is the heat flux vector and \mathbf{P}' is the stress part of the pressure tensor. The heat flux vector is then a new quantity, a product of the third moment. So another equation would be required, or the system can be truncated at this point. This can be done by assuming the existence of an equation of state, such that the energy equation is not required. The form of the equation of state mainly

depends on the pressure tensor. If the pressure is isotropic there is only one equation of state needed. The resulting system of equations is as in the original system (5.12)-(5.20).

In the anisotropic case, the pressure tensor is the sum of a parallel and a perpendicular component.

$$\mathbf{P} = P_{\perp} \mathbf{I} + (P_{\parallel} - P_{\perp}) \frac{\mathbf{B}\mathbf{B}}{B^2} \quad (5.32)$$

In a coordinate system that is aligned such that the B field is along the z axis, it has the form

$$\mathbf{P} = \begin{pmatrix} P_{\perp} & 0 & 0 \\ 0 & P_{\perp} & 0 \\ 0 & 0 & P_{\parallel} \end{pmatrix} \quad (5.33)$$

Using the concept of kinetic temperature, one can use the perpendicular and parallel temperature to derive two equations of state.

$$P_{\perp} = nkT_{\perp} \quad (5.34)$$

$$P_{\parallel} = nkT_{\parallel} \quad (5.35)$$

Since the degrees of freedom are different for the parallel and the perpendicular movement, there are 2 adiabatic equations necessary.

$$\frac{P_{\perp}}{\rho^2} = \text{const} \quad (5.36)$$

$$\frac{P_{\parallel}}{\rho^3} = \text{const} \quad (5.37)$$

or

$$\frac{P_{\perp}}{n^2} = \text{const} \quad (5.38)$$

$$\frac{P_{\parallel}}{n^3} = \text{const} \quad (5.39)$$

Generalized Ohm's law

An other equation for the current density can be found by using equation (5.30). For electrons and ions this is

$$\begin{aligned} \frac{\partial n_e \mathbf{v}_e}{\partial t} + \nabla \cdot (n_e \mathbf{v}_e \mathbf{v}_e) &= -\frac{1}{m_e} \nabla \cdot \mathbf{P}_e - \frac{en_e}{m_e} (\mathbf{E} + \mathbf{v}_e \times \mathbf{B}) + n_e \mathbf{g} + n_e \nu \nabla^2 \mathbf{v}_e \\ \frac{\partial n_i \mathbf{v}_i}{\partial t} + \nabla \cdot (n_i \mathbf{v}_i \mathbf{v}_i) &= -\frac{1}{m_i} \nabla \cdot \mathbf{P}_i + \frac{en_i}{m_i} (\mathbf{E} + \mathbf{v}_i \times \mathbf{B}) + n_i \mathbf{g} + n_i \nu \nabla^2 \mathbf{v}_i \end{aligned} \quad (5.40)$$

The isotropic pressure was used. We neglect the gravitational force, so

$$\frac{\partial n_e \mathbf{v}_e}{\partial t} + \nabla \cdot (n_e \mathbf{v}_e \mathbf{v}_e) = -\frac{1}{m_e} \nabla \cdot \mathbf{P}_e - \frac{en_e}{m_e} (\mathbf{E} + \mathbf{v}_e \times \mathbf{B}) + n_e \nu \nabla^2 \mathbf{v}_e \quad (5.42)$$

$$\frac{\partial n_i \mathbf{v}_i}{\partial t} + \nabla \cdot (n_i \mathbf{v}_i \mathbf{v}_i) = -\frac{1}{m_i} \nabla \cdot \mathbf{P}_i + \frac{en_i}{m_i} (\mathbf{E} + \mathbf{v}_i \times \mathbf{B}) + n_i \nu \nabla^2 \mathbf{v}_i \quad (5.43)$$

When the current densities are small, we can neglect the terms that are quadratic in \mathbf{v} .

$$\frac{\partial n_e \mathbf{v}_e}{\partial t} = -\frac{1}{m_e} \nabla \cdot \mathbf{P}_e - \frac{en_e}{m_e} (\mathbf{E} + \mathbf{v}_e \times \mathbf{B}) + n_e \nu \nabla^2 \mathbf{v}_e \quad (5.44)$$

$$\frac{\partial n_i \mathbf{v}_i}{\partial t} = -\frac{1}{m_i} \nabla \cdot \mathbf{P}_i + \frac{en_i}{m_i} (\mathbf{E} + \mathbf{v}_i \times \mathbf{B}) + n_i \nu \nabla^2 \mathbf{v}_i \quad (5.45)$$

Multiplying the ion equation by m_e

$$\frac{\partial n_e \mathbf{v}_e}{\partial t} = -\frac{1}{m_e} \nabla \cdot \mathbf{P}_e - \frac{en_e}{m_e} (\mathbf{E} + \mathbf{v}_e \times \mathbf{B}) + n_e \nu \nabla^2 \mathbf{v}_e \quad (5.46)$$

$$m_e \frac{\partial n_i \mathbf{v}_i}{\partial t} = -\frac{m_e}{m_i} \nabla \cdot \mathbf{P}_i + \frac{en_i m_e}{m_i} (\mathbf{E} + \mathbf{v}_i \times \mathbf{B}) + m_e n_i \nu \nabla^2 \mathbf{v}_i \quad (5.47)$$

A terms with the factor $\frac{m_e}{m_i}$ are very small and can be neglected.

$$\frac{\partial n_e \mathbf{v}_e}{\partial t} = -\frac{1}{m_e} \nabla \cdot \mathbf{P}_e - \frac{en_e}{m_e} (\mathbf{E} + \mathbf{v}_e \times \mathbf{B}) + n_e \nu \nabla^2 \mathbf{v}_e \quad (5.48)$$

$$m_e \frac{\partial n_i \mathbf{v}_i}{\partial t} = m_e n_i \nu \nabla^2 \mathbf{v}_i \quad (5.49)$$

Now I subtract the equations

$$m_e \frac{\partial n_i \mathbf{v}_i}{\partial t} - \frac{\partial n_e \mathbf{v}_e}{\partial t} = m_e n_i \nu \nabla^2 \mathbf{v}_i + \frac{1}{m_e} \nabla \cdot \mathbf{P}_e + \frac{en_e}{m_e} (\mathbf{E} + \mathbf{v}_e \times \mathbf{B}) - n_e \nu \nabla^2 \mathbf{v}_e \quad (5.50)$$

(5.51)

Alternate set of equations

$$\nabla \cdot \mathbf{B} = 0 \quad (5.52)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (5.53)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} + \varepsilon_0 \frac{\partial \mathbf{E}}{\partial t} \quad (5.54)$$

$$\mathbf{E} + \mathbf{v} \times \mathbf{B} = \eta + \frac{1}{ne} \mathbf{j} \times \mathbf{B} - \frac{1}{ne} \nabla \cdot \mathbf{P}_e + \frac{m_e}{ne^2} \frac{\partial \mathbf{j}}{\partial t} \quad (5.55)$$

$$\frac{\partial n}{\partial t} + \nabla \cdot (n \mathbf{v}) = 0 \quad (5.56)$$

$$\frac{\partial n \mathbf{v}}{\partial t} + \nabla \cdot (n \mathbf{v} \mathbf{v}) = -\frac{1}{m} \nabla \cdot \mathbf{P} + \frac{en}{m} \mathbf{E} + \frac{1}{m} \mathbf{j} \times \mathbf{B} + n \mathbf{g} + n \nu \nabla^2 \mathbf{v} \quad (5.57)$$

5.1.5 Basic equation according to [Landau and Lifschitz(1967)]

Alternate set of equations

$$\nabla \cdot \mathbf{H} = 0 \quad (5.58)$$

$$\frac{\partial \mathbf{H}}{\partial t} = \nabla \times (\mathbf{v} \times \mathbf{H}) + \frac{c^2}{4\pi\sigma} \nabla^2 \mathbf{H} \quad (5.59)$$

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{v}) = 0 \quad (5.60)$$

$$\frac{\partial \mathbf{v}}{\partial t} + (\mathbf{v} \cdot \nabla) \mathbf{v} = -\frac{\nabla P}{\rho} - \frac{1}{4\pi\rho} (\mathbf{H} \times (\nabla \times \mathbf{H})) + \frac{\eta}{\rho} \nabla^2 \mathbf{v} + \frac{1}{\rho} \left(\zeta + \frac{\eta}{3} \right) \nabla (\nabla \cdot \mathbf{v}) \quad (5.61)$$

$$P = P(\rho, T) \quad (5.62)$$

$$\rho T \left(\frac{\partial s}{\partial t} + \mathbf{v} \cdot \nabla s \right) = \sigma'_{ik} \frac{\partial v_i}{\partial x_k} + \nabla \cdot (\chi \nabla T) + \frac{c^2}{16\pi^2 \sigma} (\nabla \times \mathbf{H})^2 \quad (5.63)$$

For detailed description see [Landau and Lifschitz(1967)].

5.1.6 Possible simplifications

Often the gravitational field can be neglected. Also, in a collision-less plasma, the viscosity term can be neglected. Also, the ideal gas equation can be used. Then we have

$$\nabla \cdot \mathbf{E} = \frac{\rho_e}{\varepsilon_0} \quad (5.64)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (5.65)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (5.66)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} + \varepsilon_0 \frac{\partial \mathbf{E}}{\partial t} \quad (5.67)$$

$$\mathbf{j} = \sigma(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \quad (5.68)$$

$$P = nkT \quad (5.69)$$

$$\frac{d}{dt} \left(\frac{P}{\rho^\gamma} \right) = 0 \quad (5.70)$$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{v}) \quad (5.71)$$

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P + \rho_e \mathbf{E} + \mathbf{j} \times \mathbf{B} \quad (5.72)$$

Then we have 17 equations with 18 unknown parameters: $\mathbf{B}, \mathbf{E}, \mathbf{j}, \mathbf{v}, \sigma, \rho, \rho_e$ and T .

The plasma conductivity has the equation

$$\sigma = \frac{ne^2}{m_e \nu_c} \quad (5.73)$$

ν_c is the collision frequency [Baumjohann and Treumann(1999)]. If there are no collisions, it is 0 and the conductivity is infinite.

If we set the conductivity to quasi infinity, there can build up no electric field. Also, ohm's law gets a different form because $\frac{\mathbf{j}}{\sigma} = 0$

$$\nabla \cdot \mathbf{E} = \frac{\rho_e}{\varepsilon_0} \quad (5.74)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (5.75)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (5.76)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} + \varepsilon_0 \frac{\partial \mathbf{E}}{\partial t} \quad (5.77)$$

$$\mathbf{E} + \mathbf{v} \times \mathbf{B} = 0 \quad (5.78)$$

$$P = nkT \quad (5.79)$$

$$\frac{d}{dt} \left(\frac{P}{\rho^\gamma} \right) = 0 \quad (5.80)$$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{v}) \quad (5.81)$$

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P + \mathbf{j} \times \mathbf{B} \quad (5.82)$$

We have 17 equations with 17 unknown parameters, so this would be a useful system. I call it EMHD equations: $\mathbf{B}, \mathbf{E}, \mathbf{j}, \mathbf{v}, \rho, \rho_e$ and T .

When we regard only waves with low frequencies, we can neglect the displacement current, because the derivative of the electric field is small.

$$\nabla \cdot \mathbf{E} = \frac{\rho_e}{\varepsilon_0} \quad (5.83)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (5.84)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (5.85)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} \quad (5.86)$$

$$\mathbf{E} + \mathbf{v} \times \mathbf{B} = 0 \quad (5.87)$$

$$P = nkT \quad (5.88)$$

$$\frac{d}{dt} \left(\frac{P}{\rho^\gamma} \right) = 0 \quad (5.89)$$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{v}) \quad (5.90)$$

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P + \mathbf{j} \times \mathbf{B} \quad (5.91)$$

Alternative form der Konti Gl.:

$$\frac{D\rho}{Dt} + \rho \nabla \cdot \mathbf{v} = 0 \quad (5.92)$$

If the system is time dependent, the solenoidity is a necessary result of Faraday's equation, so

$$\nabla \cdot \mathbf{E} = \frac{\rho_e}{\varepsilon_0} \quad (5.93)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (5.94)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} \quad (5.95)$$

$$\mathbf{E} + \mathbf{v} \times \mathbf{B} = 0 \quad (5.96)$$

$$P = nkT \quad (5.97)$$

$$\frac{d}{dt} \left(\frac{P}{\rho^\gamma} \right) = 0 \quad (5.98)$$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{v}) \quad (5.99)$$

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P + \mathbf{j} \times \mathbf{B} \quad (5.100)$$

is enough: We have 16 equations with 17 unknown parameters.

If we know the temperature (isothermal case), we can remove either the gas equation or the adiabatic equation:

$$\nabla \cdot \mathbf{E} = \frac{\rho_e}{\varepsilon_0} \quad (5.101)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (5.102)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} \quad (5.103)$$

$$\mathbf{E} + \mathbf{v} \times \mathbf{B} = 0 \quad (5.104)$$

$$\frac{d}{dt} \left(\frac{P}{\rho^\gamma} \right) = 0 \quad (5.105)$$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{v}) \quad (5.106)$$

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P + \mathbf{j} \times \mathbf{B} \quad (5.107)$$

15 equations with 16 unknown parameters.

The equation of motion and Ampere's law can be combined:

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P + \frac{1}{\mu_0} \nabla \times \mathbf{B} \times \mathbf{B} \quad (5.108)$$

$$= -\nabla P - \frac{1}{\mu_0} \mathbf{B} \times \nabla \times \mathbf{B} \quad (5.109)$$

And Ohm's, Faraday's and Ampere's law can be combined. too.

$$\mathbf{j} = \sigma(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \quad (5.110)$$

$$\rightarrow \nabla \times \mathbf{B} = \mu_0 \sigma(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \quad (5.111)$$

Taking the rotation of the equation results in

$$-\nabla^2 \mathbf{B} = \mu_0 \sigma (\nabla \times \mathbf{E} + \nabla \times (\mathbf{v} \times \mathbf{B})) \quad (5.112)$$

$$-\nabla^2 \mathbf{B} = \mu_0 \sigma \left(-\frac{\partial \mathbf{B}}{\partial t} + \nabla \times (\mathbf{v} \times \mathbf{B}) \right) \quad (5.113)$$

$$\frac{\partial \mathbf{B}}{\partial t} = \frac{1}{\mu_0 \sigma} \nabla^2 \mathbf{B} + \nabla \times (\mathbf{v} \times \mathbf{B}) \quad (5.114)$$

So the new system of equations is

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho (\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P - \frac{1}{\mu_0} \mathbf{B} \times (\nabla \times \mathbf{B}) \quad (5.115)$$

$$\frac{D\rho}{Dt} + \rho \nabla \cdot \mathbf{v} = 0 \quad (5.116)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (5.117)$$

$$\frac{d}{dt} \left(\frac{P}{\rho^\gamma} \right) = 0 \quad (5.118)$$

$$\frac{\partial \mathbf{B}}{\partial t} = \frac{1}{\mu_0 \sigma} \nabla^2 \mathbf{B} + \nabla \times (\mathbf{v} \times \mathbf{B}) \quad (5.119)$$

So these are 9 equations with 9 parameters, if the conductivity is taken as a parameter. $\mathbf{B}, \mathbf{v}, \sigma, \rho, P$.

Further simplification of Newton II

Using the identity

$$\nabla(\mathbf{A} \cdot \mathbf{B}) = (\mathbf{A} \cdot \nabla) \mathbf{B} + (\mathbf{B} \cdot \nabla) \mathbf{A} + \mathbf{A} \times (\nabla \times \mathbf{B}) + \mathbf{B} \times (\nabla \times \mathbf{A}) \quad (5.120)$$

for any vector fields \mathbf{A} and \mathbf{B} , we can write for our special case

$$\nabla(\mathbf{B} \cdot \mathbf{B}) = (\mathbf{B} \cdot \nabla) \mathbf{B} + (\mathbf{B} \cdot \nabla) \mathbf{B} + \mathbf{B} \times (\nabla \times \mathbf{B}) + \mathbf{B} \times (\nabla \times \mathbf{B}) \quad (5.121)$$

$$\nabla B^2 = 2(\mathbf{B} \cdot \nabla) \mathbf{B} + 2\mathbf{B} \times (\nabla \times \mathbf{B}) \quad (5.122)$$

$$\mathbf{B} \times (\nabla \times \mathbf{B}) = \nabla \frac{B^2}{2} - (\mathbf{B} \cdot \nabla) \mathbf{B} \quad (5.123)$$

So the equation of motion becomes

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho (\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P - \frac{1}{\mu_0} \mathbf{B} \times (\nabla \times \mathbf{B}) \quad (5.124)$$

$$= -\frac{1}{\mu_0} \left(\nabla \frac{B^2}{2} - (\mathbf{B} \cdot \nabla) \mathbf{B} \right) - \nabla P \quad (5.125)$$

$$= \frac{1}{\mu_0} (\mathbf{B} \cdot \nabla) \mathbf{B} - \nabla \left(\frac{B^2}{2\mu_0} + P \right) \quad (5.126)$$

In tensor notation

$$\rho \frac{\partial v_i}{\partial t} + \rho v_j \partial_j v_i = \frac{1}{\mu_0} B_j \partial_j B_i - \partial_i \left(\frac{B_l B_l}{2\mu_0} + P \right) \quad (5.127)$$

$$\rho \frac{\partial v_i}{\partial t} = -\partial_j \rho v_j v_i + \partial_j \frac{1}{\mu_0} B_j B_i - \partial_j \delta_{ij} \left(\frac{B_l B_l}{2\mu_0} + P \right) \quad (5.128)$$

$$= -\partial_j \left(\rho v_j v_i - \frac{1}{\mu_0} B_j B_i + \delta_{ij} \left(\frac{B_l B_l}{2\mu_0} + P \right) \right) \quad (5.129)$$

$$= -\partial_j P_{ij} \quad (5.130)$$

where P_{ij} is the Maxwellian stress tensor. This equation represents also the conservation of momentum.

5.1.7 Validity of MHD

Since the theory does not make any distinction between the components, it can only be used to model phenomena that have a characteristic timescale that is longer than the longest characteristic period of any component. This is normally the cyclotron frequency of the heaviest ion.

In our case, however, it seems that the time scale of the plasma frequency is longer. So I think the MHD equations can be used up to a frequency of a few 10 kHz.

Teil III

KINETIC EFFECTS

6. BASICS OF THE KINETIC PLASMA THEORY

6.1 Exact phase space

A plasma consists of many particles of different kind, interacting with each other. Each particle is fully defined by its charge, mass, position vector \mathbf{q} and momentum vector \mathbf{p} . When a different set of equations is used for each species, there are two possibilities how to represent the plasma system. The way, I will use, is a 6 dimensional phase space, where each particle is represented by a point. The other possibility is to use a $6N$ space, where N is the number of particles of this species. Then the momentary state of the system is represented by a single point. The whole procedure, I describe is derived in a more detailed way in [Baumjohann and Treumann(1999)].

When using the 6 dimensional representation, the exact number density of a particle can be written as

$$f_{exact,i}(\mathbf{q}, \mathbf{p}, t) = \delta(\mathbf{q} - \mathbf{q}_i(t))\delta(\mathbf{p} - \mathbf{p}_i(t)) \quad (6.1)$$

So the whole exact number density is

$$f_{exact}(\mathbf{q}, \mathbf{p}, t) = \sum_i \delta(\mathbf{q} - \mathbf{q}_i(t))\delta(\mathbf{p} - \mathbf{p}_i(t)) \quad (6.2)$$

If the total number of particles is taken to be constant, we can say that a volume in the phase space, dV does not change its size during its evolvement in time, but merely changes its shape. So we can write

$$\frac{D}{Dt}f_{exact}(\mathbf{q}, \mathbf{p}, t) = \left(\frac{\partial}{\partial t} + \mathbf{v} \cdot \nabla_q + \frac{\partial \mathbf{p}}{\partial t} \cdot \nabla_p \right) f_{exact}(\mathbf{q}, \mathbf{p}, t) = 0 \quad (6.3)$$

$\frac{D}{Dt}$ is the substantial derivative. $\frac{\partial \mathbf{p}}{\partial t}$ is the force, which is $q(\mathbf{E} + \mathbf{v} \times \mathbf{B})$ in our case, so

$$\left(\frac{\partial}{\partial t} + \mathbf{v} \cdot \nabla_q + q(\mathbf{E}_m + \mathbf{v} \times \mathbf{B}_m) \cdot \nabla_p \right) f_{exact}(\mathbf{q}, \mathbf{p}, t) = 0 \quad (6.4)$$

This important equation is called the *Klimontovich-Dupree equation*. Subscript m indicates that the microscopic fields are meant.

6.2 The average Distribution function

We define the averaged phase space density.

$$f = \langle f_{exact}(\mathbf{q}, \mathbf{p}, t) \rangle \quad (6.5)$$

So the exact phase state density consists of two parts, the averaged phase space density and a fluctuation term.

$$f_{exact} = f + \delta f_{exact}(\mathbf{q}, \mathbf{p}, t) \quad (6.6)$$

$\langle \delta f_{exact}(\mathbf{q}, \mathbf{p}, t) \rangle = 0$ must be true. Similar

$$\mathbf{E}_m(\mathbf{q}, \mathbf{p}, t) = \mathbf{E}(\mathbf{q}, \mathbf{p}, t) + \delta \mathbf{E}(\mathbf{q}, \mathbf{p}, t) \quad (6.7)$$

$$\mathbf{B}_m(\mathbf{q}, \mathbf{p}, t) = \mathbf{B}(\mathbf{q}, \mathbf{p}, t) + \delta \mathbf{B}(\mathbf{q}, \mathbf{p}, t) \quad (6.8)$$

$$\langle \delta \mathbf{E}(\mathbf{q}, \mathbf{p}, t) \rangle = 0 \quad (6.9)$$

$$\langle \delta \mathbf{B}(\mathbf{q}, \mathbf{p}, t) \rangle = 0 \quad (6.10)$$

Inserting these equations into (6.4) yields the kinetic equation.

$$\left(\frac{\partial}{\partial t} + \mathbf{v} \cdot \nabla_q + q(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \cdot \nabla_p \right) f(\mathbf{q}, \mathbf{p}, t) + q(\delta \mathbf{E} + \mathbf{v} \times \delta \mathbf{B}) \cdot \nabla_p \delta f(\mathbf{q}, \mathbf{p}, t) = 0 \quad (6.11)$$

It describes the evolution of the coarse grained phase state density under influence of the averaged fields. The value of the distribution function f can be interpreted as the probability to find a particle in the volume $d\mathbf{q}d\mathbf{p}$ of the phase space. The last term models the interaction between fields and particles. When collisions between particles are to be considered, there might be additional terms. Space plasma can be regarded as collision less most of the time, so I will neglect the collision term and even the EM interaction term in equation (6.11). Then I get the simplest kinetic equation that can be used to describe plasma, the Vlasov equation.

$$\left(\frac{\partial}{\partial t} + \mathbf{v} \cdot \nabla_q + q(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \cdot \nabla_p \right) f(\mathbf{q}, \mathbf{p}, t) = 0 \quad (6.12)$$

This equation can also be written in a slightly different form, where index e describes the distribution function for the electrons, i for the ions.

$$\left(\frac{\partial}{\partial t} + \mathbf{v}_e \cdot \nabla_q - \frac{e}{m_e}(\mathbf{E} + \mathbf{v}_e \times \mathbf{B}) \cdot \nabla_v \right) f_e(\mathbf{q}, \mathbf{v}, t) = 0 \quad (6.13)$$

$$\left(\frac{\partial}{\partial t} + \mathbf{v}_i \cdot \nabla_q + \frac{Ze}{m_i}(\mathbf{E} + \mathbf{v}_i \times \mathbf{B}) \cdot \nabla_v \right) f_i(\mathbf{q}, \mathbf{v}, t) = 0 \quad (6.14)$$

These equations can be manipulated in a way to produce the equations of the two fluid theory, as shown in [Kippenhahn and Moellenhoff(1973)], so two fluid theory is a subset of the kinetic theory.

6.3 The Liouville theorem

If collisions and interactions between particles and microscopic fields can be neglected, such that $\nabla \cdot \mathbf{v} = 0$, as in case of Vlasov's equation, Liouville's theorem holds, which states that a phase space volume does not change, it marly can be deformed. This is a result of the conservation of particle numbers, so it holds

exactly only for exact phase state density. In averaged phase space, it is only an approximation, although normally a good one.

A volume in phase space dV moves under the action of the Lorenz force like an incompressible fluid. The reason for this behavior is that the divergency of the velocity is zero.

6.4 The macroscopic observables

To get macroscopic observables, which do not depend on the velocity distribution but are the result of it, one has to take the respective velocity moment of the distribution, that is, integrate over the velocity space to get rid of the velocity dependance.

$$M_i(\mathbf{q}, t) = \int \mathbf{v}^i f(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.15)$$

\mathbf{v}^i is the dyadic product of the velocity vector with itself, i times. The first four moments are the interesting ones. When we integrate the distribution function over the whole phase space we get the number of particles:

$$N(\mathbf{q}, \mathbf{v}, t) = \int_V \int_v f(\mathbf{q}, \mathbf{v}, t) d^3v d^3q \quad (6.16)$$

When You divide this number by the volume, You get the number density:

$$n(\mathbf{q}, t) = \int f(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.17)$$

Then the bulk velocity,

$$\mathbf{v}_b(\mathbf{q}, t) = \frac{1}{n} \int \mathbf{v} f(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.18)$$

the pressure tensor, where we integrate over the velocity fluctuations

$$\mathbf{P}(\mathbf{q}, t) = m \int (\mathbf{v} - \mathbf{v}_b)^2 f(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.19)$$

and the heat tensor.

$$\mathbf{Q}(\mathbf{q}, t) = m \int (\mathbf{v} - \mathbf{v}_b)^3 f(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.20)$$

the trace of the heat tensor corresponds to the heat flux vector.

$$\phi_H(\mathbf{q}, t) = \frac{1}{2} m \int (\mathbf{v} - \mathbf{v}_b) \cdot (\mathbf{v} - \mathbf{v}_b)^2 f(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.21)$$

the trace of the pressure tensor, which corresponds to the isotropic part of the pressure, called thermal pressure, can be used to define a scalar temperature of the plasma component, which is called kinetic temperature.

$$T(\mathbf{q}, t) = \frac{m}{2kn} \int (\mathbf{v} - \mathbf{v}_b) \cdot (\mathbf{v} - \mathbf{v}_b) f(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.22)$$

This temperature is not the same as the thermodynamic temperature which is defined only for a system in equilibrium. The kinetic temperature is a directed parameter. In an anisotropic plasma, it has different values for different directions, because the velocity distributions differ.

6.5 Maxwell equations

Taking into account the velocity distributions of the plasma, the Maxwell equations can be written accordingly:

$$\nabla \cdot \mathbf{E} = \frac{1}{\epsilon_0} \sum_s q_s \int f_s(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.23)$$

$$\nabla \times \mathbf{H} - \epsilon_0 \frac{\partial \mathbf{E}}{\partial t} = \sum_s q_s \int \mathbf{v} f_s(\mathbf{q}, \mathbf{v}, t) d^3v \quad (6.24)$$

$$\nabla \times \mathbf{E} + \mu_0 \frac{\partial \mathbf{H}}{\partial t} = 0 \quad (6.25)$$

$$\mu_0 \nabla \cdot \mathbf{H} = 0 \quad (6.26)$$

where subscript s denotes the species of the particles.

Teil IV

PLASMA WAVES

7. MHD WAVES

7.1 Linearized perturbation theory

7.1.1 Equations

A linearized perturbation theory is used. The perturbed parameters consist of an unperturbed part with index 0 and a perturbed part with index 1. Hence:

$$\mathbf{B} = \mathbf{B}_0 + \mathbf{B}_1 \quad (7.1)$$

$$\mathbf{E} = \mathbf{E}_0 + \mathbf{E}_1 \quad (7.2)$$

$$\mathbf{j} = \mathbf{j}_0 + \mathbf{j}_1 \quad (7.3)$$

$$\mathbf{v} = \mathbf{v}_0 + \mathbf{v}_1 \quad (7.4)$$

$$P = P_0 + P_1 \quad (7.5)$$

$$\rho = \rho_0 + \rho_1 \quad (7.6)$$

As basis for the system of equations we can take 5.12 to 5.20, neglecting gravitation, viscosity and the displacement current. Conductivity approaches infinity, so there can exist no electric field.

$$\nabla \cdot \mathbf{B} = 0 \quad (7.7)$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t} \quad (7.8)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B} = \mathbf{j} \quad (7.9)$$

$$\mathbf{E} = -\mathbf{v} \times \mathbf{B} \quad (7.10)$$

$$P = P(\rho, T) \quad (7.11)$$

$$\frac{d}{dt} \left(\frac{p}{\rho^\gamma} \right) = 0 \quad (7.12)$$

$$\frac{\partial \rho}{\partial t} = -\nabla \cdot (\rho \mathbf{v}) \quad (7.13)$$

$$\rho \frac{\partial \mathbf{v}}{\partial t} + \rho(\mathbf{v} \cdot \nabla) \mathbf{v} = -\nabla P + \mathbf{j} \times \mathbf{B} \quad (7.14)$$

For the undisturbed parameters:

$$\nabla \cdot \mathbf{B}_0 = 0 \quad (7.15)$$

$$\nabla \times \mathbf{E}_0 = 0 \quad (7.16)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B}_0 = \mathbf{j}_0 \quad (7.17)$$

$$\mathbf{E}_0 = -\mathbf{v}_0 \times \mathbf{B}_0 \quad (7.18)$$

$$P_0 = P_0(\rho, T) \quad (7.19)$$

$$\frac{d}{dt} \left(\frac{p}{\rho^\gamma} \right) = 0 \quad (7.20)$$

$$\nabla \cdot (\rho_0 \mathbf{v}_0) = 0 \quad (7.21)$$

$$\rho_0 (\mathbf{v}_0 \cdot \nabla) \mathbf{v}_0 = -\nabla P_0 + \mathbf{j}_0 \times \mathbf{B}_0 \quad (7.22)$$

The undisturbed magnetic field shall point only in x direction $B_0 = B_{x,0}$ and \mathbf{v}_0 shall be zero.

$$\frac{\partial B_0}{\partial x} = 0 \quad (7.23)$$

$$\frac{\partial}{\partial t} \text{whatever}_0 = 0 \quad (7.24)$$

$$\mathbf{E}_0 = \mathbf{0} \quad (7.25)$$

$$\mathbf{j}_0 = \mathbf{0} \quad (7.26)$$

$$P_0 = P_0(\rho, T) \quad (7.27)$$

$$\frac{d}{dt} \left(\frac{p}{\rho^\gamma} \right) = 0 \quad (7.28)$$

$$\nabla P_0 = \mathbf{0} \quad (7.29)$$

so

$$\nabla \cdot (\mathbf{B}_0 + \mathbf{B}_1) = 0 \quad (7.30)$$

$$\nabla \times (\mathbf{E}_0 + \mathbf{E}_1) = -\frac{\partial}{\partial t} (\mathbf{B}_0 + \mathbf{B}_1) \quad (7.31)$$

$$\frac{1}{\mu_0} \nabla \times (\mathbf{B}_0 + \mathbf{B}_1) = (\mathbf{j}_0 + \mathbf{j}_1) \quad (7.32)$$

$$(\mathbf{E}_0 + \mathbf{E}_1) = -((\mathbf{v}_0 + \mathbf{v}_1) \times (\mathbf{B}_0 + \mathbf{B}_1)) \quad (7.33)$$

$$(P_0 + P_1) = (P_0 + P_1)(\rho, T) \quad (7.34)$$

$$\frac{d}{dt} \left(\frac{p_0 + p_1}{(\rho_0 + \rho_1)^\gamma} \right) = 0 \quad (7.35)$$

$$\frac{\partial(\rho_0 + \rho_1)}{\partial t} = -\nabla \cdot ((\rho_0 + \rho_1)(\mathbf{v}_0 + \mathbf{v}_1)) \quad (7.36)$$

$$(\rho_0 + \rho_1) \frac{\partial(\mathbf{v}_0 + \mathbf{v}_1)}{\partial t} + (\rho_0 + \rho_1)((\mathbf{v}_0 + \mathbf{v}_1) \cdot \nabla)(\mathbf{v}_0 + \mathbf{v}_1) = -\nabla(P_0 + P_1) + (\mathbf{j}_0 + \mathbf{j}_1) \times (\mathbf{B}_0 + \mathbf{B}_1) \quad (7.37)$$

Using (7.23)-(7.29)

$$\nabla \cdot \mathbf{B}_0 = \nabla \cdot \mathbf{B}_1 = 0 \quad (7.38)$$

$$\nabla \times \mathbf{E}_1 = -\frac{\partial}{\partial t} \mathbf{B}_1 \quad (7.39)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B}_1 = \mathbf{j}_1 \quad (7.40)$$

$$\mathbf{E}_1 = -\mathbf{v}_1 \times (\mathbf{B}_0 + \mathbf{B}_1) \quad (7.41)$$

$$(P_0 + P_1) = (P_0 + P_1)(\rho, T) \quad (7.42)$$

$$\frac{d}{dt} \left(\frac{p_1}{\rho_1^\gamma} \right) = 0 \quad (7.43)$$

$$\frac{\partial \rho_1}{\partial t} = -\nabla \cdot ((\rho_0 + \rho_1) \mathbf{v}_1) \quad (7.44)$$

$$(\rho_0 + \rho_1) \frac{\partial \mathbf{v}_1}{\partial t} + ((\rho_0 + \rho_1) \mathbf{v}_1 \cdot \nabla) \mathbf{v}_1 = -\nabla P_1 + \mathbf{j}_1 \times (\mathbf{B}_0 + \mathbf{B}_1) \quad (7.45)$$

If the perturbations are small, I can neglect all multiples of parameters with index 1.

$$\nabla \cdot \mathbf{B}_0 = \nabla \cdot \mathbf{B}_1 = 0 \quad (7.46)$$

$$\nabla \times \mathbf{E}_1 = -\frac{\partial}{\partial t} \mathbf{B}_1 \quad (7.47)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B}_1 = \mathbf{j}_1 \quad (7.48)$$

$$\mathbf{E}_1 = -\mathbf{v}_1 \times \mathbf{B}_0 \quad (7.49)$$

$$(P_0 + P_1) = (P_0 + P_1)(\rho, T) \quad (7.50)$$

$$\frac{d}{dt} \left(\frac{p_1}{\rho_1^\gamma} \right) = 0 \quad (7.51)$$

$$\frac{\partial \rho_1}{\partial t} = -\nabla \cdot (\rho_0 \mathbf{v}_1) \quad (7.52)$$

$$\rho_0 \frac{\partial \mathbf{v}_1}{\partial t} = -\nabla P_1 + \mathbf{j}_1 \times \mathbf{B}_0 \quad (7.53)$$

Since the time scale of the wave motion is small, the process can be regarded as adiabatic. The temperature is constant, and the equation of state is superfluous.

$$\nabla \cdot \mathbf{B}_0 = \nabla \cdot \mathbf{B}_1 = 0 \quad (7.54)$$

$$\nabla \times \mathbf{E}_1 = -\frac{\partial}{\partial t} \mathbf{B}_1 \quad (7.55)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B}_1 = \mathbf{j}_1 \quad (7.56)$$

$$\mathbf{E}_1 = -\mathbf{v}_1 \times \mathbf{B}_0 \quad (7.57)$$

$$\frac{P_1}{P_0} = \gamma \frac{\rho_1}{\rho_0} \quad (7.58)$$

$$\frac{\partial \rho_1}{\partial t} = -\nabla \cdot (\rho_0 \mathbf{v}_1) \quad (7.59)$$

$$\rho_0 \frac{\partial \mathbf{v}_1}{\partial t} = -\nabla P_1 + \mathbf{j}_1 \times \mathbf{B}_0 \quad (7.60)$$

7.1.2 Harmonic solution

Postulating a time and space harmonic distribution in space and time of the perturbed parameters:

$$\mathbf{B}_1 = B_1 e^{i(\mathbf{k} \cdot \mathbf{r} - \omega t)} \quad (7.61)$$

$$\mathbf{E}_1 = E_1 e^{i(\mathbf{k} \cdot \mathbf{r} - \omega t)} \quad (7.62)$$

$$\mathbf{j}_1 = j_1 e^{i(\mathbf{k} \cdot \mathbf{r} - \omega t)} \quad (7.63)$$

$$\mathbf{v}_1 = v_1 e^{i(\mathbf{k} \cdot \mathbf{r} - \omega t)} \quad (7.64)$$

$$P_1 = P_{1,0} e^{i(\mathbf{k} \cdot \mathbf{r} - \omega t)} \quad (7.65)$$

$$\rho_1 = \rho_{1,0} e^{i(\mathbf{k} \cdot \mathbf{r} - \omega t)} \quad (7.66)$$

Performing a Fourier transform of the system:

$$i\mathbf{k} \cdot \mathbf{B}_1 = 0 \quad (7.67)$$

$$i\mathbf{k} \times \mathbf{E}_1 = i\omega \mathbf{B}_1 \quad (7.68)$$

$$\frac{i}{\mu_0} \mathbf{k} \times \mathbf{B}_1 = \mathbf{j}_1 \quad (7.69)$$

$$\mathbf{E}_1 = -\mathbf{v}_1 \times \mathbf{B}_0 \quad (7.70)$$

$$\frac{P_1}{P_0} = \gamma \frac{\rho_1}{\rho_0} \quad (7.71)$$

$$-i\omega \rho_1 = -i\mathbf{k} \cdot (\rho_0 \mathbf{v}_1) \quad (7.72)$$

$$-i\omega \rho_0 \mathbf{v}_1 = -i\mathbf{k} P_1 + \mathbf{j}_1 \times \mathbf{B}_0 \quad (7.73)$$

Hence

$$\mathbf{k} \cdot \mathbf{B}_1 = 0 \quad (7.74)$$

$$\mathbf{k} \times \mathbf{E}_1 = \omega \mathbf{B}_1 \quad (7.75)$$

$$\frac{i}{\mu_0} \mathbf{k} \times \mathbf{B}_1 = \mathbf{j}_1 \quad (7.76)$$

$$\mathbf{E}_1 = -\mathbf{v}_1 \times \mathbf{B}_0 \quad (7.77)$$

$$\frac{P_1}{P_0} = \gamma \frac{\rho_1}{\rho_0} \quad (7.78)$$

$$\omega \rho_1 = \mathbf{k} \cdot (\rho_0 \mathbf{v}_1) \quad (7.79)$$

$$i\omega \rho_0 \mathbf{v}_1 = i\mathbf{k}P_1 - \mathbf{j}_1 \times \mathbf{B}_0 \quad (7.80)$$

Alfven waves

All parameters depend only on x and t , the velocity points in y direction, the background magnetic field points in x direction.

$$k_x B_{1,x} = 0 \quad (7.81)$$

$$\begin{pmatrix} \frac{\partial}{\partial x} \\ \frac{\partial}{\partial y} \\ \frac{\partial}{\partial z} \end{pmatrix} \times \begin{pmatrix} E_{1,x}(x,t) \\ E_{1,y}(x,t) \\ E_{1,z}(x,t) \end{pmatrix} = \begin{pmatrix} 0 \\ -\frac{\partial}{\partial x} E_{1,z}(x,t) \\ \frac{\partial}{\partial x} E_{1,y}(x,t) \end{pmatrix} = \omega \mathbf{B}_1 \quad (7.82)$$

$$\frac{i}{\mu_0} \begin{pmatrix} \frac{\partial}{\partial x} \\ \frac{\partial}{\partial y} \\ \frac{\partial}{\partial z} \end{pmatrix} \times \begin{pmatrix} B_{1,x}(x,t) \\ B_{1,y}(x,t) \\ B_{1,z}(x,t) \end{pmatrix} = \frac{i}{\mu_0} \begin{pmatrix} 0 \\ -\frac{\partial}{\partial x} B_{1,z}(x,t) \\ \frac{\partial}{\partial x} B_{1,y}(x,t) \end{pmatrix} = \mathbf{j}_1 \quad (7.83)$$

$$\mathbf{E}_1 = - \begin{pmatrix} 0 \\ v_{1,y}(x,t) \\ 0 \end{pmatrix} \times \begin{pmatrix} B_{0,x} \\ 0 \\ 0 \end{pmatrix} \quad (7.84)$$

$$\frac{P_1}{P_0} = \gamma \frac{\rho_1}{\rho_0} \quad (7.85)$$

$$\omega \rho_1 = 0 \quad (7.86)$$

$$i\omega \rho_0 \mathbf{v}_1 = i\mathbf{k}P_1 - \begin{pmatrix} j_{1,x}(x,t) \\ j_{1,y}(x,t) \\ j_{1,z}(x,t) \end{pmatrix} \times \begin{pmatrix} B_{0,x} \\ 0 \\ 0 \end{pmatrix} \quad (7.87)$$

According to [7.99], the density does not vary. So according to [7.85] the pressure is also constant.

$$k_x B_{1,x} = 0 \quad (7.88)$$

$$\omega \mathbf{B}_1 = \begin{pmatrix} 0 \\ -k_x E_{1,z}(x, t) \\ k_x E_{1,y}(x, t) \end{pmatrix} \quad (7.89)$$

$$\mathbf{j}_1 = \frac{i}{\mu_0} \begin{pmatrix} 0 \\ -k_x B_{1,z}(x, t) \\ k_x B_{1,y}(x, t) \end{pmatrix} \quad (7.90)$$

$$\mathbf{E}_1 = \begin{pmatrix} 0 \\ 0 \\ v_{1,y}(x, t) B_{0,x} \end{pmatrix} \quad (7.91)$$

$$P_1 = 0 \quad (7.92)$$

$$\rho_1 = 0 \quad (7.93)$$

$$i\omega \rho_0 \mathbf{v}_1 = - \begin{pmatrix} 0 \\ j_{1,z}(x, t) B_{0,x} \\ -j_{1,y}(x, t) B_{0,x} \end{pmatrix} \quad (7.94)$$

So we can forget the first equation.

$$\omega \mathbf{B}_1 = \begin{pmatrix} 0 \\ -k_x E_{1,z}(x, t) \\ 0 \end{pmatrix} \quad (7.95)$$

$$\mathbf{j}_1 = \frac{i}{\mu_0} \begin{pmatrix} 0 \\ 0 \\ k_x B_{1,y}(x, t) \end{pmatrix} \quad (7.96)$$

$$\mathbf{E}_1 = \begin{pmatrix} 0 \\ 0 \\ v_{1,y}(x, t) B_{0,x} \end{pmatrix} \quad (7.97)$$

$$P_1 = 0 \quad (7.98)$$

$$\rho_1 = 0 \quad (7.99)$$

$$i\omega \rho_0 \mathbf{v}_1 = - \begin{pmatrix} 0 \\ j_{1,z}(x, t) B_{0,x} \\ 0 \end{pmatrix} \quad (7.100)$$

Since each component has only one dimension, we can reduce this system to 1d. Of course the components have to fit together.

$$B_1 = -\frac{k_x}{\omega} E_{1,z} \quad (7.101)$$

$$j_1 = \frac{i}{\mu_0} k_x B_{1,y} \quad (7.102)$$

$$E_{1,z} = v_{1,y} B_{0,x} \quad (7.103)$$

$$P_1 = 0 \quad (7.104)$$

$$\rho_1 = 0 \quad (7.105)$$

$$i\omega \rho_0 v_{1,y} = -j_{1,z} B_{0,x} \quad (7.106)$$

So from (7.106).

$$v_{1,y} = \frac{v j_{1,z} B_{0,x}}{\omega \rho_0} \quad (7.107)$$

Eliminate j with 7.102.

$$v_{1,y} = -\frac{k_x B_{1,y} B_{0,x}}{\omega \rho_0 \mu_0} \quad (7.108)$$

Get rid of B_1

$$v_{1,y} = \frac{k_x^2 E_{1,z} B_{0,x}}{\omega^2 \rho_0 \mu_0} \quad (7.109)$$

Get rid of E_1

$$1 = \frac{k_x^2 B_{0,x}^2}{\omega^2 \rho_0 \mu_0} \quad (7.110)$$

So we get the dispersion relation

$$k_x^2 = \frac{\omega^2 \rho_0 \mu_0}{B_{0,x}^2} \quad (7.111)$$

and the Alfven velocity

$$v_A = \frac{\omega}{k} = \frac{B_{0,x}^2}{\sqrt{\rho_0 \mu_0}} \quad (7.112)$$

For very strong magnetic fields and very thin plasma, $v_A \rightarrow \infty$, which is not physical reality. In reality, $v_A \rightarrow c$.

MHD Compression Wave

The perturbed parameters depend now on y , while the magnetic induction field points, again in the x direction.

$$\mathbf{B}_0 = B_{0,x} \quad (7.113)$$

$$\frac{\partial}{\partial y} B_{1,y}(y, t) = 0 \quad (7.114)$$

$$\nabla \times \mathbf{E}_1(y, t) = -\frac{\partial}{\partial t} \mathbf{B}_1(y, t) \quad (7.115)$$

$$\frac{1}{\mu_0} \nabla \times \mathbf{B}_1(y, t) = \mathbf{j}_1(y, t) \quad (7.116)$$

$$\mathbf{E}_1(y, t) = -\mathbf{v}_1(y, t) \times \mathbf{B}_0 \quad (7.117)$$

$$\frac{P_1(y, t)}{P_0} = \gamma \frac{\rho_1(y, t)}{\rho_0} \quad (7.118)$$

$$\frac{\partial \rho_1(y, t)}{\partial t} = -\nabla \cdot (\rho_0 \mathbf{v}_1(y, t)) \quad (7.119)$$

$$\rho_0 \frac{\partial \mathbf{v}_1(y, t)}{\partial t} = -\nabla P_1(y, t) + \mathbf{j}_1(y, t) \times \mathbf{B}_0 \quad (7.120)$$

$$\mathbf{B}_0 = B_{0,x} \quad (7.121)$$

$$-\imath\omega B_{1,y}(y, t) = 0 \quad (7.122)$$

$$\begin{pmatrix} \frac{\partial}{\partial x} \\ \frac{\partial}{\partial y} \\ \frac{\partial}{\partial z} \end{pmatrix} \times \begin{pmatrix} E_{1,x}(y, t) \\ E_{1,y}(y, t) \\ E_{1,z}(y, t) \end{pmatrix} = \imath\omega \begin{pmatrix} B_{1,x}(y, t) \\ B_{1,y}(y, t) \\ B_{1,z}(y, t) \end{pmatrix} \quad (7.123)$$

$$\frac{1}{\mu_0} \begin{pmatrix} \frac{\partial}{\partial x} \\ \frac{\partial}{\partial y} \\ \frac{\partial}{\partial z} \end{pmatrix} \times \begin{pmatrix} B_{1,x}(y, t) \\ B_{1,y}(y, t) \\ B_{1,z}(y, t) \end{pmatrix} = \begin{pmatrix} j_{1,x}(y, t) \\ j_{1,y}(y, t) \\ j_{1,z}(y, t) \end{pmatrix} \quad (7.124)$$

$$\begin{pmatrix} E_{1,x}(y, t) \\ E_{1,y}(y, t) \\ E_{1,z}(y, t) \end{pmatrix} = - \begin{pmatrix} v_{1,x}(y, t) \\ v_{1,y}(y, t) \\ v_{1,z}(y, t) \end{pmatrix} \times \begin{pmatrix} B_{0,x} \\ 0 \\ 0 \end{pmatrix} \quad (7.125)$$

$$\frac{P_1(y, t)}{P_0} = \gamma \frac{\rho_1(y, t)}{\rho_0} \quad (7.126)$$

$$-\imath\omega\rho_1(y, t) = - \begin{pmatrix} \frac{\partial}{\partial x} \\ \frac{\partial}{\partial y} \\ \frac{\partial}{\partial z} \end{pmatrix} \cdot \left(\rho_0 \begin{pmatrix} v_{1,x}(y, t) \\ v_{1,y}(y, t) \\ v_{1,z}(y, t) \end{pmatrix} \right) \quad (7.127)$$

$$-\rho_0\imath\omega \begin{pmatrix} v_{1,x}(y, t) \\ v_{1,y}(y, t) \\ v_{1,z}(y, t) \end{pmatrix} = - \begin{pmatrix} \frac{\partial}{\partial x} \\ \frac{\partial}{\partial y} \\ \frac{\partial}{\partial z} \end{pmatrix} P_1(y, t) + \begin{pmatrix} j_{1,x}(y, t) \\ j_{1,y}(y, t) \\ j_{1,z}(y, t) \end{pmatrix} \times \begin{pmatrix} B_{0,x}(y, t) \\ 0 \\ 0 \end{pmatrix} \quad (7.128)$$

$$\mathbf{B}_0 = B_{0,x} \quad (7.129)$$

$$B_{1,y}(y, t) = 0 \quad (7.130)$$

$$\begin{pmatrix} 0 \\ \imath k \\ 0 \end{pmatrix} \times \begin{pmatrix} E_{1,x}(y, t) \\ E_{1,y}(y, t) \\ E_{1,z}(y, t) \end{pmatrix} = \imath\omega \begin{pmatrix} B_{1,x}(y, t) \\ B_{1,y}(y, t) \\ B_{1,z}(y, t) \end{pmatrix} \quad (7.131)$$

$$\frac{1}{\mu_0} \begin{pmatrix} 0 \\ \imath k \\ 0 \end{pmatrix} \times \begin{pmatrix} B_{1,x}(y, t) \\ B_{1,y}(y, t) \\ B_{1,z}(y, t) \end{pmatrix} = \begin{pmatrix} j_{1,x}(y, t) \\ j_{1,y}(y, t) \\ j_{1,z}(y, t) \end{pmatrix} \quad (7.132)$$

$$\begin{pmatrix} E_{1,x}(y, t) \\ E_{1,y}(y, t) \\ E_{1,z}(y, t) \end{pmatrix} = - \begin{pmatrix} 0 \\ v_{1,y}(y, t) \\ 0 \end{pmatrix} \times \begin{pmatrix} B_{0,x} \\ 0 \\ 0 \end{pmatrix} \quad (7.133)$$

$$\frac{P_1(y, t)}{P_0} = \gamma \frac{\rho_1(y, t)}{\rho_0} \quad (7.134)$$

$$\imath\omega\rho_1(y, t) = \begin{pmatrix} 0 \\ \imath k \\ 0 \end{pmatrix} \cdot \left(\rho_0 \begin{pmatrix} 0 \\ v_{1,y}(y, t) \\ 0 \end{pmatrix} \right) \quad (7.135)$$

$$-\rho_0\imath\omega \begin{pmatrix} 0 \\ v_{1,y}(y, t) \\ 0 \end{pmatrix} = - \begin{pmatrix} 0 \\ \imath k \\ 0 \end{pmatrix} P_1(y, t) + \begin{pmatrix} j_{1,x}(y, t) \\ j_{1,y}(y, t) \\ j_{1,z}(y, t) \end{pmatrix} \times \begin{pmatrix} B_{0,x}(y, t) \\ 0 \\ 0 \end{pmatrix} \quad (7.136)$$

$$\mathbf{B}_0 = B_{0,x} \quad (7.137)$$

$$B_{1,y}(y, t) = 0 \quad (7.138)$$

$$\begin{pmatrix} ikE_{1,z}(y, t) \\ 0 \\ -ikE_{1,x}(y, t) \end{pmatrix} = i\omega \begin{pmatrix} B_{1,x}(y, t) \\ B_{1,y}(y, t) \\ B_{1,z}(y, t) \end{pmatrix} \quad (7.139)$$

$$\frac{1}{\mu_0} \begin{pmatrix} ikB_{1,z}(y, t) \\ 0 \\ -ikB_{1,x}(y, t) \end{pmatrix} = \begin{pmatrix} j_{1,x}(y, t) \\ j_{1,y}(y, t) \\ j_{1,z}(y, t) \end{pmatrix} \quad (7.140)$$

$$\begin{pmatrix} E_{1,x}(y, t) \\ E_{1,y}(y, t) \\ E_{1,z}(y, t) \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ v_{1,y}(y, t)B_{0,x} \end{pmatrix} \quad (7.141)$$

$$\frac{P_1(y, t)}{P_0} = \gamma \frac{\rho_1(y, t)}{\rho_0} \quad (7.142)$$

$$i\omega\rho_1(y, t) = ik\rho_0v_{1,y}(y, t) \quad (7.143)$$

$$-\rho_0 i\omega \begin{pmatrix} 0 \\ v_{1,y}(y, t) \\ 0 \end{pmatrix} = - \begin{pmatrix} 0 \\ ik \\ 0 \end{pmatrix} P_1(y, t) + \begin{pmatrix} 0 \\ j_{1,z}(y, t)B_{0,x}(y, t) \\ -j_{1,y}(y, t)B_{0,x}(y, t) \end{pmatrix} \quad (7.144)$$

$$\mathbf{B}_0 = B_{0,x} \quad (7.145)$$

$$B_{1,y}(y, t) = B_{1,z}(y, t) = 0 \quad (7.146)$$

$$E_{1,x}(y, t) = E_{1,y}(y, t) = 0 \quad (7.147)$$

$$j_{1,x}(y, t) = j_{1,y}(y, t) = 0 \quad (7.148)$$

$$\begin{pmatrix} ikE_{1,z}(y, t) \\ 0 \\ 0 \end{pmatrix} = i\omega \begin{pmatrix} B_{1,x}(y, t) \\ 0 \\ 0 \end{pmatrix} \quad (7.149)$$

$$\frac{1}{\mu_0} \begin{pmatrix} 0 \\ 0 \\ -ikB_{1,x}(y, t) \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ j_{1,z}(y, t) \end{pmatrix} \quad (7.150)$$

$$\begin{pmatrix} 0 \\ 0 \\ E_{1,z}(y, t) \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \\ v_{1,y}(y, t)B_{0,x} \end{pmatrix} \quad (7.151)$$

$$\frac{P_1(y, t)}{P_0} = \gamma \frac{\rho_1(y, t)}{\rho_0} \quad (7.152)$$

$$\omega\rho_1(y, t) = k\rho_0v_{1,y}(y, t) \quad (7.153)$$

$$-\rho_0 i\omega \begin{pmatrix} 0 \\ v_{1,y}(y, t) \\ 0 \end{pmatrix} = - \begin{pmatrix} 0 \\ ik \\ 0 \end{pmatrix} P_1(y, t) + \begin{pmatrix} 0 \\ j_{1,z}(y, t)B_{0,x}(y, t) \\ 0 \end{pmatrix} \quad (7.154)$$

$$kE_{1,z}(y, t) = \omega B_{1,x}(y, t) \quad (7.155)$$

$$-\frac{1}{\mu_0} \imath k B_{1,x}(y, t) = j_{1,z}(y, t) \quad (7.156)$$

$$E_{1,z}(y, t) = v_{1,y}(y, t) B_{0,x} \quad (7.157)$$

$$\frac{P_1(y, t)}{P_0} = \gamma \frac{\rho_1(y, t)}{\rho_0} \quad (7.158)$$

$$\omega \rho_1(y, t) = k \rho_0 v_{1,y}(y, t) \quad (7.159)$$

$$-\rho_0 \imath \omega v_{1,y}(y, t) = -\imath k P_1(y, t) + j_{1,z}(y, t) B_{0,x}(y, t) \quad (7.160)$$

I define the adiabatic sound speed.

$$v_s = \sqrt{\gamma \frac{P_0}{\rho_0}} \quad (7.161)$$

$$E_{1,z}(y, t) = \frac{\omega}{k} B_{1,x}(y, t) \quad (7.162)$$

$$j_{1,z}(y, t) = -\frac{1}{\mu_0} \imath k B_{1,x}(y, t) \quad (7.163)$$

$$E_{1,z}(y, t) = v_{1,y}(y, t) B_{0,x} \quad (7.164)$$

$$P_1(y, t) = v_s^2 \rho_1(y, t) \quad (7.165)$$

$$v_{1,y}(y, t) = \frac{\omega \rho_1(y, t)}{k \rho_0} \quad (7.166)$$

$$\omega v_{1,y}(y, t) = k v_s^2 \frac{\rho_1(y, t)}{\rho_0} + \imath j_{1,z}(y, t) \frac{B_{0,x}(y, t)}{\rho_0} \quad (7.167)$$

Eliminate j from 7.167.

$$\omega v_{1,y} = k v_s^2 \frac{\rho_1}{\rho_0} + k B_{1,x} \frac{B_{0,x}}{\mu_0 \rho_0} \quad (7.168)$$

Now eliminate B_1 .

$$\omega v_{1,y} = k v_s^2 \frac{\rho_1}{\rho_0} + k^2 \frac{1}{\omega} E_{1,z} \frac{B_{0,x}}{\mu_0 \rho_0} \quad (7.169)$$

Eliminate E .

$$\omega v_{1,y} = k v_s^2 \frac{\rho_1}{\rho_0} + k^2 \frac{1}{\omega} v_{1,y} \frac{B_{0,x}^2}{\mu_0 \rho_0} \quad (7.170)$$

The last ratio is the Alfven speed squared.

$$\omega v_{1,y} = k v_s^2 \frac{\rho_1}{\rho_0} + k^2 \frac{1}{\omega} v_{1,y} v_A^2 \quad (7.171)$$

Divide by v_1

$$\omega = k v_s^2 \frac{\rho_1}{\rho_0} \frac{1}{v_{1,y}} + k^2 \frac{1}{\omega} v_A^2 \quad (7.172)$$

and replace is

$$\omega = kv_s^2 \frac{\rho_1}{\rho_0} \frac{\rho_0 k}{\omega \rho_1} + k^2 \frac{1}{\omega} v_A^2 \quad (7.173)$$

$$\omega^2 = k^2 v_s^2 + k^2 v_A^2 \quad (7.174)$$

So we get the dispersion relation

$$\omega = k \sqrt{v_s^2 + v_A^2} \quad (7.175)$$

and the phase speed

$$v_{mhdcomp} = \frac{\omega}{k} = \sqrt{v_s^2 + v_A^2} \quad (7.176)$$

7.2 Langmuir waves

Using a *Störungsansatz*, we can write the parameters as sum of the constant mean values with index 0 and the disturbances with index 2.

$$n_e = N_0 + n_1 \quad (7.177)$$

$$E = E_0 + E_1 \quad (7.178)$$

$$v = v_0 + v_1 \quad (7.179)$$

We can set v_0 arbitrarily equal to zero. The equation that lead to the plasma frequency of the electrons can be written as

$$\frac{\partial v_1}{\partial t} = -\frac{eE_1}{m_e} \quad (7.180)$$

when using a 1D approximation. This equation lacks a term that takes care of the fact that not the plasma has a velocity distribution different from zero. One has to include the gradient of the thermal pressure.

$$\frac{\partial v_1}{\partial t} = -\frac{eE_1}{m_e} - \frac{\gamma kT}{m_e n_0} \frac{\partial n_1}{\partial x} \quad (7.181)$$

(why?)

Using the continuity equation (5.56):

$$\frac{\partial n_e}{\partial t} + \nabla \cdot (n_e \mathbf{v}) = 0 \quad (7.182)$$

For the 1D case:

$$\frac{\partial}{\partial t}(n_0 + n_1) = -\frac{\partial}{\partial x}((n_0 + n_1)v_1) \quad (7.183)$$

The time derivative of the average part is zero, so

$$\frac{Dn_1}{Dt} = -n_0 \frac{\partial v_1}{\partial x} - n_1 \frac{\partial v_1}{\partial x} \quad (7.184)$$

$n_1 \ll n_0$, so

$$\frac{Dn_1}{Dt} = -n_0 \frac{\partial v_1}{\partial x} \quad (7.185)$$

When the convective part is far smaller than the time derivative of the substantial derivative, it can be neglected and the substantial derivative can be transformed to a partial derivative.

$$\frac{\partial n_1}{\partial t} = -n_0 \frac{\partial v_1}{\partial x} \quad (7.186)$$

Differentiating with respect to time:

$$\frac{\partial^2 n_1}{\partial t^2} = -n_0 \frac{\partial^2 v_1}{\partial x \partial t} \quad (7.187)$$

Now I use 7.181 to get rid of the temporal derivative of v_1 .

$$\frac{\partial^2 n_1}{\partial t^2} = -n_0 \frac{\partial}{\partial x} \left(-\frac{eE_1}{m_e} - \frac{\gamma kT}{m_e n_0} \frac{\partial n_1}{\partial x} \right) \quad (7.188)$$

$$= \frac{en_0}{m_e} \frac{\partial E_1}{\partial x} + \frac{\gamma kT}{m_e n_0^2} \frac{\partial^2 n_1}{\partial x^2} \quad (7.189)$$

This is a wave equation. Poisson's law for the field due to the disturbance can be written as

$$\frac{dE_1}{dx} = -\frac{en_1}{\varepsilon_0} \quad (7.190)$$

and be used to eliminate the spatial derivative of the electric field.

$$\frac{\partial^2 n_1}{\partial t^2} = -\frac{e^2 n_0 n_1}{m_e \varepsilon_0} + \frac{\gamma kT}{m_e n_0^2} \frac{\partial^2 n_1}{\partial x^2} \quad (7.191)$$

Remembering that

$$\omega_p^2 = \frac{n_0 e^2}{m \varepsilon_0} \quad (7.192)$$

and the thermal velocity

$$v_{the} = \sqrt{\frac{kT}{m_e}} \quad (7.193)$$

one can write

$$\frac{\partial^2 n_1}{\partial t^2} + \omega_p^2 n_1 - \frac{\gamma v_{the}^2}{n_0^2} \frac{\partial^2 n_1}{\partial x^2} = 0 \quad (7.194)$$

Solving this, results in the dispersion relation

$$\omega_l^2 = \omega_p^2 + k^2 \gamma_e v_{the}^2 \quad (7.195)$$

The phase velocity is

$$v_l = \frac{\omega_l}{k} = \sqrt{\frac{\omega_p^2}{k^2} + \gamma_e v_{the}^2} \quad (7.196)$$

The Langmuir wave is a kind of electrostatic wave. It is dispersive for hot plasmas. Only in the limit of zero temperature or vanishing k , it becomes the Langmuir oscillation, which can be seen as wave with infinite wavelength.

8. KINETIC PLASMA WAVES

8.1 *Electrostatic waves*

Treating the electrostatic waves by a kinematic approach results in more information than by other theories. In particular I will show that there is a damping mechanism intrinsic in the theory. This mechanism, called Landau Damping, is not explained by other methods.

For simplicity, I will look at a quasi-neutral plasma, where the ions are static, so I will only use the equation for the electron gas (6.13) without the subscript e.

$$\left(\frac{\partial}{\partial t} + \mathbf{v} \cdot \nabla_q - \frac{e}{m} (\mathbf{E} + \mathbf{v} \times \mathbf{B}) \cdot \nabla_v \right) f(\mathbf{q}, \mathbf{v}, t) = 0 \quad (8.1)$$

A useful approach is the variational principle, so we disturb the fields.

$$f = f_0 + f_1 \quad (8.2)$$

$$\mathbf{E} = \mathbf{E}_0 + \mathbf{E}_1 \quad (8.3)$$

$$\mathbf{B} = \mathbf{B}_0 + \mathbf{B}_1 \quad (8.4)$$

We neglect any background field ($\mathbf{E}_0 = \mathbf{B}_0 = 0$) and regard the undisturbed density function as constant, such that any derivative is vanishing. Further we say that there is no current in the undisturbed plasma.

$$\mathbf{v}_{b,0} = \frac{1}{n_0} \int f_0 \mathbf{v} d^3p = 0 \quad (8.5)$$

he electrons must have a velocity distribution such that $f(\mathbf{v}) \rightarrow 0$ as $v \rightarrow \infty$. When we consider only terms to order 1, we get

$$\frac{\partial f_1}{\partial t} + (\mathbf{v} \cdot \nabla_q) f_1 - \left(\frac{e}{m} (\mathbf{E}_1 + \mathbf{v} \times \mathbf{B}_1) \cdot \nabla_v \right) f_0 = 0 \quad (8.6)$$

If the variation takes place only in one direction, the rotational term must vanish and we only have to take into account the component in which the disturbance takes place, say the x axis. So we get a scalar equation.

$$\frac{\partial f_1}{\partial t} + \left(v \frac{\partial}{\partial x} \right) f_1 = \frac{e}{m} E_1 \cdot \frac{\partial}{\partial v} f_0 \quad (8.7)$$

I omitted the subscript for shorter notation. Now we postulate a sinusoidal distribution of the fields:

$$f_1 = f e^{i(kx - \omega t)} \quad (8.8)$$

$$f_0 = f_0(v) \quad (8.9)$$

$$E_1 = E e^{i(kx - \omega t)} \quad (8.10)$$

E is the disturbance amplitude of the electric field. It shall be constant. Hence we get

$$\frac{\partial}{\partial t} f e^{i(kx - \omega t)} + \left(v \frac{\partial}{\partial x} \right) f e^{i(kx - \omega t)} = \left(\frac{e}{m} E e^{i(kx - \omega t)} \frac{\partial}{\partial v} \right) f_0 \quad (8.11)$$

and

$$-i\omega f + ikvf = \frac{e}{m} E \frac{\partial}{\partial v} f_0 \quad (8.12)$$

So we have one relation between the disturbance amplitudes E and f .¹ The second one we get from one of the Maxwell equations.

$$\nabla \cdot \mathbf{E} = \frac{\rho_e}{\epsilon_0} \quad (8.13)$$

or for our one dimensional case:

$$ikE e^{i(kx - \omega t)} = \frac{\rho_e}{\epsilon_0} \quad (8.14)$$

ρ_e is the charge density which can be written as

$$\rho_e = eZn_i - en_e \quad (8.15)$$

$$= eZn_i - e \int_{-\infty}^{\infty} (f_0 + f_1) dv \quad (8.16)$$

But in case of quasi neutrality, this entity must be zero for the undisturbed case:

$$eZn_i - e \int_{-\infty}^{\infty} f_0 dv = 0 \quad (8.17)$$

So

$$\rho_e = e \int_{-\infty}^{\infty} f e^{i(kx - \omega t)} dv \quad (8.18)$$

By substituting this into equation (8.14) and dividing by the exponential term, we get

¹ I want to emphasize that this equation is not completely valid in a physical sense. We did perform a fourier transform in both, space and time, which presumes spatially and temporally periodically varying parameters. While the former can be justified, this is not necessarily true for the temporal periodicity. There exists a derivation where the transform with respect to time is not performed, but it is mathematically more demanding. It uses a Laplace transform with respect to time, instead of the second Fourier transform.

$$ikE = \frac{1}{\epsilon_0} e \int_{-\infty}^{\infty} f dv \quad (8.19)$$

Now we can isolate f in equation (8.12) and substitute it into (8.19).

$$f = -i \frac{e}{mk} E \frac{\frac{\partial f_0}{\partial v}}{v - \frac{\omega}{k}} \quad (8.20)$$

$$\frac{e^2}{\epsilon_0 k^2 m} \int_{-\infty}^{\infty} \frac{\frac{\partial f_0}{\partial v}}{v - \frac{\omega}{k}} dv = 1 \quad (8.21)$$

This is the dispersion relation for an electrostatic wave without magnetic field. We define

$$n_0 = \int_{-\infty}^{\infty} f_0 dv \quad (8.22)$$

and

$$F(v) = \frac{f_0(v)}{n_0} \quad (8.23)$$

such that

$$\int_{-\infty}^{\infty} F dv = 1 \quad (8.24)$$

Hence

$$\frac{e^2}{\epsilon_0 k^2 m} \int_{-\infty}^{\infty} \frac{n_0 \frac{\partial F}{\partial v}}{v - \frac{\omega}{k}} dv = 1 \quad (8.25)$$

and

$$\omega_p^2 = \frac{n_0 e^2}{m \epsilon_0} \quad (8.26)$$

then

$$\frac{\omega_p^2}{k^2} \int_{-\infty}^{\infty} \frac{\frac{\partial F}{\partial v}}{v - \frac{\omega}{k}} dv = 1 \quad (8.27)$$

When comparing this equation with the respective dispersion relation of two component theory, one notes several points:

- The result of the dispersion relation depends now on the distribution function. It can be shown that the dispersion relations are equivalent, when postulating a Maxwell distribution of velocities.
- There are also solutions for a complex ω .
- A complex ω leads to damping.

The last item will be treated in the next subsection.

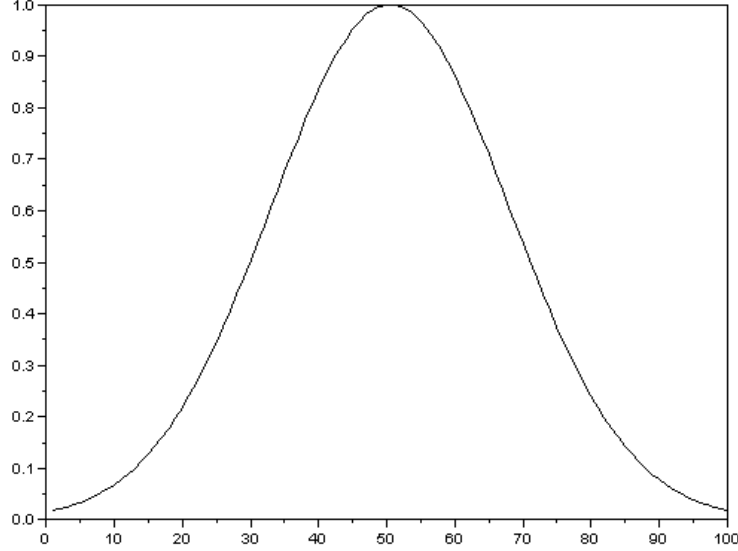


Fig. 8.1: Maxwell Distribution

8.1.1 Landau damping

The dispersion relation (??) can result in a complex ω , which, in turn, leads to waves that are either damped or excited. The imaginary part of the frequency is normally small in relation to the real part. This was expected, since, otherwise two fluid theory would not produce realistic predictions, which it does.

The important part of the dispersion relation is the integral.

$$I = \int_{-\infty}^{\infty} \frac{\frac{\partial F}{\partial v}}{v - \frac{\omega}{k}} dv = -\frac{k}{\omega} \int_{-\infty}^{\infty} \frac{\frac{\partial F}{\partial v}}{1 - \frac{vk}{\omega}} dv \quad (8.28)$$

The distribution function must tend to zero if the velocity goes to plus or minus infinity. We postulate the maximum at $v = 0$ (no bulk velocity), so the shape of F shall be like a Maxwell distribution. Figures 8.1 and 8.2 show the plots of the Maxwell distribution function and its derivative. Figure 8.3 shows the denominator of the integral, if $\frac{\omega}{k} = 3$.

So the numerator and the denominator of the kernel of the integral are prominent in different regions of the range of the velocity, as long as the maximum of F and $\frac{\omega}{k}$ are far enough apart. Then we can divide the integral in two parts, where the boundary is half way between $\max(v)$ and $\frac{\omega}{k}$. I call this speed v_{sep} .

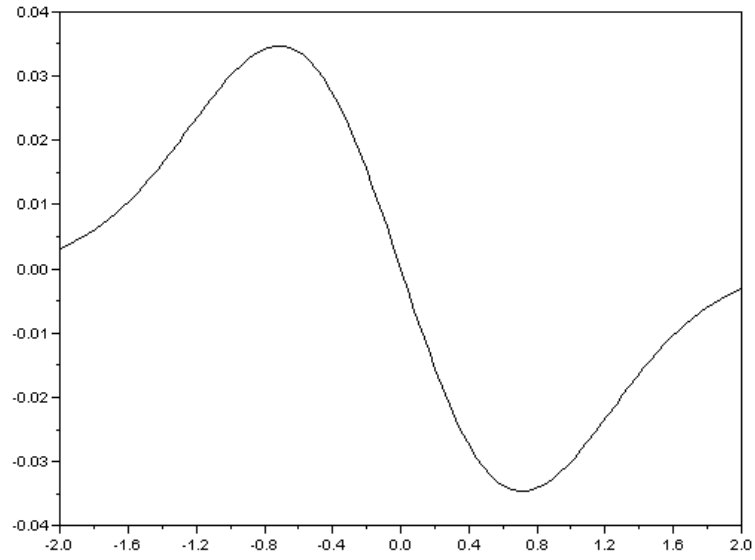


Fig. 8.2: Derivative of Maxwell Distribution

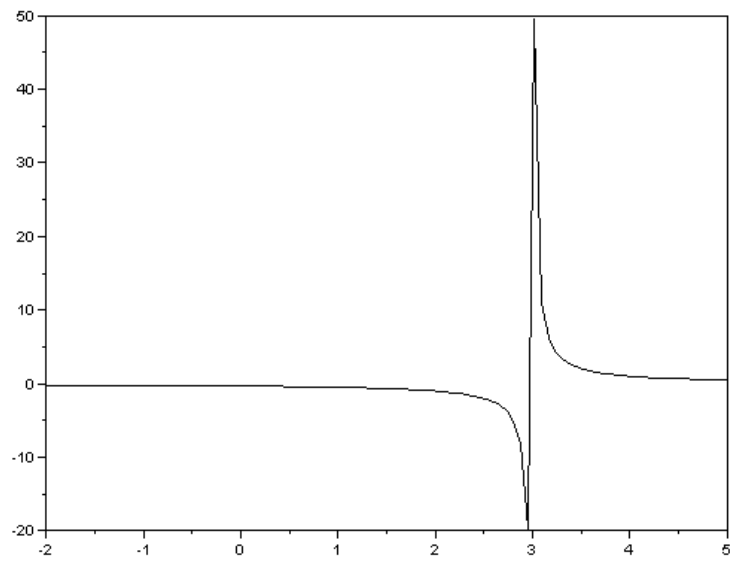


Fig. 8.3: Denominator of the integral: $\omega/k=3$

$$I = I_1 + I_2 \quad (8.29)$$

$$I_1 = \int_{-\infty}^{v_{sep}} \frac{\frac{\partial F}{\partial v}}{v - \frac{\omega}{k}} dv \quad (8.30)$$

$$I_2 = \int_{v_{sep}}^{\infty} \frac{\frac{\partial F}{\partial v}}{v - \frac{\omega}{k}} dv \quad (8.31)$$

Ad Integral 1:

In the part of the region, where the differential of F is prominent, $|\frac{kv}{\omega}|$ is small. Here we can approximate the denominator.

$$\left(1 - \frac{kv}{\omega}\right)^{-1} = 1 + \frac{kv}{\omega} + \left(\frac{kv}{\omega}\right)^2 \dots \quad (8.32)$$

Hence

$$I_1 = -\frac{k}{\omega} \left(\int_{-\infty}^{\infty} \frac{\partial F}{\partial v} dv + \frac{k}{\omega} \int_{-\infty}^{\infty} \frac{\partial F}{\partial v} v dv + \frac{k^2}{\omega^2} \int_{-\infty}^{\infty} \frac{\partial F}{\partial v} v^2 dv + \dots \right) \quad (8.33)$$

By partial integration one gets

$$\begin{aligned} I_1 &= -\frac{k}{\omega} [F]_{-\infty}^{\infty} \\ &- \frac{k^2}{\omega^2} [Fv]_{-\infty}^{\infty} + \frac{k^2}{\omega^2} \int_{-\infty}^{\infty} F dv \\ &- \frac{k^3}{\omega^3} [Fv^2]_{-\infty}^{\infty} + \frac{2k^3}{\omega^3} \int_{-\infty}^{\infty} Fv dv \\ &- \frac{k^4}{\omega^4} [Fv^3]_{-\infty}^{\infty} + \frac{3k^4}{\omega^4} \int_{-\infty}^{\infty} Fv^2 dv - \dots \end{aligned} \quad (8.34)$$

Since F is zero at plus or minus infinity, we can set all negative terms to zero.

$$\begin{aligned} I_1 &= \frac{k^2}{\omega^2} \int_{-\infty}^{\infty} F dv \\ &+ \frac{2k^3}{\omega^3} \int_{-\infty}^{\infty} Fv dv \\ &+ \frac{2k^4}{\omega^4} \int_{-\infty}^{\infty} Fv^2 dv + \dots \end{aligned} \quad (8.35)$$

Fv is an even function, so this integral (and all even integrals of higher order) is(are) also zero. The following equation remains.

$$I_1 = \frac{k^2}{\omega^2} \int_{-\infty}^{\infty} F dv + \frac{3k^4}{\omega^4} \int_{-\infty}^{\infty} Fv^2 dv + \dots \quad (8.36)$$

$$= \frac{k^2}{\omega^2} + \frac{3k^4}{\omega^4} v^2 + \dots \quad (8.37)$$

Ad Integral 2:

If we look at the diagrams, we realize that $\frac{\partial F}{\partial v}$ does not change its value much near $v = \frac{\omega}{k}$, where the denominator of the kernel is zero. So we take the derivative as a constant and set the integration range from $\frac{\omega}{k} - (\frac{\omega}{k} - v_{sep})$ to $\frac{\omega}{k} + (\frac{\omega}{k} - v_{sep})$.

$$I_2 = \frac{\partial F}{\partial v} \Big|_{v=\frac{\omega}{k}} \int_{v_{sep}}^{2\frac{\omega}{k}-v_{sep}} \left(v - \frac{\omega}{k}\right)^{-1} dv \quad (8.38)$$

Since ω is in general complex, we can split this integral in its real and imaginary part.

$$I_3 = \int_{v_{sep}}^{2\frac{\omega}{k}-v_{sep}} \left(v - \frac{\omega_r}{k} - i\frac{\omega_i}{k}\right)^{-1} dv \quad (8.39)$$

$$\begin{aligned} &= \int_{v_{sep}}^{2\frac{\omega}{k}-v_{sep}} \frac{v - \frac{\omega_r}{k}}{\left(v - \frac{\omega_r}{k}\right)^2 + \left(\frac{\omega_i}{k}\right)^2} dv + \frac{i\omega_i}{k} \int_{v_{sep}}^{2\frac{\omega}{k}-v_{sep}} \frac{1}{\left(v - \frac{\omega_r}{k}\right)^2 + \left(\frac{\omega_i}{k}\right)^2} dv \\ &= I_r + I_i \end{aligned} \quad (8.41)$$

I_r is even about $v = \frac{\omega}{k}$, so it vanishes. For I_i we substitute $x = v - \frac{\omega_r}{k}$ and get the standard integral

$$I_i = \frac{i\omega_i}{k} \int_{-(\frac{\omega_r}{k}-v_{sep})}^{+(\frac{\omega_r}{k}-v_{sep})} \frac{1}{x^2 + \frac{\omega_i^2}{k^2}} dx \quad (8.42)$$

$$= \frac{i\omega_i}{k} \left[\frac{k}{\omega_i} \arctan \frac{x}{\frac{\omega_i}{k}} \right]_{-(\frac{\omega_r}{k}-v_{sep})}^{+(\frac{\omega_r}{k}-v_{sep})} \quad (8.43)$$

$$= i \left[\arctan \frac{x}{\frac{\omega_i}{k}} \right]_{-(\frac{\omega_r}{k}-v_{sep})}^{+(\frac{\omega_r}{k}-v_{sep})} \quad (8.44)$$

$$= i \left[\arctan \left(\frac{+(\frac{\omega_r}{k}-v_{sep})}{\frac{\omega_i}{k}} \right) - \arctan \left(\frac{-(\frac{\omega_r}{k}-v_{sep})}{\frac{\omega_i}{k}} \right) \right] \quad (8.45)$$

Since the real part of the frequency is far greater than the imaginary part, we can extend the boundary of the integral to plus and minus infinity.

$$I_i = i [\arctan(\infty) - \arctan(-\infty)] \quad (8.46)$$

$$= i\pi \quad (8.47)$$

Hence

$$I_3 = i\pi \quad (8.48)$$

and

$$I_2 = i \frac{\partial F}{\partial v} \Big|_{v=\frac{\omega}{k}} \pi \quad (8.49)$$

From equations (??), (8.37) and (8.49), we get

$$\frac{\omega_p^2}{k^2}(I_1 + I_2) = 1 \quad (8.50)$$

or

$$\frac{\omega_p^2}{k^2} \left[\left(\frac{k^2}{\omega^2} + \frac{3k^4}{\omega^4} \bar{v}^2 \right) + \left(i \frac{\partial F}{\partial v} \Big|_{v=\frac{\omega}{k}} \pi \right) \right] = 1 \quad (8.51)$$

I dismissed all terms of higher order in the solution of I_2 . To get a valid dispersion relation, we have to isolate ω .

$$\omega^2 = \omega_p^2 \left[\left(1 + \frac{3k^2}{\omega^2} \bar{v}^2 \right) + \frac{\omega^2}{k^2} \left(i \frac{\partial F}{\partial v} \Big|_{v=\frac{\omega}{k}} \pi \right) \right] \quad (8.52)$$

$$\omega^2 = \omega_p^2 + \omega_p^2 \left[\frac{3k^2}{\omega^2} \bar{v}^2 + \frac{\omega^2}{k^2} \left(i \frac{\partial F}{\partial v} \Big|_{v=\frac{\omega}{k}} \pi \right) \right] \quad (8.53)$$

This equation requires a complex ω . As we postulated at the beginning of the derivation, the disturbance is proportional to

$$e^{-i\omega t} = e^{-i\omega_r t} e^{\omega_i t} \quad (8.54)$$

So the imaginary part of the frequency controls the excitation or damping of the wave, depending on its sign. Its sign, in turn, depends on the sign of the slope of the distribution function at the point $\frac{\omega}{k}$. In case of a Maxwell distribution, the slope is negative, which corresponds to a damping situation. This damping is called *Landau damping*.

8.1.2 Two fluid instability

As we said in the last subsection, the slope of the velocity distribution function is normally negative, which correspond to damping. But can there be a situation where excitation happens? The answer is *yes*. I can think of two such situations. The first one is if a second fluid moved through the first one (for instance an electron beam) and has a bulk velocity that is just a little bit greater than $\frac{\omega}{k}$. Then the two distribution functions add, as can be seen in the diagrams 8.4 - 8.6. The slope at the relevant point is now positive. This is a situation that can not be described by two fluid theory. There is an energy transfer from the electron beam to the underlying fluid, by electrostatic waves, without need of collisions as in normal hydrodynamics.

8.1.3 Cyclotron maser Instability

The second scenario, I want to mention is the cyclotron maser instability. Here, the distribution function is thinned out at the right velocity, because particles with this certain speed are absorbed by a planetary atmosphere. This may happen when particles are trapped in the radiation belt of the planetary magnetic field. Particles which have a certain velocity component along the magnetic field lines can travel into the high atmosphere of the planet in the auroral region. The probability is high, that they collide with an atmospheric particle, due to the high density in this region. If this happens they are lost for the plasma of the radiation belt, so the distribution function decreases in the opposite direction, where the absorbed particles fail to return after undergoing the mirror process.

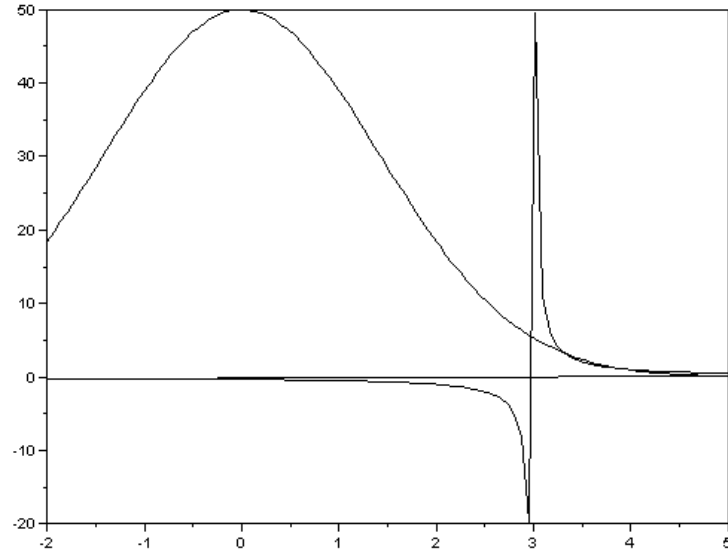


Fig. 8.4: Maxwell Distribution and the denominator of the integral kernel

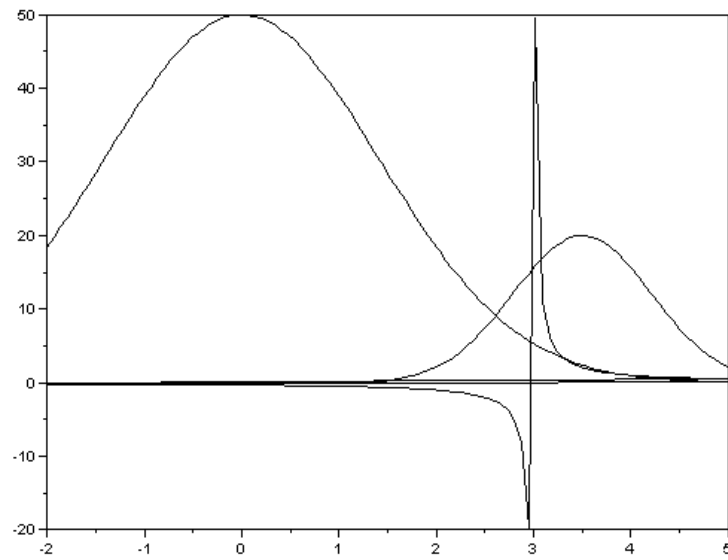


Fig. 8.5: Maxwell Distribution of two fluids and the denominator of the integral kernel

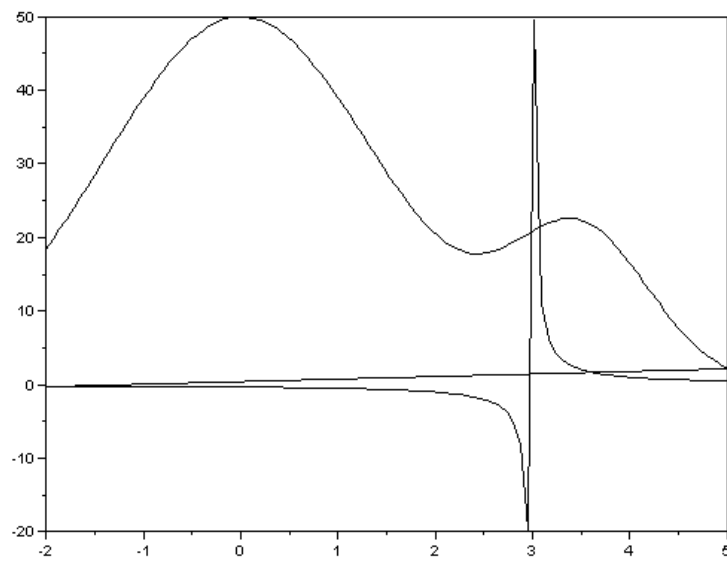


Fig. 8.6: Combined Maxwell Distribution of two fluids and the denominator of the integral kernel

8.1.4 Qualitative physical description of Landau damping

[*Jackson(1981)*] gives an interesting, physical description of Landau damping. He describes the damping process a result of an energy transfer from the wave to the particles. When the wave is sufficiently slow, particles are trapped in the wave and will move along with the wave. For this to happen, the faster particles have to be slowed down, the particles that are slower than the speed of the wave, are accelerated. In a normal Maxwell distribution, there are always more slower particles than faster particles, so more particles gain energy than loose energy. This net energy gain is removed from the energy of the wave. It is dampened. Only when the gradient is reversed, there can be the case that there are more particles around to be slowed down. This would lead to the excitation of the wave.

9. WAVE ZOOLOGY

9.1 MHD waves

Tab. 9.1: MHD Wave zoology

Name	Characteristics	Dispersion relation	Phase speed
Alfven Waves	transversal, $k \parallel B_0$, inkompressible	$k^2 = \frac{\omega^2 \rho_0 \mu_0}{B_0^2}$	$\frac{B_{0,x}}{\sqrt{\rho_0 \mu_0}}$
MHD Compression Waves	longitudinal, $k \perp B_0$	$\omega = k \sqrt{v_s^2 + v_A^2}$	$\sqrt{v_s^2 + v_A^2}$
x	x	x	x
x	x	x	x

Tab. 9.2: MHD Wave zoology 2

Name	Frequency range in IMF	Can exist in IMF ?
Alfven Waves	x	yes
MHD Compression Waves	x	yes
x	x	x
x	x	x

9.2 Kinetic waves

Tab. 9.3: Kinetic Wave zoology

Name	Characteristics	Dispersion relation	Phase speed
Langmuir Waves		$\omega_l^2 = \omega_p^2 + k^2 \gamma_e v_{the}^2$	$\sqrt{\frac{\omega_p^2}{k^2} + \gamma_e v_{the}^2}$
x	x	x	x
x	x	x	x

Tab. 9.4: Kinetic Wave zoology 2

Name	Frequency range in IMF	Can exist in IMF ?
Langmuir Waves	x	yes
x	x	x
x	x	x

Teil V

EM WAVES IN PLASMA

10. FREQUENCY DISPERSION CHARACTERISTICS

10.1 General

The 1D equation of motion for an isolated electron is

$$m_e [\ddot{x} + \gamma \dot{x} + \omega_p x] = -eE \quad (10.1)$$

γ corresponds to a damping constant. When the exciting field is harmonic, one can solve this equation to give

$$x = -\frac{eE}{m_e(\omega_p^2 - \omega^2 - i\omega\gamma)} \quad (10.2)$$

So the dipole moment is

$$p = -ex = \frac{e^2 E}{m_e(\omega_p^2 - \omega^2 - i\omega\gamma)} \quad (10.3)$$

Further

$$P = (\varepsilon - 1)\varepsilon_0 E \quad (10.4)$$

so

$$\frac{e^2 E}{m_e(\omega_p^2 - \omega^2 - i\omega\gamma)} = (\varepsilon - 1)\varepsilon_0 E \quad (10.5)$$

$$(\varepsilon - 1)\varepsilon_0 = \frac{e^2}{m_e(\omega_p^2 - \omega^2 - i\omega\gamma)} \quad (10.6)$$

$$\varepsilon = 1 + \frac{e^2}{\varepsilon_0 m_e(\omega_p^2 - \omega^2 - i\omega\gamma)} \quad (10.7)$$

The imaginary part of the permittivity can be positive (attenuation) or negative (amplification). In case of free electrons ($\omega_p \rightarrow 0$) the equation becomes

$$\varepsilon = 1 + \frac{e^2}{\varepsilon_0 m_e(\omega^2 - i\omega\gamma)} \quad (10.8)$$

In [Oswald(2005)] I find

$$\varepsilon = \varepsilon_0 \left(1 - \frac{\omega_p^2}{\omega^2} \right) \quad (10.9)$$

for unmagnetized plasma, which is the high frequency limit. The dispersion relation is then

$$k^2 = \omega^2 \mu_0 \varepsilon_0 \left(1 - \frac{\omega_p^2}{\omega^2} \right) \quad (10.10)$$

When the frequency of the EM wave is smaller than the plasma frequency, the wave number is imaginary. The wave is reflected and the field strengths decrease exponentially. When the frequency is larger than the plasma frequency, the wave number is real, so there is no net energy flow between wave and plasma.

10.2 The Maxwell equations in Matter

$$\nabla \cdot \mathbf{D} = 0 \quad (10.11)$$

$$\nabla \times \mathbf{H} - \frac{\partial \mathbf{D}}{\partial t} = 0 \quad (10.12)$$

$$\nabla \times \mathbf{E} + \frac{\partial \mathbf{B}}{\partial t} = 0 \quad (10.13)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (10.14)$$

The sources inside the matter are included in the dielectric tensor. One can define external sources, like the charges and currents of an antenna. Then the equations can look like

$$\nabla \cdot \mathbf{D} = \rho_{ant} \quad (10.15)$$

$$\nabla \times \mathbf{H} - \frac{\partial \mathbf{D}}{\partial t} = \mathbf{j}_{ant} \quad (10.16)$$

$$\nabla \times \mathbf{E} + \frac{\partial \mathbf{B}}{\partial t} = 0 \quad (10.17)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (10.18)$$

10.3 The Boundary Conditions

$$\mathbf{n} \times \Delta \mathbf{E} = 0 \quad (10.19)$$

$$\mathbf{n} \cdot \Delta \mathbf{B} = 0 \quad (10.20)$$

$$\mathbf{n} \times (\mathbf{H}_2 - \mathbf{H}_1) = \mathbf{j}_s \quad (10.21)$$

$$\mathbf{n} \cdot (\mathbf{D}_2 - \mathbf{D}_1) = \sigma \quad (10.22)$$

$$(10.23)$$

10.4 Dielectric tensor

10.4.1 Cold plasma approximation

In [Oswald(2005)] I derived the dielectric tensor for cold magnetized plasma. The direction of the external magnetic field is the z-axis.

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} K' & iK'' & 0 \\ -iK'' & K' & 0 \\ 0 & 0 & K_0 \end{pmatrix} \quad (10.24)$$

where

$$K' = 1 - \frac{UX}{U^2 - Y^2} \quad (10.25)$$

$$K'' = -\frac{XY}{U^2 - Y^2} \quad (10.26)$$

$$K_0 = 1 - \frac{X}{U} \quad (10.27)$$

$$U = 1 - \frac{i\nu}{\omega} \quad (10.28)$$

$$X = \frac{\omega_p^2}{\omega^2} \quad (10.29)$$

$$Y = \frac{\omega_c}{\omega} \quad (10.30)$$

ν is the electron collision frequency.

so

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} 1 - \frac{UX}{U^2 - Y^2} & -i \frac{XY}{U^2 - Y^2} & 0 \\ i \frac{XY}{U^2 - Y^2} & 1 - \frac{UX}{U^2 - Y^2} & 0 \\ 0 & 0 & 1 - \frac{X}{U} \end{pmatrix} \quad (10.31)$$

or in detail

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} 1 - \frac{(1 - \frac{i\nu}{\omega}) \frac{\omega_p^2}{\omega^2}}{(1 - \frac{i\nu}{\omega})^2 - (\frac{\omega_c}{\omega})^2} & -i \frac{\frac{\omega_p^2}{\omega^2} \frac{\omega_c}{\omega}}{(1 - \frac{i\nu}{\omega})^2 - (\frac{\omega_c}{\omega})^2} & 0 \\ i \frac{\frac{\omega_p^2}{\omega^2} \frac{\omega_c}{\omega}}{(1 - \frac{i\nu}{\omega})^2 - (\frac{\omega_c}{\omega})^2} & 1 - \frac{(1 - \frac{i\nu}{\omega}) \frac{\omega_p^2}{\omega^2}}{(1 - \frac{i\nu}{\omega})^2 - (\frac{\omega_c}{\omega})^2} & 0 \\ 0 & 0 & 1 - \frac{\frac{\omega_p^2}{\omega^2}}{1 - \frac{i\nu}{\omega}} \end{pmatrix} \quad (10.32)$$

When the plasma can be treated as collisionless ($\nu = 0 \rightarrow U = 1$), the equation can be simplified.

$$K' = 1 - \frac{X}{1 - Y^2} = 1 - \frac{\omega_p^2}{\omega^2 - \omega_c^2} \quad (10.33)$$

$$K'' = -\frac{XY}{1 - Y^2} = -\frac{\omega_p^2 \omega_c}{\omega(\omega^2 - \omega_c^2)} \quad (10.34)$$

$$K_0 = 1 - \frac{\omega_p^2}{\omega^2} \quad (10.35)$$

So

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} 1 - \frac{\omega_p^2}{\omega^2 - \omega_c^2} & -i \frac{\omega_p^2 \omega_c}{\omega(\omega^2 - \omega_c^2)} & 0 \\ i \frac{\omega_p^2 \omega_c}{\omega(\omega^2 - \omega_c^2)} & 1 - \frac{\omega_p^2}{\omega^2 - \omega_c^2} & 0 \\ 0 & 0 & 1 - \frac{\omega_p^2}{\omega^2} \end{pmatrix} \quad (10.36)$$

Generalized for different particle species s, it is

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} 1 - \sum_s \frac{\omega_{p,s}^2}{\omega^2 - \omega_{c,s}^2} & -i \sum_s \frac{\omega_{p,s}^2 \omega_{c,s}}{\omega(\omega^2 - \omega_{c,s}^2)} & 0 \\ i \sum_s \frac{\omega_{p,s}^2 \omega_{c,s}}{\omega(\omega^2 - \omega_{c,s}^2)} & 1 - \sum_s \frac{\omega_{p,s}^2}{\omega^2 - \omega_{c,s}^2} & 0 \\ 0 & 0 & 1 - \sum_s \frac{\omega_{p,s}^2}{\omega^2} \end{pmatrix} \quad (10.37)$$

When, additionally, $B_0 \rightarrow 0$, the gyration frequency approaches zero and the gyrotropic tensor becomes an isotropic tensor, as in unmagnetized plasma.

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} 1 - \frac{\omega_p^2}{\omega^2} & 0 & 0 \\ 0 & 1 - \frac{\omega_p^2}{\omega^2} & 0 \\ 0 & 0 & 1 - \frac{\omega_p^2}{\omega^2} \end{pmatrix} \quad (10.38)$$

The other extremum is that the external magnetic field is very strong. Then the tensor becomes *uniaxial*.

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 - \frac{\omega_p^2}{\omega^2} \end{pmatrix} \quad (10.39)$$

10.4.2 The Stix notation

Tensors (10.32) and (10.36) can be written in a way such that they include left and right handed polarization separately. First (10.36).

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} 1 - \frac{\omega_p^2}{(\omega + \omega_c)(\omega - \omega_c)} & -i \frac{\omega_p^2 \omega_c}{\omega(\omega + \omega_c)(\omega - \omega_c)} & 0 \\ i \frac{\omega_p^2 \omega_c}{\omega(\omega + \omega_c)(\omega - \omega_c)} & 1 - \frac{\omega_p^2}{(\omega + \omega_c)(\omega - \omega_c)} & 0 \\ 0 & 0 & 1 - \frac{\omega_p^2}{\omega^2} \end{pmatrix} \quad (10.40)$$

or

$$\bar{\varepsilon} = \varepsilon_0 \begin{pmatrix} 1 - \left(\frac{\omega_p^2}{\omega(\omega + \omega_c)} + \frac{\omega_p^2}{\omega(\omega - \omega_c)} \right) & -i \left(\frac{\omega_p^2}{\omega(\omega + \omega_c)} - \frac{\omega_p^2}{\omega(\omega - \omega_c)} \right) & 0 \\ i \left(\frac{\omega_p^2}{\omega(\omega + \omega_c)} - \frac{\omega_p^2}{\omega(\omega - \omega_c)} \right) & 1 - \left(\frac{\omega_p^2}{\omega(\omega + \omega_c)} + \frac{\omega_p^2}{\omega(\omega - \omega_c)} \right) & 0 \\ 0 & 0 & 1 - \frac{\omega_p^2}{\omega^2} \end{pmatrix} \quad (10.41)$$

$\omega + \omega_c$ corresponds to right handed polarization, while $\omega - \omega_c$ corresponds to left handed polarization, depending on convention. We can define

$$S = \frac{1}{2}(R + L) \quad (10.42)$$

$$D = \frac{1}{2}(R - L) \quad (10.43)$$

$$R = 1 + \chi^- = 1 - \frac{\omega_p^2}{\omega(\omega + \omega_c)} \quad (10.44)$$

$$L = 1 + \chi^+ = 1 - \frac{\omega_p^2}{\omega(\omega - \omega_c)} \quad (10.45)$$

$$P = 1 - \frac{\omega_p^2}{\omega^2} \quad (10.46)$$

Then the tensor can be written as

$$\bar{\epsilon} = \epsilon_0 \begin{pmatrix} S & -iD & 0 \\ iD & S & 0 \\ 0 & 0 & P \end{pmatrix} \quad (10.47)$$

χ is the susceptibility and is additive. Therefor the susceptibilities of the different particle species s can simply be added together.

$$R = 1 + \sum \chi_s^- = 1 - \sum \frac{\omega_{p,s}^2}{\omega(\omega + \omega_{c,s})} \quad (10.48)$$

$$L = 1 + \sum \chi_s^+ = 1 - \sum \frac{\omega_{p,s}^2}{\omega(\omega - \omega_{c,s})} \quad (10.49)$$

$$P = 1 - \sum \frac{\omega_{p,s}^2}{\omega^2} \quad (10.50)$$

10.4.3 the general dispersion relation

The dielectric tensor can be used to establish a general dispersion relation that can be used to find the different wave modi. I have to use the Maxwell equations for media.

$$\nabla \cdot \mathbf{D} = 0 \quad (10.51)$$

$$\nabla \times \mathbf{H} - \frac{\partial \mathbf{D}}{\partial t} = 0 \quad (10.52)$$

$$\nabla \times \mathbf{E} + \frac{\partial \mathbf{B}}{\partial t} = 0 \quad (10.53)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (10.54)$$

Postulating a harmonic behavior and Fourier transforming (10.52) and (10.53), I get

$$\mathbf{k} \times \mathbf{E} = \omega \mathbf{B} \quad (10.55)$$

$$\mathbf{k} \times \mathbf{H} = -\omega \mathbf{D} \quad (10.56)$$

These equations can be further combined to give

$$\mathbf{k} \times \mathbf{E} = \omega \mathbf{B} \quad (10.57)$$

$$\mathbf{k} \times \mathbf{B} = -\omega \mu \mathbf{D} \quad (10.58)$$

$$\rightarrow \mathbf{k} \times \mathbf{k} \times \mathbf{E} + \omega^2 \mu \mathbf{D} = 0 \quad (10.59)$$

or

$$\mathbf{k} \times \mathbf{k} \times \mathbf{E} + \omega^2 \mu \varepsilon_0 \varepsilon \cdot \mathbf{E} = 0 \quad (10.60)$$

Defining $n = \frac{\mathbf{k}c}{\omega \sqrt{\mu_0 \varepsilon_0}} = \frac{\mathbf{k}c}{\omega}$, I can write

$$\mathbf{n} \times \mathbf{n} \times \mathbf{E} + \epsilon \cdot \mathbf{E} = 0 \quad (10.61)$$

Attenzione !!! I made two important things in this transformation: I assumed that $\mu = \mu_0$ and I drew the permittivity of free space out of the epsilon tensor. I also use an other epsilon to allow for this change. The first assumption is valid for plasma, since the gyration effect is completely described by the permittivity tensor.

Using

$$\mathbf{n} \times \mathbf{n} \times \mathbf{E} = \mathbf{nnE} - \mathbf{n}^2 \mathbf{E} \quad (10.62)$$

I get

$$\mathbf{nnE} - \mathbf{n}^2 \mathbf{E} + \epsilon \cdot \mathbf{E} = 0 \quad (10.63)$$

or

$$(\mathbf{nn} - \mathbf{n}^2 \mathbf{I} + \epsilon) \mathbf{E} = 0 \quad (10.64)$$

So I can define a Radiation tensor \mathbf{T} to write the equation, governing \mathbf{E} , in concise form:

$$\mathbf{T} \cdot \mathbf{E} = 0 \quad (10.65)$$

where

$$\mathbf{T} = \begin{pmatrix} n_1^2 - \mathbf{n}^2 & n_1 n_2 & n_1 n_3 \\ n_1 n_2 & n_2^2 - \mathbf{n}^2 & n_2 n_3 \\ n_1 n_3 & n_2 n_3 & n_3^2 - \mathbf{n}^2 \end{pmatrix} + \begin{pmatrix} S & -iD & 0 \\ iD & S & 0 \\ 0 & 0 & P \end{pmatrix} \quad (10.66)$$

$$= \begin{pmatrix} n_1^2 - \mathbf{n}^2 + S & n_1 n_2 - iD & n_1 n_3 \\ n_1 n_2 + iD & n_2^2 - \mathbf{n}^2 + S & n_2 n_3 \\ n_1 n_3 & n_2 n_3 & n_3^2 - \mathbf{n}^2 + P \end{pmatrix} \quad (10.67)$$

Assuming that the \mathbf{n} vector is in the 1-3 plane:

$$\mathbf{T} = \begin{pmatrix} n_1^2 - \mathbf{n}^2 + S & -iD & n_1 n_3 \\ iD & -\mathbf{n}^2 + S & 0 \\ n_1 n_3 & 0 & n_3^2 - \mathbf{n}^2 + P \end{pmatrix} \quad (10.68)$$

Transforming the tensor into a spherical coordinate system, where

$$n1 = n \sin(\theta) \cos(\phi) \quad (10.69)$$

$$n2 = n \sin(\theta) \sin(\phi) \quad (10.70)$$

$$n3 = n \cos(\theta) \quad (10.71)$$

we get

$$\mathbf{T} = \begin{pmatrix} n^2 \sin^2(\theta) - n^2 + S & -\imath D & n^2 \sin(\theta) \cos(\theta) \\ \imath D & -n^2 + S & 0 \\ n^2 \sin(\theta) \cos(\theta) & 0 & n^2 \cos^2(\theta) - n^2 + P \end{pmatrix} \quad (10.72)$$

$$= \begin{pmatrix} S - n^2 \cos^2(\theta) & -\imath D & n^2 \sin(\theta) \cos(\theta) \\ \imath D & S - n^2 & 0 \\ n^2 \sin(\theta) \cos(\theta) & 0 & P - n^2 \sin^2(\theta) \end{pmatrix} \quad (10.73)$$

θ is the angle between the z axis, which is also the direction of the external magnetic field, and the direction \mathbf{n} , which is also the direction of \mathbf{k} . Since the equation has no source terms, it can be solved by setting the determinant of the tensor equal to zero. This produces the dispersion relations of the wave modi. The equation is universal, when shifting to plasma with collisions or temperate plasma, one has only to change the dielectric tensor. At low frequency, the nonlocality in space can be ignored.

10.4.4 Hot plasma

10.5 The dyadic Green's function

On base of the Maxwell equations in matter

$$\nabla \cdot \mathbf{D} = \rho_{ant} \quad (10.74)$$

$$\nabla \times \mathbf{H} - \frac{\partial \mathbf{D}}{\partial t} = \mathbf{j}_{ant} \quad (10.75)$$

$$\nabla \times \mathbf{E} + \frac{\partial \mathbf{B}}{\partial t} = 0 \quad (10.76)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (10.77)$$

in combination with the constitutive relations

$$\mathbf{D} = \epsilon_0 \epsilon \cdot \mathbf{E} \quad (10.78)$$

$$\mathbf{B} = \mu_0 \cdot \mathbf{H} \quad (10.79)$$

on can derive the wave equation by performing the rotation of (10.76).

$$\nabla \times \nabla \times \mathbf{E} + \nabla \times \frac{\partial \mathbf{B}}{\partial t} = \quad (10.80)$$

$$\nabla \times \nabla \times \mathbf{E} + \frac{\partial}{\partial t} (\nabla \times \mathbf{B}) = 0 \quad (10.81)$$

With (10.75) and (10.79)

$$\nabla \times \nabla \times \mathbf{E} + \frac{\partial}{\partial t}(\mu_0 \frac{\partial \mathbf{D}}{\partial t} + \mu_0 \mathbf{j}_{ant}) = \quad (10.82)$$

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}, t) + \mu_0 \frac{\partial^2 \mathbf{D}(\mathbf{r}, t)}{\partial t^2} + \mu_0 \frac{\partial \mathbf{j}_{ant}(\mathbf{r}, t)}{\partial t} = 0 \quad (10.83)$$

Performing a Fourier transform with respect to time and using (10.78) one gets

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}, \omega) - \mu_0 \omega^2 \mathbf{D}(\mathbf{r}, \omega) - \mu_0 \omega \mathbf{j}_{ant}(\mathbf{r}, \omega) = \quad (10.84)$$

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}, \omega) - \mu_0 \epsilon_0 \omega^2 \epsilon \cdot \mathbf{E}(\mathbf{r}, \omega) - \mu_0 \omega \mathbf{j}_{ant}(\mathbf{r}, \omega) =$$

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}, \omega) - k_0^2 \epsilon \cdot \mathbf{E}(\mathbf{r}, \omega) - \mu_0 \omega \mathbf{j}_{ant}(\mathbf{r}, \omega) = 0$$

where $k_0^2 = \mu_0 \epsilon_0 \omega^2$. We want to find the dyadic Green's function such that

$$\mathbf{E}(\mathbf{r}, \omega) = \int_V \mathbf{G}(\mathbf{r} - \mathbf{r}') \cdot \mathbf{j}_{ant}(\mathbf{r}', \omega) dV' \quad (10.85)$$

so

$$\nabla \times \nabla \times \int_V \mathbf{G}(\mathbf{r} - \mathbf{r}') \cdot \mathbf{j}(\mathbf{r}', \omega) dV' - k_0^2 \epsilon \cdot \int_V \mathbf{G}(\mathbf{r} - \mathbf{r}') \cdot \mathbf{j}(\mathbf{r}', \omega) dV' - \mu_0 \omega \mathbf{j}_{ant}(\mathbf{r}, \omega) \quad (10.86)$$

$$\int_V (\nabla \times \nabla \times \mathbf{G}(\mathbf{r} - \mathbf{r}') - k_0^2 \epsilon \cdot \mathbf{G}(\mathbf{r} - \mathbf{r}') - \mu_0 \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}')) \cdot \mathbf{j}(\mathbf{r}', \omega) dV' \quad (10.87)$$

$$\nabla \times \nabla \times \mathbf{G}(\mathbf{r} - \mathbf{r}') - k_0^2 \epsilon \cdot \mathbf{G}(\mathbf{r} - \mathbf{r}') = \mu_0 \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') \quad (10.88)$$

Using the identity

$$\nabla \times \nabla \times \mathbf{G} = \nabla \nabla \mathbf{G} - \nabla^2 \mathbf{G} \quad (10.89)$$

we get

$$\nabla \nabla \mathbf{G}(\mathbf{r} - \mathbf{r}') - \nabla^2 \mathbf{G}(\mathbf{r} - \mathbf{r}') - k_0^2 \epsilon \cdot \mathbf{G}(\mathbf{r} - \mathbf{r}') = \mu_0 \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') \quad (10.90)$$

$$(\nabla \nabla - \nabla^2 \mathbf{I} - k_0^2 \epsilon) \cdot \mathbf{G}(\mathbf{r} - \mathbf{r}') = \mu_0 \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') \quad (10.91)$$

$(\nabla \nabla - \nabla^2 \mathbf{I} - k_0^2 \epsilon) \mathbf{G}(\mathbf{r} - \mathbf{r}')$ can be written as functional of its Fourier transform $(k^2 \mathbf{I} - \mathbf{k} \mathbf{k} - \mu_0 \omega^2 \epsilon) \Gamma(\mathbf{k})$

$$(\nabla \nabla - \nabla^2 \mathbf{I} - k_0^2 \epsilon) \mathbf{G}(\mathbf{r} - \mathbf{r}') = \frac{1}{(2\pi)^{\frac{3}{2}}} \int_{\mathbf{k}} (-\mathbf{k} \mathbf{k} + k^2 \mathbf{I} - k_0^2 \epsilon) \Gamma(\mathbf{k}) e^{i\mathbf{k} \cdot (\mathbf{r} - \mathbf{r}')} d\mathbf{k} \quad (10.92)$$

The Fourier transform of the right side:

$$\mu_0 \imath \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') = \frac{1}{(2\pi)^{\frac{3}{2}}} \int_{\mathbf{k}} \mu_0 \imath \omega \mathbf{I} \delta(\mathbf{k}) e^{i\mathbf{k} \cdot (\mathbf{r} - \mathbf{r}')} d\mathbf{k} \quad (10.93)$$

It has to be emphasized that $\delta(\mathbf{k})$ is **not** itself a delta function. When substituted:

$$(k^2 \mathbf{I} - \mathbf{k}\mathbf{k} - \mu_0 \omega^2 \epsilon) \cdot \Gamma(\mathbf{k}) = \mu_0 \imath \omega \mathbf{I} \delta(\mathbf{k}) \quad (10.94)$$

$$\delta(\mathbf{k}) = \frac{1}{(2\pi)^{\frac{3}{2}}} \int_{\mathbf{r}} \delta(\mathbf{r} - \mathbf{r}') e^{-i\mathbf{k} \cdot (\mathbf{r} - \mathbf{r}')} d(\mathbf{r} - \mathbf{r}') \quad (10.95)$$

$$= \frac{1}{(2\pi)^{\frac{3}{2}}} \quad (10.96)$$

Hence

$$\Gamma(\mathbf{k}) = (k^2 \mathbf{I} - \mathbf{k}\mathbf{k} - k_0^2 \epsilon)^{-1} \frac{\mu_0 \imath \omega}{(2\pi)^{\frac{3}{2}}} \quad (10.97)$$

So we, get the negative radiation tensor \mathbf{T} from the last section.

$$\lambda = -\mathbf{T} = -(\mathbf{k}\mathbf{k} - k^2 \mathbf{I} + k_0^2 \epsilon) \quad (10.98)$$

By defining a new dyadic

$$\tilde{\mathbf{k}} = \begin{pmatrix} 0 & -k_3 & k_2 \\ k_3 & 0 & -k_1 \\ -k_2 & k_1 & 0 \end{pmatrix} \quad (10.99)$$

then

$$\lambda = -(\tilde{\mathbf{k}}\tilde{\mathbf{k}} + k_0^2 \epsilon) \quad (10.100)$$

The the equation for the dyadic Green's function can be written in a more concise way

$$\Gamma(\mathbf{k}) = \lambda^{-1} \frac{\mu_0 \imath \omega}{(2\pi)^{\frac{3}{2}}} \quad (10.101)$$

Expanded

$$\lambda = \begin{pmatrix} \mathbf{k}^2 - k_1^2 & -k_1 k_2 & -k_1 k_3 \\ -k_1 k_2 & \mathbf{k}^2 - k_2^2 & -k_2 k_3 \\ k_1 k_3 & -k_2 k_3 & \mathbf{k}^2 - k_3^2 \end{pmatrix} - k_0^2 \begin{pmatrix} S & -iD & 0 \\ iD & S & 0 \\ 0 & 0 & P \end{pmatrix} \quad (10.102)$$

$$= \begin{pmatrix} \mathbf{k}^2 - k_1^2 - k_0^2 S & -k_1 k_2 + i k_0^2 D & -k_1 k_3 \\ -k_1 k_2 - i k_0^2 D & \mathbf{k}^2 - k_2^2 - k_0^2 S & -k_2 k_3 \\ -k_1 k_3 & -k_2 k_3 & \mathbf{k}^2 - k_3^2 - k_0^2 P \end{pmatrix} \quad (10.103)$$

And the Green's function in real space, what we are looking for, is

$$\mathbf{G}(\mathbf{r} - \mathbf{r}') = \frac{-\mu_0 \imath \omega}{(2\pi)^3} \int_{-\infty}^{\infty} \frac{adj(\mathbf{T})}{|\mathbf{T}|} e^{i\mathbf{k} \cdot (\mathbf{r} - \mathbf{r}')} d\mathbf{k} \quad (10.104)$$

10.5.1 Vacuum case

In the case of vacuum

$$D = 0 \quad (10.105)$$

$$P = 1 \quad (10.106)$$

$$S = 1 \quad (10.107)$$

$$\mathbf{T} = - \begin{pmatrix} k_2^2 + k_3^2 - k_0^2 & -k_1 k_2 & -k_1 k_3 \\ -k_1 k_2 & k_1^2 + k_3^2 - k_0^2 & -k_2 k_3 \\ -k_1 k_3 & -k_2 k_3 & k_1^2 + k_2^2 - k_0^2 \end{pmatrix} \quad (10.108)$$

$$\mathbf{T}^{-1} = \begin{pmatrix} -\frac{k_0^2 - k_1^2}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} & \frac{k_1 k_2}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} & \frac{k_1 k_3}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} \\ \frac{k_1 k_2}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} & -\frac{k_0^2 - k_2^2}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} & \frac{k_2 k_3}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} \\ \frac{k_1 k_3}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} & \frac{k_2 k_3}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} & -\frac{k_0^2 - k_3^2}{k_0^2(-k_0^2 + k_1^2 + k_2^2 + k_3^2)} \end{pmatrix} \quad (10.109)$$

$$\mathbf{T}^{-1} = \frac{1}{k_0^2(k^2 - k_0^2)} \begin{pmatrix} k_1^2 - k_0^2 & k_1 k_2 & k_1 k_3 \\ k_1 k_2 & k_2^2 - k_0^2 & k_2 k_3 \\ k_1 k_3 & k_2 k_3 & k_3^2 - k_0^2 \end{pmatrix} \quad (10.110)$$

$$\mathbf{T}^{-1} = \frac{\mathbf{k}\mathbf{k} - \mathbf{I}k_0^2}{k_0^2(k^2 - k_0^2)} \quad (10.111)$$

Which means

$$\Gamma(\mathbf{k}) = \frac{-\mu_0 \omega}{(2\pi)^{\frac{3}{2}}} \frac{\mathbf{k}\mathbf{k} - \mathbf{I}k_0^2}{k_0^2(k^2 - k_0^2)} \quad (10.112)$$

and

$$\mathbf{G}(\mathbf{r} - \mathbf{r}') = \frac{-\mu_0 \omega}{k_0^2(2\pi)^3} \int_{-\infty}^{\infty} \frac{\mathbf{k}\mathbf{k} - \mathbf{I}k_0^2}{k^2 - k_0^2} e^{i\mathbf{k} \cdot (\mathbf{r} - \mathbf{r}')} d\mathbf{k} \quad (10.113)$$

Then

$$\tilde{\Gamma}_{11} = \frac{\imath (k_0^2 - k_1^2)}{\omega \epsilon_0 (2\pi)^{\frac{3}{2}} (k^2 - k_0^2)} \quad (10.114)$$

$$\tilde{\Gamma}_{12} = -\frac{\imath k_1 k_2}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - \frac{\omega^2}{c^2})} \quad (10.115)$$

$$\tilde{\Gamma}_{13} = -\frac{\imath k_1 k_3}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - \frac{\omega^2}{c^2})} \quad (10.116)$$

$$\tilde{\Gamma}_{21} = -\frac{\imath k_1 k_2}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - \frac{\omega^2}{c^2})} \quad (10.117)$$

$$\tilde{\Gamma}_{22} = \frac{\imath (k_0^2 - k_2^2)}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - k_0^2)} \quad (10.118)$$

$$\tilde{\Gamma}_{23} = -\frac{\imath k_2 k_3}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - \frac{\omega^2}{c^2})} \quad (10.119)$$

$$\tilde{\Gamma}_{31} = -\frac{\imath k_1 k_3}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - \frac{\omega^2}{c^2})} \quad (10.120)$$

$$\tilde{\Gamma}_{32} = -\frac{\imath k_2 k_3}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - \frac{\omega^2}{c^2})} \quad (10.121)$$

$$\tilde{\Gamma}_{33} = \frac{\imath (k_0^2 - k_3^2)}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - k_0^2)} \quad (10.122)$$

So in general

$$\tilde{\Gamma}_{ij} = \frac{\imath \left(-k_i k_j + \frac{\omega^2}{c^2} \delta_{ij} \right)}{(2\pi)^{\frac{3}{2}} \omega \epsilon_0 (k^2 - k_0^2)} \quad (10.123)$$

The elements off the diagonal integrate to zero due to symmetry reasons. So we have to solve the integrals

$$G_{ii} = \frac{\imath}{\omega \epsilon_0 (2\pi)^3} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \frac{(k_0^2 - k_i^2) e^{\imath \mathbf{k} \cdot (\mathbf{r} - \mathbf{r}')}}{(k^2 - k_0^2)} \partial k_i \partial k_j \partial k_k \quad (10.124)$$

This equation can be separated into 2 integrals. The first integral is

$$I_1 = k_0^2 \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \frac{e^{\imath \mathbf{k} \cdot (\mathbf{r} - \mathbf{r}')}}{(k^2 - k_0^2)} \partial k_i \partial k_j \partial k_k \quad (10.125)$$

This is the triple version of the contour integral found in many textbooks. The poles are at $k_1 = \pm k_0$.

$$\Gamma(1, 1) = \frac{-k_1^2 k^2 + k_0^2 (k_3^2 P + k_2^2 S + k_1^2 (P + S) - P S k_0^2)}{k_0^2 (k^2 (k_3^2 P + k_n^2 S)) - k_0^2 (-D^2 k_n^2 + S(2k_3^2 P + k_n^2 (P + S)) + P(D - S)(D + S)k_0^2)} \quad (10.126)$$

Derivation from scratch

On base of the Maxwell equations in vacuum

$$\nabla \cdot \mathbf{D} = \rho_{ant} \quad (10.127)$$

$$\nabla \times \mathbf{H} - \frac{\partial \mathbf{D}}{\partial t} = \mathbf{j}_{ant} \quad (10.128)$$

$$\nabla \times \mathbf{E} + \frac{\partial \mathbf{B}}{\partial t} = 0 \quad (10.129)$$

$$\nabla \cdot \mathbf{B} = 0 \quad (10.130)$$

in combination with the constitutive relations

$$\mathbf{D} = \epsilon_0 \mathbf{E} \quad (10.131)$$

$$\mathbf{B} = \mu_0 \mathbf{H} \quad (10.132)$$

on can derive the wave equation by performing the rotation of (10.129).

$$\nabla \times \nabla \times \mathbf{E} + \nabla \times \frac{\partial \mathbf{B}}{\partial t} = \quad (10.133)$$

$$\nabla \times \nabla \times \mathbf{E} + \frac{\partial}{\partial t} (\nabla \times \mathbf{B}) = 0 \quad (10.134)$$

With (10.128) and (10.132)

$$\nabla \times \nabla \times \mathbf{E} + \frac{\partial}{\partial t} (\mu_0 \frac{\partial \mathbf{D}}{\partial t} + \mu_0 \mathbf{j}_{ant}) = \quad (10.135)$$

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}, t) + \mu_0 \frac{\partial^2 \mathbf{D}(\mathbf{r}, t)}{\partial t^2} + \mu_0 \frac{\partial \mathbf{j}_{ant}(\mathbf{r}, t)}{\partial t} = 0 \quad (10.136)$$

Performing a Fourier transform with respect to time and using (10.131) one gets

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}, \omega) - \mu_0 \omega^2 \mathbf{D}(\mathbf{r}, \omega) - \mu_0 \omega \mathbf{j}_{ant}(\mathbf{r}, \omega) = \quad (10.137)$$

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}, \omega) - \mu_0 \epsilon_0 \omega^2 \mathbf{E}(\mathbf{r}, \omega) - \mu_0 \omega \mathbf{j}_{ant}(\mathbf{r}, \omega) =$$

$$\nabla \times \nabla \times \mathbf{E}(\mathbf{r}, \omega) - k_0^2 \mathbf{E}(\mathbf{r}, \omega) - \mu_0 \omega \mathbf{j}_{ant}(\mathbf{r}, \omega) = 0$$

where $k_0^2 = \mu_0 \epsilon_0 \omega^2$ We want to find the Green's function such that

$$\mathbf{E}(\mathbf{r}, \omega) = \int_V \mathbf{G}(\mathbf{r} - \mathbf{r}') \cdot \mathbf{j}_{ant}(\mathbf{r}', \omega) dV' \quad (10.138)$$

so

$$\nabla \times \nabla \times \int_V \mathbf{G}(\mathbf{r} - \mathbf{r}') \cdot \mathbf{j}(\mathbf{r}', \omega) dV' - k_0^2 \int_V \mathbf{G}(\mathbf{r} - \mathbf{r}') \cdot \mathbf{j}(\mathbf{r}', \omega) dV' - \mu_0 \omega \mathbf{j}_{ant}(\mathbf{r}, \omega) = 0 \quad (10.139)$$

$$\int_V (\nabla \times \nabla \times \mathbf{G}(\mathbf{r} - \mathbf{r}') - k_0^2 \mathbf{G}(\mathbf{r} - \mathbf{r}') - \mu_0 \imath \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}')) \cdot \mathbf{j}(\mathbf{r}', \omega) dV' = 0 \quad (10.140)$$

To ensure that this Integral is always zero, its integrand has to vanish.

$$\nabla \times \nabla \times \mathbf{G}(\mathbf{r} - \mathbf{r}') - k_0^2 \mathbf{G}(\mathbf{r} - \mathbf{r}') - \mu_0 \imath \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') = 0 \quad (10.141)$$

or

$$(\nabla \times \nabla \times \mathbf{I} - k_0^2) \mathbf{G}(\mathbf{r} - \mathbf{r}') = \mu_0 \imath \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') \quad (10.142)$$

This equation can be solved easily, as described in [Weiglhofer(1986)].

Taking the divergence of (10.142), we get

$$-k_0^2 \nabla \cdot \mathbf{G}(\mathbf{r} - \mathbf{r}') = \mu_0 \imath \omega \nabla \delta(\mathbf{r} - \mathbf{r}') \quad (10.143)$$

or

$$\nabla \cdot \mathbf{G}(\mathbf{r} - \mathbf{r}') = -\frac{\mu_0 \imath \omega}{k_0^2} \nabla \delta(\mathbf{r} - \mathbf{r}') \quad (10.144)$$

Using the identity

$$\nabla \times \nabla \times \mathbf{G} = \nabla(\nabla \cdot \mathbf{G}) - \nabla^2 \mathbf{G} \quad (10.145)$$

we get

$$\nabla(\nabla \cdot \mathbf{G}(\mathbf{r} - \mathbf{r}')) - \nabla^2 \mathbf{G}(\mathbf{r} - \mathbf{r}') - k_0^2 \mathbf{G}(\mathbf{r} - \mathbf{r}') = \mu_0 \imath \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') \quad (10.146)$$

$$(\nabla^2 + k_0^2) \mathbf{G}(\mathbf{r} - \mathbf{r}') = \nabla(\nabla \cdot \mathbf{G}(\mathbf{r} - \mathbf{r}')) - \mu_0 \imath \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') \quad (10.147)$$

Using (10.5.1):

$$(\nabla^2 + k_0^2) \mathbf{G}(\mathbf{r} - \mathbf{r}') = \nabla \left(-\frac{\mu_0 \imath \omega}{k_0^2} \nabla \delta(\mathbf{r} - \mathbf{r}') \right) - \mu_0 \imath \omega \mathbf{I} \delta(\mathbf{r} - \mathbf{r}') \quad (10.148)$$

$$(\nabla^2 + k_0^2) \mathbf{G}(\mathbf{r} - \mathbf{r}') = -\frac{\mu_0 \imath \omega}{k_0^2} (\nabla \nabla + k^2 \mathbf{I}) \delta(\mathbf{r} - \mathbf{r}') \quad (10.149)$$

The solution of this equation is

$$\mathbf{G}(\mathbf{r} - \mathbf{r}') = -(\nabla \nabla + k^2 \mathbf{I}) g(\mathbf{r} - \mathbf{r}') \quad (10.150)$$

where g is the scalar Green's function of the Helmholtz equation.

$$g(\mathbf{r} - \mathbf{r}') = \frac{1}{4\pi \imath \omega \epsilon_0} \frac{e^{-\imath k |\mathbf{r} - \mathbf{r}'|}}{|\mathbf{r} - \mathbf{r}'|} \quad (10.151)$$

10.5.2 Isotropic case

To check the validity of this equation, the isotropic dispersion relation can easily be recovered when setting the determinant to zero with $D = 0$ and $S = P = 1 - \frac{\omega_p^2}{\omega^2}$:

$$\begin{aligned}
 & \left(-\frac{\omega^2}{c^2} (k^2 (k_3^2 P + (k_1^2 + k_2^2) P) - \frac{\omega^2}{c^2} (P (2k_3^2 P + k_1^2 2P + k_2^2 2P) + 3 \frac{\omega^2}{c^2}))) \right) = 0 \\
 & \left(-\frac{\omega^2}{c^2} (k^4 P - \frac{\omega^2}{c^2} (2k^2 P^2 + P^3 \frac{\omega^2}{c^2})) \right) = 0 \\
 & k^4 P - \frac{\omega^2}{c^2} (2k^2 P^2 + P^3 \frac{\omega^2}{c^2}) = 0 \\
 & k^4 - 2 \frac{\omega^2}{c^2} k^2 P + P^2 \frac{\omega^4}{c^4} = 0 \\
 & \left(k^2 - P \frac{\omega^2}{c^2} \right)^2 = 0 \\
 & k^2 = \frac{\omega^2}{c^2} \left(1 - \frac{\omega_p^2}{\omega^2} \right) \quad (10.153)
 \end{aligned}$$

10.5.3 Anisotropic case

Fields

The determinant and inverse of λ can best be computed with a symbolic computer package. See appendix A for the output of Mathematica. The result for the determinant is

$$\begin{aligned}
 |\lambda| &= -\omega^2 \epsilon_0 \mu_0 ((k_1^2 + k_2^2 + k_3^2) (k_3^2 P + (k_1^2 + k_2^2) S) + \\
 &\quad + (D^2 (k_1^2 + k_2^2) - S (2k_3^2 P + k_1^2 (P + S) + k_2^2 (P + S))) \omega^2 \epsilon_0 \mu_0 + P(-D^2 + S^2) \omega^4 \epsilon_0^2 \mu_0^2) \\
 k_0 &= \frac{\omega}{c} \text{ is the wave number in vacuum.}
 \end{aligned} \quad (10.154)$$

$$\begin{aligned}
 |\lambda| &= -k_0^2 ((k_1^2 + k_2^2 + k_3^2) (k_3^2 P + (k_1^2 + k_2^2) S) + \\
 &\quad + (D^2 (k_1^2 + k_2^2) - S (2k_3^2 P + k_1^2 (P + S) + k_2^2 (P + S))) k_0^2 + P(-D^2 + S^2) k_0^4)
 \end{aligned} \quad (10.155)$$

This can be simplified even further, when separating into a parallel and a perpendicular component.

$$\begin{aligned}
 |\lambda| &= -k_0^2 (k^2 (k_{\parallel}^2 P + k_{\perp}^2 S) + \\
 &\quad + (D^2 k_{\perp}^2 - S (2k_{\parallel}^2 P + k_{\perp}^2 (P + S))) k_0^2 + P(-D^2 + S^2) k_0^4)
 \end{aligned} \quad (10.156)$$

$$\begin{aligned}
 |\lambda| &= -k_0^2 (k^2 (k_{\parallel}^2 P + k_{\perp}^2 S) + \\
 &\quad + (D^2 k_{\perp}^2 - S (2k_{\parallel}^2 P + k_{\perp}^2 P + k_{\perp}^2 S)) k_0^2 + P(-D^2 + S^2) k_0^4)
 \end{aligned} \quad (10.157)$$

When α is the angle between the direction of the magnetic field and the component of \mathbf{k} ,

$$|\lambda| = -k_0^2(k^4(P \cos^2 \alpha + S \sin^2 \alpha) + (D^2 k^2 \sin^2 \alpha - S(2k^2 P \cos^2 \alpha + k^2 P \sin^2 \alpha + k^2 S \sin^2 \alpha))k_0^2 + P(-D^2 + S^2)k_0^4) \quad (10.158)$$

$$|\lambda| = -k_0^2(k^4(P \cos^2 \alpha + S \sin^2 \alpha) + (D^2 k^2 \sin^2 \alpha - S k^2(P \cos^2 \alpha + P + S \sin^2 \alpha))k_0^2 + P(-D^2 + S^2)k_0^4) \quad (10.159)$$

$$S = \frac{1}{2}(R + L) \quad (10.160)$$

$$D = \frac{1}{2}(R - L) \quad (10.161)$$

$$\begin{aligned} S^2 - D^2 &= (S + D)(S - D) \\ &= \frac{1}{4}(2R)(2L) \\ &= RL \end{aligned} \quad (10.162)$$

$$|\lambda| = -k_0^2(k^4(P \cos^2 \alpha + S \sin^2 \alpha) + (D^2 k^2 \sin^2 \alpha - S k^2(P \cos^2 \alpha + P + S \sin^2 \alpha))k_0^2 + PRLk_0^4) \quad (10.163)$$

$$|\lambda| = -k_0^2(k^4(P \cos^2 \alpha + S \sin^2 \alpha) + k^2(D^2 \sin^2 \alpha - SP \cos^2 \alpha - SP - S^2 \sin^2 \alpha)k_0^2 + PRLk_0^4) \quad (10.164)$$

$$|\lambda| = -k_0^2(k^4(P \cos^2 \alpha + S \sin^2 \alpha) + k^2((D^2 - S^2) \sin^2 \alpha - SP(\cos^2 \alpha + 1))k_0^2 + PRLk_0^4) \quad (10.165)$$

$$|\lambda| = -k_0^2(k^4(P \cos^2 \alpha + S \sin^2 \alpha) - k^2(RL \sin^2 \alpha + (PS \cos^2 \alpha + 1))k_0^2 + PRLk_0^4) \quad (10.166)$$

To check the validity of this equation, the isotropic dispersion relation can easily be recovered when setting the determinant to zero with $D = 0$ and $S = P = 1 - \frac{\omega_p^2}{\omega^2}$:

$$\begin{aligned}
& \left(-\frac{\omega^2}{c^2} (k^2 (k_3^2 P + (k_1^2 + k_2^2) P) - \frac{\omega^2}{c^2} (P (2k_3^2 P + k_1^2 2P + k_2^2 2P) + 3 \frac{\omega^2}{c^2}))) \right) = 0 \\
& \left(-\frac{\omega^2}{c^2} (k^4 P - \frac{\omega^2}{c^2} (2k^2 P^2 + P^3 \frac{\omega^2}{c^2})) \right) = 0 \\
& k^4 P - \frac{\omega^2}{c^2} (2k^2 P^2 + P^3 \frac{\omega^2}{c^2}) = 0 \\
& k^4 - 2 \frac{\omega^2}{c^2} k^2 P + P^2 \frac{\omega^4}{c^4} = 0 \\
& \left(k^2 - P \frac{\omega^2}{c^2} \right)^2 = 0 \\
& k^2 = \frac{\omega^2}{c^2} \left(1 - \frac{\omega_p^2}{\omega^2} \right) \quad (10.168)
\end{aligned}$$

When transforming the equation to a spherical coordinate frame, the determinant becomes

$$\begin{aligned}
|\lambda| = & \left(\frac{1}{2} k_0^2 (-k^4 (P + S + (P - S) \cos(2\alpha)) + \right. \\
& + k_0^2 (k^2 (-D^2 + 3PS + S^2 + (D^2 + (P - S)S) \cos(2\alpha)) + \\
& \left. + 2P(D - S)(D + S)k_0^2)) \right) \quad (10.169)
\end{aligned}$$

$$\begin{aligned}
|\lambda| = & k_0^2 \left(\frac{1}{2} (-k^4 (P + S + (P - S) (\cos^2(\alpha) - \sin^2(\alpha))) + \right. \\
& + k_0^2 (k^2 (-D^2 + 3PS + S^2 + (D^2 + (P - S)S) (\cos^2(\alpha) - \sin^2(\alpha)) + \\
& \left. + 2P(D - S)(D + S)k_0^2)) \right) \quad (10.170)
\end{aligned}$$

where α is the angle between the wave vector and the magnetic field.

When the inverse of the matrix is written as $\lambda^{-1} = \frac{\bar{\Lambda}}{|\lambda|}$, the elements of Λ are

$$\tilde{\Lambda}_{11} = -k_2^2 k_3^2 + \left(k_1^2 + k_2^2 - P \frac{\omega^2}{c^2}\right) \left(k_1^2 + k_3^2 - S \frac{\omega^2}{c^2}\right) \quad (10.171)$$

$$\tilde{\Lambda}_{12} = k_1 k_2 k_3^2 + \left(k_1 k_2 - \imath D \frac{\omega^2}{c^2}\right) \left(k_1^2 + k_2^2 - P \frac{\omega^2}{c^2}\right) \quad (10.172)$$

$$\tilde{\Lambda}_{13} = k_3 \left(k_1 k^2 + (-\imath D k_2 - k_1 S) \frac{\omega^2}{c^2}\right) \quad (10.173)$$

$$\tilde{\Lambda}_{21} = k_1 k_2 k_3^2 + \left(k_1 k_2 + \imath D \frac{\omega^2}{c^2}\right) \left(k_1^2 + k_2^2 - P \frac{\omega^2}{c^2}\right) \quad (10.174)$$

$$\tilde{\Lambda}_{22} = -k_1^2 k_3^2 + \left(k_1^2 + k_2^2 - P \frac{\omega^2}{c^2}\right) \left(k_2^2 + k_3^2 - S \frac{\omega^2}{c^2}\right) \quad (10.175)$$

$$\tilde{\Lambda}_{23} = k_3 \left(k_2 k^2 + (\imath D k_1 - k_2 S) \frac{\omega^2}{c^2}\right) \quad (10.176)$$

$$\tilde{\Lambda}_{31} = k_3 \left(k_1 k^2 + (\imath D k_2 - k_1 S) \frac{\omega^2}{c^2}\right) \quad (10.177)$$

$$\tilde{\Lambda}_{32} = k_3 \left(k_2 k^2 + (-\imath D k_1 - k_2 S) \frac{\omega^2}{c^2}\right) \quad (10.178)$$

$$\tilde{\Lambda}_{33} = k_3^2 k^2 + \frac{\omega^2}{c^2} \left(- (k_1^2 + k_2^2 + 2k_3^2) S + (-D^2 + S^2) \frac{\omega^2}{c^2}\right) \quad (10.179)$$

So the dyadic Green's function has the following elements in Fourier space:

$$\tilde{\Gamma}_{11} = \mu_0 \imath \omega \frac{-k_2^2 k_3^2 + \left(k_1^2 + k_2^2 - P \frac{\omega^2}{c^2}\right) \left(k_1^2 + k_3^2 - S \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.180)$$

$$\tilde{\Gamma}_{12} = \mu_0 \imath \omega \frac{k_1 k_2 k_3^2 + \left(k_1 k_2 - \imath D \frac{\omega^2}{c^2}\right) \left(k_1^2 + k_2^2 - P \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.181)$$

$$\tilde{\Gamma}_{13} = \mu_0 \imath \omega \frac{k_3 \left(k_1 k^2 + (-\imath D k_2 - k_1 S) \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.182)$$

$$\tilde{\Gamma}_{21} = \mu_0 \imath \omega \frac{k_1 k_2 k_3^2 + \left(k_1 k_2 + \imath D \frac{\omega^2}{c^2}\right) \left(k_1^2 + k_2^2 - P \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.183)$$

$$\tilde{\Gamma}_{22} = \mu_0 \imath \omega \frac{-k_1^2 k_3^2 + \left(k_1^2 + k_2^2 - P \frac{\omega^2}{c^2}\right) \left(k_2^2 + k_3^2 - S \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.184)$$

$$\tilde{\Gamma}_{23} = \mu_0 \imath \omega \frac{k_3 \left(k_2 k^2 + (\imath D k_1 - k_2 S) \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.185)$$

$$\tilde{\Gamma}_{31} = \mu_0 \imath \omega \frac{k_3 \left(k_1 k^2 + (\imath D k_2 - k_1 S) \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.186)$$

$$\tilde{\Gamma}_{32} = \mu_0 \imath \omega \frac{k_3 \left(k_2 k^2 + (-\imath D k_1 - k_2 S) \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.187)$$

$$\tilde{\Gamma}_{33} = \mu_0 \imath \omega \frac{k_3^2 k^2 + \frac{\omega^2}{c^2} \left(-\left(k_1^2 + k_2^2 + 2k_3^2\right) S + \left(-D^2 + S^2\right) \frac{\omega^2}{c^2}\right)}{|\lambda| (2\pi)^{\frac{3}{2}}} \quad (10.188)$$

Potentials

Based on equation (3.11) of [Oswald(2005)], one can derive a simple equation which governs the scalar potential in an cold anisotropic plasma from a point source in the quasistatic limit. The procedure is based on the analysis of [Balmann(1964)]. After transforming the cited equation to ω space, one gets

$$\nabla \times \nabla \times \mathbf{A} - k_0^2 \epsilon \mathbf{A} = \imath \omega \mu_0 \epsilon_0 \epsilon \nabla \phi + \mu_0 \mathbf{j} \quad (10.189)$$

Taking the divergence of this equation leads to

$$\nabla \cdot \epsilon \nabla \phi + \imath \omega \nabla \cdot \epsilon \mathbf{A} = \frac{\nabla \cdot \mathbf{j}}{\imath \omega \epsilon_0} \quad (10.190)$$

Requiring that the Coulomb gauge

$$\nabla \cdot \epsilon \mathbf{A} = 0 \quad (10.191)$$

is fulfilled, the equation simplifies to

$$\nabla \cdot \epsilon \nabla \phi = \frac{\nabla \cdot \mathbf{j}}{\imath \omega \epsilon_0} \quad (10.192)$$

and by use of the continuity equation to

$$\nabla \cdot \epsilon \nabla \phi = -\frac{q}{\epsilon_0} \quad (10.193)$$

Fourier transform of 10.189 gives

$$-\mathbf{k} \times \mathbf{k} \times \tilde{\mathbf{A}} - k_0^2 \epsilon \tilde{\mathbf{A}} = \omega \mu_0 \epsilon_0 \epsilon \mathbf{k} \tilde{\phi} + \mu_0 \mathbf{j} \quad (10.194)$$

or

$$\mathbf{M} \tilde{\mathbf{A}} = \omega \mu_0 \epsilon_0 \epsilon \mathbf{k} \tilde{\phi} + \mu_0 \mathbf{j} \quad (10.195)$$

When \mathbf{M} is the vector operator

$$\mathbf{M} = -\mathbf{k} \times \mathbf{k} \times -k_0^2 \epsilon \quad (10.196)$$

Transforming also 10.192

$$-\mathbf{k} \cdot \epsilon \mathbf{k} \tilde{\phi} = \frac{\mathbf{k} \cdot \mathbf{j}}{\omega \epsilon_0} \quad (10.197)$$

or when solved for the potential

$$\tilde{\phi} = -\frac{\mathbf{k} \cdot \mathbf{j}}{\omega \epsilon_0 \mathbf{k} \cdot \epsilon \mathbf{k}} \quad (10.198)$$

Substitution (10.195) results in

$$\tilde{\mathbf{A}} = \mu_0 \mathbf{M}^{-1} \left(-\epsilon \frac{\mathbf{k}(\mathbf{k} \cdot \mathbf{j})}{\mathbf{k} \cdot \epsilon \mathbf{k}} + \mathbf{j} \right) \quad (10.199)$$

10.6 Permeability

The magnetic moment of an electron due to gyration is

$$\mathbf{m} = -\frac{1}{2} \mathbf{r} \times e \mathbf{v} \quad (10.200)$$

$$= -\frac{1}{2} r_e v_{\perp} \mathbf{e}_3 \quad (10.201)$$

$$= -\frac{1}{2} e \frac{v_{\perp}^2}{\omega_{ce}} \mathbf{e}_3 \quad (10.202)$$

$$= -\frac{1}{2} \frac{m_e v_{\perp}^2}{B} \mathbf{e}_3 \quad (10.203)$$

$$= -\frac{E_{kin,\perp}}{B} \mathbf{e}_3 \quad (10.204)$$

$$(10.205)$$

when the external magnetic field points in the \mathbf{e}_3 direction.

$$\mathbf{M}_e = -n_e \frac{E_{kin,\perp}}{B} \mathbf{e}_3 \quad (10.206)$$

Ignoring any bulk velocity, one can take the thermal velocity:

$$\mathbf{M}_e = -n_e \frac{E_{th,\perp}}{B} \mathbf{e}_3 \quad (10.207)$$

$$= -n_e \frac{n_e kT}{B} \mathbf{e}_3 \quad (10.208)$$

$$= -\frac{n_e^2 kT}{B} \mathbf{e}_3 \quad (10.209)$$

$$(10.210)$$

$$\mathbf{B} = \mu \mu_0 \mathbf{H} \quad (10.211)$$

$$\mu = \frac{1}{1 - \chi_B} \quad (10.212)$$

$$\chi_B \mathbf{e}_3 = \mu_0 \frac{\mathbf{M}}{\mathbf{B}} = -\frac{\mu_0 n_e^2 kT}{B^2} \mathbf{e}_3 \quad (10.213)$$

$$\chi_{\mathbf{b}} = \begin{pmatrix} \mu_0 & 0 & 0 \\ 0 & \mu_0 & 0 \\ 0 & 0 & -\frac{\mu_0 n_e^2 kT}{B^2} \end{pmatrix} \quad (10.214)$$

$$\mu = \begin{pmatrix} 1 - \mu_0 & 0 & 0 \\ 0 & 1 - \mu_0 & 0 \\ 0 & 0 & 1 + \frac{\mu_0 n_e^2 kT}{B^2} \end{pmatrix}^{-1} \quad (10.215)$$

10.7 Nonlocal response

The usual relation

$$\mathbf{D}(\omega, \mathbf{k}) = \epsilon(\omega, \mathbf{k}) \cdot \mathbf{E}(\omega, \mathbf{k}) \quad (10.216)$$

is a relation in Fourier space. Transformation in space and time leads to a Convolution integral:

$$\mathbf{D}(t, \mathbf{r}) = \frac{1}{2\pi} \int_{-\infty}^{\infty} dt' \int_{-\infty}^{\infty} d\mathbf{r}'^3 \epsilon(t - t', \mathbf{r} - \mathbf{r}') \cdot \mathbf{E}(t', \mathbf{r}') \quad (10.217)$$

The dielectric function depends on distance and time differences. This equation is only true for homogenous tempered media. The value of the displacement at a point in space and time depends on the electric field of every other point in spacetime.

Teil VI

A BODY MOVING THROUGH PLASMA

11. POTENTIAL OF S/C SURFACE

The potential of the surface is a function of the difference of the photoelectric current I_{ph} due to outflowing electrons and the inflowing thermal electron current of the plasma I_e .

12. THE BASIC EQUATIONS

The Vlasov equations

$$\left(\frac{\partial}{\partial t} + \mathbf{v}_s \cdot \nabla_r - \frac{q_s}{m_s} (\mathbf{E} + (\mathbf{v}_s + \mathbf{v}_{sc}) \times \mathbf{B}) \cdot \nabla_v \right) f_s(\mathbf{r}, \mathbf{v}, t) = 0 \quad (12.1)$$

$$(12.2)$$

have to be solved concurrently with the Poisson equation

$$\nabla^2 \Phi = \frac{1}{\epsilon_0} \sum_s q_s \int f_s(\mathbf{r}, \mathbf{v}, t) d^3v \quad (12.3)$$

Teil VII

COVARIANT DESCRIPTION

13. THE BASIC EQUATIONS

Teil VIII

IDEEN

Im metall fermi verteilung, ausserhalb maxwell verteilung, weil im metall die elektronen dichte so hoch ist, dass das pauli prinzip bis ca. $10^4 K$ relevant ist

Wenn eine antenne in ein leitendes medium eingebettet wird, nimmt der strom mit der entfernung vom feed stärker ab, weil das angrenzende leitende medium auch zur verfuegung steht.

Great sensitivity of current on medium

Emittierung von elektronen an der antennespitze ?

14. REFERENZEN

- [*Manning*(2000)], [*Staras*(1964)], [*Moncuquet et al.*(2000)], [*Blomberg et al.*(2005)].
 [Weiglhofer(1986)][*Staelin et al.*(1994)*Staelin, Morgenthaler, and J.Kong*][*Burden and Faires*(1999)][*Harring*
 [*Mathews and Walker*(1970)]
 [*Ohnuma*(1994)]
 [*Schmidt*(1979)]
 [*Sitenko*(1967)]
 [*Klimontovich*(1983)]
 [*Balanis*(1989)]
 [*Stakgold*(1979)]
 [*Walker*(1993)]
 [*Edited by Moore and Pizer*(1986)]
 [*Al’pert*(1983a)]
 [*Al’pert*(1983b)]
 [*Lonngren and Savov*(2005)] [*Rucker et al.*(2005)*Rucker, Macher, Fischer, Oswald, Bougeret, Kaiser, and*
 [?]
 [*Lai*(1998)] [*Wang and Wang*(1972)]
 [*Nevels*(2004)]
 [*Ward et al.*(2005)*Ward, Swenson, and Furse*]
 [*Matin et al.*(1982)*Matin, Mushiake, Ishizone, and Sawaya*]
 [*Nikitin and Swenson*(2001)]
 [*Balmain*(1964)]
 [*Eroglu and Lee*(2003)]
 [*Wu*(2003)]
 [*Li et al.*(2001)*Li, Leong, and Huang*]
 [*Pathak*(1983)]
 [*Richie and Gangl*(1995)]
 [*Hwu et al.*(1992)*Hwu, Chen, and Arndt*]
 [*Kellogg*(2001)]
 [*Linh and Nachman*(1990)]
 [*Krill et al.*(1982)*Krill, Andreo, and Farrell*]
 [*Chugonov and Mareev*(2003)]
 [*Oswald et al.*(2005)*Oswald, Macher, Fischer, Rucker, Bougeret, Kaiser, and Goetz*]
 [*Tai*(1981)]
 [*Chugonov et al.*(2005 In press)*Chugonov, Fiala, Soucek, and Santolik*]
 [*Marin*(1992)]
 [*Aksun*(1996)]
 [*Barkeshli and Pathak*(1991)]
 [*Olyslager and Derudder*(2003)]
 [*Cheng*(1996)]
 [*Meyer*(1973)]
 [*Singh*(1974)]

-
- [*Ishizone et al.*(1974)*Ishizone, Sawaya, Adachi, and Mushiake*]
[?]
[*Adachi et al.*(1970)*Adachi, Kasahara, and Mushiake*]
[*Lin and Mei*(1968)]
[*Richmond*(1966)]
[*Beghin et al.*(2005)*Beghin, Decreau, Pickett, Sundkvist, and Lefebvre*]
[*Beghin and Kolesnikova*(1998)]
[*Kolesnikova and Beghin*(1998)]
[*Beghin*(1995)]
[*Kim et al.*(2004)*Kim, Meinecke, and Breinbjerg*]
[*Dong*(2002)]
[*Geng*(2003)]
[*Michielsen and Flachetti*(2005)]
[*Bucci*(2005)]
[*Sharkawy et al.*(2005)*Sharkawy, Demir, and Elsherbeni*]
[*Langenberg*(2003)]
[*Mehanee and Zhdanov*(2005)]
[*Tai*(1981)] [*Tai*(1964)]
[*Pathak*(1999)] [*Zhian et al.*(2004)*Zhian, Yan, Bo, and Deyuan*]
[*Tai*(1994)] [*Castellanos*(1964)]

Teil IX

QUANTUM MECHANICAL DESCRIPTION

Teil X

SOLID STATE EFFECTS

Teil XI

BEPI COLOMBO

15. PARAMETERS AT AND IN THE HERMEAN MAGNETOSPHERE

- Ion species: H,He,Na,K,O
- Distance from sun: 0.31-0.47 AU
- $n_e \sim 10 - 500 cm^{-3}$
- $T_e \sim 5 \cdot 10^4 - 10^{10} K$
- $f_{pe} \sim 200 - 300 kHz$ in the IMF
- $f_{pe} \sim 1 - 3 kHz$ in the magnetosphere
- $IMF \sim 25 nT$
- Alfven mach number can be < 1
- $\lambda_D = 10 - 100 m$
- $I_{ph} \sim 5 - 50 nA cm^{-2}$
- $I_e \sim 0.1 - 10 nA cm^{-2}$

The expected frequency ranges can be seen in figure 15.1.

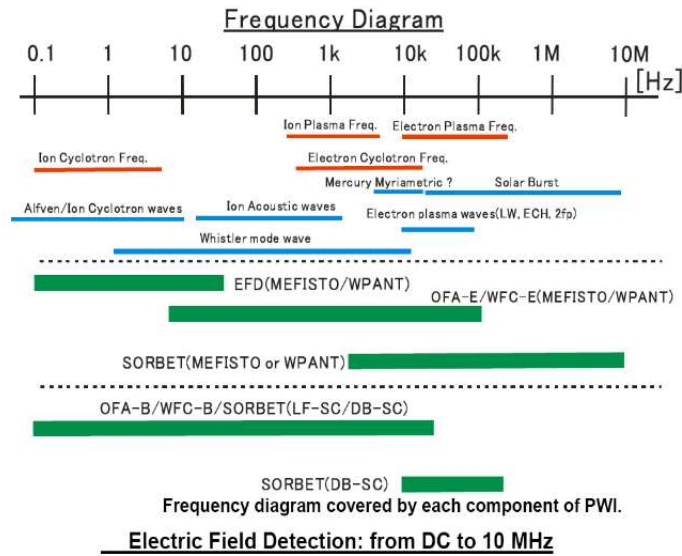


Fig. 15.1: Frequency range of the expected plasma waves measured by Bepi Colombo

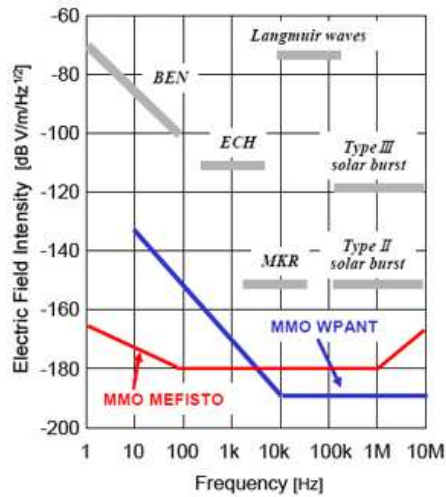


Figure 1.6: Sensitivities of the two electric field antennas (WPANT and MEFISTO) as well as expected intensities of natural waves.

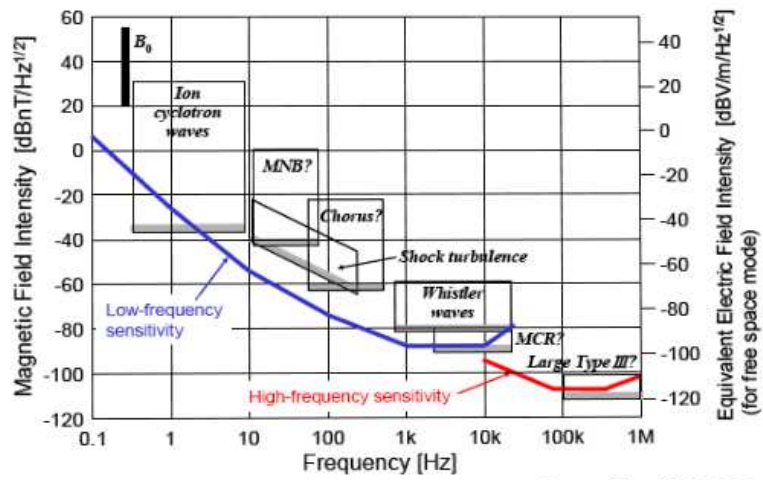


Figure 1.7: Sensitivities of two search coils (LF-SC and DB-SC) as well as expected intensities of natural waves.

16. WHAT TO DO

- Effect of movement through the plasma
- Effect of ion gap upon I_{ph} and I_e
- Effect of tunneling through ion gap
- Effect of ion gap upon calculation of antenna impedance and effective height
- Using the hot plasma tensor for calculation
- Isolated part of the antennas taken into account ?
- Is thermal noise routinely subtracted from radio observations ? see fig. 4.1
- TNS: Effect of shotnoise on spheres
- implement the MOM for antennas imbedded in plasma

16. APPENDIX A

$$M = \{\{1, 0, 0\}, \{0, 1, 0\}, \{0, 0, 1\}\}$$

$$\begin{aligned} & \{\{1, 0, 0\}, \{0, 1, 0\}, \{0, 0, 1\}\} \\ \epsilon\epsilon &= \epsilon_0\{\{S, -I * D, 0\}, \{I * D, S, 0\}, \{0, 0, P\}\} \\ & \{\{S\epsilon_0, -iD\epsilon_0, 0\}, \{iD\epsilon_0, S\epsilon_0, 0\}, \{0, 0, P\epsilon_0\}\} \\ & \{k1, k2, k3\} \end{aligned}$$

$$\begin{aligned} k &= \{K * \text{Sin}[\alpha] * \text{Cos}[\varphi], K * \text{Sin}[\alpha] * \text{Sin}[\varphi], K * \text{Cos}[\alpha]\} \\ & \{K \text{Cos}[\varphi] \text{Sin}[\alpha], K \text{Sin}[\alpha] \text{Sin}[\varphi], K \text{Cos}[\alpha]\} \end{aligned}$$

$$\text{Outer}[\text{Times}, k, k]$$

$$\begin{aligned} & \{\{k1^2, k1k2, k1k3\}, \{k1k2, k2^2, k2k3\}, \{k1k3, k2k3, k3^2\}\} \\ & \{\{k1^2, k1k2, k1k3\}, \{k1k2, k2^2, k2k3\}, \{k1k3, k2k3, k3^2\}\} \end{aligned}$$

$$\begin{aligned} \lambda &= k.k * M - \text{Outer}[\text{Times}, k, k] - \mu_0 * \omega^2 * \epsilon\epsilon \\ & \{\{k2^2 + k3^2 - S\omega^2\epsilon_0\mu_0, -k1k2 + iD\omega^2\epsilon_0\mu_0, -k1k3\}, \\ & \{-k1k2 - iD\omega^2\epsilon_0\mu_0, k1^2 + k3^2 - S\omega^2\epsilon_0\mu_0, -k2k3\}, \{-k1k3, -k2k3, k1^2 + k2^2 - P\omega^2\epsilon_0\mu_0\}\} \end{aligned}$$

$$\text{Simplify}[\lambda]$$

$$\begin{aligned} & \{\{k2^2 + k3^2 - S\omega^2\epsilon_0\mu_0, -k1k2 + iD\omega^2\epsilon_0\mu_0, -k1k3\}, \\ & \{-k1k2 - iD\omega^2\epsilon_0\mu_0, k1^2 + k3^2 - S\omega^2\epsilon_0\mu_0, -k2k3\}, \{-k1k3, -k2k3, k1^2 + k2^2 - P\omega^2\epsilon_0\mu_0\}\} \end{aligned}$$

$$\text{detlam} = \text{Det}[\lambda]$$

$$-k1^2k3^2P\omega^2\epsilon_0\mu_0 - k2^2k3^2P\omega^2\epsilon_0\mu_0 - k3^4P\omega^2\epsilon_0\mu_0 - k1^4S\omega^2\epsilon_0\mu_0 - 2k1^2k2^2S\omega^2\epsilon_0\mu_0 -$$

$$\begin{aligned} & k2^4S\omega^2\epsilon_0\mu_0 - k1^2k3^2S\omega^2\epsilon_0\mu_0 - k2^2k3^2S\omega^2\epsilon_0\mu_0 - D^2k1^2\omega^4\epsilon_0^2\mu_0^2 - D^2k2^2\omega^4\epsilon_0^2\mu_0^2 + \\ & k1^2PS\omega^4\epsilon_0^2\mu_0^2 + \\ & k2^2PS\omega^4\epsilon_0^2\mu_0^2 + 2k3^2PS\omega^4\epsilon_0^2\mu_0^2 + k1^2S^2\omega^4\epsilon_0^2\mu_0^2 + k2^2S^2\omega^4\epsilon_0^2\mu_0^2 + D^2P\omega^6\epsilon_0^3\mu_0^3 - \\ & PS^2\omega^6\epsilon_0^3\mu_0^3 \end{aligned}$$

$$\text{Simplify}[\%]$$

$$\begin{aligned} & -\omega^2\epsilon_0\mu_0 ((k1^2 + k2^2 + k3^2) (k3^2P + (k1^2 + k2^2) S) + \\ & (D^2 (k1^2 + k2^2) - S (2k3^2P + k1^2(P + S) + k2^2(P + S))) \omega^2\epsilon_0\mu_0 + P (-D^2 + S^2) \omega^4\epsilon_0^2\mu_0^2) \end{aligned}$$

$$\text{FullSimplify}[\%]$$

$$\begin{aligned} & -\omega^2\epsilon_0\mu_0 ((k1^2 + k2^2 + k3^2) (k3^2P + (k1^2 + k2^2) S) - \\ & \omega^2\epsilon_0\mu_0 (-D^2 (k1^2 + k2^2) + S (2k3^2P + k1^2(P + S) + k2^2(P + S)) + P(D - S)(D + S)\omega^2\epsilon_0\mu_0)) \end{aligned}$$

$$\%/.k1 \rightarrow K * \text{Sin}[\alpha] * \text{Cos}[\varphi]$$

$$\begin{aligned} & -\omega^2\epsilon_0\mu_0 ((k2^2 + k3^2 + K^2\text{Cos}[\varphi]^2\text{Sin}[\alpha]^2) (k3^2P + S (k2^2 + K^2\text{Cos}[\varphi]^2\text{Sin}[\alpha]^2)) - \\ & \omega^2\epsilon_0\mu_0 (-D^2 (k2^2 + K^2\text{Cos}[\varphi]^2\text{Sin}[\alpha]^2) + \\ & S (2k3^2P + k2^2(P + S) + K^2(P + S)\text{Cos}[\varphi]^2\text{Sin}[\alpha]^2) + P(D - S)(D + S)\omega^2\epsilon_0\mu_0)) \end{aligned}$$

$$\%/.k2 \rightarrow K * \text{Sin}[\alpha] * \text{Sin}[\varphi]$$

$$\begin{aligned} & -\omega^2\epsilon_0\mu_0 \\ & ((k3^2 + K^2\text{Cos}[\varphi]^2\text{Sin}[\alpha]^2 + K^2\text{Sin}[\alpha]^2\text{Sin}[\varphi]^2) (k3^2P + S (K^2\text{Cos}[\varphi]^2\text{Sin}[\alpha]^2 + K^2\text{Sin}[\alpha]^2\text{Sin}[\varphi]^2)) - \end{aligned}$$

$$\begin{aligned}
& (\omega^2 \epsilon_0 \mu_0 ((k_2^2 + k_3^2 + K^2 \cos[\varphi]^2 \sin[\alpha]^2) (k_3^2 P + S (k_2^2 + K^2 \cos[\varphi]^2 \sin[\alpha]^2)) - \\
& \omega^2 \epsilon_0 \mu_0 (-D^2 (k_2^2 + K^2 \cos[\varphi]^2 \sin[\alpha]^2) + \\
& S (2k_3^2 P + k_2^2(P+S) + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))) , \\
& (-Kk_3\cos[\varphi]\sin[\alpha] (k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + k_3\omega^2(iDk_2 + KS\cos[\varphi]\sin[\alpha])\epsilon_0\mu_0)/ \\
& (\omega^2\epsilon_0\mu_0 ((k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) (k_3^2 P + S (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2)) - \\
& \omega^2\epsilon_0\mu_0 (-D^2 (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + \\
& S (2k_3^2 P + k_2^2(P+S) + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))))), \\
& \{- (Kk_2\cos[\varphi]\sin[\alpha] (k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + i\omega^2\epsilon_0\mu_0 \\
& (iKk_2P\cos[\varphi]\sin[\alpha] + D (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) - DP\omega^2\epsilon_0\mu_0))/ \\
& (\omega^2\epsilon_0\mu_0 ((k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) (k_3^2 P + S (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2)) - \\
& \omega^2\epsilon_0\mu_0 (-D^2 (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + \\
& S (2k_3^2 P + k_2^2(P+S) + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))), \\
& (-k_2^2 (k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + \omega^2\epsilon_0\mu_0 (k_3^2 P + k_2^2(P+S) + K^2S\cos[\varphi]^2\sin[\alpha]^2 - PS\omega^2\epsilon_0\mu_0))/ \\
& (\omega^2\epsilon_0\mu_0 ((k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) (k_3^2 P + S (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2)) - \\
& \omega^2\epsilon_0\mu_0 (-D^2 (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + \\
& S (2k_3^2 P + k_2^2(P+S) + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))), \\
& (-k_2k_3 (k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + k_3\omega^2(k_2S - iDK\cos[\varphi]\sin[\alpha])\epsilon_0\mu_0)/ \\
& (\omega^2\epsilon_0\mu_0 ((k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) (k_3^2 P + S (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2)) - \\
& \omega^2\epsilon_0\mu_0 (-D^2 (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + \\
& S (2k_3^2 P + k_2^2(P+S) + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))))), \\
& \{- (Kk_3\cos[\varphi]\sin[\alpha] (k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + k_3\omega^2(-iDk_2 + KS\cos[\varphi]\sin[\alpha])\epsilon_0\mu_0)/ \\
& (\omega^2\epsilon_0\mu_0 ((k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) (k_3^2 P + S (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2)) - \\
& \omega^2\epsilon_0\mu_0 (-D^2 (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + \\
& S (2k_3^2 P + k_2^2(P+S) + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))), \\
& (-k_2k_3 (k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + k_3\omega^2(k_2S + iDK\cos[\varphi]\sin[\alpha])\epsilon_0\mu_0)/ \\
& (\omega^2\epsilon_0\mu_0 ((k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) (k_3^2 P + S (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2)) - \\
& \omega^2\epsilon_0\mu_0 (-D^2 (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + S (2k_3^2 P + k_2^2(P+S) + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2) + \\
& P(D-S)(D+S)\omega^2\epsilon_0\mu_0))), (-k_3^2 (k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + \\
& \omega^2\epsilon_0\mu_0 (S (k_2^2 + 2k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + (D-S)(D+S)\omega^2\epsilon_0\mu_0))/ \\
& (\omega^2\epsilon_0\mu_0 ((k_2^2 + k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) (k_3^2 P + S (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2)) - \\
& \omega^2\epsilon_0\mu_0 (-D^2 (k_2^2 + K^2\cos[\varphi]^2\sin[\alpha]^2) + \\
& S (2k_3^2 P + k_2^2(P+S) + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))))). \}} \\
& \%/.k_2 \rightarrow K * \textbf{\textit{Sin}}[\alpha] * \textbf{\textit{Sin}}[\varphi] \\
& \{ \{ (-K^2\cos[\varphi]^2\sin[\alpha]^2 (k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2 + K^2\sin[\alpha]^2\sin[\varphi]^2) + \\
& \omega^2\epsilon_0\mu_0 (k_3^2 P + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2 + K^2SSin[\alpha]^2\sin[\varphi]^2 - PS\omega^2\epsilon_0\mu_0))/ \\
& (\omega^2\epsilon_0\mu_0 ((k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2 + K^2\sin[\alpha]^2\sin[\varphi]^2) (k_3^2 P + K^2S\cos[\varphi]^2\sin[\alpha]^2 + \\
& K^2SSin[\alpha]^2\sin[\varphi]^2) - \omega^2\epsilon_0\mu_0 (-D^2 (K^2\cos[\varphi]^2\sin[\alpha]^2 + K^2\sin[\alpha]^2\sin[\varphi]^2) + \\
& S (2k_3^2 P + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2 + K^2(P+S)\sin[\alpha]^2\sin[\varphi]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))), \\
& (-K^2\cos[\varphi]\sin[\alpha]^2\sin[\varphi] (k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2 + K^2\sin[\alpha]^2\sin[\varphi]^2) + \\
& \omega^2\epsilon_0\mu_0 (K^2PCos[\varphi]\sin[\alpha]^2\sin[\varphi] + iD (K^2\cos[\varphi]^2\sin[\alpha]^2 + K^2\sin[\alpha]^2\sin[\varphi]^2) - iDP\omega^2\epsilon_0\mu_0))/ \\
& (\omega^2\epsilon_0\mu_0 ((k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2 + K^2\sin[\alpha]^2\sin[\varphi]^2) (k_3^2 P + K^2S\cos[\varphi]^2\sin[\alpha]^2 + \\
& K^2SSin[\alpha]^2\sin[\varphi]^2) - \omega^2\epsilon_0\mu_0 (-D^2 (K^2\cos[\varphi]^2\sin[\alpha]^2 + K^2\sin[\alpha]^2\sin[\varphi]^2) + \\
& S (2k_3^2 P + K^2(P+S)\cos[\varphi]^2\sin[\alpha]^2 + K^2(P+S)\sin[\alpha]^2\sin[\varphi]^2) + P(D-S)(D+S)\omega^2\epsilon_0\mu_0))), \\
& (-Kk_3\cos[\varphi]\sin[\alpha] (k_3^2 + K^2\cos[\varphi]^2\sin[\alpha]^2 + K^2\sin[\alpha]^2\sin[\varphi]^2) + \\
& k_3\omega^2(KS\cos[\varphi]\sin[\alpha] + iDK\sin[\alpha]\sin[\varphi])\epsilon_0\mu_0)/
\end{aligned}$$

$$\begin{aligned}
& (\omega^2 \epsilon_0 \mu_0 ((k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) (k^3 P + K^2 S \cos[\varphi]^2 \sin[\alpha]^2 + \\
& K^2 S \sin[\alpha]^2 \sin[\varphi]^2) - \omega^2 \epsilon_0 \mu_0 (-D^2 (K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + S(2k^3 P + \\
& K^2(P+S)\cos[\varphi]^2 \sin[\alpha]^2 + K^2(P+S)\sin[\alpha]^2 \sin[\varphi]^2) + P(D-S)(D+S)\omega^2 \epsilon_0 \mu_0))) \}, \\
& \{- (K^2 \cos[\varphi] \sin[\alpha]^2 \sin[\varphi]) (k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + \\
& i \omega^2 \epsilon_0 \mu_0 (DK^2 \cos[\varphi]^2 \sin[\alpha]^2 + iK^2 PCos[\varphi]\sin[\alpha]^2 \sin[\varphi] + DK^2 \sin[\alpha]^2 \sin[\varphi]^2 - DP\omega^2 \epsilon_0 \mu_0)) / \\
& (\omega^2 \epsilon_0 \mu_0 ((k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) (k^3 P + K^2 SCos[\varphi]^2 \sin[\alpha]^2 + \\
& K^2 SSin[\alpha]^2 \sin[\varphi]^2) - \omega^2 \epsilon_0 \mu_0 (-D^2 (K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + S(2k^3 P + \\
& K^2(P+S)\cos[\varphi]^2 \sin[\alpha]^2 + K^2(P+S)\sin[\alpha]^2 \sin[\varphi]^2) + P(D-S)(D+S)\omega^2 \epsilon_0 \mu_0))), \\
& (-K^2 \sin[\alpha]^2 \sin[\varphi]^2 (k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + \\
& \omega^2 \epsilon_0 \mu_0 (k^3 P + K^2 SCos[\varphi]^2 \sin[\alpha]^2 + K^2(P+S)\sin[\alpha]^2 \sin[\varphi]^2 - PS\omega^2 \epsilon_0 \mu_0))/ \\
& (\omega^2 \epsilon_0 \mu_0 ((k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) (k^3 P + K^2 SCos[\varphi]^2 \sin[\alpha]^2 + \\
& K^2 SSin[\alpha]^2 \sin[\varphi]^2) - \omega^2 \epsilon_0 \mu_0 (-D^2 (K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + \\
& S(2k^3 P + K^2(P+S)\cos[\varphi]^2 \sin[\alpha]^2 + K^2(P+S)\sin[\alpha]^2 \sin[\varphi]^2) + P(D-S)(D+S)\omega^2 \epsilon_0 \mu_0))))), \\
& -(k^3 (K \sin[\alpha] \sin[\varphi] (k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + \\
& \omega^2 (iDKCos[\varphi]\sin[\alpha] - KSSin[\alpha]\sin[\varphi])\epsilon_0 \mu_0)))/ \\
& (\omega^2 \epsilon_0 \mu_0 ((k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) \\
& (k^3 P + K^2 SCos[\varphi]^2 \sin[\alpha]^2 + K^2 SSin[\alpha]^2 \sin[\varphi]^2) + \omega^2 (K^2 (D^2 - S(P+S)) Cos[\varphi]^2 \sin[\alpha]^2 + \\
& D^2 K^2 \sin[\alpha]^2 \sin[\varphi]^2 - S(2k^3 P + K^2(P+S)\sin[\alpha]^2 \sin[\varphi]^2)) \epsilon_0 \mu_0 + P(-D^2 + S^2) \omega^4 \epsilon_0^2 \mu_0^2))) \}, \\
& \{- (k^3 (K Cos[\varphi] \sin[\alpha] (k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + \\
& \omega^2 (-KSCos[\varphi]\sin[\alpha] + iDKSin[\alpha]\sin[\varphi])\epsilon_0 \mu_0)) / \\
& (\omega^2 \epsilon_0 \mu_0 ((k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) \\
& (k^3 P + K^2 SCos[\varphi]^2 \sin[\alpha]^2 + K^2 SSin[\alpha]^2 \sin[\varphi]^2) + \omega^2 (K^2 (D^2 - S(P+S)) Cos[\varphi]^2 \sin[\alpha]^2 + \\
& D^2 K^2 \sin[\alpha]^2 \sin[\varphi]^2 - S(2k^3 P + K^2(P+S)\sin[\alpha]^2 \sin[\varphi]^2)) \epsilon_0 \mu_0 + P(-D^2 + S^2) \omega^4 \epsilon_0^2 \mu_0^2)), \\
& -(k^3 (K \sin[\alpha] \sin[\varphi] (k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) - \\
& \omega^2 (iDKCos[\varphi]\sin[\alpha] + KSSin[\alpha]\sin[\varphi])\epsilon_0 \mu_0)))/ \\
& (\omega^2 \epsilon_0 \mu_0 ((k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) \\
& (k^3 P + K^2 SCos[\varphi]^2 \sin[\alpha]^2 + K^2 SSin[\alpha]^2 \sin[\varphi]^2) + \omega^2 (K^2 (D^2 - S(P+S)) Cos[\varphi]^2 \sin[\alpha]^2 + \\
& D^2 K^2 \sin[\alpha]^2 \sin[\varphi]^2 - S(2k^3 P + K^2(P+S)\sin[\alpha]^2 \sin[\varphi]^2)) \epsilon_0 \mu_0 + P(-D^2 + S^2) \omega^4 \epsilon_0^2 \mu_0^2)), \\
& (-k^3 (k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + \omega^2 \epsilon_0 \mu_0 \\
& (S(2k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + (D-S)(D+S)\omega^2 \epsilon_0 \mu_0)))/ \\
& (\omega^2 \epsilon_0 \mu_0 ((k^3 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) (k^3 P + K^2 SCos[\varphi]^2 \sin[\alpha]^2 + \\
& K^2 SSin[\alpha]^2 \sin[\varphi]^2) - \omega^2 \epsilon_0 \mu_0 (-D^2 (K^2 \cos[\varphi]^2 \sin[\alpha]^2 + K^2 \sin[\alpha]^2 \sin[\varphi]^2) + S(2k^3 P + \\
& K^2(P+S)\cos[\varphi]^2 \sin[\alpha]^2 + K^2(P+S)\sin[\alpha]^2 \sin[\varphi]^2) + P(D-S)(D+S)\omega^2 \epsilon_0 \mu_0)))) \}.
\end{aligned}$$

$$\%/.k3 \rightarrow K * \text{Cos}[\alpha]$$

$$\begin{aligned} & \{ \{ (-K^2 \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 (K^2 \text{Cos}[\alpha]^2 + K^2 \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) + \\ & \omega^2 \epsilon_0 \mu_0 (K^2 P \text{Cos}[\alpha]^2 + K^2 (P + S) \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 S \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2 - P S \omega^2 \epsilon_0 \mu_0)) / \\ & (\omega^2 \epsilon_0 \mu_0 ((K^2 \text{Cos}[\alpha]^2 + K^2 \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) \\ & (K^2 P \text{Cos}[\alpha]^2 + K^2 S \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 S \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) - \\ & \omega^2 \epsilon_0 \mu_0 (-D^2 (K^2 \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) + S (2K^2 P \text{Cos}[\alpha]^2 + \\ & K^2 (P + S) \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 (P + S) \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) + P (D - S) (D + S) \omega^2 \epsilon_0 \mu_0)) \} , \\ & (-K^2 \text{Cos}[\varphi] \text{Sin}[\alpha]^2 \text{Sin}[\varphi] (K^2 \text{Cos}[\alpha]^2 + K^2 \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) + \\ & \omega^2 \epsilon_0 \mu_0 (K^2 P \text{Cos}[\varphi] \text{Sin}[\alpha]^2 \text{Sin}[\varphi] + i D (K^2 \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) - i D P \omega^2 \epsilon_0 \mu_0)) / \\ & (\omega^2 \epsilon_0 \mu_0 ((K^2 \text{Cos}[\alpha]^2 + K^2 \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) \\ & (K^2 P \text{Cos}[\alpha]^2 + K^2 S \text{Cos}[\varphi]^2 \text{Sin}[\alpha]^2 + K^2 S \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2) - \end{aligned}$$

[illegible]

$$\begin{aligned}
& (K^4 \sin[\alpha]^2 \sin[2\varphi] + 2i\omega^2 \epsilon_0 \mu_0 (-K^2 \sin[\alpha]^2 (D - iP \cos[\varphi] \sin[\varphi]) + DP\omega^2 \epsilon_0 \mu_0)) / \\
& (\omega^2 \epsilon_0 \mu_0 (-K^4 (P + S + (P - S) \cos[2\alpha]) + \\
& \omega^2 \epsilon_0 \mu_0 (K^2 (-D^2 + 3PS + S^2 + (D^2 + (P - S)S) \cos[2\alpha]) + 2P(D - S)(D + S)\omega^2 \epsilon_0 \mu_0))) , \\
& (K^2 \sin[2\alpha] (K^2 \cos[\varphi] - \omega^2 (S \cos[\varphi] + iD \sin[\varphi]) \epsilon_0 \mu_0)) / (\omega^2 \epsilon_0 \mu_0 (-K^4 (P + S + (P - S) \cos[2\alpha]) + \\
& \omega^2 \epsilon_0 \mu_0 (K^2 (-D^2 + 3PS + S^2 + (D^2 + (P - S)S) \cos[2\alpha]) + 2P(D - S)(D + S)\omega^2 \epsilon_0 \mu_0))) , \\
& \{ (K^4 \sin[\alpha]^2 \sin[2\varphi] + 2i\omega^2 \epsilon_0 \mu_0 (K^2 \sin[\alpha]^2 (D + iP \cos[\varphi] \sin[\varphi]) - DP\omega^2 \epsilon_0 \mu_0)) / \\
& (\omega^2 \epsilon_0 \mu_0 (-K^4 (P + S + (P - S) \cos[2\alpha]) + \\
& \omega^2 \epsilon_0 \mu_0 (K^2 (-D^2 + 3PS + S^2 + (D^2 + (P - S)S) \cos[2\alpha]) + 2P(D - S)(D + S)\omega^2 \epsilon_0 \mu_0))) , \\
& (-4K^4 \sin[\alpha]^2 \sin[\varphi]^2 + \omega^2 \epsilon_0 \mu_0 (K^2 (3P + 2S + (P - 2S) \cos[2\alpha] - 2P \cos[2\varphi] \sin[\alpha]^2) - \\
& 4PS\omega^2 \epsilon_0 \mu_0)) / (2\omega^2 \epsilon_0 \mu_0 (K^4 (P + S + (P - S) \cos[2\alpha]) + \\
& \omega^2 \epsilon_0 \mu_0 (K^2 (D^2 - S(3P + S) - (D^2 + (P - S)S) \cos[2\alpha]) - 2P(D - S)(D + S)\omega^2 \epsilon_0 \mu_0))) , \\
& (K^2 \sin[2\alpha] (K^2 \sin[\varphi] + \omega^2 (iD \cos[\varphi] - S \sin[\varphi]) \epsilon_0 \mu_0)) / (\omega^2 \epsilon_0 \mu_0 (-K^4 (P + S + (P - S) \cos[2\alpha]) + \\
& \omega^2 \epsilon_0 \mu_0 (K^2 (-D^2 + 3PS + S^2 + (D^2 + (P - S)S) \cos[2\alpha]) + 2P(D - S)(D + S)\omega^2 \epsilon_0 \mu_0))) , \\
& \{ (K^2 \sin[2\alpha] (K^2 \cos[\varphi] + \omega^2 (-S \cos[\varphi] + iD \sin[\varphi]) \epsilon_0 \mu_0)) / (\omega^2 \epsilon_0 \mu_0 (-K^4 (P + S + (P - S) \cos[2\alpha]) + \\
& \omega^2 \epsilon_0 \mu_0 (K^2 (-D^2 + 3PS + S^2 + (D^2 + (P - S)S) \cos[2\alpha]) + 2P(D - S)(D + S)\omega^2 \epsilon_0 \mu_0))) , \\
& (2K^2 \cos[\alpha] \sin[\alpha] (K^2 \sin[\varphi] + \omega^2 (-iD \cos[\varphi] - S \sin[\varphi]) \epsilon_0 \mu_0)) / \\
& (\omega^2 \epsilon_0 \mu_0 (-K^4 (P + S + (P - S) \cos[2\alpha]) + \\
& \omega^2 \epsilon_0 \mu_0 (K^2 (-D^2 + 3PS + S^2 + (D^2 + (P - S)S) \cos[2\alpha]) + 2P(D - S)(D + S)\omega^2 \epsilon_0 \mu_0))) , \\
& (-2K^4 \cos[\alpha]^2 + \omega^2 \epsilon_0 \mu_0 (K^2 S(3 + \cos[2\alpha]) + 2(D - S)(D + S)\omega^2 \epsilon_0 \mu_0)) / \\
& (\omega^2 \epsilon_0 \mu_0 (K^4 (P + S + (P - S) \cos[2\alpha]) + \\
& \omega^2 \epsilon_0 \mu_0 (K^2 (D^2 - S(3P + S) - (D^2 + (P - S)S) \cos[2\alpha]) - 2P(D - S)(D + S)\omega^2 \epsilon_0 \mu_0))) \} \}
\end{aligned}$$

Inverse[λ] * detlam

$$\begin{aligned}
& \{ \{ -k_2^2 k_3^2 + (k_1^2 + k_2^2 - P\omega^2 \epsilon_0 \mu_0) (k_1^2 + k_3^2 - S\omega^2 \epsilon_0 \mu_0) , \\
& k_1 k_2 k_3^2 - (-k_1 k_2 + iD\omega^2 \epsilon_0 \mu_0) (k_1^2 + k_2^2 - P\omega^2 \epsilon_0 \mu_0) , \\
& k_1^3 k_3 + k_1 k_2^2 k_3 + k_1 k_3^3 - iDk_2 k_3 \omega^2 \epsilon_0 \mu_0 - k_1 k_3 S\omega^2 \epsilon_0 \mu_0 \} , \\
& \{ k_1 k_2 k_3^2 - (-k_1 k_2 - iD\omega^2 \epsilon_0 \mu_0) (k_1^2 + k_2^2 - P\omega^2 \epsilon_0 \mu_0) , \\
& -k_1^2 k_3^2 + (k_1^2 + k_2^2 - P\omega^2 \epsilon_0 \mu_0) (k_2^2 + k_3^2 - S\omega^2 \epsilon_0 \mu_0) , \\
& k_1^2 k_2 k_3 + k_2^3 k_3 + k_2 k_3^3 + iDk_1 k_3 \omega^2 \epsilon_0 \mu_0 - k_2 k_3 S\omega^2 \epsilon_0 \mu_0 \} , \\
& \{ k_1^3 k_3 + k_1 k_2^2 k_3 + k_1 k_3^3 + iDk_2 k_3 \omega^2 \epsilon_0 \mu_0 - k_1 k_3 S\omega^2 \epsilon_0 \mu_0 , \\
& k_1^2 k_2 k_3 + k_2^3 k_3 + k_2 k_3^3 - iDk_1 k_3 \omega^2 \epsilon_0 \mu_0 - k_2 k_3 S\omega^2 \epsilon_0 \mu_0 , \\
& k_1^2 k_3^2 + k_2^2 k_3^2 + k_3^4 - k_1^2 S\omega^2 \epsilon_0 \mu_0 - k_2^2 S\omega^2 \epsilon_0 \mu_0 - 2k_3^2 S\omega^2 \epsilon_0 \mu_0 - D^2 \omega^4 \epsilon_0^2 \mu_0^2 + S^2 \omega^4 \epsilon_0^2 \mu_0^2 \} \}
\end{aligned}$$

FullSimplify[%]

$$\begin{aligned}
& \{ \{ -k_2^2 k_3^2 + (k_1^2 + k_2^2 - P\omega^2 \epsilon_0 \mu_0) (k_1^2 + k_3^2 - S\omega^2 \epsilon_0 \mu_0) , \\
& k_1 k_2 k_3^2 + (k_1 k_2 - iD\omega^2 \epsilon_0 \mu_0) (k_1^2 + k_2^2 - P\omega^2 \epsilon_0 \mu_0) , \\
& k_3 (k_1 (k_1^2 + k_2^2 + k_3^2) + (-iDk_2 - k_1 S)\omega^2 \epsilon_0 \mu_0) \} , \\
& \{ k_1 k_2 k_3^2 + (k_1 k_2 + iD\omega^2 \epsilon_0 \mu_0) (k_1^2 + k_2^2 - P\omega^2 \epsilon_0 \mu_0) , \\
& -k_1^2 k_3^2 + (k_1^2 + k_2^2 - P\omega^2 \epsilon_0 \mu_0) (k_2^2 + k_3^2 - S\omega^2 \epsilon_0 \mu_0) , \\
& k_3 (k_2 (k_1^2 + k_2^2 + k_3^2) + (iDk_1 - k_2 S)\omega^2 \epsilon_0 \mu_0) \} , \\
& \{ k_3 (k_1 (k_1^2 + k_2^2 + k_3^2) + (iDk_2 - k_1 S)\omega^2 \epsilon_0 \mu_0) , k_3 (k_2 (k_1^2 + k_2^2 + k_3^2) + (-iDk_1 - k_2 S)\omega^2 \epsilon_0 \mu_0) , \\
& k_3^2 (k_1^2 + k_2^2 + k_3^2) + \omega^2 \epsilon_0 \mu_0 (- (k_1^2 + k_2^2 + 2k_3^2) S + (-D^2 + S^2) \omega^2 \epsilon_0 \mu_0) \} \}
\end{aligned}$$

%.k1 → K * Sin[α] * Cos[φ]

$$\begin{aligned}
& \{ \{ -k_2^2 k_3^2 + (k_2^2 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 - P\omega^2 \epsilon_0 \mu_0) (k_3^2 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 - S\omega^2 \epsilon_0 \mu_0) , \\
& Kk_2 k_3^2 \cos[\varphi] \sin[\alpha] + (Kk_2 \cos[\varphi] \sin[\alpha] - iD\omega^2 \epsilon_0 \mu_0) (k_2^2 + K^2 \cos[\varphi]^2 \sin[\alpha]^2 - P\omega^2 \epsilon_0 \mu_0) , \\
& k_3 (K \cos[\varphi] \sin[\alpha] (k_2^2 + k_3^2 + K^2 \cos[\varphi]^2 \sin[\alpha]^2) + \omega^2 (-iDk_2 - K S \cos[\varphi] \sin[\alpha]) \epsilon_0 \mu_0) \} , \\
\end{aligned}$$

[illegible]

$$\begin{aligned}
& K^4 \text{Sin}[\alpha]^2 \text{Sin}[\varphi]^2 + \omega^2 \epsilon_0 \mu_0 \left(-K^2 \left(P \text{Cos}[\alpha]^2 + \text{Sin}[\alpha]^2 (S + P \text{Sin}[\varphi]^2) \right) + PS \omega^2 \epsilon_0 \mu_0 \right), \\
& K^2 \text{Cos}[\alpha] \text{Sin}[\alpha] \left(K^2 \text{Sin}[\varphi] + \omega^2 (i D \text{Cos}[\varphi] - S \text{Sin}[\varphi]) \epsilon_0 \mu_0 \right) \}, \\
& \{ K^2 \text{Cos}[\alpha] \text{Sin}[\alpha] \left(K^2 \text{Cos}[\varphi] + \omega^2 (-S \text{Cos}[\varphi] + i D \text{Sin}[\varphi]) \epsilon_0 \mu_0 \right), \\
& K^2 \text{Cos}[\alpha] \text{Sin}[\alpha] \left(K^2 \text{Sin}[\varphi] + \omega^2 (-i D \text{Cos}[\varphi] - S \text{Sin}[\varphi]) \epsilon_0 \mu_0 \right), \\
& K^4 \text{Cos}[\alpha]^2 - \frac{1}{2} K^2 S \omega^2 (3 + \text{Cos}[2\alpha]) \epsilon_0 \mu_0 + (-D + S)(D + S) \omega^4 \epsilon_0^2 \mu_0^2 \} \}
\end{aligned}$$

LITERATURVERZEICHNIS

- [*Adachi et al.(1970)*Adachi, Kasahara, and Mushiake] Adachi, S., T. Kasahara, and Y. Mushiake (1970), Receiving antennas in a compressible plasma, *IEEE Transactions on Antennas and Propagation*, pp. 439–441.
- [*Aksun(1996)*] Aksun, M. (1996), A robust approach for the derivation of closed-form green’s function, *IEEE Transactions on Microwave Theory and Techniques*, 44, 651–658.
- [*Al’pert(1983a)*] Al’pert, Y. (1983a), *Space Plasma: Theory and main properties*, Cambridge University Press.
- [*Al’pert(1983b)*] Al’pert, Y. (1983b), *Space Plasma: Flow, waves and oscillations*, Cambridge University Press.
- [*Balanis(1989)*] Balanis, C. (1989), *Advanced Engineering Electromagnetics*, John Wiley & Sons.
- [*Balmain(1964)*] Balmain, K. (1964), Impedance of a short dipole antenna in magnetoplasma, *IEEE Transactions on Antennas and Propagation*.
- [*Barkeshli and Pathak(1991)*] Barkeshli, S., and P. Pathak (1991), On the dyadic green’s function for a planar multilayered dielectric/magnetic media, *IEEE Transactions on Microwave Theory and Techniques*, 40, 128–142.
- [*Baumjohann and Treumann(1999)*] Baumjohann, W., and R. Treumann (1999), *Basic Space Plasma Physics*, Imperial College Press.
- [*Beghin(1995)*] Beghin, C. (1995), Series expansion of electrostatic potential radiated by a point source in isotropic maxwellian plasma, *Radio Science*, 30, 307–322.
- [*Beghin and Kolesnikova(1998)*] Beghin, C., and E. Kolesnikova (1998), Surface charge distribution approach for modeling of quasi-static electric antennas in isotropic thermal plasma, *Radio Science*, 33, 503–516.
- [*Beghin et al.(2005)*Beghin, Decreau, Pickett, Sundkvist, and Lefebvre] Beghin, C., P. Decreau, J. Pickett, D. Sundkvist, and B. Lefebvre (2005), Modeling of cluster’s electric antennas in space: Applications to plasma diagnostics, *Radio Science*, 40, doi:10.1029/2005RS003264.
- [*Blomberg et al.(2005)*] Blomberg, L., et al. (2005), Mefisto-an electric field instrument for bepicolombo/mmo, *Advances in Space Research*.
- [*Bucci(2005)*] Bucci, O. (2005), Computational complexity in the solution of large antenna and scattering problems, *Radio Science*, 40, doi:10.1029/2004RS003196.

-
- [Burden and Faires(1999)] Burden, R., and D. Faires (1999), *Numerical Analysis*, Brooks/Cole Publishing Company.
- [Castellanos(1964)] Castellanos, D. (1964), On a class of integral equations and its applications to the theory of linear antennas, Ph.D. thesis, University of Michigan.
- [Cheng(1996)] Cheng, D. (1996), Green dyadic and dipole radiation in triaxial omega medium, *Electronic Letters*, 32, 529–530.
- [Chugonov and Mareev(2003)] Chugonov, Y., and E. Mareev (2003), Transmission of waves near the lower oblique resonance using dipoles in the ionosphere, *Radio Sci.*, 38, doi:10.1029/2001RS002531.
- [Chugonov et al.(2005 In press)Chugonov, Fiala, Soucek, and Santolik] Chugonov, Y., V. Fiala, J. Soucek, and O. Santolik (2005 In press), Noise induced on an electric antenna and its effective length in solar wind: Application to cluster observations, *Advances in Space Research*.
- [Dong(2002)] Dong, B. (2002), Three-dimensional electromagnetic wave polarizations in a plasma, *Radio Science*, 37, doi:10.1029/2001RS002496.
- [Edited by Moore and Pizer(1986)] Edited by Moore, J., and R. Pizer (1986), *Moment Methods in Electromagnetics*, Research Studies Press.
- [Eroglu and Lee(2003)] Eroglu, A., and J. Lee (2003), Dyadic green's function for a gyro-electric medium, *IEEE Transactions on Antennas and Propagation*.
- [Geng(2003)] Geng, Y. (2003), Analysis of electromagnetic scattering by a plasma anisotropic sphere, *Radio Science*, 38, doi:10.1029/2003RS002913.
- [Harrington(1968)] Harrington, R. (1968), *Field Computation by Moment Methods*, Robert E. Krieger Publishing Company.
- [Hwu et al.(1992)Hwu, Chen, and Arndt] Hwu, S., Q. Chen, and G. Arndt (1992), Near field predictions for the high power dipole antenna of the space shuttle wisp payload, *IEEE Transactions on Antennas and Propagation*.
- [Ishizone et al.(1974)Ishizone, Sawaya, Adachi, and Mushiake] Ishizone, T., K. Sawaya, S. Adachi, and Y. Mushiake (1974), Measurements of the transmitting and the receiving patterns of a dipole antenna for an electron plasma wave, *IEEE Transactions on Antennas and Propagation*, 22, 662–666.
- [Jackson(1981)] Jackson, J. (1981), *Klassische Elektrodynamik*, de Gruyter.
- [Kellogg(2001)] Kellogg, P. (2001), Antenna-plasma and antenna-spacecraft resistance on the wind spacecraft, *J. Geophys. Res.*, 106, 18,721–18,727.
- [Kim et al.(2004)Kim, Meinecke, and Breinbjerg] Kim, O., P. Meinecke, and O. Breinbjerg (2004), Method of moments solution of volume integral equations using higher-order hierarchical legendre basis functions, *Radio Science*, 39, doi:10.1029/2004RS003041.

-
- [Kippenhahn and Moellenhoff(1973)] Kippenhahn, R., and C. Moellenhoff (1973), *Elementare Plasmaphysik*, B.I.-Wissenschaftsverlag.
- [Klimontovich(1983)] Klimontovich, Y. (1983), *The Kinetic Theory of Electromagnetic Processes*, Springer Verlag.
- [Kolesnikova and Beghin(1998)] Kolesnikova, E., and C. Beghin (1998), Application of the surface-charge distribution method to the interpretation of impedance measurements of a rocket-borne dipole antenna, *Radio Science*, 33, 491–502.
- [Kraus and Marhefka(2002)] Kraus, J., and R. Marhefka (2002), *Antennas for all applications/ 3rd edition*, Mc Graw Hill.
- [Krill et al.(1982)Krill, Andreo, and Farrell] Krill, J., R. Andreo, and R. Farrell (1982), A computational alternative for variational expressions that involve dyadic green functions, *IEEE Transactions on Antennas and Propagation*, 30, 1003–1005.
- [Lai(1998)] Lai, S. (1998), A critical overview of measurement techniques of spacecraft charging in space plasma, *Measurement Techniques in Space Plasmas: Fields, Geophysical Monograph 119*.
- [Landau and Lifschitz(1967)] Landau, L., and E. Lifschitz (1967), *Elektrodynamik der Kontinua/ Lehrbuch der theoretischen Physik VIII*, Akademie Verlag Berlin.
- [Langenberg(2003)] Langenberg, K. (2003), A thorough look at the nonuniqueness of the electromagnetic scattering integral equation solutions as compared to the scalar acoustic ones, *Radio Science*, 38, doi: 10.1029/2001RS002558.
- [Li et al.(2001)Li, Leong, and Huang] Li, L., M. Leong, and Y. Huang (2001), Electromagnetic padiation of antennas in the presence of an arbitrarily shaped dielectric object: Green dyadics and their applications, *IEEE Transactions on Antennas and Propagation*, 49.
- [Lin and Mei(1968)] Lin, S., and K. Mei (1968), Numerical solution of dipole radiation in a compressible plasma, *IEEE Transactions on Antennas and Propagation*, 16, 235–241.
- [Linh and Nachman(1990)] Linh, N., and M. Nachman (1990), Excitation of the half-frequency of the input signal in the response of an antenna immersed in a plasma, *IEEE Transactions on Plasma Science*, 18, 717–724.
- [Lonngren and Savov(2005)] Lonngren, K., and V. Savov (2005), *Fundamentals of Electromagnetics with Matlab*, Scitech Publishing, Inc.
- [Manning(2000)] Manning, R. (2000), Instrumentation for space-based low frequency radio astronomy, *AGU Geophysical Monograph, Nr. 119*.
- [Marin(1992)] Marin, M. (1992), An asymptotic closed-form representation for the grounded double-layer surface green's function, *IEEE Transactions on Antennas and Propagation*, 40, 1357–1366.

-
- [Mathews and Walker(1970)] Mathews, J., and R. Walker (1970), *Mathematical Methods of Physics*, The Benjamin/Cummings Publishing Company.
- [Matin et al.(1982)Matin, Mushiake, Ishizone, and Sawaya] Matin, A., Y. Mushiake, T. Ishizone, and K. Sawaya (1982), Radiation from a small monopole in a uniaxially anisotropic plasma, *IEEE Transactions on Antennas and Propagation*, 30.
- [Mehanee and Zhdanov(2005)] Mehanee, S., and M. Zhdanov (2005), A quasi-analytical boundary condition for three-dimensional finite difference electromagnetic modeling, *Radio Science*, 39, doi:10.1029/2004RS003029.
- [Meyer(1973)] Meyer, P. (1973), Current distribution on a cylindrical antenna in a plasma, *IEEE Transactions on Antennas and Propagation*, pp. 102–104.
- [Meyer-Vernet et al.(1998)Meyer-Vernet, Hoang, Issautier, Maksimovic, Manning, and Moncuquet] Meyer-Vernet, N., S. Hoang, K. Issautier, M. Maksimovic, R. Manning, and M. Moncuquet (1998), Measuring plasma parameters with thermal noise spectroscopy, *AGU Geophysical Monograph*, Nr. 103.
- [Michielsen and Flachetti(2005)] Michielsen, B., and C. Flachetti (2005), Covariance operators, green functions, and canonical stochastic electromagnetic fields, *Radio Science*, 40, doi:10.1029/2004RS003086.
- [Moncuquet et al.(2000)] Moncuquet, H., et al. (2000), The radio waves & thermal electrostatic noise spectroscopy (sorbet) experiment on bepi-columbo/mmo/pwi: Scientific objectives and performance, *Advances in Space Research*.
- [Nevels(2004)] Nevels, R. (2004), The time domain green's function and propagator for maxwell's equation, *IEEE Transactions on Antennas and Propagation*, 52.
- [Nikitin and Swenson(2001)] Nikitin, P., and C. Swenson (2001), Impedance of a short dipole antenna in a cold plasma, *IEEE Transactions on Antennas and Propagation*, 49.
- [Ohnuma(1994)] Ohnuma, T. (1994), *Radiation Phenomena in Plasma*, World Scientific Publishing Co. Pte. Ltd.
- [Olyslager and Derudder(2003)] Olyslager, F., and H. Derudder (2003), Series representation of green dyadics for layered media using pmls, *IEEE Transactions on Antennas and Propagation*, 51, 2319–2326.
- [Oswald(2005)] Oswald, T. (2005), Electromagnetic waves in space and the stereo/waves experiment, Master's thesis, Universitaet Graz, Technische Universitaet Graz.
- [Oswald et al.(2005)Oswald, Macher, Fischer, Rucker, Bougeret, Kaiser, and Goetz] Oswald, T., W. Macher, G. Fischer, H. Rucker, J. Bougeret, M. Kaiser, and K. Goetz (2005), Numerical analysis of the stereo waves antennas: first results, in *Proc. Planetary radio emission workshop VI, Graz*, Austrian Academy of Sciences Press, Vienna.

-
- [Pathak(1983)] Pathak, P. (1983), On the eigenfunction expansion of electromagnetic dyadic green's functions, *IEEE Transactions on Antennas and Propagation*, 31.
- [Pathak(1999)] Pathak, P. (1999), New techniques for analysis/synthesis of electrically large satellite antennas, in *Proceedings of the IEEE*, pp. 475–477, IEEE.
- [Richie and Gangl(1995)] Richie, J., and R. Gangl (1995), Efeimf hybrid simulation using nec: Vswr for the wisp experiment, *IEEE Transactions on Antennas and Propagation*, 37.
- [Richmond(1966)] Richmond, J. (1966), A wire-grid model for scattering by conducting bodies, *IEEE Transactions on Antennas and Propagation*, 14, 782–786.
- [Rucker et al.(2005)] Rucker, Macher, Fischer, Oswald, Bougeret, Kaiser, and Goetz] Rucker, H., W. Macher, G. Fischer, T. Oswald, J.-L. Bougeret, M. Kaiser, and K. Goetz (2005), Analysis of spacecraft antenna systems: Implications for stereo/waves, *Adv. Space Res.*, 36, 1530–1533, doi: 10.1016/j.asr.2005.07.060.
- [Rucker(2003)] Rucker, H. O. (2003), Physik der magnetosphäre i, lehrskriptum des Institutes fuer Geophysik, Astrophysik und Meteorologie, Universitaet Graz.
- [Schmidt(1979)] Schmidt, G. (1979), *Physics of High Temperature Plasmas*, Academic Press, inc.
- [Sharkawy et al.(2005)] Sharkawy, Demir, and Elsherbeni] Sharkawy, M., V. Demir, and A. Elsherbeni (2005), Iterative multiregion technique for large-scale electromagnetic scattering problems: Two-dimensional case, *Radio Science*, 40, doi:10.1029/2004RS003175.
- [Singh(1974)] Singh, N. (1974), Fields of an electric dipole perpendicular to a magnetostatic field in a hot plasma, *IEEE Transactions on Antennas and Propagation*, pp. 505–507.
- [Sitenko(1967)] Sitenko, A. (1967), *Electromagnetic fluctuations in plasma*, Academic Press, inc.
- [Staelin et al.(1994)] Staelin, Morgenthaler, and J.Kong] Staelin, D., A. Morgenthaler, and J.Kong (1994), *Electromagnetic Waves*, Prentice Hall.
- [Stakgold(1979)] Stakgold, I. (1979), *Green's Functions and Boundary Value Problems*, John Wiley & Sons.
- [Staras(1964)] Staras, H. (1964), The impedance of an electric dipole in a magneto-ionic medium, *IEEE Transactions*.
- [Stix(1992)] Stix, T. (1992), *Waves in Plasmas*, American Institute of Physics.
- [Swanson(1989)] Swanson, D. (1989), *Plasma Waves*, Academic Press, inc.

-
- [Tai(1964)] Tai, C. (1964), A study of electrodynamics of moving media, in *Proceedings of the IEEE*, pp. 685–689, IEEE.
- [Tai(1981)] Tai, C. (1981), Comments on "electric dyadic green's functions in the source region", in *Proceedings of the IEEE*, vol. 69, pp. 282–285, IEEE.
- [Tai(1994)] Tai, C. (1994), Vector green functions versus dyadic green functions, *Technical Report of the Department of Electrical Engineering and Computer Science/University of Michigan*, RL 910.
- [Walker(1993)] Walker, A. (1993), *Plasma Waves in the Magnetosphere*, Springer Verlag.
- [Wang and Wang(1972)] Wang, T., and T. Wang (1972), Radiation resistance of small electric and magnetic antennas in cold uniaxial plasma, *IEEE Transactions on Antennas and Propagation*.
- [Ward et al.(2005) Ward, Swenson, and Furse] Ward, J., C. Swenson, and C. Furse (2005), The impedance of a short dipole antenna in a magnetized plasma via a finite difference time domain model, *IEEE Transactions on Antennas and Propagation*, 53.
- [Weiglhofer(1986)] Weiglhofer, W. (1986), The representation of electromagnetic fields in anisotropic media in terms of dyadic green's functions, Ph.D. thesis, Technical University of Graz.
- [Wu(2003)] Wu, C. (2003), Radiation from dipoles in a magneto-ionic medium, *IEEE Transactions on Antennas and Propagation*.
- [Zhian et al.(2004) Zhian, Yan, Bo, and Deyuan] Zhian, Q., C. Yan, W. Bo, and S. Deyuan (2004), A new approach to dyadic green's function problem of a field vector, in *4th International Conference on Microwave and Millimeter Wave Technology Proceedings*, pp. 347–356.

ABBILDUNGSVERZEICHNIS

2.1	Logarithmic plot of Electron or proton number density	6
2.2	Debye length of electrons (blue) and protons (red)	6
2.3	Plasma parameter	7
2.4	Logarithmic plot of Interplanetary magnetic field	7
2.5	Plasma Frequency	8
2.6	Plasma Frequency	8
2.7	Plasma Frequency	9
2.8	Logarithmic plot of the Plasma Conductivity	9
2.9	Logarithmic plot of the Plasma Beta	10
2.10	Mean free path	10
2.11	Mean free path	12
2.12	Mean free path	12
2.13	Logarithmic plot of the Cyclotron frequency for electrons	13
2.14	Logarithmic plot of the Cyclotron frequency for protons	13
4.1	Thermal noise spectrum	16
8.1	Maxwell Distribution	50
8.2	Derivative of Maxwell Distribution	51
8.3	Denominator of the integral: $\omega/k=3$	51
8.4	Maxwell Distribution and the denominator of the integral kernel	55
8.5	Maxwell Distribution of two fluids and the denominator of the integral kernel	55
8.6	Combined Maxwell Distribution of two fluids and the denomina- tor of the integral kernel	56
15.1	Frequency range of the expected plasma waves measured by Bepi Colombo	94

TABELLENVERZEICHNIS

2.1	Range of basic plasma parameters	3
9.1	MHD Wave zoology	58
9.2	MHD Wave zoology 2	58
9.3	Kinetic Wave zoology	58
9.4	Kinetic Wave zoology 2	59