


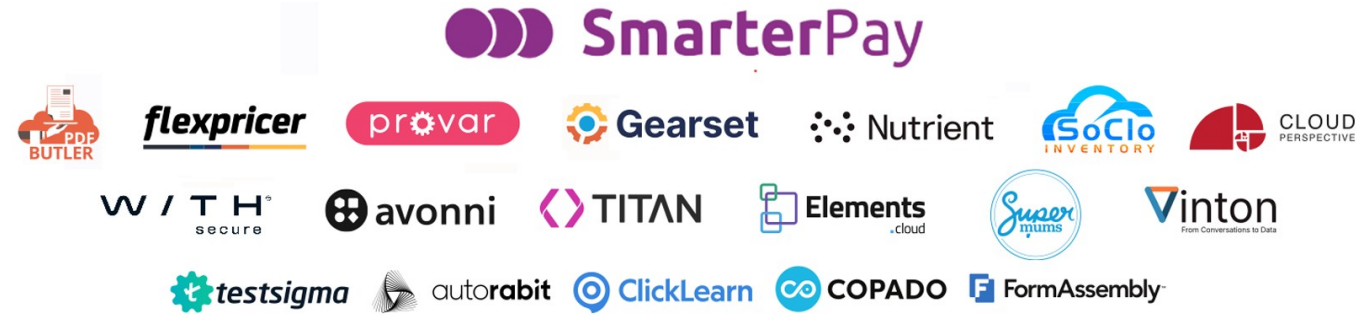

Scaling Apex and LWC with Apex Cursors

Andrew Fawcett, AndyInTheCloud Consulting Ltd

andy@andyinthecloud.com


<https://www.linkedin.com/in/andyfawcett/>

#LDNsCall #LC26



Accessing and processing datasets today in SOQL


UI paging with OFFSET/LIMIT vs async processing in fixed-size chunks.

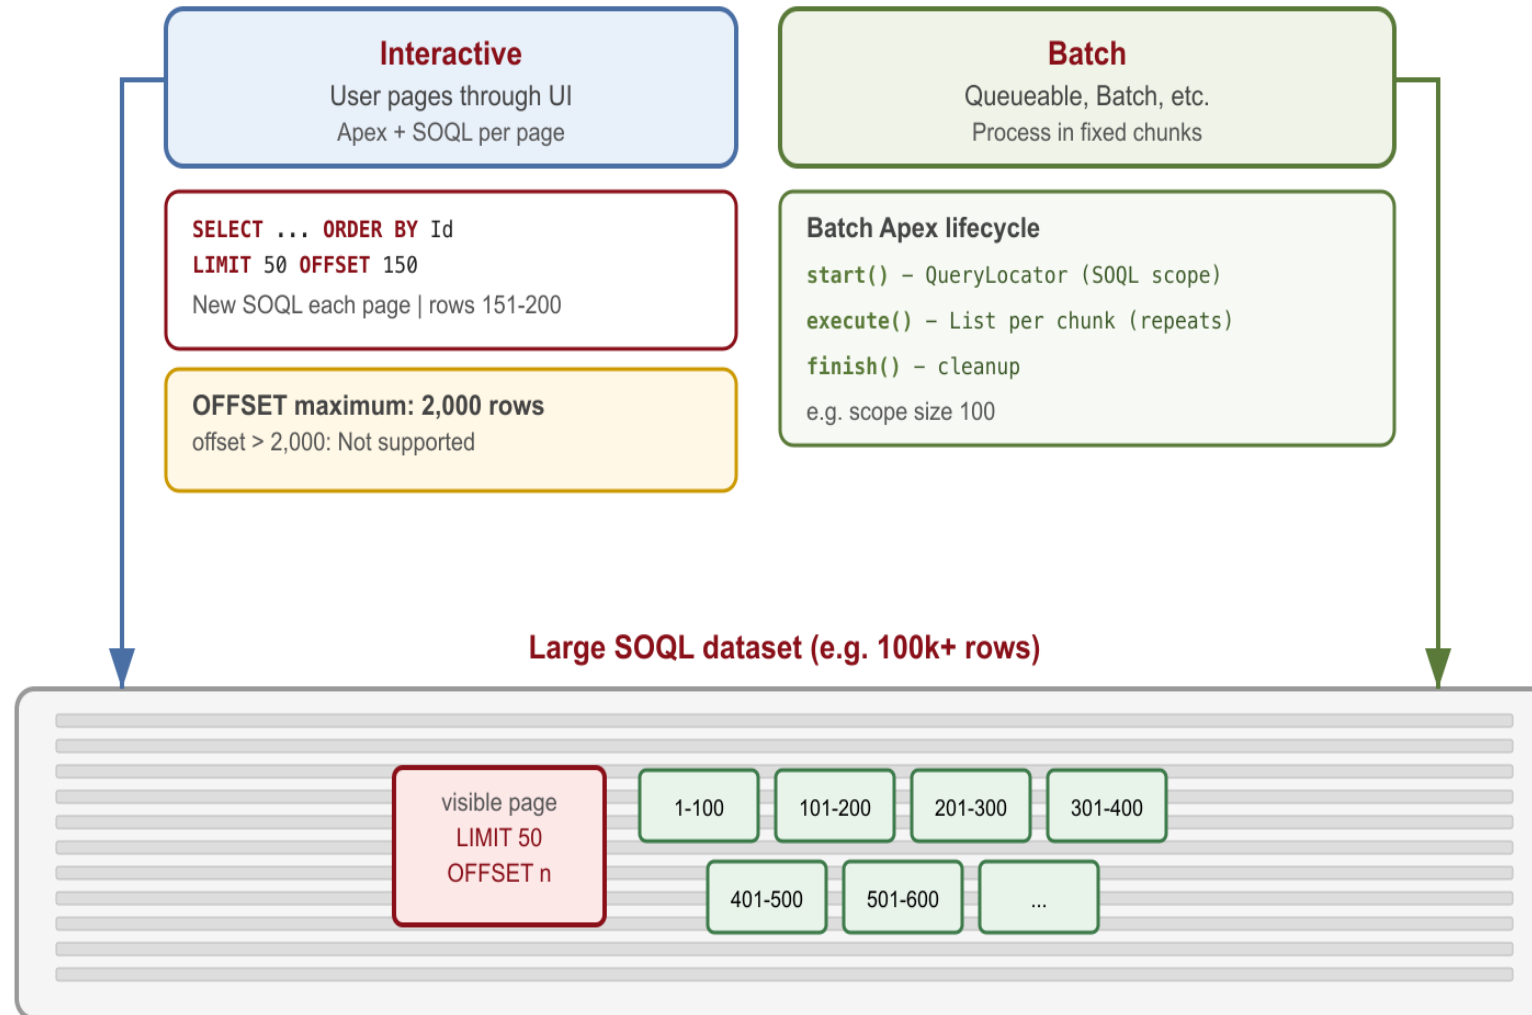

What is a SQL Cursor?

Traverse a query result incrementally instead of returning the full set at once.

1. One declared result set - position moves along rows

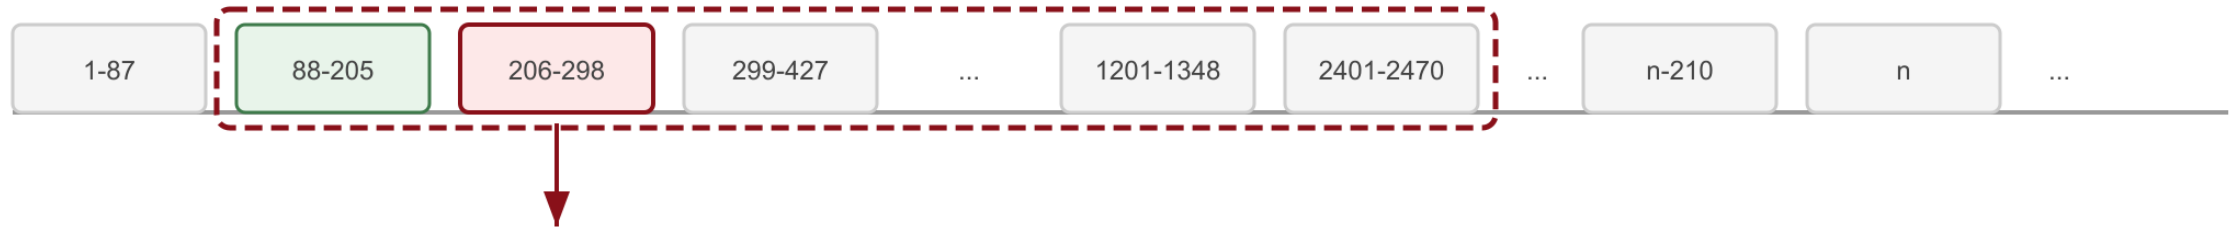

2. Lifecycle pattern (SQL statements)

- 1 **DECLARE** c **CURSOR FOR** <select>;
Defines query scope
- 2 **OPEN** c;
Before first row
- 3 **FETCH ... FROM** c **INTO** ...;
NEXT, PRIOR, ABSOLUTE...
- 4 **CLOSE** c;
Release resources
- 5 **DEALLOCATE** c; (some products)
Drop definition

Example

```
DECLARE account_cur CURSOR FOR
SELECT id, name FROM accounts
WHERE active ORDER BY id;

OPEN account_cur;
FETCH NEXT FROM account_cur ...
CLOSE account_cur;
```

3. Access patterns (how you read rows)

Forward-only cursor (typical default)

FETCH NEXT – one row forward
Most common in ETL / streaming loops

Scrollable cursor (when supported)


FETCH NEXT | PRIOR | FIRST | LAST
FETCH ABSOLUTE n | **FETCH RELATIVE** n
Jump relative to start or current position (product-dependent)



What is a SOQL Cursor?

SQL cursor concepts on Salesforce: Database.getCursor(SOQL) and incremental fetch in Apex.

1. One SOQL result set - position moves along rows

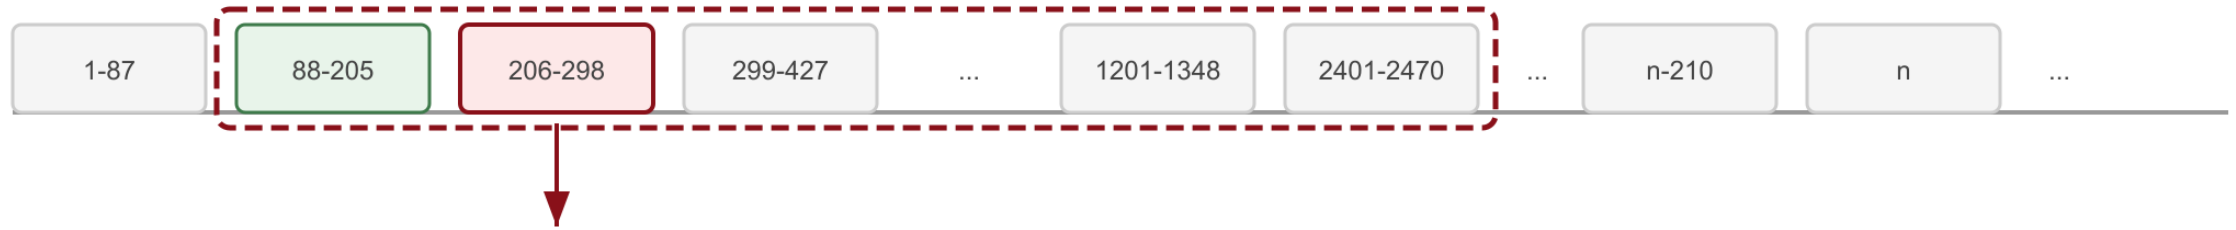

2. Lifecycle pattern (Apex API)

- 1 **Database.getCursor(soql);**
Or PaginationCursor
- 2 **cursor.getNumRecords();**
Optional row count
- 3 **cursor.fetch(offset, count);**
Repeat until done
- 4 Hold cursor: LWC or Cache
Available across requests
- 5 Governed by Limits.*ApexCursor*
Apex cursor limits

Example (this repo)

```
Database.Cursor c =
Database.getCursor(
'SELECT Id, Name FROM Account
WHERE Name LIKE 'TEST%'
ORDER BY Name',
AccessLevel.USER_MODE);
List<Account> batch =
c.fetch(offset, pageSize);
```

3. Access patterns (how you read rows)

Database.Cursor

fetch(offset, count)
Forward by offset into scope (infinite scroll)

Database.PaginationCursor

fetchPage(start, pageSize)
Page-oriented access; CursorFetchResult

position in scope

0-99 100-199 ... 200-299

fetch(200, 100) = rows 200-299

Usecases for Apex Cursors

Optimial handling of larger data volumes

Interactive

- Data Analyst tools and views
- End user list views, reporting and drilldown
- Preview job records to process

```
apex>  
Database.PaginationCursor c =  
    Database.getPaginationCursor(  
        soql, AccessLevel.USER_MODE);  
Database.CursorFetchResult r =  
    c.fetchPage(start, pageSize);
```

Batch

- Orchestrate process execution
- Look ahead to optimize within limits
- Safer immutable record set

```
apex>  
Database.Cursor c =  
    Database.getCursor(  
        soql, AccessLevel.USER_MODE);  
List<Account> batch =  
    c.fetch(offset, pageSize);
```

Architecture

24hr cached large record sets | Scalable replacement to SOQL OFFSET | Bidirectional navigation

Demo 1: Virtual Data Table



Infinite Loading

Refresh

Standard Cursor

Pagination Cursor

☐ Use Session Cache

	Account Name	Industry	Type	Billing City	Phone
1	TEST_Acme_Alliance_00234_1779980748800	Hospitality	Other	TEST City 34	+1-555-334-1234
2	TEST_Acme_Alliance_00494_1779980749060	Hospitality	Other	TEST City 94	+1-555-594-1494
3	TEST_Acme_Alliance_00754_1779980749320	Hospitality	Other	TEST City 54	+1-555-854-1754
4	TEST_Acme_Alliance_01014_1779980749580	Hospitality	Other	TEST City 14	+1-555-214-2014
5	TEST_Acme_Alliance_01274_1779980749840	Hospitality	Other	TEST City 74	+1-555-474-2274
6	TEST_Acme_Alliance_01534_1779980750100	Hospitality	Other	TEST City 34	+1-555-734-2534
7	TEST_Acme_Alliance_01794_1779980750360	Hospitality	Other	TEST City 94	+1-555-994-2794

Debug Info

Loaded Records: 50

Total Records: 5000

Has More: true

Cursor Type: Pagination Cursor

Using Session Cache: false

Deleted Rows Skipped: 0

Limits Info

TRANSACTION

Standard Cursors: 0/50

Standard Cursor Rows: 0/50000000

Pagination Cursors: 1/50

Pagination Cursor Rows: 5000/100000

Fetch Calls: 1/100

DAILY (ORG)

Daily Standard Cursors: 0/10000

Daily Pagination Cursors: 7/200000

Daily Cursor Rows: 47423/100000000

Demo 1: Virtual Data Table Summary

1

```
apex>  
cursor = Database.getCursor(  
    ACCOUNT_SOQL,  
    AccessLevel.USER_MODE);  
pageCursor =  
    Database.getPaginationCursor(  
        ACCOUNT_SOQL,  
        AccessLevel.USER_MODE);
```

2


```
apex>  
if (pageCursor == null) {  
    pageCursor = Database.getPaginationCursor(  
        ACCOUNT_SOQL, AccessLevel.USER_MODE);  
    Cache.Session.put(  
        SESSION_PAGINATION_CURSOR_KEY,  
        pageCursor);  
}
```

3

```
apex>  
Integer remaining = totalRecords - start;  
Integer fetchSize = remaining > 0  
    ? Math.min(pageSize, remaining) : 0;  
fetchResult = fetchSize > 0  
    ? pageCursor.fetchPage(start, fetchSize)  
    : null;
```

- Standard Cursor or PaginationCursor — same ACCOUNT_SOQL, different paging APIs
- Optional Cache.Session keeps the pagination cursor across user session
- Page size is capped to remaining rows in the result set
- Limits panel shows cursor, fetch, and daily governor usage

Demo 2: Interactive Reporting and Drilldown

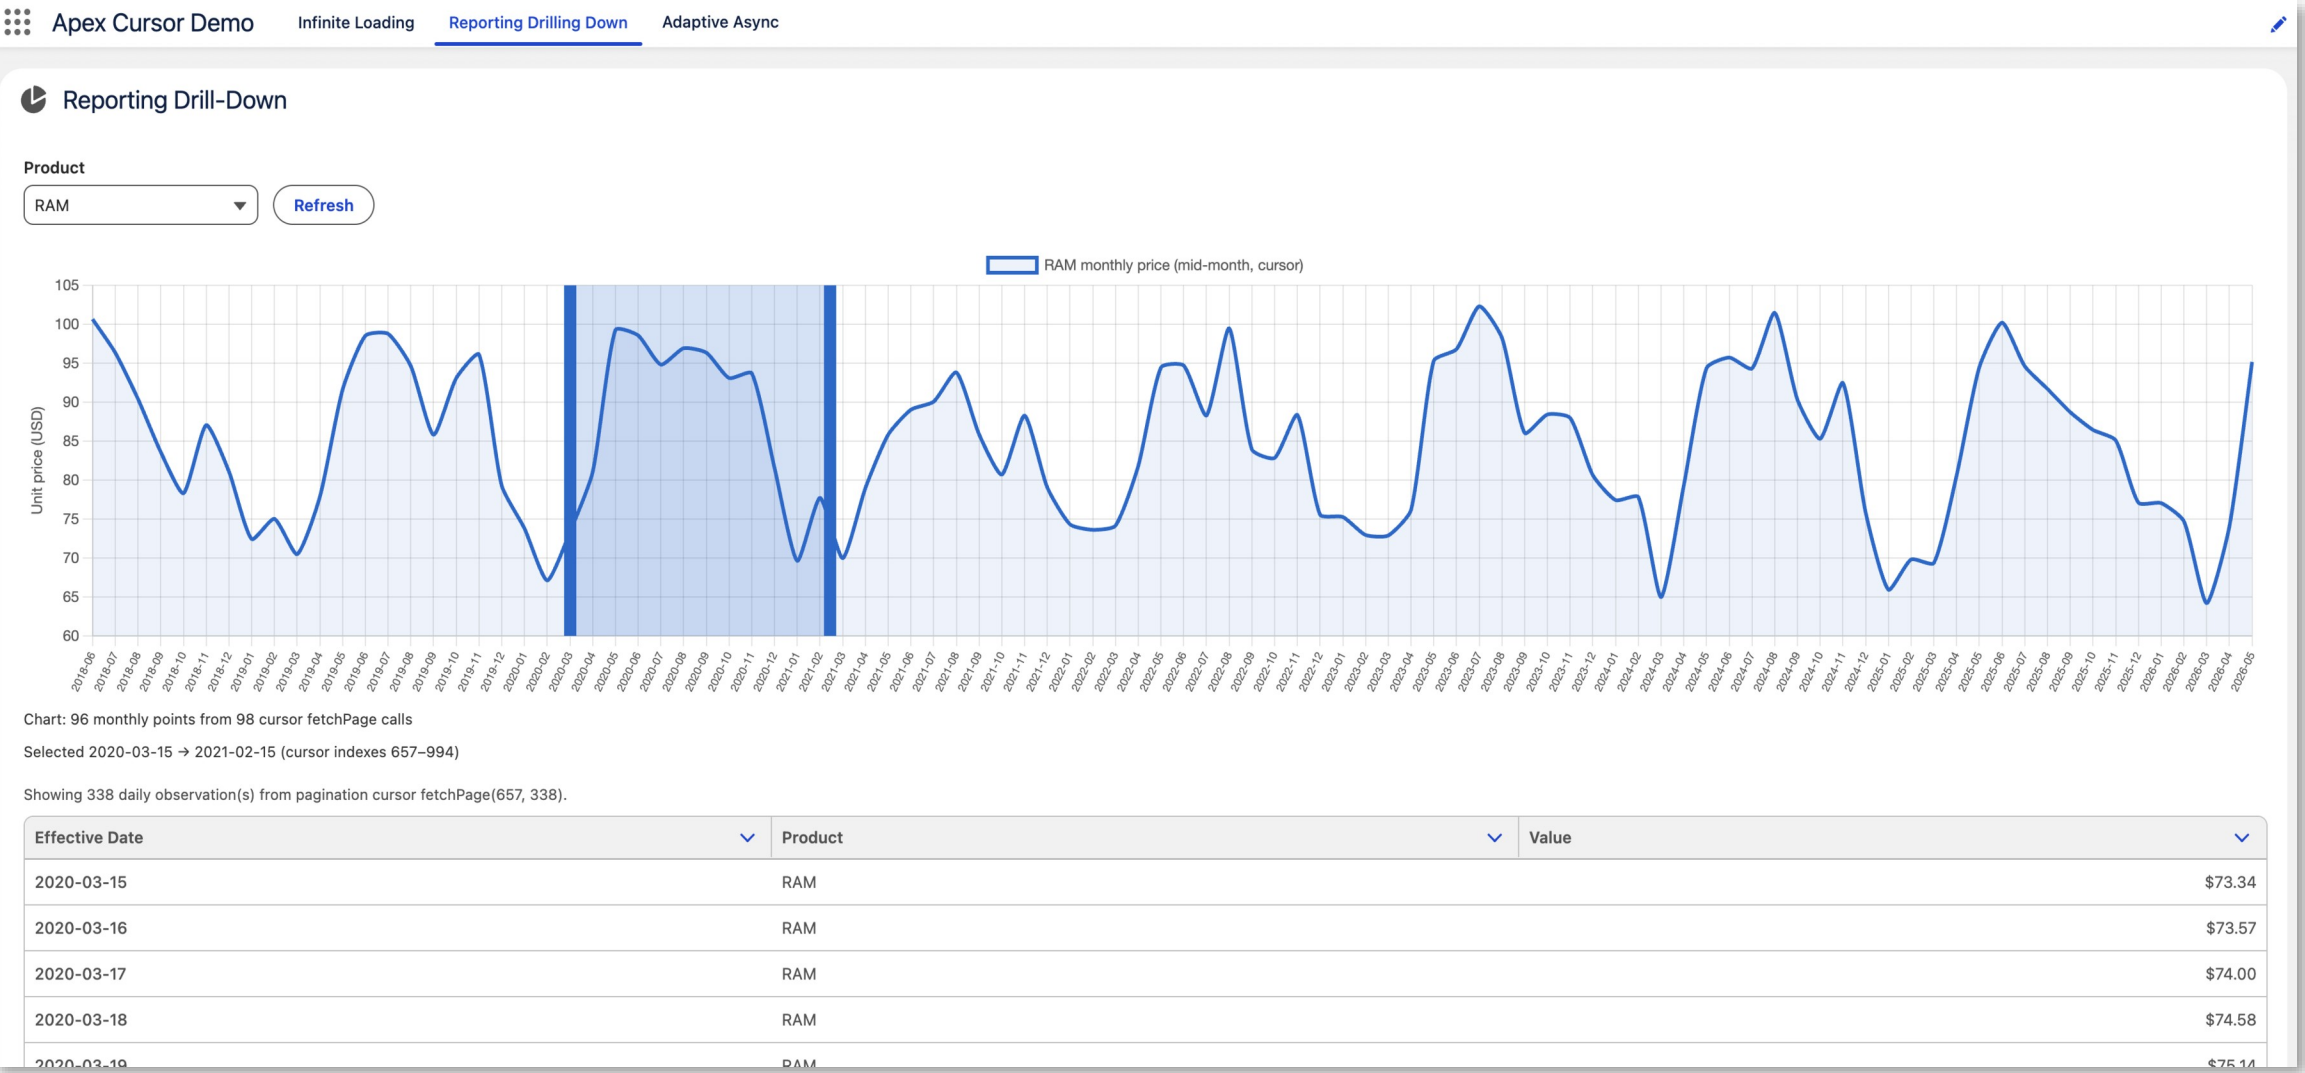

Demo 2: Interactive Reporting and Drilldown Summary

1

```
sql>  
SELECT Id, EffectiveDate__c,  
       Value__c, Product__c  
FROM UnitPriceObservation__c  
WHERE Product__c = :product  
ORDER BY EffectiveDate__c ASC
```

2

```
apex>  
Database.CursorFetchResult  
midChunk =  
    pageCursor.fetchPage(dayIndex, 1);
```

3

```
apex>  
Database.CursorFetchResult  
drilldownRecords =  
    pageCursor.fetchPage(  
        drillStart, drillSize);
```

- PaginationCursor builds the monthly chart with one fetchPage per month
- Session cache keeps the cursor for brush-selection drill-down
- Index-based fetchPage maps chart range to daily observation rows
- fetchPage reports deleted rows when underlying data changes

Demo 3: Adaptive Async




Adaptive Async

Start run

External_Id__c

1500 demo order(s) · max 100 HTTP callouts/chunk

Run: cf5fc5b7-6574-4f2c-be8a-1bab0b3700bf 1500 / 1500 orders (100%) · chunk 5

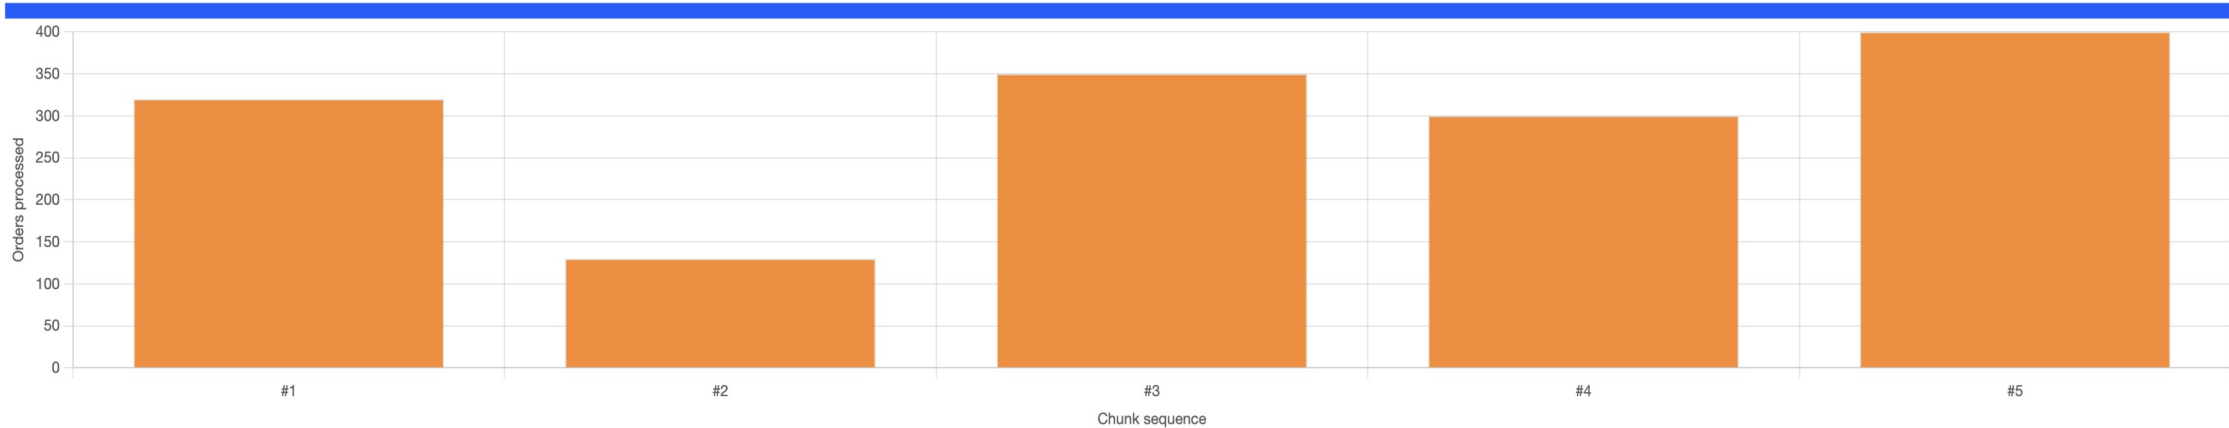

Run complete after 5 chunk(s).

Chunk telemetry (5 events)

Seq	Planned	Processed	Callouts	Success	Job Id	Error
1	320	320	100	Yes	707De000031kno8IAA	
2	130	130	100	Yes	707De000031knmjIAA	
3	350	350	100	Yes	707De000031knkDIAQ	
4	300	300	100	Yes	707De000031knhzIAA	
5	400	400	100	Yes	707De000031knl3IAA	

Demo 3: Adaptive Async Summary

1

```
apex>
Database.Cursor cursor =
  Database.getCursor(
    soql,
    AccessLevel.USER_MODE);
System.enqueueJob(
  new AdaptiveOrderWorkerQueueable(
    runId, cursor, 1), options);
```

2

```
apex>
Integer rowCalloutsRequired =
  rowCalloutsFor(row);
Boolean canProcessRow =
  rowCalloutsRequired == 0 ||
  scope.predictedCallouts +
  rowCalloutsRequired <= calloutBudget;
```

3

```
apex>
if (Limits.getFetchCallsOnApexCursor() >=
  Limits.getLimitFetchCallsOnApexCursor()) {
  return scope;
}
```

- One cursor opened in Apex and passed through chained queueable jobs
- Chunk size adapts to remaining HTTP callout budget per transaction
- Track fetch limits dynamically via `Limits.getFetchCallsOnApexCursor`
- Cursor position travels on the job state

Usage Best Practices

Stable ORDER BY

```
apex>  
'SELECT ... FROM Account  
  WHERE Name LIKE 'TEST%'  
  ORDER BY Name',  
  AccessLevel.USER_MODE);
```

Sort on a unique, stable key.
Keeps offsets and page indexes predictable.

Guard number of records

```
apex>  
if (cursor.getNumRecords() == 0) {  
  return result;  
}
```

Exit early when the result set is empty.
fetch(0, 0) can throw a GACK.

Cap fetchPage size

```
apex>  
pageSize = Math.min(  
  PAGE_SIZE,  
  pc.getNumRecords()  
  - startIndex);
```

Do not request rows past the result set end.
Critical for partial last pages.

Retry transient errors

```
apex>  
{ catch (System.  
  TransientCursorException e) {  
  if (++retries <= MAX)  
    return retry();
```

TransientCursorException may be retried.
Do not retry FatalCursorException.

Cursor returns to LWC

```
apex>  
@AuraEnabled  
public static Result load(...) {  
  result.cursor = cursor;  
  return result;
```

Cursors are Aura-serializable.
Return on @AuraEnabled result.

Check for latest security changes

```
apex>  
[SELECT Id FROM Account  
  WHERE Id IN :ids  
  WITH USER_MODE];  
cursor = Database.getCursor(
```

Fetch does not re-evaluate security, per Batch
Apex. If critical query changes.

Limits



Limit	Pagination	Standard
Per transaction (each Apex request)		
Cursor instances open	50	50
Rows across all cursors in txn	100,000	50,000,000
Fetch calls (shared)	100	100
Per pagination fetchPage call		
Max rows per page	2,000	—
Per org (rolling 24 hours)		
Cursor instances opened	200,000	10,000
New rows fetched (shared)	100,000,000	100,000,000

- Transaction limits apply to each Apex request; daily limits roll per org over 24 hours.
- Fetch calls and daily row counts are shared across standard and pagination cursors.
- Cursors expire like API query cursors — see API Query Cursor Limits in Salesforce Help.

Other Use Cases

Cursor patterns beyond the three demos



Records to Process Adjustment

Present records to process and let users deselect rows.
Pass the cursor and row indexes to ignore into the job.



Point in Time Reporting

Snapshot a record-set selection for the user session.



Repeatable Datasets

Retry processing against the exact original record set.



Simple Queue

Create task records and delete when complete — until cursor rows reach zero.



 SmarterPay



flexpricer

provar

Gearset

Nutrient

SoClo
INVENTORY

CLOUD
PERSPECTIVE

W / T H
secure

avonni

TITAN

Elements
.cloud

Super
mums

Vinton
From Conversations to Data

testsigma

autorabit

ClickLearn

COPADO

FormAssembly

Q&A




#LDNsCall #LC26

Andrew Fawcett

andy@andyinthecloud.com | LinkedIn

[View Session Resources](#)



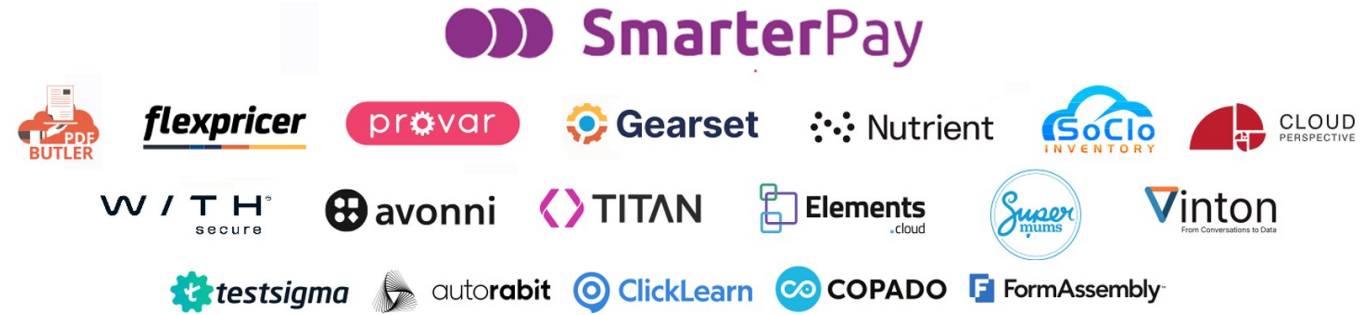

Thank You

Andrew Fawcett

andy@andyinthecloud.com | LinkedIn

#LDNsCall #LC26

