

000
001
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
018
019
020
021
022
023
024
025
026
027
028
029
030
031
032
033
034
035
036
037
038
039
040
041
042
043
044
045
046
047
048
049
050
051
052
053

Optimal independence tests for Bayesian Networks

Anonymous Author(s)
Affiliation
Address
email

Abstract

1 Introduction

Learning Bayesian networks for general distributions is intractable task Chickering [1996]. However, in practise for distributions appearing in real data, still we are able to recover Bayesian network structure. This implies that real data distribution has some special properties, which simplify process of structure recovery. This process is almost always based on computation local statistics, and then reasoning about global structure Jaakkola et al. [2010]; Tsamardinos et al. [2006]. Local statistics describe complexity (e.g. number of parameters in case of BIC), and level of independence between nodes (e.g. mutual information tests, conditional independence tests). We focus in this work on improvement of independence tests by learning it for CPDs present in data.

We consider parameterized family of independence tests. Before inferring about structure of Bayesian network, we tune classifier predict independence or dependence on CPDs present in data. This way, we obtain highly sensitive independence test, which fires on dependence or independence phenomenas present in our data.

2 Related work

Independence tests used in Bayesian networks

- Schäfer and Strimmer [2005] Here they learn a Gaussian Graphical Model (GGM) using estimates of the partial correlation matrix.
- Opgen-Rhein and Strimmer [2007] Here they learn an approximate causal structure on gene expression based on full-order partial correlation (as an approximation to lower-order partial correlation that is called for theoretically for a Bayesian network).
- Tsamardinos et al. [2006] MMHC algorithm. They use a test based on what is called the G^2 statistic (asymptotically distributed as χ^2) and they also talk about a couple other independence tests that we may want to look into.

There has been extensive research in area of scoring functions for Bayesian networks. This step is critical to recover no-complete graph structure. Without any scoring function, log-likelihood term would force optimization to choose fully connected graph. There have been proposed few regularizations (scoring functions) to address this problem. One most widely used is Bayesian Information Criterion (BIC) Schwarz et al. [1978]. Variety of such scoring functions calculate dependency between nodes conditioned on potential parents De Campos [2006]. Usual measures of dependency are based on mutual information, conditional independence test, or are fully Bayesian. Fully Bayesian methods assume probability distribution over CPDs of independent variables, and dependent variables.

We should discuss:

- LL (Log-likelihood) (1912-22)
- MDL/BIC (Minimum description length/Bayesian Information Criterion) (1978)
- AIC (Akaike Information Criterion) (1974)
- NML (Normalized Minimum Likelihood) (2008)
- MIT (Mutual Information Tests) (2006)

Use in Bayesian networks Schäfer and Strimmer [2005]

Existing independence tests:

- Pearson's χ -squared. The problem is the null hypothesis is independence, but independence is what we're trying to show.

Margaritis [2003]

3 Independence testing

Manifold of Independence

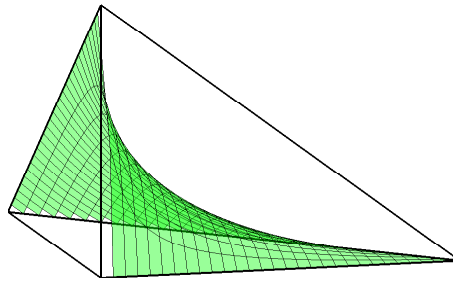


Figure 1: A

3.1 Discrete variables formulation

3.2 Continuous variables formulation

4 Experiments

4.1 Classification of Synthetic CPDs

We generated distributions from toy Bayesian networks.

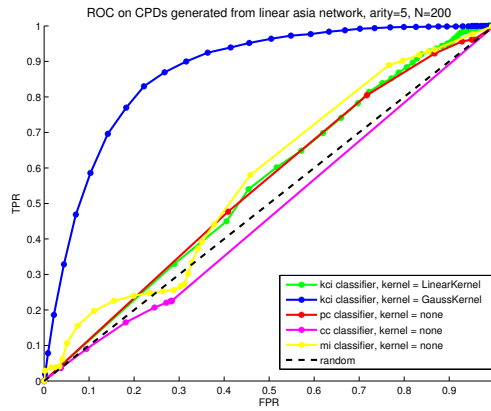


Figure 2: A

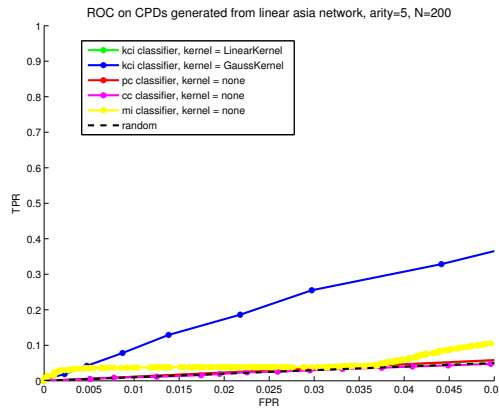


Figure 3: A

4.2 Classification of CPDs from Gene Expression

4.3 Synthetic Bayesian networks

4.4 Gene expression data

5 Discussion

References

- D. M. Chickering. Learning bayesian networks is np-complete. In *Learning from data*, pages 121–130. Springer, 1996.
- L. M. De Campos. A scoring function for learning bayesian networks based on mutual information and conditional independence tests. *The Journal of Machine Learning Research*, 7:2149–2187, 2006.
- T. Jaakkola, D. Sontag, A. Globerson, and M. Meila. Learning bayesian network structure using lp relaxations. In *International Conference on Artificial Intelligence and Statistics*, pages 358–365, 2010.
- D. Margaritis. *Learning Bayesian network model structure from data*. PhD thesis, University of Pittsburgh, 2003.
- R. Opgen-Rhein and K. Strimmer. From correlation to causation networks: a simple approximate learning algorithm and its application to high-dimensional plant gene expression data. *BMC systems biology*, 1(1): 37, 2007.

162 J. Schäfer and K. Strimmer. An empirical bayes approach to inferring large-scale gene association networks.
163 *Bioinformatics*, 21(6):754–764, 2005.

164 G. Schwarz et al. Estimating the dimension of a model. *The annals of statistics*, 6(2):461–464, 1978.

165 I. Tsamardinos, L. E. Brown, and C. F. Aliferis. The max-min hill-climbing bayesian network structure learning
166 algorithm. *Machine learning*, 65(1):31–78, 2006.

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215