



HTML

CSS

Java Script

Web Design and Development I

Mohammad Zafar Shafaq



Agenda

CSS Basics
Selectors


CSS - SCROLLBARS

CSS provides a property called *overflow*, which tells the browser what to do if the box's contents are larger than the box itself. This property can take one

Sr.No.	Value & Description
1	Visible Allows the content to overflow the borders of its containing element.
2	Hidden The content of the nested element is simply cut off at the border of the containing element and no scrollbars is visible.
3	Scroll The size of the containing element does not change, but the scrollbars are added to allow the user to scroll to see the content.
4	Auto The purpose is the same as scroll, but the scrollbar will be shown only if the content does overflow.



CSS - SCROLLBARS



DEMO-1

CSS – CURSORS


The *cursor* property of CSS allows you to specify the type of cursor that should be displayed to the user.

Sr.No	Value & Description
1	Auto Shape of the cursor depends on the context area it is over. For example an I over text, a hand over a link, and so on...
2	Crosshair A crosshair or plus sign
3	Default An arrow
4	Pointer A pointing hand (in IE 4 this value is hand)
5	Move The I bar

CSS – CURSORS




	e-resize	The cursor indicates that an edge of a box is to be moved right (east)
7	ne-resize (north/east)	The cursor indicates that an edge of a box is to be moved up and right
8	nw-resize (north/west)	The cursor indicates that an edge of a box is to be moved up and left
9	n-resize	The cursor indicates that an edge of a box is to be moved up (north)
10	se-resize (south/east)	The cursor indicates that an edge of a box is to be moved down and right
11	sw-resize (south/west)	The cursor indicates that an edge of a box is to be moved down and left
12	s-resize	The cursor indicates that an edge of a box is to be moved down (south)
13	w-resize	The cursor indicates that an edge of a box is to be moved left (west)
14	Text	The I bar
15	Wait	An hour glass





CSS – CURSORS



DEMO-2




CSS BORDER

border-width: used to set the width of border








border-style: used to set the style of border


border-color: used to set the color of border

border-image: linear-gradient(to right, red 20%, green 20%, green 40%, blue 40%, blue 60%, maroon 60%, maroon 80%, chocolate 80%);



BORDER STYLES

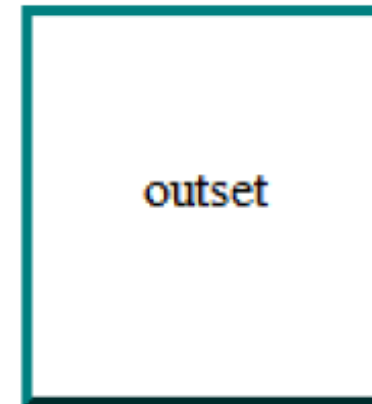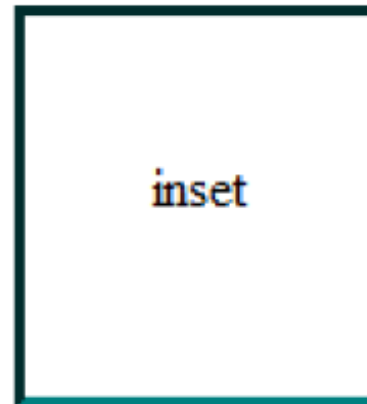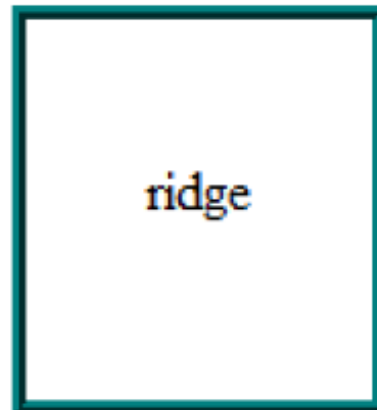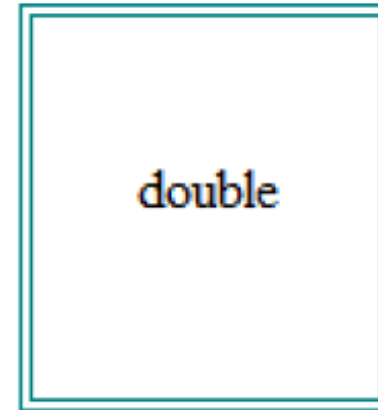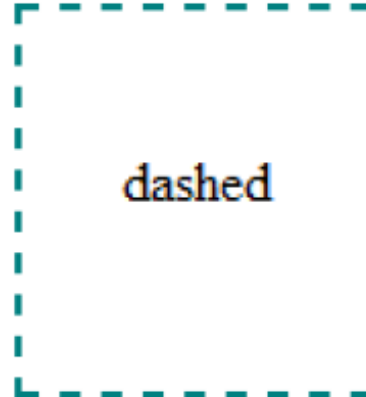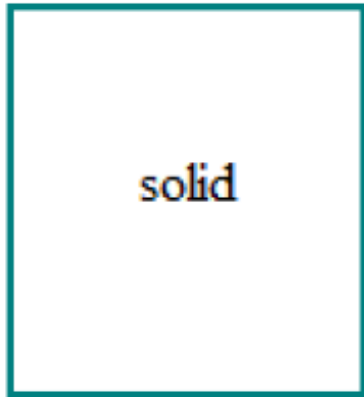

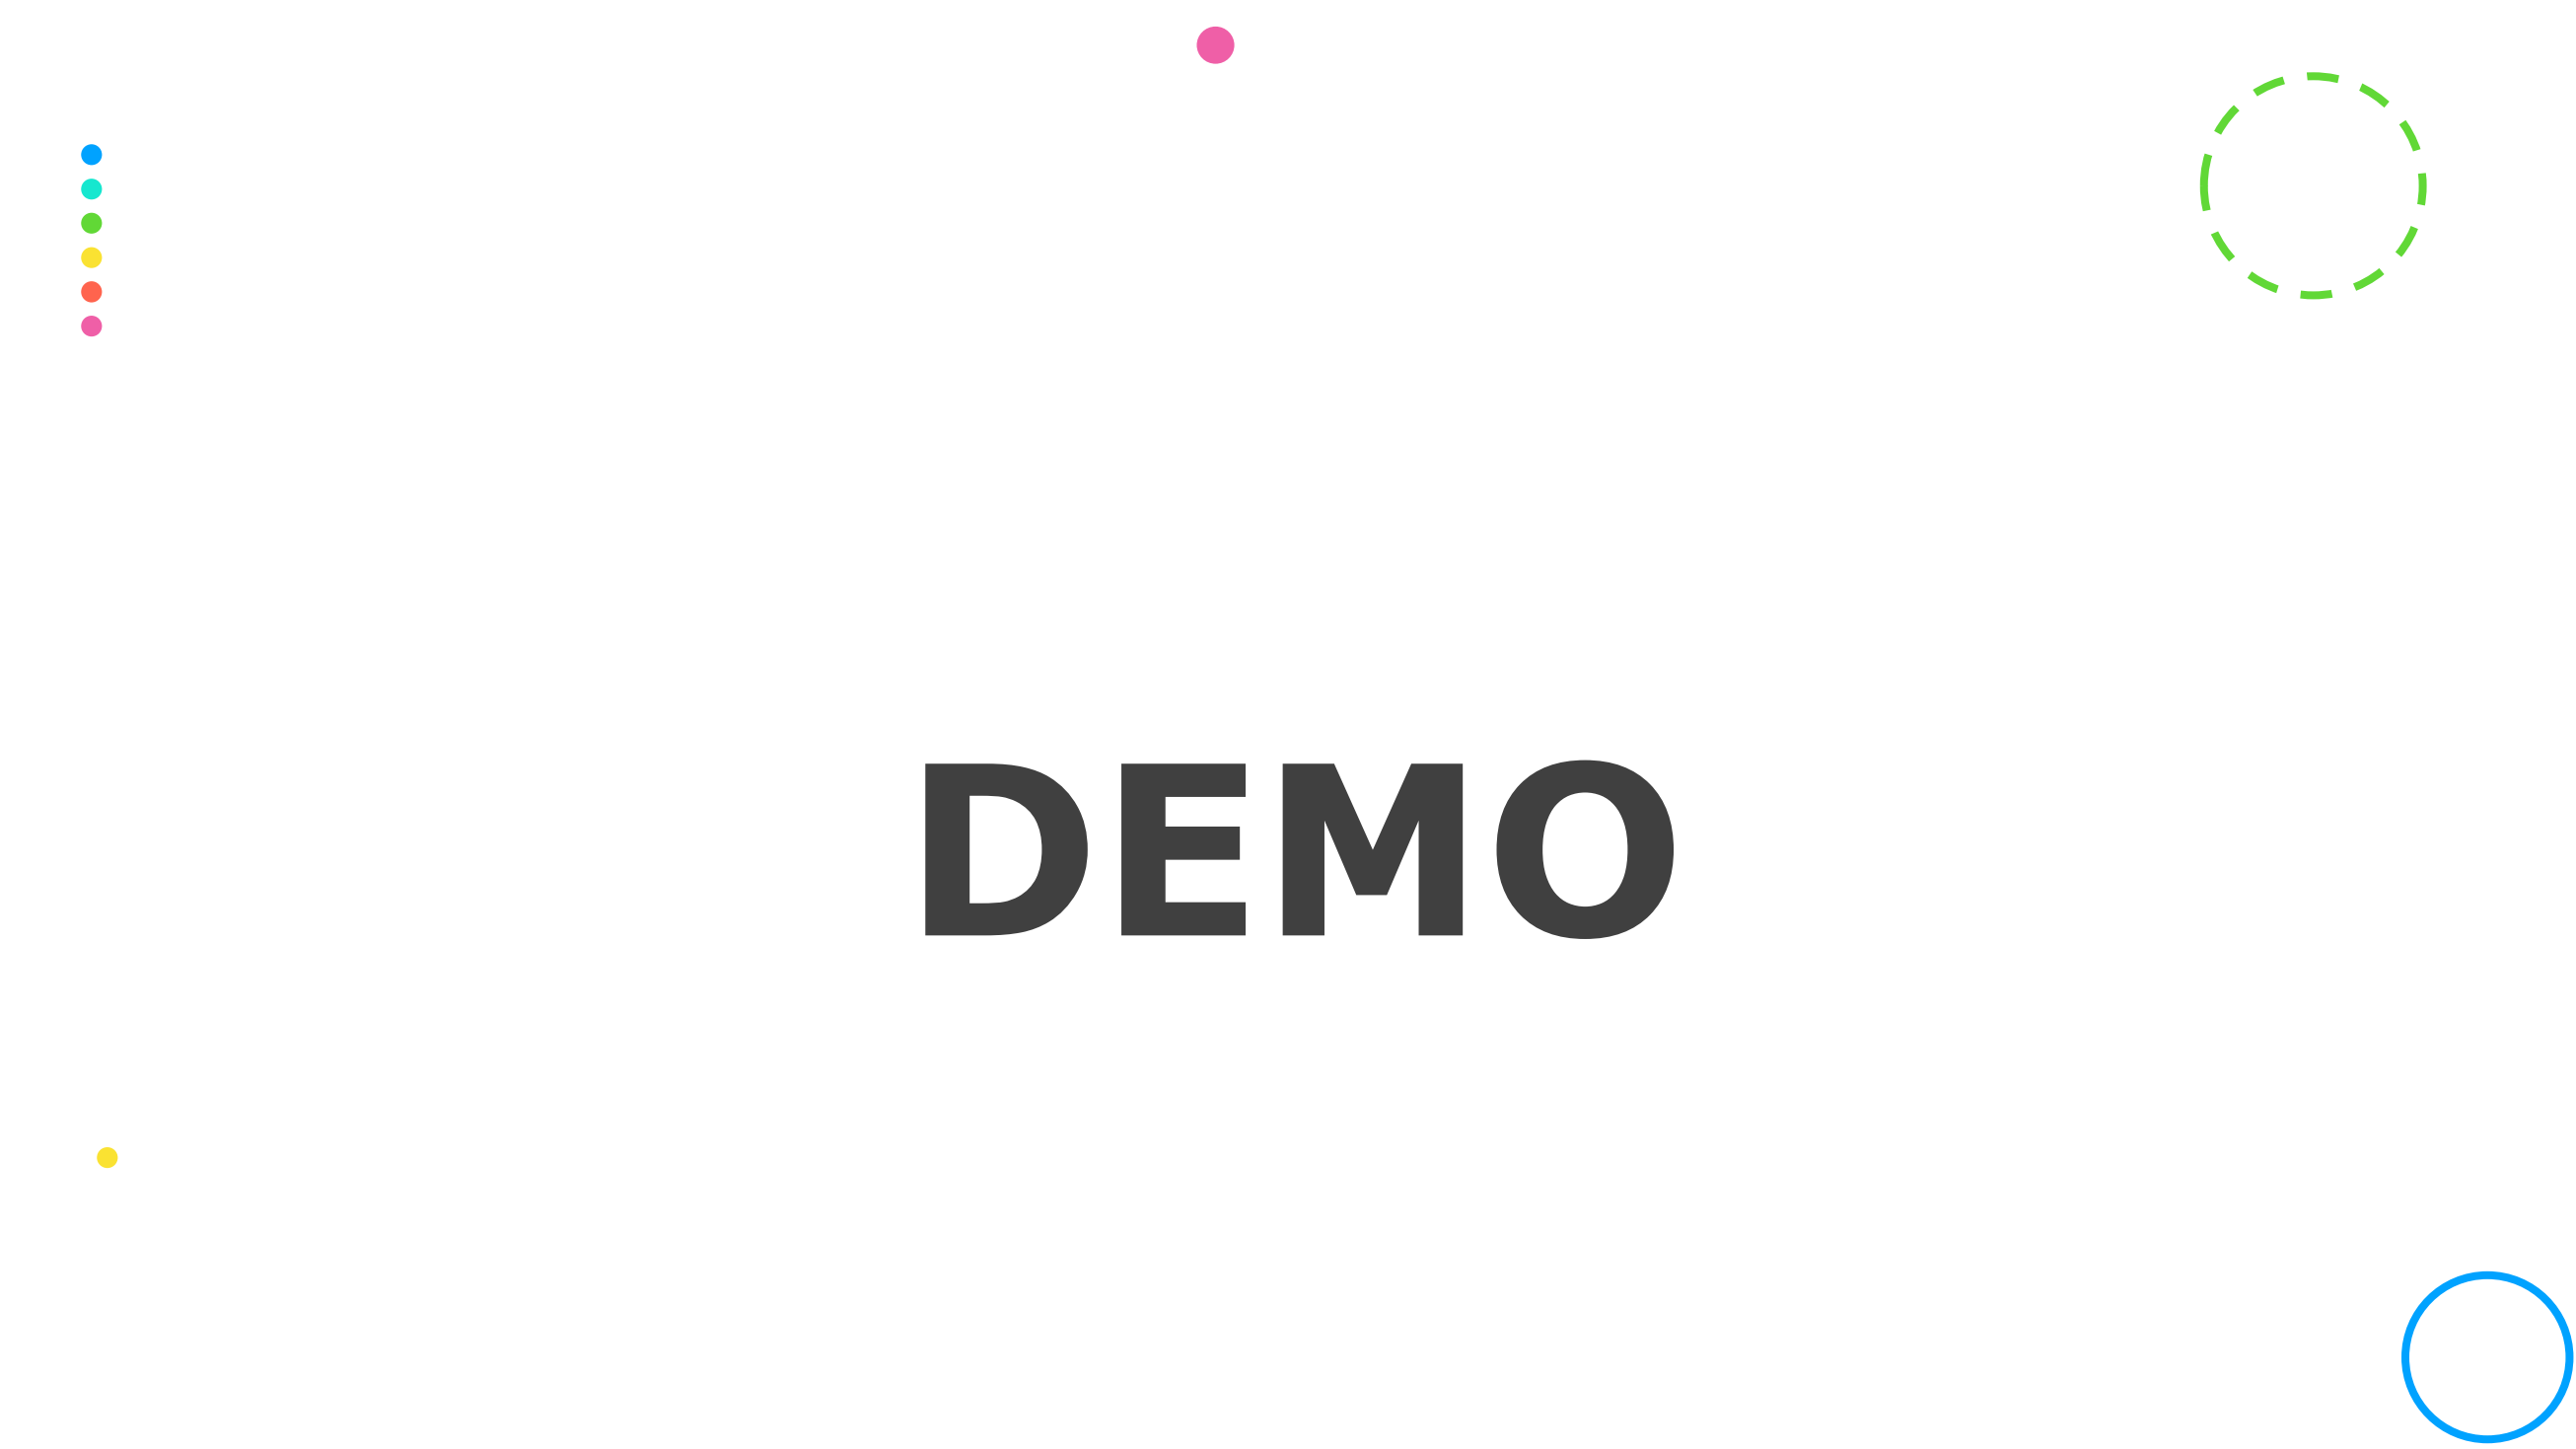

DEMO



CSS – OUTLINES




we can set the following outline properties using CSS.

The **outline-width** property is used to set the width of the outline.

The **outline-style** property is used to set the line style for the outline.

The **outline-color** property is used to set the color of the outline.

The **outline** property is used to set all the above three properties in a single statement.



DIFFERENCE BETWEEN BORDER AND OUTLINE

Outline is a line that goes around the element, outside of the border.

In contrast to border, outlines do not take any space in the box model.

So adding an outline to an element does not affect the position of the element or other elements.

In addition, outlines can be non-rectangular in some browsers. This can happen if outline is applied on a span element that has text with different font-size properties inside it. Unlike borders, outlines *cannot* have rounded corners.



THE VALUES OF OUTLINE-STYLE PROPERTY



none – No border. (Equivalent of `outline-width:0;`)

solid – Outline is a single solid line.

dotted – Outline is a series of dots.

dashed – Outline is a series of short lines.

double – Outline is two solid lines.


groove – Outline looks as though it is carved into the page.

ridge – Outline looks the opposite of groove.

inset – Outline makes the box look like it is embedded in the page.


outset – Outline makes the box look like it is coming out of the canvas.

hidden – Same as none.





CSS – OUTLINES



DEMO-3




CSS - MULTI COLUMNS



CSS3 supported multi columns to arrange the text as newspaper structure. Some of most common used multi columns properties as shown below –

Sr.No.	Value & Description	
1	column-count:	Used to count the number of columns that element should be divided.
3	column-gap:	Used to decide the gap between the columns.
4	column-rule:	Used to specifies the number of rules.
5	rule-color:	Used to specifies the column rule color.
6	rule-style:	Used to specifies the style rule for column.
7	rule-width:	Used to specifies the width.






CSS - MULTI COLUMNS



DEMO-4



Questions?
