

Salah Uddin Selim

FYDP_Report

 FYDP I

Document Details

Submission ID**trn:oid:::3618:129498781****Submission Date****Feb 28, 2026, 11:16 PM GMT+6****Download Date****Feb 28, 2026, 11:36 PM GMT+6****File Name****FYDP_Report.pdf****File Size****460.7 KB****38 Pages****7,923 Words****46,345 Characters**

16% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

Filtered from the Report

- Bibliography
- Quoted Text

Match Groups

-  **123 Not Cited or Quoted 16%**
Matches with neither in-text citation nor quotation marks
-  **1 Missing Quotations 0%**
Matches that are still very similar to source material
-  **0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
-  **0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 6%  Internet sources
- 8%  Publications
- 12%  Submitted works (Student Papers)

Match Groups

- 123** Not Cited or Quoted 16%
Matches with neither in-text citation nor quotation marks
- 1** Missing Quotations 0%
Matches that are still very similar to source material
- 0** Missing Citation 0%
Matches that have quotation marks, but no in-text citation
- 0** Cited and Quoted 0%
Matches with in-text citation present, but no quotation marks

Top Sources

- 6% Internet sources
- 8% Publications
- 12% Submitted works (Student Papers)

Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

- 1** Student papers
United International University on 2024-11-03 <1%
- 2** Internet
f1000research-files.f1000.com <1%
- 3** Publication
Paolo Ferro, Harinadh Vemanaboina, Chander Prakash. "Computational Techniqu... <1%
- 4** Publication
Surendran, Sumisha. "Plagiarism Detection in Source Code Using Machine Learni... <1%
- 5** Student papers
Islington College,Nepal on 2025-12-17 <1%
- 6** Student papers
JB Institute of Engineering And Technology on 2026-01-11 <1%
- 7** Student papers
University of Westminster on 2025-04-15 <1%
- 8** Internet
www.mdpi.com <1%
- 9** Student papers
UNICAF on 2024-12-08 <1%
- 10** Publication
K. V. Sambasivarao, Anasuya Sesha Roopa Devi Bhima. "Artificial Intelligence, Co... <1%

11	Student papers	Islington College,Nepal on 2025-12-16	<1%
12	Publication	H. S. Suresh Kumar, C. N. Pushpa, J. Thriveni, K. R. Venugopal. "Holistic AI-Based P...	<1%
13	Student papers	University of Newcastle on 2024-10-16	<1%
14	Student papers	United International University on 2024-06-02	<1%
15	Student papers	University of Glasgow on 2015-09-06	<1%
16	Student papers	University of Sunderland on 2025-07-04	<1%
17	Student papers	University of Westminster on 2025-11-13	<1%
18	Internet	www.numberanalytics.com	<1%
19	Student papers	Universiti Malaysia Pahang Al-Sultan Abdullah (UMPSA) on 2026-01-11	<1%
20	Publication	Arvind Dagur, Sohiti Agarwal, Dharendra Kumar Shukla, Shabir Ali, Sandhya Sharm...	<1%
21	Publication	Jiayao Chen, Hongwei Huang, Mingliang Zhou. "AI-Enhanced Safety Evaluation fo...	<1%
22	Publication	Saurav Mallik, Zhongming Zhao, Soumita Seth, Aimin Li, Kasmika Borah, Himanis...	<1%
23	Internet	www.coursehero.com	<1%
24	Student papers	University of North Texas on 2026-02-23	<1%

25	Student papers	Ahsanullah University of Science and Technology on 2025-12-02	<1%
26	Publication	Srinivas Sethi, Bibhudatta Sahoo, Deepak Tosh, Suvendra Kumar Jayasingh, Soura...	<1%
27	Student papers	United International University on 2025-03-02	<1%
28	Student papers	University of Bristol on 2023-08-29	<1%
29	Internet	ijrpr.com	<1%
30	Internet	ijsret.com	<1%
31	Internet	www.researchgate.net	<1%
32	Student papers	Anna University on 2025-12-17	<1%
33	Student papers	Imperial College of Science, Technology and Medicine on 2021-09-03	<1%
34	Internet	ijirt.org	<1%
35	Internet	tijer.org	<1%
36	Student papers	Ajou University Graduate School on 2024-06-02	<1%
37	Student papers	Mahidol University on 2009-10-12	<1%
38	Publication	O. Obulesu, Vaishnavi Pujala, Yakshitha Koulampeta, M. Mahendra. "Chapter 78 A...	<1%

39	Student papers	The Hong Kong Polytechnic University on 2018-04-23	<1%
40	Student papers	United International University on 2023-06-25	<1%
41	Student papers	University of Hull on 2024-05-02	<1%
42	Student papers	University of West London on 2023-05-29	<1%
43	Internet	ijcrar.com	<1%
44	Internet	zenodo.org	<1%
45	Student papers	The Scientific & Technological Research Council of Turkey (TUBITAK) on 2026-01-24	<1%
46	Student papers	United International University on 2021-11-28	<1%
47	Student papers	United International University on 2025-03-02	<1%
48	Internet	hal.archives-ouvertes.fr	<1%
49	Internet	ojs3.unpatti.ac.id	<1%
50	Internet	studenttheses.uu.nl	<1%
51	Student papers	American Public University System on 2025-09-07	<1%
52	Publication	K. Anita Davamani, Malathy Jawahar, L. Jani Anbarasi, Vinayakumar Ravi, Alanoud...	<1%

53	Student papers	United International University on 2023-09-13	<1%
54	Internet	www.ijmse.com	<1%
55	Publication	"Computational Intelligence and Data Analytics", Springer Science and Business ...	<1%
56	Student papers	SP Jain School of Global Management on 2024-09-08	<1%
57	Student papers	University of Birmingham on 2025-08-31	<1%
58	Publication	Uttam Ghosh, Danda B Rawat, Raja Datta, Al-Sakib Khan Pathan. "Internet of Thin...	<1%
59	Internet	etheses.whiterose.ac.uk	<1%
60	Internet	www.gabormelli.com	<1%
61	Student papers	Canada College on 2023-11-14	<1%
62	Student papers	Orissa University of Agriculture & Technology on 2025-09-30	<1%
63	Student papers	United International University on 2025-02-24	<1%
64	Student papers	University of Bolton on 2025-04-15	<1%
65	Student papers	University of East London on 2024-10-02	<1%
66	Student papers	University of Newcastle on 2023-10-11	<1%

67	Student papers	University of Wollongong on 2023-10-24	<1%
68	Internet	www.enfintechnologies.com	<1%
69	Publication	"Data Science and Applications", Springer Science and Business Media LLC, 2026	<1%
70	Student papers	Copenhagen Business School on 2026-02-09	<1%
71	Student papers	GMR Institute of Technology on 2024-08-03	<1%
72	Student papers	United International University on 2025-08-11	<1%
73	Student papers	Ahsanullah University of Science and Technology on 2025-12-03	<1%
74	Student papers	Ahsanullah University of Science and Technology on 2025-12-04	<1%
75	Student papers	United International University on 2024-11-03	<1%

Leukemia Cell Classification Using Deep Learning Model

FYDP I Report

By

Sajedur Rahman (0112230857)

Salah Uddin Selim (0112230512)

Afia Tasnim Ria (0112231058)

Tanvin Chowdhury (011222124)

Tasnema Ferdous (011222123)

47

February 28, 2026



Department of Computer Science and Engineering
United International University

Contents

14	1 Introduction	3
	1.1 Project Overview	3
	1.2 Motivation	3
	1.3 Objectives	4
	1.4 Methodology	5
	1.5 Project Outcome	6
	2 Background	7
	2.1 Preliminaries	7
	2.1.1 Medical Foundations and Leukemia Taxonomy	7
	2.1.2 Image Preprocessing and Data Preparation	8
23	2.1.3 Machine Learning Framework	9
	2.1.4 Loss Function and Performance Metrics	9
	2.1.5 Architecture Found	10
	2.1.6 K-Nearest Neighbors(KNN)	16
50	2.2 Literature Review	18
	2.2.1 Related Work	18
	2.2.2 Key Findings & Gap Analysis	19
	2.3 Summary	22
15	3 Project Design	23
	3.1 Requirement Analysis	23
	3.1.1 Functional Requirements	23
	3.1.2 Non-Functional Requirements	23
	3.2 Methodology	24
	3.2.1 Project workflow	24
	3.2.2 ResNet using Feynman's Path Integral	27
1	3.3 Summary	30
	5 Standards and Design Constraints	31
	5.1 Standards Compliance	31

5.2	Design Constraints	31
5.2.1	Economic Constraint	32
5.2.2	Technical Constraint	32
5.2.3	Environmental Constraint	32
5.2.4	Ethical and Health Constraints	32
5.3	Sustainability and Social Impact	33
5.4	Complex Engineering Problem	33
5.4.1	Knowledge Profile	33
5.4.2	Complex Problem Solving	34
5.4.3	Engineering Activities	36

Chapter 1

Introduction

1.1 Project Overview

Leukemia is a life-threatening blood cancer that affects the white blood cells of the bone marrow. That comes from uncontrolled production of white blood cells, which interfere with our immune system to fight against infection & produce red blood cells. Leukemia needs early & accurate diagnosis to improve patient survival probability.

The traditional approach to the diagnosis of leukemia by manual microscopic examination is time consuming & also highly dependent on pathologists expert, which may lead to delay & some time error. This project is Leukemia Cell Classification Using a Deep Learning Model; our aim is to develop an automated system for leukemia classification using medical image analysis.

Blood smear slides are collected from various hospitals, and then, using a microscope with a high-resolution camera, images are captured from the slide. Medical experts label cells into three categories: healthy, Acute Lymphoblastic Leukemia (ALL), Acute Myeloid Leukemia (AML), Chronic Lymphocytic Leukemia (CLL), and Chronic Myeloid Leukemia (CML). Then, apply image preprocessing techniques to increase the dataset. Then split the dataset for training, validation & testing. Apply a data augmentation technique for improving dataset diversity & reducing overfitting.

Resnet, which is a deep learning model, is used for the ability to extract hierarchical features & learn complex cellular features. After training & testing, this system enhances diagnostic accuracy & efficiency in the real healthcare environment by automated detection of leukemia from microscope imaging.

1.2 Motivation

Leukemia is a hematological malignancy that occurs due to the uncontrolled production of abnormal white blood cells in the bone marrow and peripheral blood. According to

the World Health Organization (WHO), which estimated that approximately 474,000 new cases and over 311,000 deaths occur annually just because of this type of blood cancer, leukemia. In a report by Blood Cancer United, it is estimated that around 66890 people were expected to be diagnosed with leukemia in 2025 in the USA. They also stated that around 475,323 people are living with it. AACR Cancer Progress Report 2025 says that there are 66,890 new cases and 23,540 deaths in the US because of leukemia.

Early detection is very important because leukemia progress is very rapid. It creates variants, and treatment loses its effectiveness. Early detection allows timely and specific treatment which improves survival rates, lowers mortality rates, and reduces complications.

Manual or traditional detection is very time consuming and highly dependent on the hematologist's expertise. In early-stage symptoms and the changes or abnormalities are not visible or detected by the manual process. That is why the deep learning model can be effective to detect leukemia in the early stage by observing previous data.

1.3 Objectives

Main objective of our research is to develop a real time, automated, and reliable system by using deep learning architectures to classify leukemia subtypes (AML, ALL, CLL, CML) for microscopic blood smear images. The specific objectives of our research are:

- To develop an end-to-end automated leukemia classification framework based on deep learning techniques to minimize human error.
- To implement image preprocessing and synthetic data augmentation techniques to reduce class imbalance and improve model performance across diverse clinical datasets.
- To utilize Convolutional Neural Networks (CNN) for the automated extraction of high dimensional and discriminative features from the blood smear images which are often subtle to the human eye.
- To classify leukemia samples to specific subtypes (AML, ALL, CLL, CML) and separate them from normal blood samples with high accuracy.
- To validate performance of ResNet using standard evaluation including F1 scores, recall, accuracy, precision, and confusion matrix to ensure clinical reliability standards.
- To analyze the feasibility and effectiveness of AI-assisted leukemia classification as a secondary tool for early detection of leukemia.
- To support hematologists in the clinical decision making.

1.4 Methodology

This study aimed at developing and evaluating a deep learning based automated system for leukemia detection. The proposed approach focuses on classifying microscopic blood smear images into leukemia and non leukemia categories and into leukemia subtypes classification (AML, ALL, CML, CLL).

Dataset Description

We have collected a dataset from hospitals with proper rules and regulations. We collect PBF (Peripheral Blood Smear) slides and took microscopic images and then split dataset into

- Training Dataset: 70%
- Validation Dataset: 15%
- Test Dataset: 15%

We tried to create the dataset in a way that we can mitigate the datasets bias less.

Data Preprocessing:

In the Medical image processing this part is the most crucial part because it helps to enhance model performance.

1. Image Resizing: All image are resized to fixed resolution for match input requirements.
2. Noise Reduction: Techniques like Gaussian Blur are apply to minimize artifacts and enhance image clarity.
3. Normalization Pixel intensity value are normalized to a standard range, ensuring consistent feature representation across the dataset.
4. Data Augmentation apply to mitigate overfitting and class imbalance. Data augmentation techniques including rotation, flipping, zooming and adjustment are used.

Model Architecture

The proposed system is ResNet due to it effectiveness in medical image analysis. ResNet architecture consists of multiple convolutional layers for feature extraction.

1.5 Project Outcome

Our aims to develop a system that can automatically classify leukemia cells from blood smear image by using a deep learning model. This model is expected to achieve strong performance of accuracy, recall, precision, & F1 score.

This approach reduces need for manual diagnosis, improves consistency and make the diagnostic process faster. Proposed solution increase access for early leukemia detection. Also, save time, improve diagnostic efficiency & give clinical support in healthcare environment.

Chapter 2

Background

2.1 Preliminaries

Here, establishes the foundational medical, computational, and mathematical concepts required for automated leukemia detection and classification.

2.1.1 Medical Foundations and Leukemia Taxonomy

Leukemia is a hematological disease by the abnormal production of White Blood Cells (WBC). These malignant cells originate in the bone marrow and interfere in the production of healthy blood cells.

Let

$$\mathcal{C} = \{c_1, c_2, \dots, c_K\}$$

denote the set of classes in this study, where $K=5$:

- c_1 (**Healthy**): Normal WBC morphology.
- c_2 (**ALL**) – Acute Lymphoblastic Leukemia. A first growing cancer of immature lymphoid cells called lymphoblasts in the bone marrow. Common in children but can affect adults. Symptoms: fatigue, infections, bone pain, bleeding and fever.
- c_3 (**AML**) - Acute Myeloid Leukemia. It's also a fast growing cancer of immature myeloid cells. More common in adults and elderly people. Symptoms: anemia, infection and bleeding.
- c_4 (**CLL**) – Chronic Lymphocytic Leukemia. A slow growing cancer of mature B-lymphocytes which mostly affects older adults. Symptoms: fatigue, weight loss.
- c_5 (**CML**) – Chronic Myeloid Leukemia. It's also a slow growing cancer of myeloid stem cells which linked the Philadelphia chromosome. Symptoms: fatigue, weight loss, enlarged spleen and night sweats.

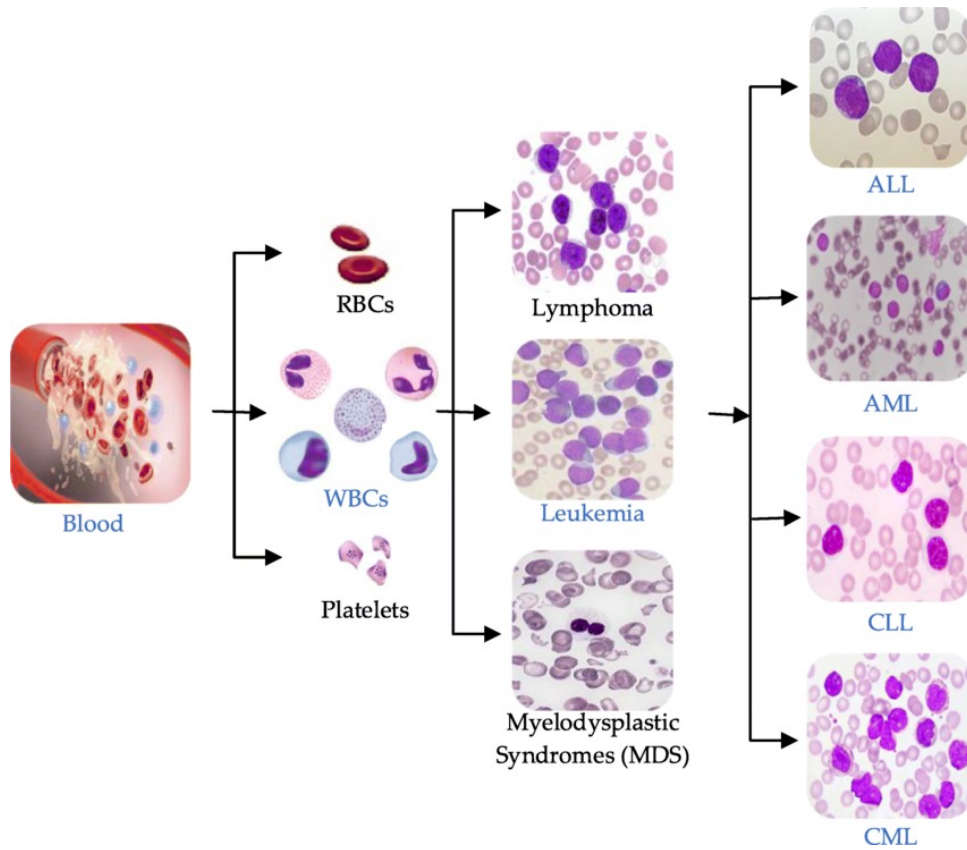


Figure 2.1: Subtype of Leukemia

Peripheral Blood Smear (PBS): PBS is the gold-standard diagnostic tool in which blood is spread on a glass slide and stained. It enables visual analysis of WBC morphology, including cell size, nuclear shape, and cytoplasmic texture.

2.1.2 Image Preprocessing and Data Preparation

To enhance data quality and ensure model compatibility, a transformation $T(\cdot)$ is applied to raw images

$$X \in \mathbb{R}^{H \times W \times 3}$$

such that:

$$X' = T(X)$$

Preprocessing: Includes resizing for fixed model input dimensions, Gaussian blur used for noise reduction and Contrast Limited Adaptive Histogram Equalization (CLAHE) to enhance nuclear details.

Data Augmentation: To mitigate overfitting in limited medical datasets, N synthetic samples are generated:

$$\tilde{X}_i = A_i(X), \quad i = 1, 2, \dots, N$$

where $A_i(\cdot)$ represents stochastic transformations like rotation, zooming and flipping.

Class Imbalance: Occurs when

$$N_{healthy} \gg N_{leukemia}$$

This imbalance is handle by using Synthetic Minority Over sampling Technique (SMOTE), random oversampling or class weighting w_k in the loss function.

2.1.3 Machine Learning Framework

The framework uses Convolutional Neural Networks (CNN) for automated feature extraction. The output of l -th convolutional layer can be expressed as:

$$\mathbf{F}^{(l)} = \sigma(\mathbf{W}^{(l)} * \mathbf{F}^{(l-1)} + \mathbf{b}^{(l)})$$

where $*$ represent convolution, $\sigma(\cdot)$ is the activation function, and $\mathbf{F}^{(l)}$ represents the feature map.

Hierarchical Learning: CNNs gradually learn simple features like edge at early stages and more complex shape patterns which important for leukemia detection.

Transfer Learning: Model parameters θ are initialized using pre-trained weights (e.g., ResNet or MobileNet):

$$\theta = \theta_{pretrained} + \Delta\theta$$

This accelerates convergence and improves generalization.

Explainable AI (XAI): Gradient weighted Class Activation Mapping (Grad-CAM) is used to generate heatmaps and highlighting regions of interest (ROI) that influence model prediction, enhancing clinical interpretability.

2.1.4 Loss Function and Performance Metrics

To address multi-class classification and class imbalance, the Weighted Categorical Cross-Entropy loss is used:

$$\mathcal{L} = - \sum_{k=1}^K w_k y_k \log(\hat{y}_k)$$

where y_k and $\hat{y}_k$ denote the ground truth and predicted probability for class k , respectively.

Model performance is evaluated using a confusion matrix comprising True Negatives (TN), True Positives (TP), False Negatives (FN) and False Positives (FP).

Table 2.1: Performance Evaluation Metrics

Metric	Formula	Description
Accuracy	$\frac{TP+TN}{TP+TN+FP+FN}$	Overall correctness
Precision	$\frac{TP}{TP+FP}$	Reliability of leukemia detection
Recall	$\frac{TP}{TP+FN}$	Sensitivity to leukemia cases
F1-score	$2 \cdot \frac{PR \cdot RE}{PR+RE}$	Balance between precision and recall
G-Mean	$\sqrt{Sensitivity \times Specificity}$	Performance on imbalanced data

2.1.5 Architecture Found

Support Vector Machine (SVM)

It's a supervised machine learning algorithm used for both Classification & Regression problem. It determine the best hyperplane that divide data points of different classes by maximizing the margin between them. The data sample which closest to the hyperplane are known as support vectors, and they play an important role in decision boundaries.

SVM works well in leukemia classification, and it has been successfully used in many research papers.

Why SVM is suitable for Leukemia Classification

1. High Dimensional Data handling - Leukemia datasets have many features & SVM performs very well in high dimensional space
2. Perform well with small dataset - Medical dataset is maximum time limited in size & SVM can achieve high accuracy with small data
3. Kernel Flexibility - RBF kernel – used for leukemia image based classification – Linear kernel – good for gene expression data
4. Good Generalization - By maximizing the margin, SVM can reduce overfitting which important for medical diagnosis
5. Already prove in Research performance for
 - ALL vs AML
 - Normal vs Leukemia cells
 - Leukemia sub type classification

SVM step for Leukemia classification

1. Input Data - Blood smear image or - Extracted feature like texture, shape, color of nucleus
2. Image preprocessing - Noise Remove - Data Augmentation - Feature Normalization - Segmentation of white blood cells

3. Feature Extraction - GLCM, HOG, LBP for feature extract from image - For deep feature extraction CNN+ SVM hybrid
4. SVM Classification - Used RBF kernel function
5. Evaluation - Accuracy, sensitivity - F1 score, Precision - Recall & confusion matrix

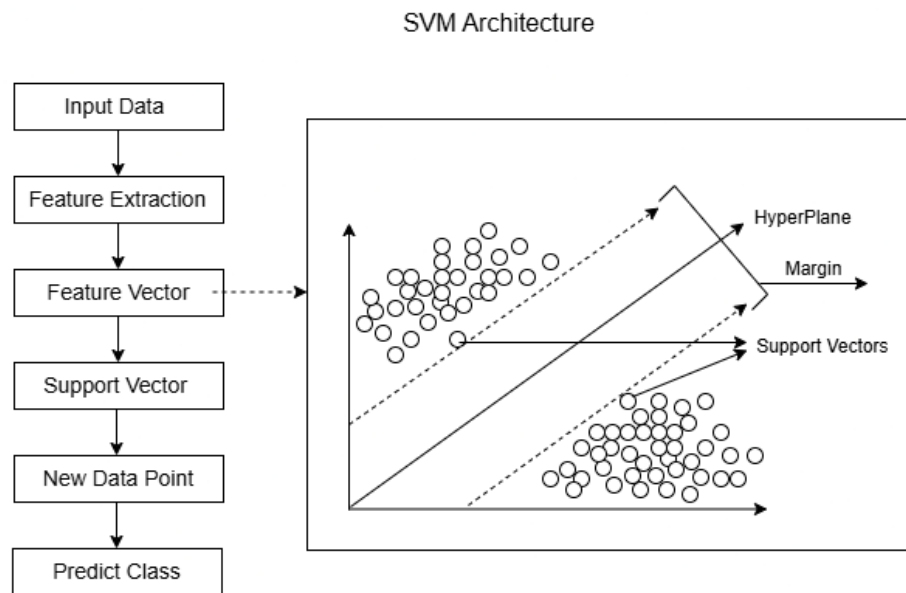


Figure 2.2: SVM Representation

Summary- SVM is good and effective for leukemia classification and detection, especially when the dataset is limited in size. With Proper feature extraction and RBF kernel function selection, SVM can achieve high classification accuracy in Leukemia detection and classification.

Convolutional Neural Networks (CNN)

CNNs are deep learning models specifically designed for image analysis. Since images are high-dimensional data, manual feature extraction is difficult. CNN address this challenge by automatically learning important visual features (edges, shapes, textures, and cells) directly from raw images. Below picture represents a typical

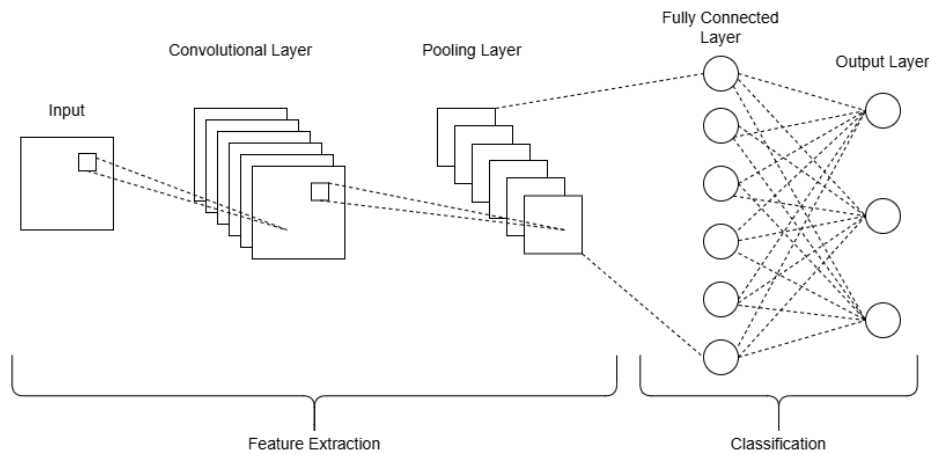


Figure 2.3: CNN Architecture

Convolutional Layers slide over images using small filters or kernels to capture specific feature or pattern such as edges, texture or little more complex structure in deeper layers. Pooling Layers are applied with convolutional layers are used to reduce the spatial dimension of the input which make it easier to process and requiring less memory while preserving the important information. Fully connected layers get high dimensional output from the previous layers and combine and integrate all the extracted features across the entire image instead of focusing only on local regions. Finally, output layer generate the predicted class probabilities. However, CNN are highly effective in medical image analysis because of their ability to learn complex visual patterns directly from raw images. This capability makes them suitable for automated leukemia detection and classification using microscopic blood smear images.

Decision Tree

It's a supervised learning algorithm commonly used for classification and regression tasks. It represents the decision making processes using a tree like structure, where each internal node performs a test on a feature, each branch shows the result of the that test and each leaf node give the final class label or predicted value. Because of it's simple structure and easy interpretation, decision tree is commonly used as a baseline classifier in many research studies.

Decision Tree Architecture

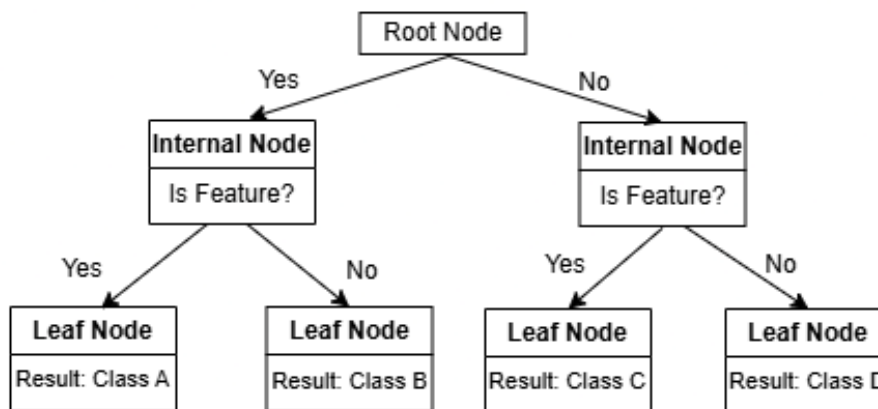


Figure 2.4: Decision Tree Architecture

Working Principle of Decision Tree: It works by repeatedly splitting the dataset into smaller group based on feature values. At every node, it select the feature that best separates the data into different classes. The choice is guided by Entropy and Information Gain. The splitting process continues until a stopping condition is satisfied like reaching a maximum depth or having pure leaf nodes.

Decision Tree in Image Classification: In image classification tasks, raw images are usually converted into feature vectors using feature extraction methods such as texture, shape or color features. These extracted features are then used as input for the decision tree classifier. The model learns decision rules that help distinguish between different image classes based on these features.

Random Forest

It's a machine learning model based on an ensemble of multiple decision tree to make better predictions. It improves prediction accuracy and reduce error by combining many tree each with different criteria. Each tree is built using random subsets of the data. Their predictions are combined through voting for classification and averaging for regression which makes it an ensemble method.

Decision trees are helpful, but they can be prone to problems. These problems include:

1. **Bias:** This occurs when a degree of error is introduced into the model, often because the instance space isn't evenly split during training, meaning the model might not see all data points. Example-Imagine we are trying to learn about diff types of fruits but only ever look at apples. If we then try to identify a banana, we'd be very biased towards saying it's an apple because that's all we've seen. This "only

looking at apples” is like unevenly splitting instance space during training our model is only seeing a limited or skewed part of the overall data. Random Forest solves reducing bias by creating many **decision trees**. Every **tree is trained on a** different and random **subset of** main dataset. So, instead of just one learner seeing only apples- One tree might see apples and oranges. Another might see bananas and grapes. A third might see a mix of everything, but in a different order.

2. Variance: it happen when model become more sensitive to fluctuations in the training data, causing it to fit noise instead of the actual underlying pattern.
3. Overfitting: This happens when model start to memorize the data rather than trying to generalize for making predictions on future data. Example: Imagine studying for a test. Just memorize every single question and answer from a practice test Instead of understanding the concepts.
4. Training Data (Practice Test): When it takes the practice test again, it scores perfectly because it memorized all the answers.
5. New Data (Real Test): When it takes the actual test, the questions are slightly different, or phrased in a new way. Because it only memorized answers and didn't learn the underlying concepts, it performs poorly on the real test.

Random Forests common solutions to overfitting in machine learning-

1. Data-Based Solutions:

Collecting More Data: The most effective method, as a larger dataset makes it harder for the model to memorize specific noise.

Data Augmentation: Expending the original dataset by generating modified copies of existing data (e.g., rotating images, adding noise).

Feature Selection/Reduction: Eliminating unnecessary or repetitive features that may negatively affect the model.

Cleaning Data: Removing outliers or errors from the training set.

2. Model-Based Solutions:

Reducing Model Complexity: Simplifying the model's architecture by using fewer layers or neurons in neural networks.

Regularization: Add penalties terms into the loss function to limit excessive model complexity (e.g., L1/L2 regularization).

Dropout: In neural networks, randomly turning off a portion of **neurons during training to reduce dependency on specific** connections.

3. Training-Based Solutions:

Cross-Validation: Test the model performance on multiple subsets of the dataset to check its robustness and generalization ability.

Early Stopping: Observing the performance of the model on a separate validation set and stop the training process when performance stops improving even if training error is still decreasing.

Hyperparameter Tuning: Adjust model settings to find the best balance between complexity and accuracy.

Use of Random Forest:

1. Complex Data: Large datasets with many features.
2. High Accuracy Robustness: When a model is required that is less likely to overfit than a single decision tree.
3. Classification Regression: Can predict categories like spam detection, disease diagnosis and numerical values like stock prices, customer satisfaction.
4. Non-linear Patterns: Good at capturing complex relationships that are not straight line trends.
5. Feature Importance: Useful for identifying key features in data, though caution is needed when features are correlated.
6. Handling Missing Data: Can effectively estimate missing values.

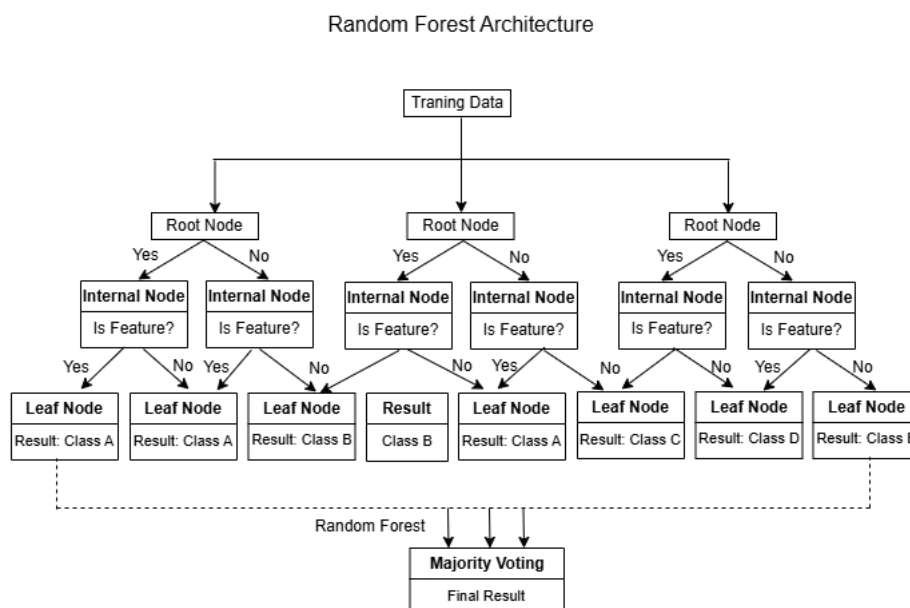


Figure 2.5: Random Forest Architecture

Random Forests reduce these problems by averaging multiple decision trees, which lowers variance and improves robustness.

2.1.6 K-Nearest Neighbors(KNN)

KNN algorithm is a straightforward, non-parametric, supervised learning model used for classification and regression tasks. It predicts the label of a new data point based on the labels of its nearest neighbors.

How the KNN Algorithm Works The core idea of KNN is that similar data points are located near one another. To classify or predict a new data point, the model follows these steps:

1. Choose the number of neighbors (K): Select a positive integer value for K. It suggested to choose an odd number for K for binary classification to prevent ties.
2. Compute distance: Measure the distance between the new data point and all existing data points in the dataset using metrics like Euclidean distance and Manhattan distance.
3. Identify the K nearest neighbors: Selects the K data points that are closest to the new point.
4. Assign a class (or value):
 - (a) For classification: The new data point is assigned to the class that appears most frequently among its K neighbors (majority vote).
 - (b) For regression: Predicted value is calculated as the average (or weighted average) of the values of the K nearest neighbors.

Key Characteristics

- Supervised Learning: KNN need a labeled dataset to train on.
- Non-Parametric: It does not assume any specific distribution for the data.
- Lazy Learner (Instance-Based): KNN does not build a model during training. It stores the dataset and performs calculation only when making prediction.

Applications

KNN is a versatile algorithm used in various fields:

- Recommendation Systems: Companies like Netflix and Amazon use it to suggest products or movies based on similar users' preferences.
- Healthcare: It can be used in predicting health risks like heart attacks or cancer based on gene expressions.
- Finance: It helps with stock market forecasting and fraud detection.

- Image Recognition: It is used in handwriting and image recognition tasks.

Limitations

Despite its simplicity, KNN has drawbacks:

- Computational Cost: As a lazy learner, storing all data points makes it memory-intensive and computationally expensive for large datasets.
- Curse of Dimensionality: The performance of KNN decreases in high-dimensional spaces where distance calculations become less reliable.
- Feature Scaling: KNN is sensitive to the scale feature, so its important to scale all feature to ensure each one contributes equally to the distance calculation.



2.2 Literature Review

2.2.1 Related Work

Automated leukemia detection and classification from microscopic blood smear images has been widely studied using traditional machine learning and more recently deep learning techniques. Early research mainly focused on manual feature extraction combined with classical classifiers, while recent studies strengthen deep CNN and transfer learning to improve accuracy and robustness.

Multiple review based studies establish the medical necessity for automated leukemia diagnosis. Comprehensive reviews on ALL highlight that traditional diagnostic methods like manual microscopy are labor intensive and mostly can happen human errors. These studies didn't gave any model or report accuracy metrics but identified diagnostic inconsistencies as major bottlenecks.

Computational approaches relied on handcrafted features such as cell size, shape, color, texture etc. Studies using multi layer perceptrons trained with algorithms such as Bayesian Regularizations achieved almost 95% accuracy on binary classifications. But they need professional equipment and large investment for that research. Other works applied classifiers like SVM, K-NN, Naive Bayes and DT on extract feature. They achieve quite a good result but they struggled with class imbalance, feature sensitivity and multi class leukemia classification.

Deep learning for leukemia classification:

Most common deep learning model used in leukemia detection is CNN. By using datasets like ALL-IDB and ASH Image Bank, CNN-based models achieved almost 88% accuracy for binary classification and 81–82% accuracy for multi-class classification. These models use image preprocessing steps such as resizing, normalization, and contrast enhancement and automatic feature extraction through convolutional layers.

Handling Imbalance data overfitting and underfitting Imbalance dataset is a common problem in leukemia detection because most of the time abnormal cells are not identified or labeled. In some papers they used so many techniques to overcome this problem like SMOTE, under sampling and extensive data augmentation. Noise-filtered under sampling approaches improved minority-class recognition by enhancing F-measure and G-Mean, though they did not directly focus on deep learning models. More recent deep learning approaches tackle imbalance at the loss-function level. weighted loss functions, regularization, and dropout are some techniques used in different papers. These techniques reduce model bias toward majority classes.

2.2.2 Key Findings & Gap Analysis

Table: Key Findings & Gap Analysis .

Area	Key Findings	Tools and Techniques Used	Gap	Proposed Solution
Medical image-based detection of Acute Lymphoblastic Leukemia	MobileNetV2 achieved 99.69%, CNN 98.6%. SMOTE handled imbalance.	Dataset: ALL image dataset. Models: MobileNetV2, Custom CNN. Data augmentation.	Limited dataset, focused only on ALL, static dataset testing.	Collect larger multi-hospital dataset. Classify all leukemia subtypes.
Image analysis for detecting leukemia subtypes	CNN: 88% (ALL), 81% (multiclass). CNN better than traditional ML.	Datasets: ALL-IDB, ASH Image Bank. OpenCV, Keras. SGD, Adam. 5-fold CV.	Small dataset, multiclass lower accuracy, augmentation noise.	Collect larger dataset. Advanced augmentation. Apply deep learning models.
Biomedical image analysis for leukemia detection	MLP(BR): 94.51%, MLP(LM): 94.39%. 32 features best result.	Dataset: 800 images. Feed-forward MLP. Preprocessing. BR, LM algorithms.	Small dataset, single hidden layer, manual microscopy error.	Use deeper MLP, data augmentation, improve feature fusion.
Microscope image analysis using deep learning	Optimized CNN: 96% accuracy. Better than ResNet50 and YOLOv8.	3256 PBS images. Deep CNN (13 conv layers). Data augmentation.	Overfitting, black-box problem, limited to ALL & AML.	Collect more hospital data. Use Adam optimizer. Systematic augmentation.
Biomedical image classification using ResNet	ResNet better than CNN on large datasets. Transfer learning effective.	Datasets: ImageNet, COCO, Kinetics-400. ResNet, SGD, augmentation.	Ethical issues, high memory demand, limited attention mechanisms.	Add attention modules. Memory-efficient architecture. Bias detection workflow.
Computer-aided classification into FAB subtype	PCA NN achieved 86.4%. Good multiclass performance.	180 images. PCA-based NN. Preprocessing, feature extraction.	Small dataset, no augmentation, no DL methods.	Expand dataset. Use augmentation, cross-validation, deep learning models.

Area	Key Findings	Tools and Techniques Used	Gap	Proposed Solution
Cell classification using Deep CNN	ConvNet: 98.3%, AUC 0.99. Robust to translation error.	Herlev, HEMLBC datasets. Pre-trained ConvNet. 5-fold CV.	Slow inference, limited labeled data.	Use Fully CNN for automatic detection. Train with diverse cells.
Systematic description of leukemia & CAD	Highlights need for automation in diagnosis.	Medical imaging, CAD framework. Literature review.	No validation metrics. Focused more on medical side.	Develop AI-based CAD system. Promote computational research.
WBC classification using CNN	90% accuracy. Robust to noise.	CNN with pre-processing. Automatic feature learning.	Focused only on WBC, not leukemia subtype.	Extend model to classify leukemia subtypes.
Data enhancement with ResNet	Accuracy: 95%, F1: 93%. Effective multiclass classification.	Expert labeling. Preprocessing (CLAHE, resizing). Transfer learning.	Limited dataset, no multi-center validation.	Collect multi-center dataset. Advanced augmentation.
Noise filtration under-sampling	Improved F-measure and G-Mean.	Nearest neighbor filtering, distance-based under-sampling.	No deep learning. No subtype classification.	Apply deep learning model for leukemia classification.
Comparative evaluation of DL models	90% accuracy with imbalance handling.	DCNN, weighted loss, dropout, regularization.	No novel model proposed.	Optimize model selection for leukemia classification.
Loss function enhancement	98.92% accuracy with faster convergence.	Deep learning with optimized loss function.	Indirect leukemia detection. Focused on WBC.	Extend optimized loss for leukemia subtype classification.
ALL Segmentation using Dual Threshold	Improved ALL cell identification.	SVM, ANN, K-means, FCM.	No deep learning, small dataset.	Use deep learning with larger dataset.
CAD system for leukemia detection	89.8% accuracy with combined features.	GLCM, SVM, texture + shape features.	Limited accuracy, no deep learning.	Combine features with deep learning model.

Area	Key Findings	Tools and Techniques Used	Gap	Proposed Solution
Computer-Based Leukemia Diagnosis	KNN best accuracy 86%.	260 images. KNN, DT, SVM, Naive Bayes.	Small, low diversity dataset.	Collect larger dataset. Use advanced deep learning models.
Leukemia subtype detection using CNN	88.25% (binary), 82% (multiclass).	ALL-IDB, ASH Image Bank. OpenCV, Keras. SGD, Adam.	Binary better than multiclass. Model optimization needed.	Hybrid deep learning for better multiclass accuracy.
Classification of leukemia cell by CNN	96.6% accuracy for binary classification.	ALL-IDB1 dataset. MATLAB implementation.	Focused only on ALL. Limited real-world validation.	Optimize CNN. Validate on clinical data.
SVM for cancer tissue classification	SVM effective for cancer classification.	SVM, jackknife CV, dimensionality reduction.	Struggles with high-feature samples.	Develop systematic SVM training method.
Unintentional leukemia detection with CBC	Incidental detection risk of overdiagnosis.	CBC, clinical decision aids.	No systematic screening recommendations.	Implement active surveillance protocols.
Computer Vision & GANs	GAN enables image translation.	CycleGAN, PatchGAN, consistency loss.	Poor geometric transformation handling.	Hybrid supervised + GAN framework.
Spatial & technical data processing	Deep networks improve performance.	Multi-scale training, 3x3 filters, 1x1 conv.	High computational cost.	Optimize network depth. Reduce computation cost.
Deep learning for leukemia detection	Hybrid model achieved 97.04% accuracy.	Hybrid CNN + CCA + Bagging. SVM, KNN.	Small dataset.	Use parallel CNN hybrid approach.
Hybrid approach for ALL classification	ResNet50, SVM, and RF have the best performance.	ResNet152, VGG16, DenseNet121, MobileNetV2, and EfficientNet.	Insufficient data for deep learning. Manual detection is slow.	Use a hybrid deep feature selection approach.

2.3 Summary

From all these previous works, we identified some gaps in leukemia classification where mostly used CNNs and transfer learning, here main problem is small data set and single-centered and mostly focus on limited subtype like AML, ALL. Here they faced some common problems like class imbalance, overfitting and lack of pathological validation. Though Resnet based models work better than CNNs, some of them used them without attention mechanisms and robust imbalance handling. In our research we will try to mitigate these problems where we will enhance the Resnet model, data augmentation, handle class imbalance and overfitting and mainly we will label it by the Expert pathologist. This approach aims to improve multi class leukemia classification with more reliability and accuracy.

Chapter 3

Project Design

3.1 Requirement Analysis

Main objective of our project is classifying leukemia cells from microscopic blood smear images using deep learning model techniques. We are working to classify healthy, Acute Lymphoblastic Leukemia (ALL), Acute Myeloid Leukemia (AML), Chronic Lymphocytic Leukemia(CLL), Chronic Myeloid Leukemia(CML) cells to support early detection of diagnosis.

3.1.1 Functional Requirements

[1]

1. We need blood smear slides from various hospitals & capture high quality microscope images from blood smear cells as input.
2. Need a medical expert to labeled image into 3 categories healthy, ALL & AML cells
3. Then apply image preprocessing steps like resizing, noise detection & remove, normalization & contrast enhancement.
4. Apply data augmentation techniques to increase dataset because dataset is limited.
5. Then apply a deep learning model like ResNet, SVM, Decision Tree, KNN & Random Forest for feature extraction and classification of leukemia. We will get output from this model like accuracy, precision, recall F1 score.

3.1.2 Non-Functional Requirements

We need to achieve high classification accuracy above 90% on unseen data. To the run medical dataset We need a standard GPU-enabled system for the model training and testing.

3.2 Methodology

3.2.1 Project workflow

This is the total workflow of our project starting from data collection to final prediction. Each step of the workflow is described below:

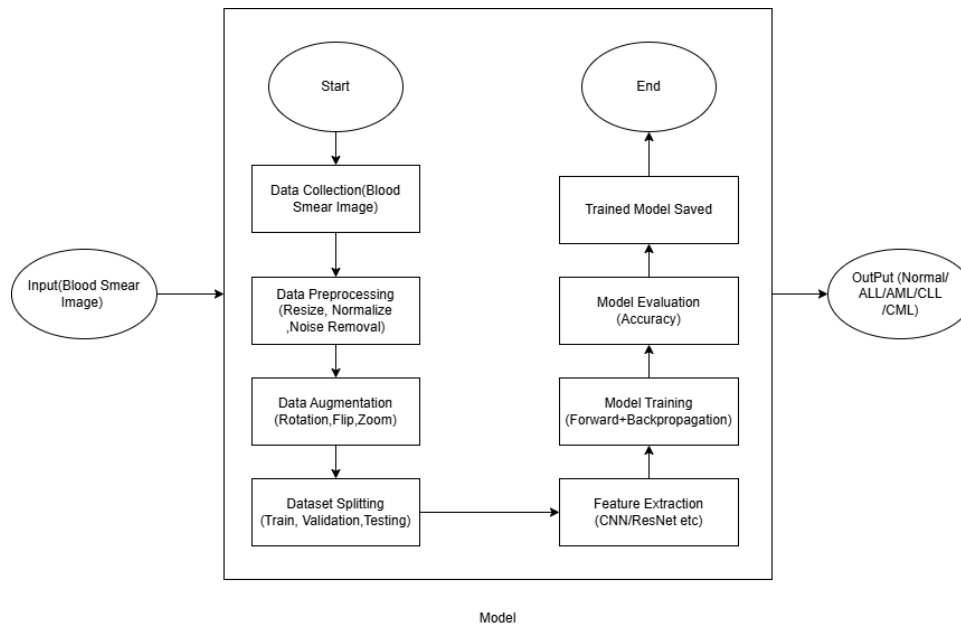


Figure 3.1: Working Flowchart

1. Input – Blood Smear Image:

Project starts with the microscope images of peripheral blood smear (PBS) slides which are captured using a high resolution digital microscope. Each picture contains WBS which may either have healthy or leukemia affected classes (AML, ALL, CLL, CML). This image is the primary input of automated leukemia classification system.

2. Data collection

Blood smear slides are collected from hospitals and diagnostic centers with proper ethical concerns. Capture image with a high resolution digital microscope. Then all the images are labeled by expert hematologists or pathologists in these categories:

- (a) Healthy
- (b) Acute Lymphoblastic Leukemia (ALL)
- (c) Acute Myeloid Leukemia (AML)
- (d) Chronic Lymphocytic Leukemia (CLL)
- (e) Chronic Myeloid Leukemia (CML)

3. Data Preprocessing

Medical image preprocessing is a challenging step to enhance model performance to ensure consistency, improve image quality and reduce variability. The following preprocessing techniques are applied:

- (a) Image Resizing: All the images are resized to fix the model resolution to match input size required for the deep learning model
- (b) Noise Removal: Gaussian blur or flirring techniques used for removing unnecessary background noise.
- (c) Normalization: Image pixel intensity values are scaled to standard range from 0 to 1 to ensure stable and faster convergence for the training.

4. **Data Augmentation** Medical datasets are always limited. Though we try to collect maximum data but its not enough so we applied data augmentation to increase the dataset. The following data augmentation are applied:

- (a) Rotation
- (b) Zoomin
- (c) Brightness adjustment
- (d) Flipping

Data augmentation helps to reduce overfitting, improve generalization and balance minority classes.

5. Dataset splitting

The dataset is divided into three subsets:

- (a) Training Dataset: 70% used to train the model
- (b) Validation Dataset: 15% used to validation the model and prevent overfitting
- (c) Test Dataset: 15% used to evaluate the model performance on unseen data through different metrics

Proper splitting ensures unbiased performance and better generalization

6. Feature Extraction

Now, a deep learning model ResNet are applied to automatically extract high level features from blood smear image. ResNet learns:

- (a) Edges and textures
- (b) Cell morphology patterns

- (c) Subtle visual differences between leukemia sub types
- (d) Nuclear structure of cell and characteristics

7. Model Training (Forward and Backpropagation):

During the training:

- (a) Input images pass through the model network part of forward propagation
- (b) The model generates predicted for each of leukemia sub type
- (c) Loss function calculates the error rate through weight and cross entropy
- (d) Backpropagation update model weight and bias rate using ADAM or SGD

This step continues for multiple iterations until the model is satisfied.

8. Model Evaluation:

After the training, the model is evaluated using the test dataset. Performance is evaluated using the below metrics:

- (a) Accuracy
- (b) Recall
- (c) Confusion matrix
- (d) Precision
- (e) F1 score

These metrics ensure whether model meet clinical standards

9. Trained Model Saved

When satisfaction of model performance achieved, the trained model is saved deployment. The saved can be used later for real time leukemia classification without retraining.

10. Output

At last, when a new blood smear image is provided, the trained system predicts the image as these classes:

- (a) Healthy
- (b) ALL
- (c) AML
- (d) CML
- (e) CLL

Output can be served as a clinical decision support tool to help hematologists for early leukemia detection

3.2.2 ResNet using Feynman's Path Integral

This section presents a physics-inspired interpretation of ResNet using the Feynman path integral formulation. Instead of viewing ResNet as a simple stack of nonlinear layers, we interpret it as a superposition of exponentially many computational paths, each associated with an energy functional.

Residual Learning as a Discrete Dynamical System

A standard residual block updates the feature representation as follows:

$$u(x, t + 1) = u(x, t) + F(u(x, t); W_t) \quad (3.1)$$

where $u(x, t)$ denotes the feature map at depth t , $F(\cdot)$ represents the residual mapping, and W_t are the learnable parameters of the t th block.

In practical architectures, the residual mapping is defined as

$$F(u_t) = W_{2,t} \sigma(W_{1,t} u_t) \quad (3.2)$$

where σ denotes a nonlinear activation function (e.g., ReLU).

This formulation can be interpreted as a forward Euler discretization of:

$$\frac{\partial u}{\partial t} = F(u, t) \quad (3.3)$$

Thus, network depth corresponds to discrete time evolution of a dynamic system.

Network Architecture

The architecture follows a standard deep residual design with skip connections.

Input Stage

- Initial convolution (7×7 , stride 2)
- Batch Normalization
- ReLU activation
- Max pooling

Residual Stages A typical configuration is shown in Table 3.1.

Table 3.1: ResNet Architecture Configuration

Stage	Number of Blocks	Output Channels
Stage 1:	3	64
Stage 2:	4	128
Stage 3:	6	256
Stage 4:	3	512

Each residual block consists of:

1. Convolution (3×3)
2. Batch Normalization
3. ReLU
4. Convolution (3×3)
5. Batch Normalization
6. Identity skip connection
7. Element-wise addition
8. ReLU activation

Path Integral Interpretation

Due to skip connections, information can propagate through multiple combinations of identity and residual mappings.

For a network with N residual blocks, each block has two transitions:

- Identity (skip path)
- Residual transformation

Thus, the total number of possible computational paths is:

$$2^N \quad (3.4)$$

Each path p can be represented as:

$$p = (s_1, s_2, \dots, s_N) \quad (3.5)$$

where

$$s_t = \{ 1 \text{ identitypath} F_t \text{ residualpath} \} \quad (3.6)$$

The contribution of a specific path is

$$u_{path} = u_0 \prod_{t=1}^N s_t \quad (3.7)$$

Therefore, the final output becomes:

$$u(x_N) = \sum_{p \in \mathcal{P}} u_0 \prod_{t=1}^N s_t \quad (3.8)$$

Hamiltonian and Energy Functional

To incorporate the physics-based interpretation, an energy (Hamiltonian) is assigned to each path:

$$H(p) = \frac{1}{2}(\sigma^2 p^2 - ibp - c) \quad (3.9)$$

where:

- p represents path momentum,
- σ^2 is the diffusion coefficient,
- b is a drift parameter,
- c is a potential term.

The action of a path is defined as

$$S_{path} = \sum_{t=1}^N H(p_t) \quad (3.10)$$

The final output using the Feynman formulation is:

$$u(x_N) = \sum_{paths} e^{-S_{path}} u(x_0) \quad (3.11)$$

Paths with lower action contribute more significantly to the final representation.

Energy-Regularized Training Objective

An energy-based regularization term can be introduced into the loss:

$$\mathcal{L}_{total} = \mathcal{L}_{task} + \lambda \sum_{paths} S_{path} \quad (3.12)$$

Alternatively, energy scaling can be integrated into each residual update:

$$u_{t+1} = u_t + \alpha_t F(u_t) \quad (3.13)$$

where

$$\alpha_t = e^{-H_t} \quad (3.14)$$

Continuous-Time Interpretation

As the network depth increases, the model approaches a continuous-time limit:

$$\frac{\partial u}{\partial t} = \sigma^2 \Delta u + b \nabla u - cu \quad (3.15)$$

This establishes a theoretical connection between deep residual networks and diffusion-based dynamical systems.

3.3 Summary

This chapter describes the methodology and design of leukemia cell classification using deep learning models. This proposal needs a high-quality microscope image, expert labeling, and preprocessing techniques such as noise removal, data augmentation, and normalization. Also, need both functional and non-functional requirements for higher accuracy.

Some models are discussed, including SVM, ResNet, CNN, Decision Tree, Random Forrest and KNN. SVMs are suitable for small and high-dimensional datasets. But ResNet and CNN can extract deep features from images. Decision trees and random forests give interpretable and robust classification, and KNN classifies data on similarity.

Chapter 5

Standards and Design Constraints

5.1 Standards Compliance

In this project, we developed a deep learning based leukemia classification system using blood smear microscopic images. Since this system is related to medical diagnosis, maintaining proper standards is very important. We followed both academic research standards and software engineering standards during the development process.

First, we followed a standard machine learning development pipeline. This includes data collection, preprocessing, model selection, training, validation, testing, and performance evaluation. This organized approach helps make sure the system is consistent and reliable.

To evaluate the model performance, we used widely accepted metrics such as accuracy, precision, recall, F1 score and confusion matrix. These metrics are commonly used in medical image classification studies.

We also followed ethical research standards. No personal patient identity was included in the dataset. The images were used only for research and educational purposes. The system is designed as a decision support tool for doctors, not as a replacement for professional medical diagnosis.

We kept a proper record of dataset preprocessing, the setting of the model and the training steps so that the work can be verified and improved in the future.

5.2 Design Constraints

During the development of this project, we faced several limitations in the real-world that affected our system design.

5.2.1 Economic Constraint

One major limitation was financial. Deep learning models like ResNet need high computational power especially GPU based systems which are expensive.

As undergraduate students, we did not have access to advanced hardware. So we used transfer learning with a pretrained ResNet instead of training a deep network from the start. This helped to reduce both computational cost and training time.

Medical data collection is also expensive. Preparing blood smear slides, taking microscopic images and labeling by expert pathologists require laboratory facilities and professional support.

5.2.2 Technical Constraint

The dataset we used was limited compared to real hospital level data. Limited data increase the risk of overfitting in deep learning models.

Another technical challenge was class imbalance between leukemia subtypes. Some types of leukemia had fewer images than others, which can affect the performance of the model.

To solve these problems, we applied data augmentation method like rotation, zooming and flipping. We also used dropout and regularization to reduce overfitting.

5.2.3 Environmental Constraint

Training deep neural networks use a lot of amount electrical energy and long time training hours increase both energy and carbon footprint.

To reduce environmental impact, we:

- Used pretrained models instead of training from start
- kept the number of training epochs low
- Applied early stopping
- Optimized batch size

These steps help to reduce unnecessary power consumption.

5.2.4 Ethical and Health Constraints

Since the system is used in medical field, incorrect prediction may cause serious health risks. A wrong prediction might delay treatment or cause mental stress for patients.

To solve these problem, we carefully validated the model using multiple evaluation metrics. We also stress that the system should support doctors, not replace them.

Patient privacy and data confidentiality were strictly protected throughout the project.

5.3 Sustainability and Social Impact

This project has important social value, especially in developing countries like Bangladesh where expert hematologists are few.

Manual blood smear analysis takes a lot of time and requires experienced specialists. In rural areas, access to such specialists is limited. Our automated classification system can help doctors by providing faster initial results.

In terms of sustainability, the system can be scalable and improved in the future. For example:

- The dataset size can be made larger through hospital collaborations.
- More leukemia subtypes can be included.
- Advanced architectures and Attention mechanisms can be added.
- This system can be made as a web based or cloud based application.

This makes the project suitable for long term research and practical use.

5.4 Complex Engineering Problem

5.4.1 Knowledge Profile

Table: Mapping with Knowledge Profile (BAETE WK1–WK8)

Knowledge Profile	Description
WK1: Mathematics	Application of linear algebra, probability theory, optimization methods, and statistical evaluation metrics for model training and performance analysis.
WK2: Natural Sciences	Basic understanding of biological and medical science related to blood cell morphology and leukemia pathology.
WK3: Engineering Fundamentals	Application of core computer science principles, algorithms, data structures, and machine learning fundamentals.
WK4: Specialized Engineering Knowledge	Use of deep learning architectures such as CNN, ResNet along with medical image processing techniques for classification.
WK5: Engineering Design	Design and development of an AI-based automated classification framework, including preprocessing pipeline and evaluation methodology.

WK6: Research Literature	Extensive review and analysis of contemporary research papers and journals on AI-based leukemia detection and medical image classification.
WK7: Society and Environment	Contribution toward improving healthcare efficiency and supporting early detection of leukemia, which has societal impact.
WK8: Ethics and Professional Responsibility	Ensuring patient data privacy, ethical handling of medical information, fairness in algorithmic decision-making, and professional integrity in research practices.

5.4.2 Complex Problem Solving

Our proposed work is analyzed according to the Complex Engineering Problem (CEP) attributes defined by Board of Accreditation for Engineering & Technical Education (BAETE). This project includes multidisciplinary knowledge, advanced analytical techniques, ethical considerations, and stakeholder involvement. The following mapping show how the project satisfies the BAETE-defined attributes of complex engineering problems (P1–P7) with justification for each category.

Table 5.1 Cost Analysis of AI-Based Leukemia Subtype Classification System

Cost Items	Unit Price (Tk)	Units	Sub Total (Tk)	Assigned Members
Dataset Collection & Annotation	60	10	600	Tanvin, Tasnema
Data Preprocessing & Augmentation	50	12	600	Tasnema, Afia
Model Development (CNN, ResNet, ML Models)	70	15	1050	Tanvin, Shajedur
Model Training & Hyperparameter Tuning	65	20	1300	Tasnema, Tanvin
Performance Evaluation & Testing	55	12	660	Tanvin, Selim
Backend Development (API for Model Deployment)	75	10	750	Selim

Frontend Interface Development	60	8	480	Tanvin, Shajedur
System Integration	60	8	480	Afia, Shajedur
Cloud Deployment / GPU Usage	120	4	480	Selim, Shajedur
Documentation (SRS, Report Writing)	40	15	600	Tasnema, Afia
Presentation & Miscellaneous	–	–	500	Afia, Selim
Total Estimated Cost			7500 Tk	

Mapping with complex problem solving

Table: Mapping with complex problem solving.

Problem Attribute	Description
P1: Depth of Knowledge Required	The project requires multidisciplinary knowledge artificial intelligence, machine learning, deep learning, medical image processing, and fundamental understanding of hematology and leukemia subtypes. It also involves advanced mathematical concepts such as linear algebra, probability, optimization algorithms, and statistical evaluation metrics.
P2: Range of Conflicting Requirements	The system must balance high classification accuracy with computational efficiency. Deep learning models offer superior performance but demand significant computational resources. Additionally, challenges such as data imbalance and limited dataset availability introduce further conflicting requirements.
P3: Depth of Analysis Required	The project requires extensive preprocessing, feature extraction, model selection, hyper parameter tuning, and performance evaluation. Comparative analysis among multiple machine learning and deep learning models is necessary to determine optimal results.
P4: Familiarity of Issues	Automated leukemia subtype classification is not a routine engineering task. The problem involves handling variability in medical images, data noise, class imbalance, and interpretability concerns, requiring innovative and adaptive problem-solving approaches.

P5: Extent of Applicable Codes	The system must adhere to ethical standards for medical data usage, ensuring patient confidentiality, secure data handling, and compliance with healthcare data protection guidelines. Transparency and mitigation of algorithmic bias are also essential considerations.
P6: Extent of Stakeholder Involvement	Key stakeholders include medical professionals, pathologists, hospital authorities, researchers, and patients. Their involvement is essential to ensure clinical relevance, system usability, and reliability of diagnostic support.
P7: Interdependence	The project is highly dependent on the availability of quality labeled datasets, computational infrastructure, and collaboration with medical experts. The performance of the overall system relies on the integration of preprocessing techniques, model architecture, and evaluation strategies.

5.4.3 Engineering Activities

Our proposed work is further assessed based on the Complex Engineering Activities framework defined by BAETE. The development of an automated leukemia subtype classification system involves diverse technical resources, multidisciplinary interaction, innovation, societal implications, and non-routine problem-solving. The following table presents the mapping of the project with the Complex Engineering Activity attributes (A1–A5) along with appropriate justification.

Attribute	Description
A1: Range of Resources	The project requires diverse resources - microscopic blood smear image datasets from hospitals and publicly available sources, high-performance computing resources (GPUs) for training deep learning models, machine learning frameworks (TensorFlow or PyTorch), and domain expertise from medical professionals for validation and interpretation of results.
A2: Level of Interaction	The project demands interaction between multidisciplinary domains - computer science, artificial intelligence, and medical science. High-quality labeled medical data is essential for achieving reliable classification accuracy. Additionally, significant computational processing power is required for model training and optimization.

10	The project applies machine learning and deep learning principles innovatively to automate leukemia subtype classification from microscopic images. The integration of advanced CNN-based architectures and comparative model analysis introduces a data-driven approach to assist traditional diagnostic methods.
6 6	The system has direct societal impact as it supports early and accurate detection of leukemia subtypes. An incorrect prediction may lead to diagnostic delays or misinterpretation, while a reliable system can assist medical professionals in improving diagnostic efficiency and patient outcomes.
	While medical image analysis and machine learning techniques exist individually, their integration for automated leukemia subtype classification presents a non-trivial and non-routine engineering challenge. The task requires adaptation of advanced deep learning models to domain-specific medical imaging constraints.