


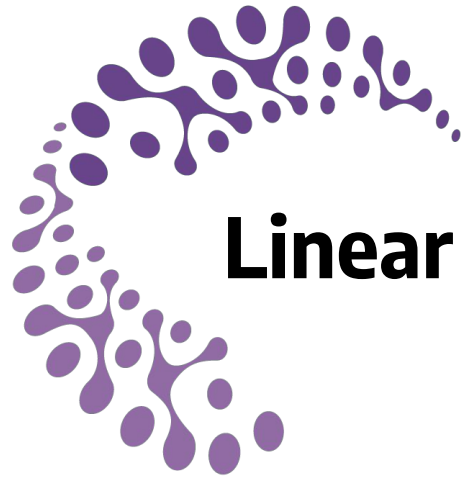

# Linear Algebra Review

CSE0613409


Machine Vision and Motion Analysis

Mahin Montasir Afif  
(MMF)


Department of Computer Science and Engineering

# What are images? (in Matlab)

- Matlab treats images as matrices of numbers
- To proceed, let's talk very briefly about how images are formed

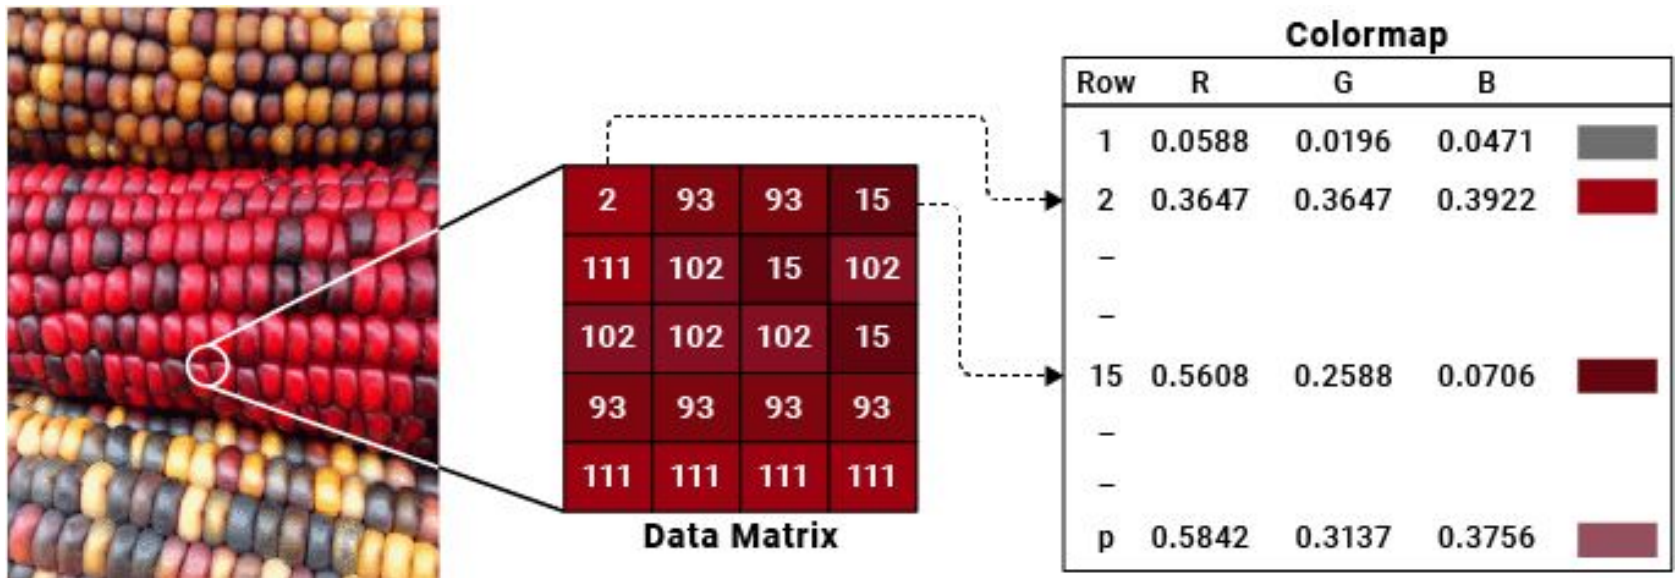

# Image formation

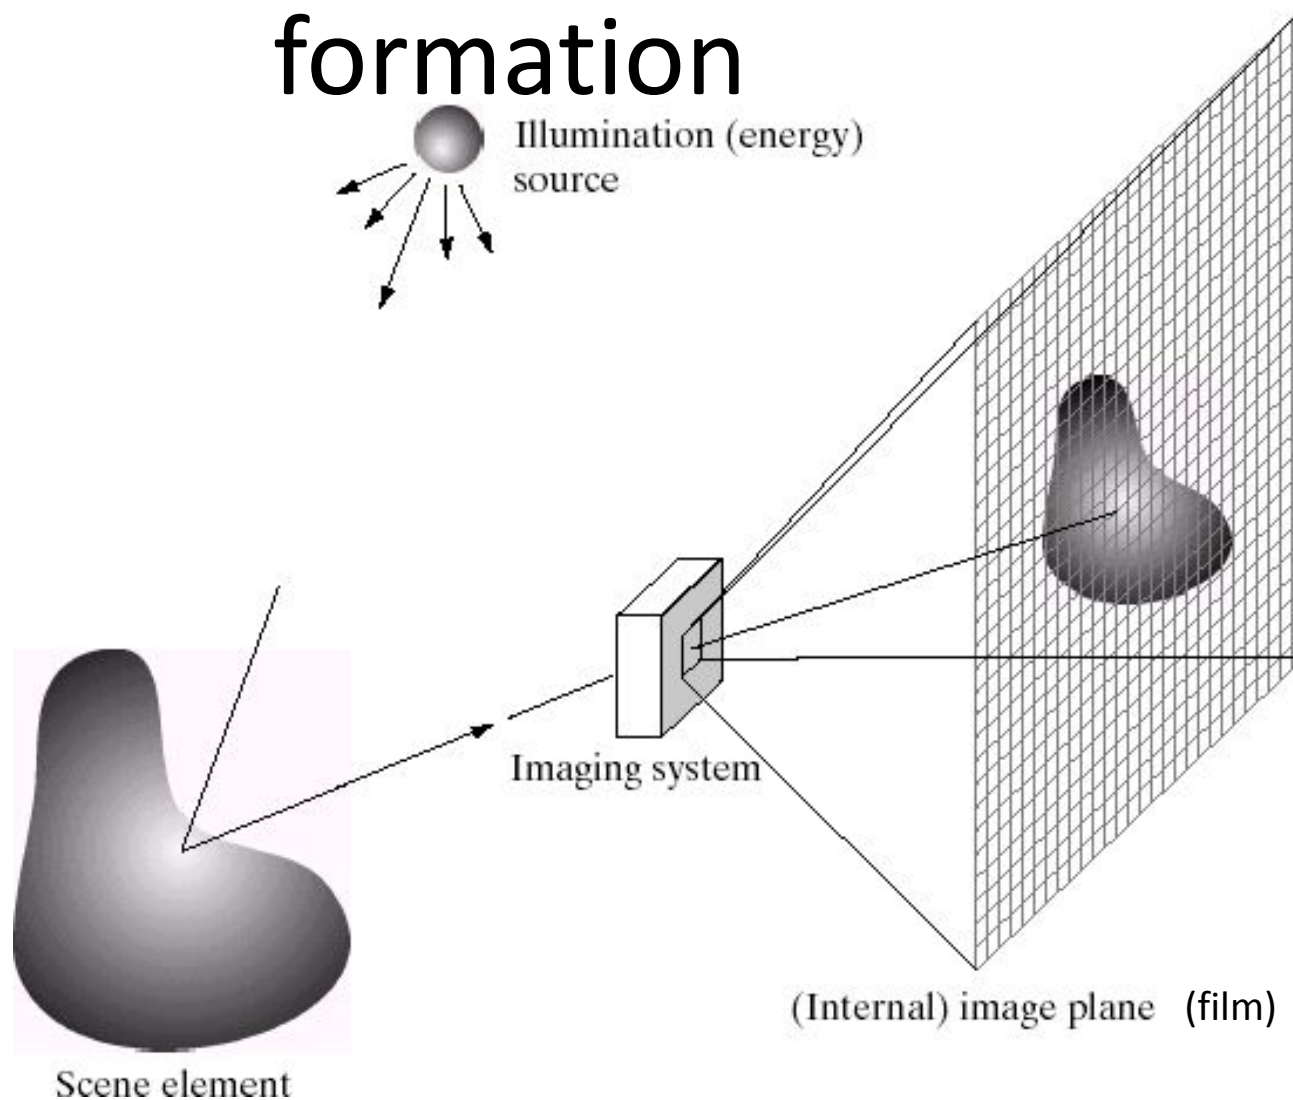

# Digital camera




A digital camera replaces film with a sensor array

- Each cell in the array is light-sensitive diode that converts photons to electrons

<http://electronics.howstuffworks.com/cameras-photography/digital/digital-camera.htm>

# Digital images

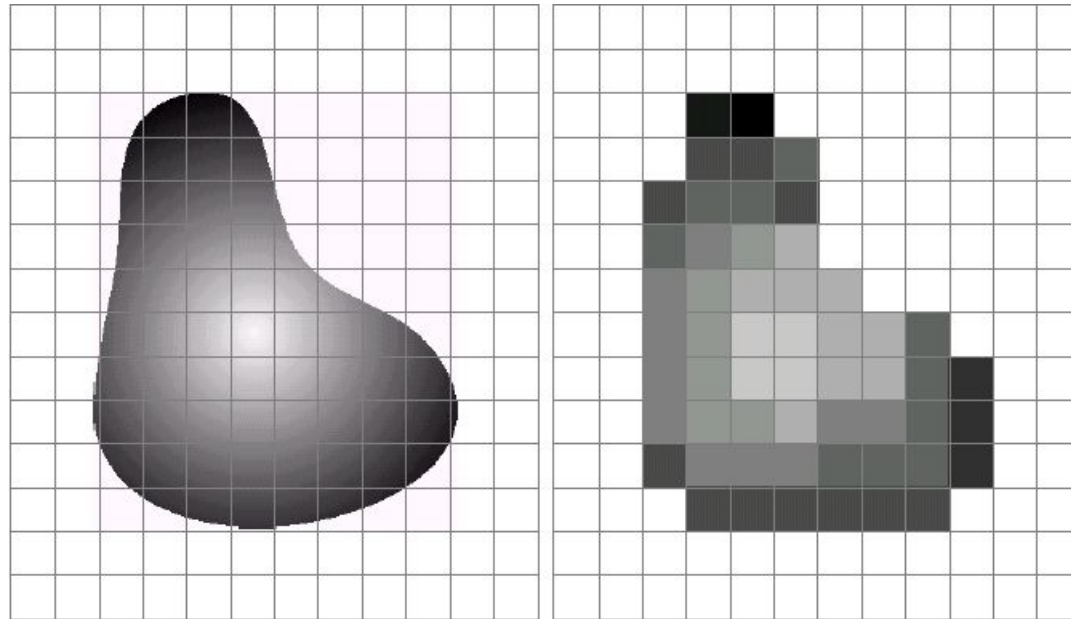

a b

**FIGURE 2.17** (a) Continuous image projected onto a sensor array. (b) Result of image sampling and quantization.



- **Sample** the 2D space on a regular grid
- **Quantize** each sample (round to nearest integer)

## Image sampling and quantization

There are numerous ways to acquire images but our objective to *generate digital images from sensed data*. To create digital image, we need to convert the continuous sensed data into digital form. This involves two processes: ***sampling*** and ***quantization***.



- The basic idea behind sampling and quantization is illustrated in Fig. 2.16. Fig. 2.16 (a) shows a continuous image,  $f(x, y)$ , that we want to convert digital form. *An image may be continuous with respect to the  $x$ - and  $y$ - coordinates and also in amplitude.* To convert it to digital form, we have to sample the function in both coordinates and in amplitude.
- Digitizing the coordinate values is called ***sampling***.
- Digitizing the amplitude values is called the ***quantization***.

# Image Sampling & Quantization

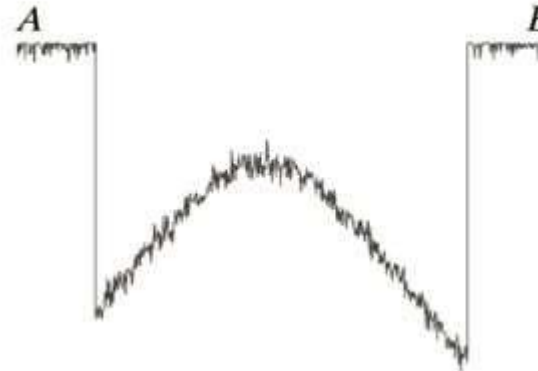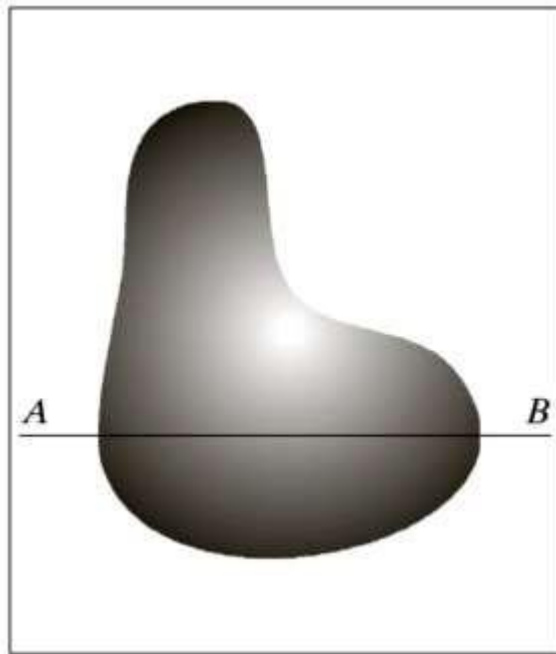

a b  
c d

**FIGURE 2.16**  
Generating a digital image.  
(a) Continuous image. (b) A scan line from A to B in the continuous image, used to illustrate the concepts of sampling and quantization. (c) Sampling and quantization. (d) Digital scan line.

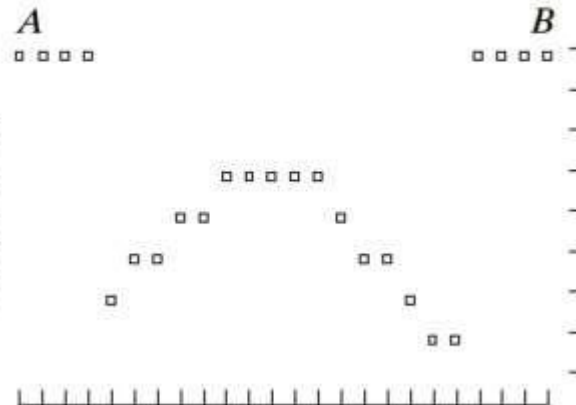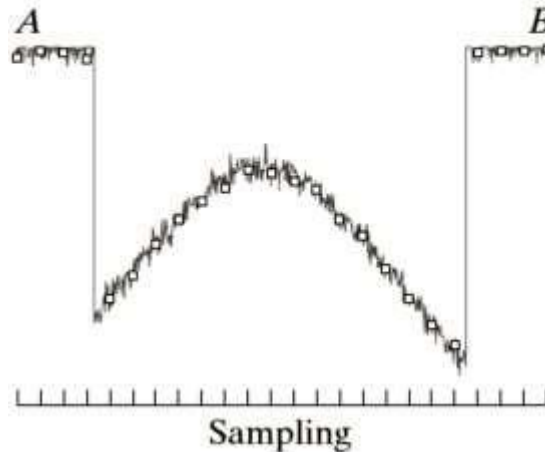

## Cont.


The one dimensional function shown in 2.16 (b) is a plot of amplitude (gray level) values of the continuous image along the line segment AB in fig. 2.16 (a).

To sample this function, we take equally spaced samples along line AB, as shown in fig. 2.16 (c). The samples are shown as small white squares superimposed on the function. The set of these discrete locations gives the sampled function.


The right side of the fig. 2.16 (c) shows the gray level scale divided into eight discrete levels, ranging from black to white. The continuous gray levels are quantized simply by assigning one of the eight discrete gray levels to each sample. *The digital samples resulting from both sampling and quantization are shown in 2.16(d).*

# Digital images

- **Quantize** each sample (round to nearest integer)
- What does quantizing signal look like?

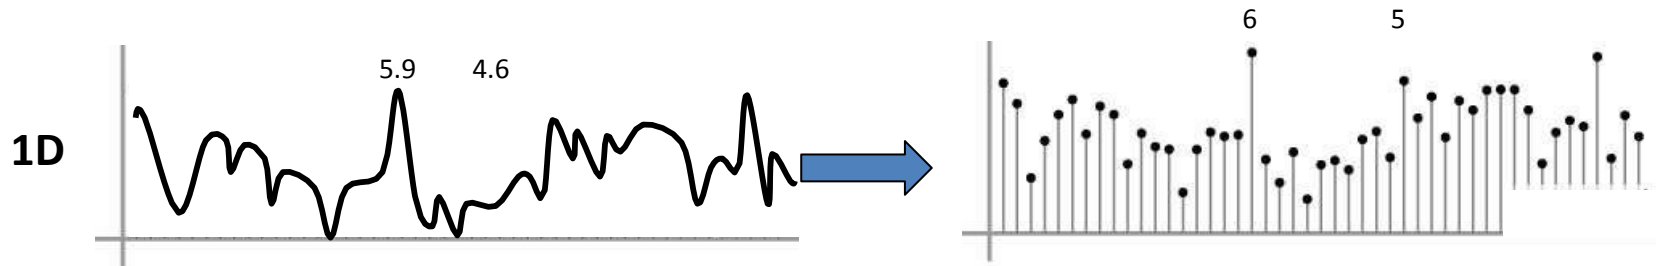


- Image thus represented as a matrix of integer values.

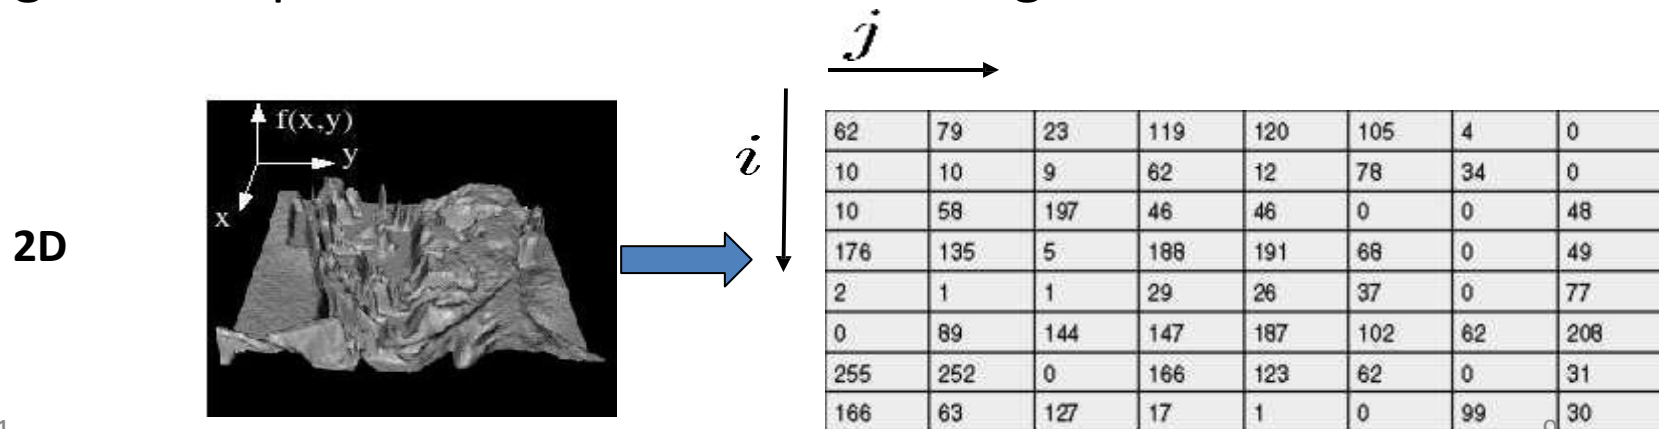

# Digital color images

A (digital) **color image** is a digital **image** that includes **color** information for each pixel. A **color image** has three values (or channels) per pixel and they measure the intensity and chrominance of light

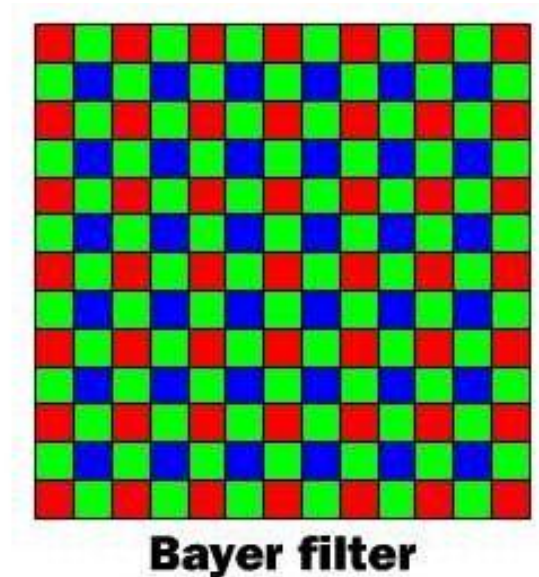

© 2000 How Stuff Works

# Digital color images

Color images,  
RGB color space:

Split image  
into three  
channels



11-Jan-21 R



G



B

# Images in Matlab

- Color images represented as a matrix with multiple channels (=1 if grayscale)
- Suppose we have a NxM RGB image called “im”
  - `im(1,1,1)` = top-left pixel value in R-channel
  - `im(y, x, b)` = y pixels **down**, x pixels **to right** in the b<sup>th</sup> channel
  - `im(N, M, 3)` = bottom-right pixel in B-channel
- `imread(filename)` returns a uint8 image (values 0 to 255)
  - Convert to double format with `double` or `im2double`

row

column

</