

Name:Afrin Sultana

Id:2023200000251

Question:2

```
kali@kali: ~  
Session Actions Edit View Help  
└─(kali@kali)-[~]  
$ nmap -A 192.168.0.1  
Starting Nmap 7.98 ( https://nmap.org ) at 2026-05-10 08:45 -0400  
Nmap scan report for 192.168.0.1  
Host is up (0.00049s latency).  
All 1000 scanned ports on 192.168.0.1 are in ignored states.  
Not shown: 1000 filtered tcp ports (no-response)  
Warning: OSScan results may be unreliable because we could not find at least 1 open and 1 closed port  
Aggressive OS guesses: D-Link DFL-700 firewall (89%), HP Officejet Pro 8500 printer (89%), IBM i 7.4 (89%),  
oIP proxy (88%), Asus WL-500gP wireless broadband router (88%), Microsoft Windows 2000 (88%), Microsoft Wind  
8%)  
No exact OS matches for host (test conditions non-ideal).  
Network Distance: 2 hops  
  
TRACEROUTE (using port 80/tcp)  
HOP RTT ADDRESS  
1 0.43 ms 192.168.163.2  
2 0.25 ms 192.168.0.1  
  
OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 64.35 seconds  
└─(kali@kali)-[~]
```

```
OS and Service detection performed. Please report any incorrect results  
Nmap done: 1 IP address (1 host up) scanned in 64.35 seconds  
  
└─(kali@kali)-[~]  
$ nmap -sn 192.168.0.1/24  
Starting Nmap 7.98 ( https://nmap.org ) at 2026-05-10 08:50 -0400  
Nmap scan report for 192.168.0.0  
Host is up (0.00038s latency).  
Nmap scan report for 192.168.0.1  
Host is up (0.00064s latency).  
Nmap scan report for 192.168.0.2  
Host is up (0.00053s latency).  
Nmap scan report for 192.168.0.3  
Host is up (0.00045s latency).  
Nmap scan report for 192.168.0.4  
Host is up (0.00066s latency).  
Nmap scan report for 192.168.0.5  
Host is up (0.00057s latency).  
Nmap scan report for 192.168.0.6  
Host is up (0.0019s latency).  
Nmap scan report for 192.168.0.7  
Host is up (0.0019s latency).  
Nmap scan report for 192.168.0.8
```

```
Nmap done: 256 IP addresses (256 hosts up) scanned in 180.34 seconds
```

```
(kali㉿kali)-[~]
```

```
$ nmap -A 192.168.0.1
```

```
Starting Nmap 7.98 ( https://nmap.org ) at 2026-05-10 08:55 -0400
```

```
Nmap scan report for 192.168.0.1
```

```
Host is up (0.010s latency).
```

```
All 1000 scanned ports on 192.168.0.1 are in ignored states.
```

```
Not shown: 1000 filtered tcp ports (no-response)
```

```
Warning: OSScan results may be unreliable because we could not find at least 1 open and  
Aggressive OS guesses: D-Link DFL-700 firewall (89%), HP Officejet Pro 8500 printer (89%  
oIP proxy (88%), Asus WL-500gP wireless broadband router (88%), Microsoft Windows 2000 (8%)
```

```
No exact OS matches for host (test conditions non-ideal).
```

```
Network Distance: 2 hops
```

```
TRACEROUTE (using port 80/tcp)
```

```
HOP RTT ADDRESS
```

```
1 0.55 ms 192.168.163.2
```

```
2 0.28 ms 192.168.0.1
```

```
OS and Service detection performed. Please report any incorrect results at https://nmap.org.
```

```
Nmap done: 1 IP address (1 host up) scanned in 66.65 seconds
```

```
(kali㉿kali)-[~]
```

```
$ nmap -sV --script vuln 192.168.0.1
```

```
Starting Nmap 7.98 ( https://nmap.org ) at 2026-05-10 08:57 -0400
```

```
Nmap scan report for 192.168.0.1
```

```
Host is up (0.014s latency).
```

```
All 1000 scanned ports on 192.168.0.1 are in ignored states.
```

```
Not shown: 1000 filtered tcp ports (no-response)
```

```
Service detection performed. Please report any incorrect results at https://nmap.org/sub
```

```
Nmap done: 1 IP address (1 host up) scanned in 65.22 seconds
```

```
(kali㉿kali)-[~]
```

```
$ sudo nmap -A -Pn 192.168.0.1
```

```
[sudo] password for kali: 
```

Question 3:

A

```
Session Actions Edit View Help
(kali@kali)-[~]
$ msfconsole
Metasploit tip: Store discovered credentials for later use with creds


/ it looks like you're trying to run a \
/ module \

[
  @ @
  || ||
  || ||
  \ \
  \ \

+ -- ==[ metasploit v6.4.116-dev ]
+ -- ==[ 2,623 exploits - 1,326 auxiliary - 1,707 payloads ]
+ -- ==[ 431 post - 49 encoders - 14 nops - 10 evasion ]

Metasploit Documentation: https://docs.metasploit.com/
The Metasploit Framework is a Rapid7 Open Source Project

msf >
```

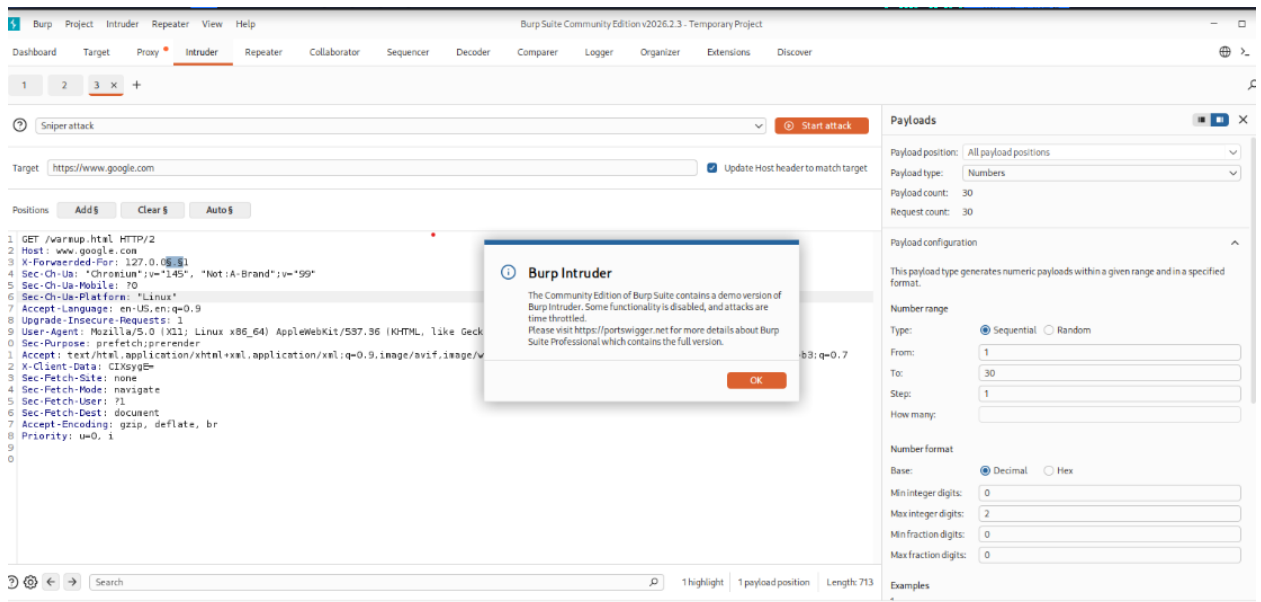

Question 4:

Task 1: Activity: Tested login forms for SQL Injection vulnerabilities and checked if authentication could be bypassed.

Executive Summary: Weak input validation allowed unauthorized database access. This can lead to data leakage and security breaches. Risk level is High.

Activity: Tested login forms for SQL Injection vulnerabilities .

Summary: Weak input validation allowed unauthorized database access. Risk level is high.

Task 2:

Activity: Tested web input fields by inserting script payloads and browser behavior. Summary: . Risk level is Medium to High.

Task 3:

Activity: Installed DVWA in Kali Linux and tested common web vulnerabilities.

Summary: Weak security settings increased the chance of cyberattacks and unauthorized access. Risk level is Medium

This lab activities improved understanding of common cybersecurity vulnerabilities and highlighted the importance of secure coding and system protection.