

SimpleRoomsEnv Transition Table

[Bookmark this page](#)

Lab Instructions

Let's revisit the SimpleRoomsEnv environment. Go to the **lib\envs** folder and open the simple_rooms.py file.

By now you should be quite familiar with this environment, its different states, and how the reward structure is implemented.

Consider the following state in this environment:



Lab Question

1/1 point (graded)


Which four of the following represent transition probabilities and expected rewards?

- ☒ s:1000000000000000 a:0 s':1000000000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:1000000000000000 a:0 s':0100000000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:1000000000000000 a:0 s':1000000000000000 p(s'|s,a):0.25 r(s,a,s'): 0
- ☒ s:1000000000000000 a:1 s':0100000000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:1000000000000000 a:1 s':1000000000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:1000000000000000 a:1 s':0100000000000000 p(s'|s,a):0.25 r(s,a,s'): 0
- ☐ s:1000000000000000 a:2 s':0000100000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☒ s:1000000000000000 a:2 s':1000000000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:1000000000000000 a:2 s':1000000000000000 p(s'|s,a):0.25 r(s,a,s'): 0
- ☒ s:1000000000000000 a:3 s':0000100000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:1000000000000000 a:3 s':1000000000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:1000000000000000 a:3 s':0000100000000000 p(s'|s,a):0.25 r(s,a,s'): 0

☒ Submit You have used 2 of 2 attempts [Show Answer](#)

☒ Correct (1/1 point)

Now consider the following state in this environment:

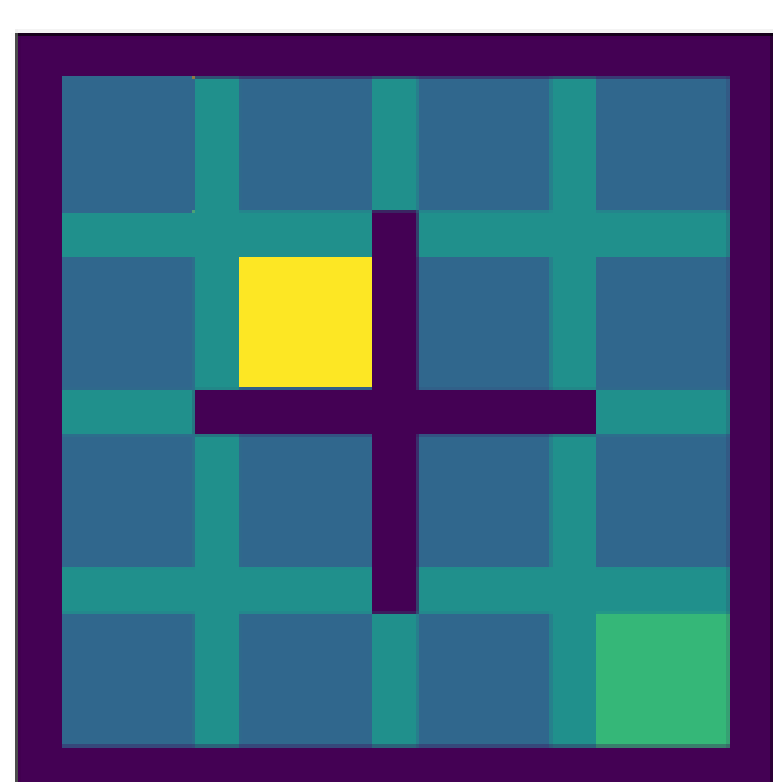

Lab Question

1/1 point (graded)

Which four of the following represent transition probabilities and expected rewards?

- ☐ s:0000010000000000 a:0 s':0000010000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☒ s:0000010000000000 a:0 s':0100000000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:0000010000000000 a:0 s':0100000000000000 p(s'|s,a):0.25 r(s,a,s'): 0
- ☒ s:0000010000000000 a:1 s':0000010000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:0000010000000000 a:1 s':0000010000000000 p(s'|s,a):1 r(s,a,s'): 1
- ☐ s:0000010000000000 a:1 s':0000010000000000 p(s'|s,a):0.25 r(s,a,s'): 0
- ☐ s:0000010000000000 a:2 s':0000010000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☒ s:0000010000000000 a:2 s':0000100000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:0000010000000000 a:2 s':0000100000000000 p(s'|s,a):0.25 r(s,a,s'): 0
- ☒ s:0000010000000000 a:3 s':0000010000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:0000010000000000 a:3 s':0000100000000000 p(s'|s,a):1 r(s,a,s'): 0
- ☐ s:0000010000000000 a:3 s':0000010000000000 p(s'|s,a):0.25 r(s,a,s'): 0

☒ Submit You have used 2 of 2 attempts [Show Answer](#)

☒ Correct (1/1 point)

[◀ Previous](#) [Next ▶](#)



[About](#)
[edX for Business](#)

Legal

[Terms of Service & Honor Code](#)
[Privacy Policy](#)
[Accessibility Policy](#)

Connect

[Blog](#)
[Contact Us](#)
[Help Center](#)



© 2012–2019 edX Inc.
EdX, Open edX, and MicroMasters are registered trademarks of edX Inc. | 粤ICP备17044299号-2