

1 The Console in Windows, MacOS X, and Linux

Almost all popular operating systems are accessed through a user-friendly *graphical user interface* (*GUI*) that is designed to make typical tasks easy to learn to solve. As a computer programmer, you often need to access some of the functionalities of the computer, which, unfortunately, are sometimes complicated by this particular graphical user interface. The *console*, also called the *terminal* and the *Windows command line*, is the right hand of a programmer. The console is a simple program that allows you to complete text commands. Almost all the tasks that can be done with the graphical user interface can be done in the console and vice versa. Using the console, you will benefit from its direct control of the programs we write, and in your education, you will benefit from the fast and raw information you get through the console.

1.1 The Basics

When you open a *directory* or *folder* in your preferred operating system, the directory will have a location in the file system, whether from the console or through the operating system's graphical user interface. The console will almost always be associated with a particular directory or folder in the file system, and it is said that it is the directory that the console is in. The exact structure of file systems varies between Linux, MacOS X, and Windows, but common is that it is a hierarchical structure. This is illustrated in Figure 1.1.

There are many predefined console commands, available in the console, and you can also make your own. In the following sections, we will review the most important commands in the three different operating systems. These are summarized in Table 1.1.

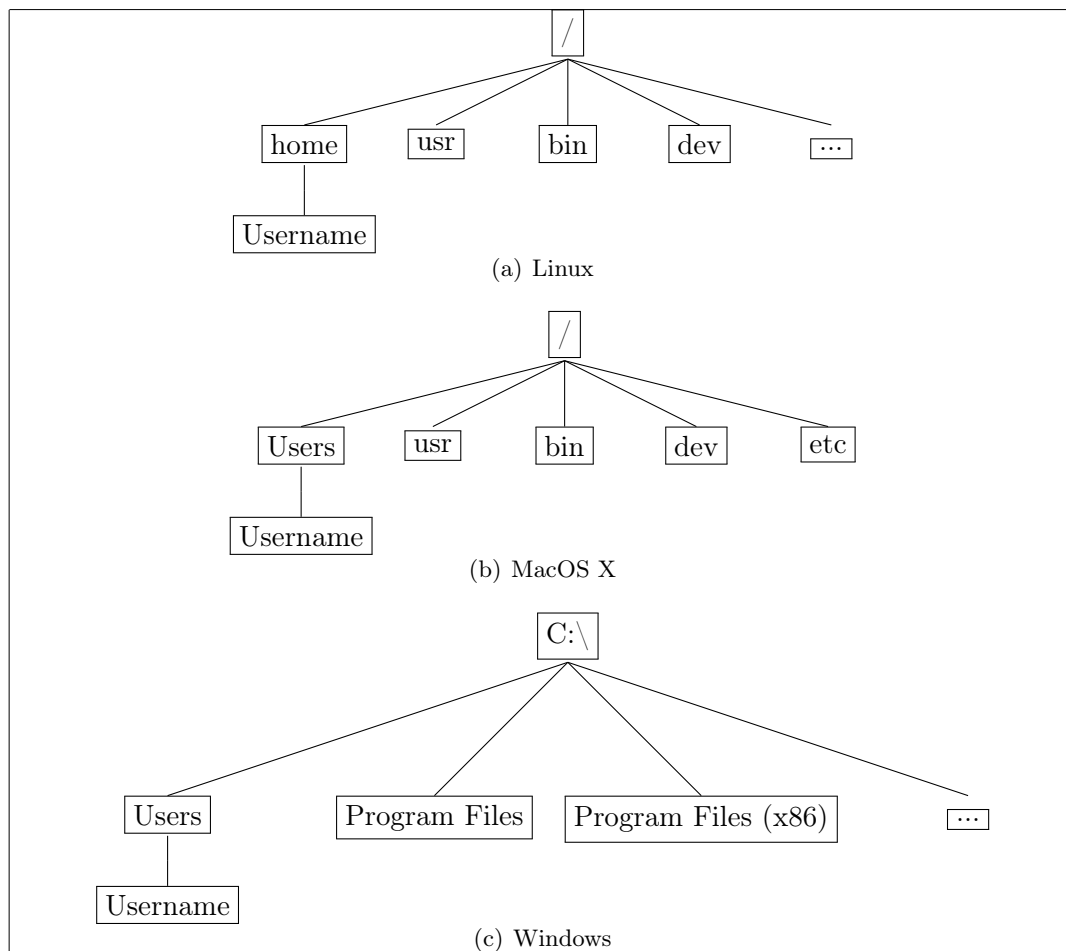


Figure 1.1: The top file hierarchy levels of common operating systems.

1.2 Windows

In this section we will discuss the commands summarized in Table 1.1. Windows 7 and earlier versions: To open the console, press **Start->Run** in the lower left corner, and then type **cmd** in the box. In Windows 8 and 10, you right-click on the windows icon, choose **Run** or equivalent in your local language, and type **cmd**. Alternatively, you can type **Windows-key + R**. Now you should open a console window with a prompt showing something like Listing 1.1.

Windows	MacOS X/Linux	Description
d	ls	Show content of present directory.
cd <d>	cd <d>	Change present directory to <d>.
mkdir <d>	mkdir <d>	Create directory <d>.
rmdir <d>	rmdir <d>	Delete <d> (Warning: cannot be reverted).
move <f> <f d>	mv <f> <f d>	Move <fil> to <f d>.
copy <f1> <f2>	cp <f1> <f2>	Create a new file called <f2> as a copy of <f1>.
del <f>	rm <f>	delete <f> (Warning: cannot be reverted).
echo <s v>	echo <s v>	Write a string or content of a variable to screen.

Table 1.1: The most important console commands for Windows, MacOS X, and Linux. Here <f*> is shorthand for any filename, <d> for any directory name, <s> for any string, and <v> for any shell-variable.

Listing 1.1: The Windows console.

```

1 Microsoft Windows [Version 6.1.7601]
2 Copyright (c) 2009 Microsoft Corporation. All rights
   reserved.
3
4 C:\Users\sporrin>
```

To see which files are in the directory, use *dir*, as shown in Listing 1.2.

Listing 1.2: Directory listing with dir.

```
1 C:\Users\sporrington>dir
2 Volume in drive C has no label.
3 Volume Serial Number is 94F0-31BD
4
5 Directory of C:\Users\sporrington
6
7 30-07-2015 15:23 <DIR> .
8 30-07-2015 15:23 <DIR> ..
9 30-07-2015 14:27 <DIR> Contacts
10 30-07-2015 14:27 <DIR> Desktop
11 30-07-2015 17:40 <DIR> Documents
12 30-07-2015 15:11 <DIR> Downloads
13 30-07-2015 14:28 <DIR> Favorites
14 30-07-2015 14:27 <DIR> Links
15 30-07-2015 14:27 <DIR> Music
16 30-07-2015 14:27 <DIR> Pictures
17 30-07-2015 14:27 <DIR> Saved Games
18 30-07-2015 17:27 <DIR> Searches
19 30-07-2015 14:27 <DIR> Videos
20 0 File(s) 0 bytes
21 13 Dir(s) 95.004.622.848 bytes free
22
23 C:\Users\sporrington>
```

We see that there are no files and thirteen directories (DIR). The columns tell from left to right: the date and time of their creation, the file size or if it is a folder, and the name file or directory name. The first two folders “.” and “..” are found in each folder and refer to this folder as well as the one above in the hierarchy. In this case, the folder “.” is an alias for C:\Users\sporrington and “..” for C:\Users.

Use **cd** to change directory, e.g., to Documents, as in Listing 1.3.

Listing 1.3: Change directory with cd.

```
1 C:\Users\sporrington>cd Documents
2
3 C:\Users\sporrington\Documents>
```

Note that some systems translate default filenames, so their names may be given different names in different languages in the graphical user interface as compared to the console.

You can use *mkdir* to create a new directory called, e.g., *myFolder*, as illustrated in Listing 1.4.

Listing 1.4: Creating a directory with *mkdir*.

```
1 C:\Users\sporrington\Documents>mkdir myFolder
2
3 C:\Users\sporrington\Documents>dir
4 Volume in drive C has no label.
5 Volume Serial Number is 94F0-31BD
6
7 Directory of C:\Users\sporrington\Documents
8
9 30-07-2015  19:17    <DIR>          .
10 30-07-2015  19:17    <DIR>          ..
11 30-07-2015  19:17    <DIR>          myFolder
12                0 File(s)              0 bytes
13                3 Dir(s)  94.656.638.976 bytes free
14
15 C:\Users\sporrington\Documents>
```

By using *dir* we inspect the result.

Files can be created by, e.g., *echo* and *redirection*, as demonstrated in Listing 1.5.

Listing 1.5: Creating a file with *echo* and redirection.

```
1 C:\Users\sporrington\Documents>echo "Hi" > hi.txt
2
3 C:\Users\sporrington\Documents>dir
4 Volume in drive C has no label.
5 Volume Serial Number is 94F0-31BD
6
7 Directory of C:\Users\sporrington\Documents
8
9 30-07-2015  19:18    <DIR>          .
10 30-07-2015  19:18    <DIR>          ..
11 30-07-2015  19:17    <DIR>          myFolder
12 30-07-2015  19:18                8 hi.txt
13                1 File(s)              8 bytes
14                3 Dir(s)  94.656.634.880 bytes free
15
16 C:\Users\sporrington\Documents>
```

To move the file *hi.txt* to the directory *myFolder*, use *move*, as shown in Listing 1.6.

Listing 1.6: Move a file with `move`.

```
1 C:\Users\sporrington\Documents>move hi.txt myFolder
2     1 file(s) moved.
3
4 C:\Users\sporrington\Documents>
```

Finally, use *del* to delete a file and *rmdir* to delete a directory, as shown in Listing 1.7.

Listing 1.7: Delete files and directories with `del` and `rmdir`.

```
1 C:\Users\sporrington\Documents>cd myFolder
2
3 C:\Users\sporrington\Documents\myFolder>del hi.txt
4
5 C:\Users\sporrington\Documents\myFolder>cd ..
6
7 C:\Users\sporrington\Documents>rmdir myFolder
8
9 C:\Users\sporrington\Documents>dir
10 Volume in drive C has no label.
11 Volume Serial Number is 94F0-31BD
12
13 Directory of C:\Users\sporrington\Documents
14
15 30-07-2015  19:20    <DIR>          .
16 30-07-2015  19:20    <DIR>          ..
17                0 File(s)                0 bytes
18                2 Dir(s)  94.651.142.144 bytes free
19
20 C:\Users\sporrington\Documents>
```

The commands available from the console must be in its *search path*. The search path can be seen using `echo`, as shown in Listing 1.8.

Listing 1.8: Displaying the search path.

```
1 C:\Users\sporrington\Documents>echo %Path%
2 C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;
   C:\Windows\System32\WindowsPowerShell\v1.0\;"\Program
   Files\emacs-24.5\bin\"
3
4 C:\Users\sporrington\Documents>
```

The path can be changed using the Control panel in the graphical user interface. In Windows 7, choose the Control panel, choose **System and Security** → **System** → **Advanced system settings** → **Environment Variables**. In Windows 10, you can find this window by searching for “Environment” in the Control panel. In the window’s **System variables** box, double-click on **Path** and add or remove a path from the list. The search path is a list of paths separated by “;”. Beware, Windows uses the search path for many different tasks, so remove only paths that you are certain are not used for anything.

A useful feature of the console is that you can use the **tab**-key to cycle through filenames. E.g., if you write **cd** followed by a space and **tab** a couple of times, then the console will suggest to you the available directories.

1.3 MacOS X and Linux

MacOS X (OSX) and Linux are very similar, and both have the option of using *bash* as console. It is in the standard console on MacOS X and on many Linux distributions. A summary of the most important *bash* commands is shown in Table 1.1. In MacOS X, you find the console by opening **Finder** and navigating to **Applications** → **Utilities** → **Terminal**. In Linux, the console can be started by typing **Ctrl + Alt + T**. Some Linux distributions have other key-combinations such as **Super + T**.

Once opened, the console is shown in a window with content, as shown in Listing 1.9.

Listing 1.9: The MacOS console.

```
1 Last login: Thu Jul 30 11:52:07 on ttys000
2 FN11194:~ sporring$
```

“FN11194” is the name of the computer, the character `~` is used as an alias for the user’s home directory, and “sporring” is the username for the user presently logged onto the system. Use *ls* to see which files are present, as shown in Listing 1.10.

Listing 1.10: Display a directory content with *ls*.

```
1 FN11194:~ sporring$ ls
2 Applications      Documents          Library            Music
   Public
3 Desktop           Downloads          Movies             Pictures
4 FN11194:~ sporring$
```

More details about the files are available by using flags to `ls` as demonstrated in Listing 1.11.

Listing 1.11: Display extra information about files using flags to `ls`.

```
1 FN11194:~ sporring$ ls -l
2 drwx----- 6 sporring staff 204 Jul 30 14:07
   Applications
3 drwx-----+ 32 sporring staff 1088 Jul 30 14:34 Desktop
4 drwx-----+ 76 sporring staff 2584 Jul 2 15:53 Documents
5 drwx-----+ 4 sporring staff 136 Jul 30 14:35 Downloads
6 drwx-----@ 63 sporring staff 2142 Jul 30 14:07 Library
7 drwx-----+ 3 sporring staff 102 Jun 29 21:48 Movies
8 drwx-----+ 4 sporring staff 136 Jul 4 17:40 Music
9 drwx-----+ 3 sporring staff 102 Jun 29 21:48 Pictures
10 drwxr-xr-x+ 5 sporring staff 170 Jun 29 21:48 Public
11 FN11194:~ sporring$
```

The flag `-l` means long, and many other flags can be found by querying the built-in manual with `man ls`. The output is divided into columns, where the left column shows a number of codes: “d” stands for directory, and the set of three of optional “rwx” denote whether respectively the owner, the associated group of users, and anyone can respectively “r” - read, “w” - write, and “x” - execute the file. In all directories but the **Public** directory, only the owner can do any of the three. For directories, “x” means permission to enter. The second column can often be ignored, but shows how many links there are to the file or directory. Then follows the username of the owner, which in this case is **sporring**. The files are also associated with a group of users, and in this case, they all are associated with the group called **staff**. Then follows the file or directory size, the date of last change, and the file or directory name. There are always two hidden directories: “.” and “..”, where “.” is an alias for the present directory, and “..” for the directory above. Hidden files will be shown with the `-a` flag.

Use `cd` to change to the directory, for example to **Documents** as shown in Listing 1.12.

Listing 1.12: Change directory with `cd`.

```
1 FN11194:~ sporring$ cd Documents/
2 FN11194:Documents sporring$
```

Note that some graphical user interfaces translate standard filenames and directories to the local language, such that navigating using the graphical user interface will reveal other files and directories, which, however, are aliases.

You can create a new directory using *mkdir*, as demonstrated in Listing 1.13.

Listing 1.13: Creating a directory using mkdir.

```
1 FN11194:Documents sporring$ mkdir myFolder
2 FN11194:Documents sporring$ ls
3 myFolder
4 FN11194:tmp sporring$
```

A file can be created using *echo* and with *redirection*, as shown in Listing 1.14.

Listing 1.14: Creating a file with echo and redirection.

```
1 FN11194:Documents sporring$ echo "hi" > hi.txt
2 FN11194:Documents sporring$ ls
3 hi.txt          myFolder
```

To move the file *hi.txt* into *myFolder*, use *mv*. This is demonstrated in Listing 1.15.

Listing 1.15: Moving files with mv.

```
1 FN11194:Documents sporring$ echo mv hi.txt myFolder/
2 FN11194:Documents sporring$
```

To delete the file and the directory, use *rm* and *rmdir*, as shown in Listing 1.16.

Listing 1.16: Deleting files and directories.

```
1 FN11194:Documents sporring$ cd myFolder/
2 FN11194:myFolder sporring$ rm hi.txt
3 FN11194:myFolder sporring$ cd ..
4 FN11194:Documents sporring$ rmdir myFolder/
5 FN11194:Documents sporring$ ls
6 FN11194:Documents sporring$
```

Only commands found on the *search path* are available in the console. The content of the search path is seen using the *echo* command, as demonstrated in Listing 1.17.

Listing 1.17: The content of the search path.

```
1 FN11194:Documents sporring$ echo $PATH
2 /Applications/Maple
   17//Applications/PackageManager.app/Contents/MacOS/:
   /Applications/MATLAB_R2014b.app/bin/:/opt/local/bin:
   /opt/local/sbin:/usr/local/bin:/usr/bin:/bin:/usr/sbin:
   /sbin:/opt/X11/bin:/Library/TeX/texbin
3 FN11194:Documents sporring$
```

The search path can be changed by editing the setup file for Bash. On MacOS X it is called `~/.profile`, and on Linux it is either `~/.bash_profile` or `~/.bashrc`. Here new paths can be added by adding the following line: `export PATH=<new path>:<another new path>:$PATH`.

A useful feature of Bash is that the console can help you write commands. E.g., if you write `fs` followed by pressing the `tab`-key, and if `Mono` is in the search path, then Bash will typically respond by completing the line as `fsharp`, and by further pressing the `tab`-key some times, Bash will show the list of options, typically `fsharp-i` and `fsharp-c`. Also, most commands have an extensive manual which can be accessed using the `man` command. E.g., the manual for `rm` is retrieved by `man rm`.