



# Machine Learning for CI

Kyra Wulffert

[kwulffert@yahoo.com](mailto:kwulffert@yahoo.com)

Matthew Treinish

[mtreinish@kortar.org](mailto:mtreinish@kortar.org)

Andrea Frittoli


[andrea.frittoli@gmail.com](mailto:andrea.frittoli@gmail.com)

August 29, 2018

[https://github.com/afrittoli/ciml\\_talk](https://github.com/afrittoli/ciml_talk)



# CI at Scale

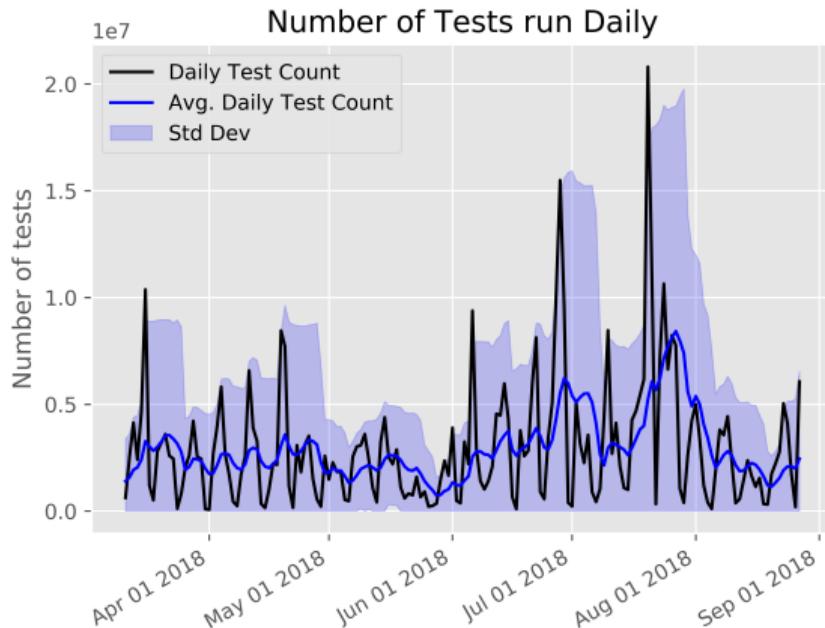

Source: [subunit2sql-graph dailycount](#)


- ▶ Continuous Integration
- ▶ Continuous Log Data
- ▶ Lots of data, little time
- ▶ Triaging failures?
- ▶ AI to the rescue!

## The OpenStack use case

- ▶ Integration testing in a VM
- ▶ System logs, application logs
- ▶ Dstat data
- ▶ Gate testing
- ▶ Not only OpenStack

Normalized system average load for different examples

# Collecting data

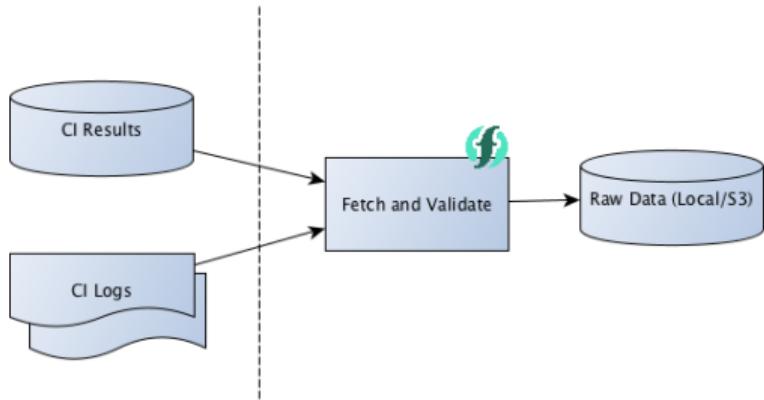


Data caching diagram

- ▶ Automation and repeatability
- ▶ Light-weight data validation
- ▶ Object storage for data
- ▶ Periodic Action on OpenWhisk

# Experiment Workflow

- ▶ Visualize data
- ▶ Define a dataset
- ▶ Define an experiment
- ▶ Run the training
- ▶ Collect results
- ▶ Visualize data

```
# Build an s3 backed dataset
ciml-build-dataset --dataset cpu-load-1min-dataset \
--build-name tempest-full \
--slicer :2000 \
--sample-interval 10min \
--features-regex "(usr|1min)" \
--class-label status \
--tdt-split 7 0 3 \
--data-path s3://cimlrawdata \
--target-data-path s3://cimldatasets
```

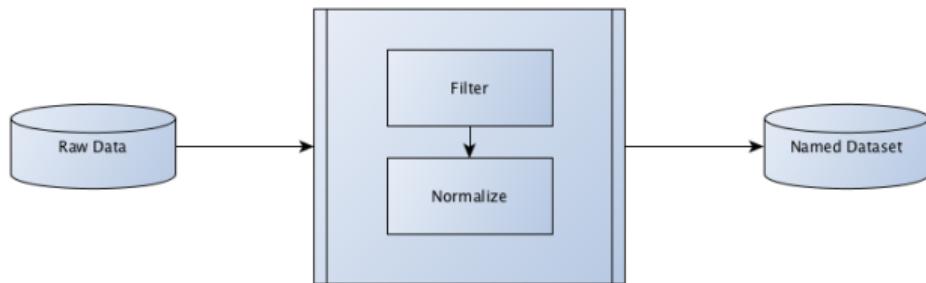

Dataset preparation diagram


# Experiment Workflow

- ▶ Visualize data
- ▶ Define a dataset
- ▶ **Define an experiment**
- ▶ Run the training
- ▶ Collect results
- ▶ Visualize data

```
# Define a local experiment
ciml-setup-experiment --experiment dnn-5x100 \
--dataset cpu-load-1min-dataset \
--estimator tf.estimator.DNNClassifier \
--hidden-layers 100/100/100/100/100 \
--steps $(( 2000 / 128 * 500 )) \
--batch-size 128 \
--epochs 500 \
--data-path s3://cimldatasets
```

```
# Train the model based on the dataset and experiment
# Store the evaluation metrics as a JSON file
ciml-train-model --dataset cpu-load-1min-dataset \
--experiment dnn-5x100 \
--data-path s3://cimldatasets
```

# Training Infrastructure

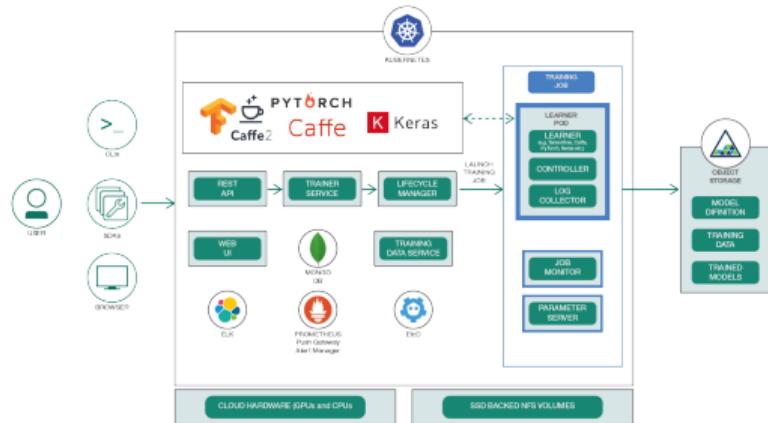

FfDL Architecture - Source:

<https://developer.ibm.com/code/>

- ▶ TensorFlow Estimator API
- ▶ CIML wrapper
- ▶ ML framework interchangeable
- ▶ Training Options:
  - ▶ Run on a local machine
  - ▶ Helm deploy CIML, run in containers
  - ▶ Submit training jobs to Ffdl
  - ▶ Kubeflow

# Prediction

- ▶ Event driven: near real time
- ▶ No request to serve the prediction to
- ▶ MQTT Trigger from the CI system
- ▶ CIML produces the prediction
- ▶ Trusted Source: Continuous Training

- ▶ CIML kubernetes app components:
  - ▶ MQTT Client receives events
  - ▶ Data module fetches and prepares data
  - ▶ TensorFlow wrapper issues the prediction
  - ▶ Example: comment back on Gerrit/Github

# Data Selection

- ▶ What is dstat data
- ▶ Experiment Reproducibility
- ▶ Dataset selection
  - ▶ Dstat Feature selection
  - ▶ Data resolution (down-sampling)

Sample of dstat data

time	usr	used	writ	1m
16/03/2018 21:44	6.1	$7.36 \cdot 10^8$	$5.78 \cdot 10^6$	0.97
16/03/2018 21:44	7.45	$7.43 \cdot 10^8$	$3.6 \cdot 10^5$	0.97
16/03/2018 21:44	4.27	$7.31 \cdot 10^8$	$4.01 \cdot 10^5$	0.97
16/03/2018 21:44	1	$7.43 \cdot 10^8$	4,096	0.97
16/03/2018 21:44	0.5	$7.44 \cdot 10^8$	$1.5 \cdot 10^7$	0.97
16/03/2018 21:44	1.75	$7.31 \cdot 10^8$	4,096	0.97
16/03/2018 21:44	0.88	$7.43 \cdot 10^8$	4,096	0.9
16/03/2018 21:44	1.39	$7.31 \cdot 10^8$	$4.51 \cdot 10^5$	0.9
16/03/2018 21:45	1.01	$7.44 \cdot 10^8$	4,096	0.9
16/03/2018 21:45	0.75	$7.46 \cdot 10^8$	61,440	0.9
16/03/2018 21:45	1.26	$7.31 \cdot 10^8$	4,096	0.9
16/03/2018 21:45	1.13	$7.44 \cdot 10^8$	4,096	0.82
16/03/2018 21:45	5.77	$7.77 \cdot 10^8$	$1.72 \cdot 10^5$	0.82
16/03/2018 21:45	9.85	$8.31 \cdot 10^8$	$4.99 \cdot 10^6$	0.82
16/03/2018 21:45	3.88	$8.46 \cdot 10^8$	$8.25 \cdot 10^7$	0.82

# Data Normalization

## ► Unrolling

Sample of unrolled data

usr1	usr2	usr3	1m1	1m2	1m3
6.1	1.75	1.26	0.97	0.97	0.9
5.9	1.5	3.1	0.9	0.92	0.97
5.8	1.76	2.2	0.89	0.91	0.94

## ► Normalizing

Sample of normalized data


usr1	usr2	usr3	1m1	1m2	1m3
0.6	0.3	-0.5	0.6	0.6	-0.5
-0.1	-0.7	0.5	-0.3	-0.2	0.5
-0.4	0.3	0	-0.4	-0.4	0

## Building the dataset

- ▶ Split in training, dev, test
- ▶ Obtain classes
- ▶ Store normalized data on s3
- ▶ Input function for training
- ▶ Input function for evaluation

# DNN - Binary Classification

- ▶ Classes: Passed or Failed
- ▶ Supervised training
- ▶ TensorFlow *DNNClassifier*, classes=2
- ▶ Hyper-parameters:
  - ▶ Activation Function: ReLU
  - ▶ Regularization: Sigmoid
  - ▶ Optimizer: Adagrad
  - ▶ Learning rate (initial): 0.05
  - ▶ 5 hidden layers, 100 units per layer
  - ▶ Batch Size: 128, Epochs: 500

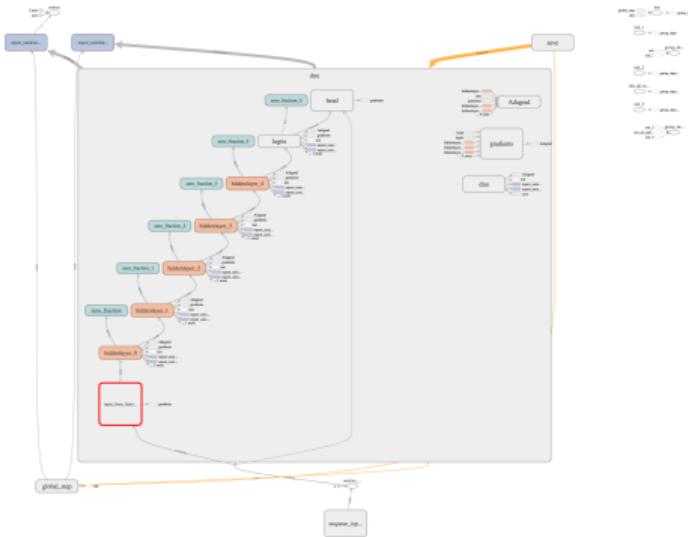

Network Graph - Source: TensorBoard

## DNN - Binary Classification

- ▶ Looking for Configurations
- ▶ TBD Graph of accuracy with different features

## DNN - Binary Classification

- ▶ Varying data sampling
- ▶ TBD Graph of accuracy with different sampling

## Changing test job

- ▶ Train with a CI Job
- ▶ Evaluating with another CI Job (as well)

## Binary Classification - Summary

- ▶ CPU and Load Avg
- ▶ Resolution: 1 minute is enough

## DNN - Multi Class

- ▶ Detecting the Cloud Provider
- ▶ Growing back number of features
- ▶ Reducing down-sampling

## DNN - Multi Class

- ▶ Playing with the network topology

## DNN - Multi Class

- ▶ Reducing the number of classes
- ▶ What does that mean
- ▶ Why did it work

## Changing test job

- ▶ Train with a CI Job
- ▶ Evaluating with another CI Job (as well)

## Multi Class - Summary

- ▶ Topology / Hyperparameters
- ▶ Loss curve

## Conclusions

- ▶ Summary on DNN single class
- ▶ Summary on DNN multi class
- ▶ Collect data
- ▶ Know your data
- ▶ Work with cloud tools

## Future Work

- ▶ Complete setup of the pipeline
- ▶ Human curated dataset for supervised training
- ▶ Making our life easier
- ▶ Integrate with real life CI system
- ▶ Explore job portability
- ▶ Tune optimization for quick convergence

Thank you!  
Questions?