




UNIQUE VACUUM  
SOLUTIONS

## Digital Pirani Vacuum Gauge HPRGE-1GH-SP

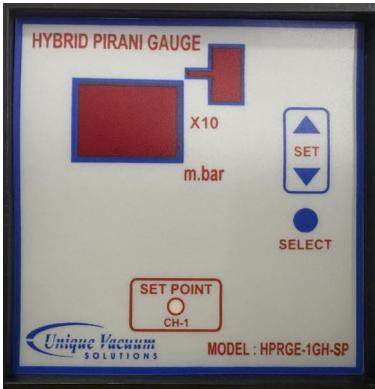

Accuracy @ 25 °C

From 1000 to 1 mbar	+/- 0.25% FS
From 1 mbar to 0.001	+/- 15%



### Special Features:

- specially designed for large volume evacuation vacuum readouts.
- High Accuracy At Higher Pressures** from 1000 mbar to 1 mbar
- Very useful for accurate measurement of vacuum from 1000 mbar to 1X10e-4 mbar
- Brass body measurement sensor with standard KF-10 / KF-16 optional KF-25 end fitting.

### TECHNICAL SPECIFICATIONS

MODEL	HPRG-1GH-SP
Number of sensor channels	One
Display range	<b>1000 mbar to 1X10e-4 mbar</b>
Display type	7 segment Exponential order display display (x.ye-z)
Units of measurement	Mbar
Vacuum gauge head compatible.	HPRS-03
Temp range	+2 to 50 deg C
Zero and full scale adjustment	At sensor END
Process control relay set point output	One Potential free NC-COM-CO contacts
Non-volatile memory	Only for setpoints
Input signal	RS485 modbus output from sensor HPRS-03
Operating voltage	From 96 to 264 v AC / 50 Hz
Overall dimension	92W X 92H X 110D mm
Input supply voltage	220V, 50 Hz

### UNIQUE VACUUM SOLUTIONS

#57, 8<sup>th</sup> cross, 1<sup>st</sup> B cross, Daddanna industrial area main road,  
vishwaneedam post, Near Peenya 2<sup>nd</sup> stage, Bangalore -560091

Ph: 080-28367059, 9886726920. e mail: [support@uniquevacuum.co.in](mailto:support@uniquevacuum.co.in),

[www.uniquevacuum.co.in](http://www.uniquevacuum.co.in)