

# Practical No:10

In [1]:

```
import numpy as np
import matplotlib.pyplot as plt
import pandas as pd
import seaborn as sns
import warnings
warnings.filterwarnings('ignore')
df = pd.read_csv('Desktop/Iris.csv')
df.head()
```

Out[1]:

	<b>Id</b>	<b>SepalLengthCm</b>	<b>SepalWidthCm</b>	<b>PetalLengthCm</b>	<b>PetalWidthCm</b>	<b>Species</b>
<b>0</b>	1	5.1	3.5	1.4	0.2	Iris-setosa
<b>1</b>	2	4.9	3.0	1.4	0.2	Iris-setosa
<b>2</b>	3	4.7	3.2	1.3	0.2	Iris-setosa
<b>3</b>	4	4.6	3.1	1.5	0.2	Iris-setosa
<b>4</b>	5	5.0	3.6	1.4	0.2	Iris-setosa

In [2]:

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 150 entries, 0 to 149
Data columns (total 6 columns):
 #   Column           Non-Null Count  Dtype  
--- 
 0   Id               150 non-null    int64  
 1   SepalLengthCm   150 non-null    float64 
 2   SepalWidthCm    150 non-null    float64 
 3   PetalLengthCm   150 non-null    float64 
 4   PetalWidthCm    150 non-null    float64 
 5   Species          150 non-null    object  
dtypes: float64(4), int64(1), object(1)
memory usage: 7.2+ KB
```

In [3]:

df.describe()

Out[3]:

	<b>Id</b>	<b>SepalLengthCm</b>	<b>SepalWidthCm</b>	<b>PetalLengthCm</b>	<b>PetalWidthCm</b>
<b>count</b>	150.000000	150.000000	150.000000	150.000000	150.000000
<b>mean</b>	75.500000	5.843333	3.054000	3.758667	1.198667
<b>std</b>	43.445368	0.828066	0.433594	1.764420	0.763161
<b>min</b>	1.000000	4.300000	2.000000	1.000000	0.100000
<b>25%</b>	38.250000	5.100000	2.800000	1.600000	0.300000
<b>50%</b>	75.500000	5.800000	3.000000	4.350000	1.300000
<b>75%</b>	112.750000	6.400000	3.300000	5.100000	1.800000
<b>max</b>	150.000000	7.900000	4.400000	6.900000	2.500000

In [7]:

df.isnull().sum()

Out[7]:

```

Id          0
SepalLengthCm 0
SepalWidthCm 0
PetalLengthCm 0
PetalWidthCm 0
Species      0
dtype: int64


```

In [8]:

```


fig, axes = plt.subplots(2, 2, figsize=(12, 6), constrained_layout = True)
for i in range(4):
    x, y = i // 2, i % 2
    axes[x, y].hist(df[df.columns[i + 1]])
    axes[x, y].set_title(f"Distribution of {df.columns[i + 1]}[:-2]")

```

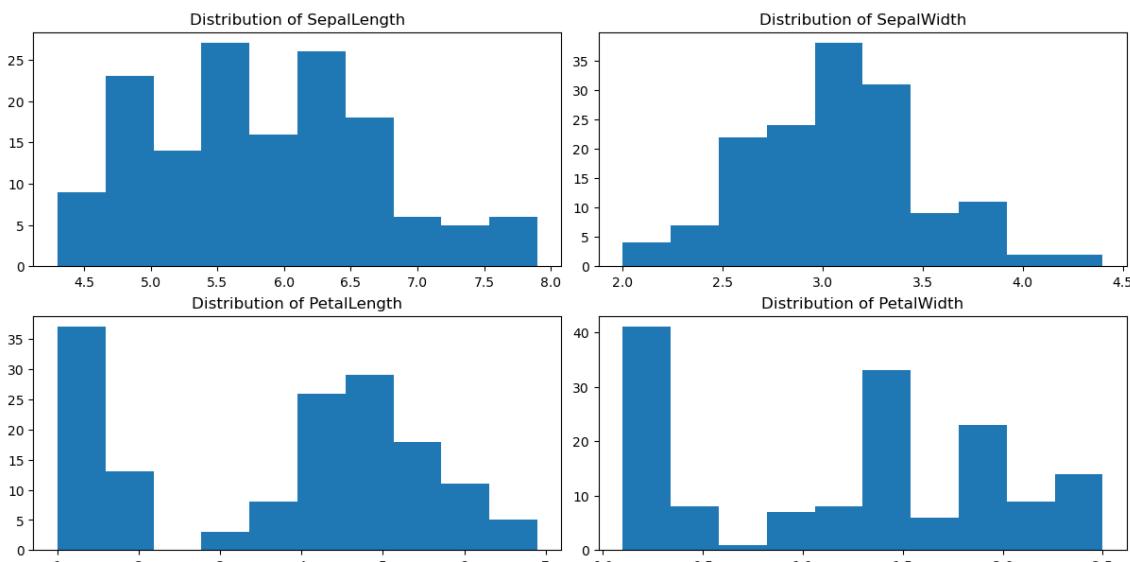

In [9]:

```
data_to_plot = [df[x] for x in df.columns[1:-1]]
fig, axes = plt.subplots(1, figsize=(12,8))
bp = axes.boxplot(data_to_plot)
```

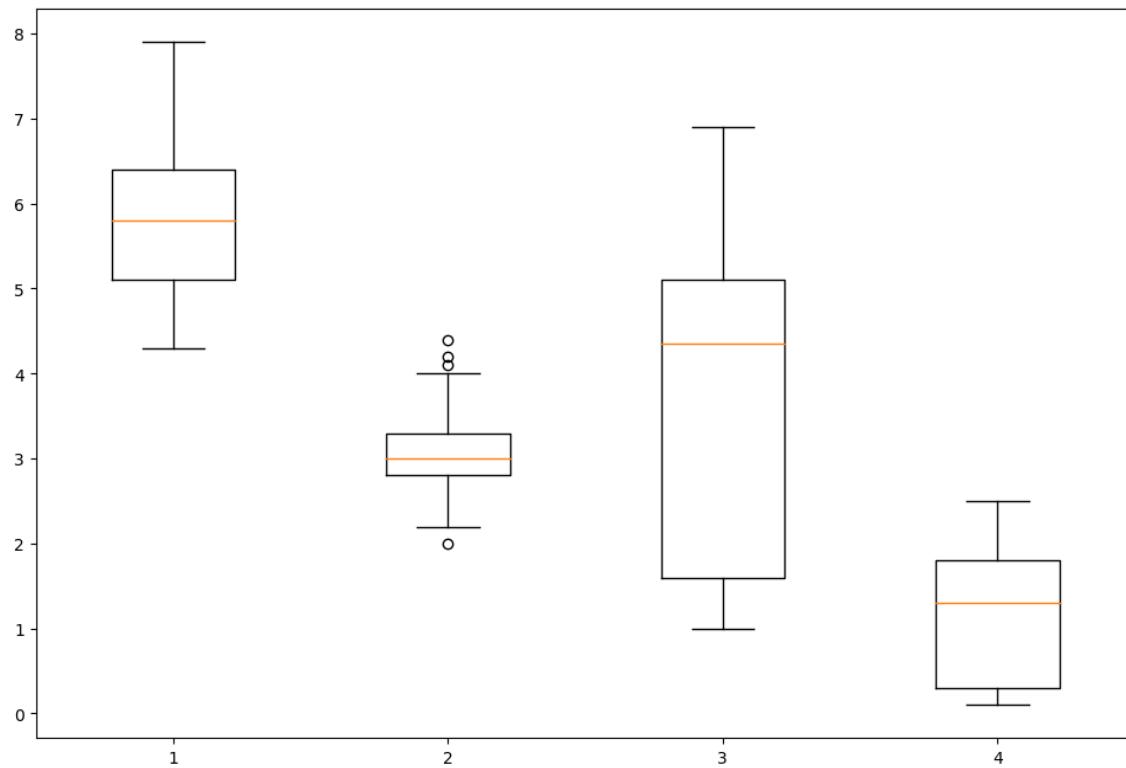


In [11]:

```
print("identify the outliers")
sns.boxplot(x='SepalLengthCm',y='SepalWidthCm',data=df)
```

Out[11]:

&lt;Axes: xlabel='SepalLengthCm', ylabel='SepalWidthCm'&gt;

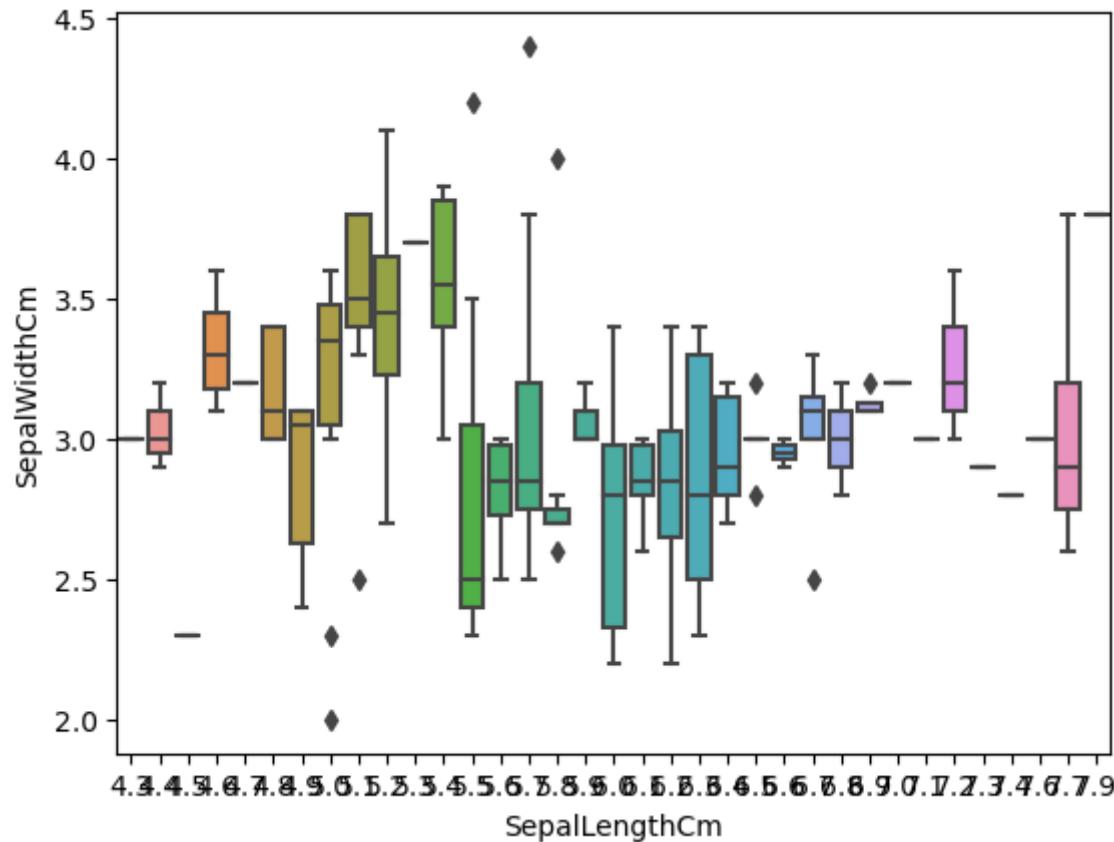


In [13]:

```
print("identify the outliers")
sns.boxplot(x='PetalLengthCm',y='PetalWidthCm',data=df)
```

identify the outliers

Out[13]:

```
<Axes: xlabel='PetalLengthCm', ylabel='PetalWidthCm'>
```

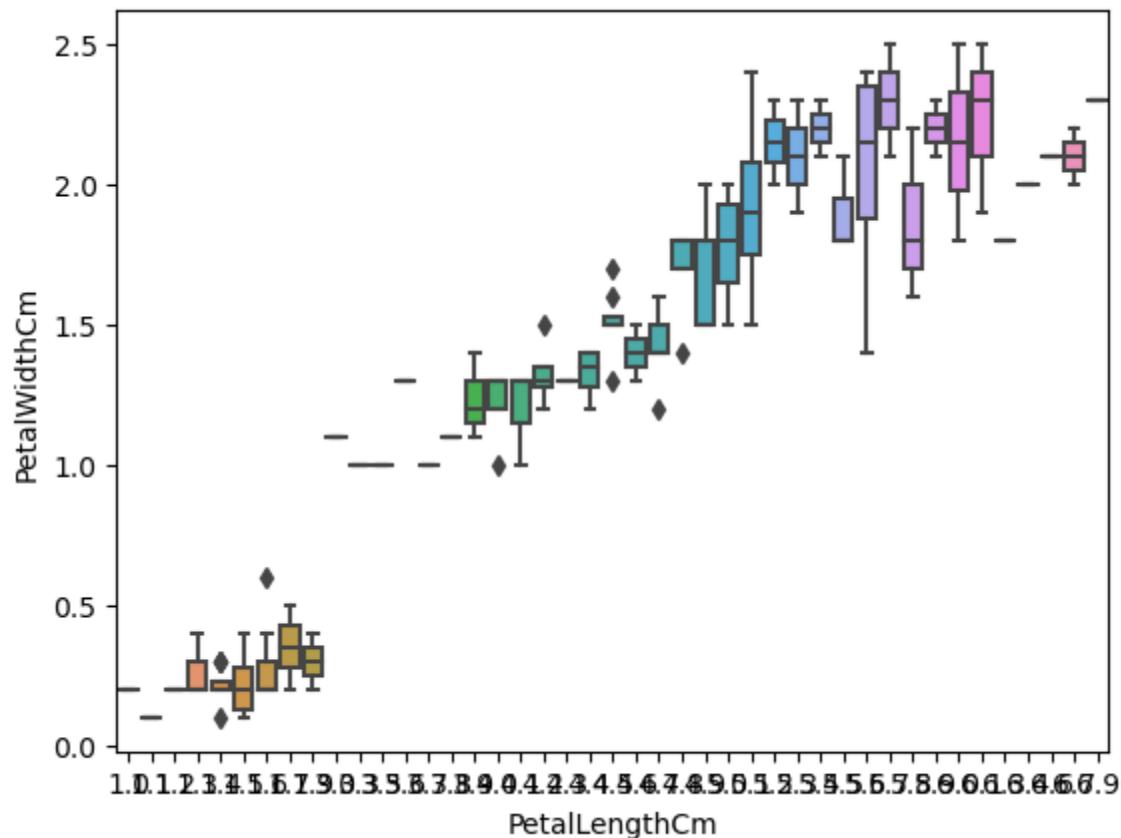

In [ ]: