
Sequence Diagram — AI Cost Autopilot

One POST /v1/chat/completions through gateway/app.py, then the dashboard polling loop. Messages use the real method names.

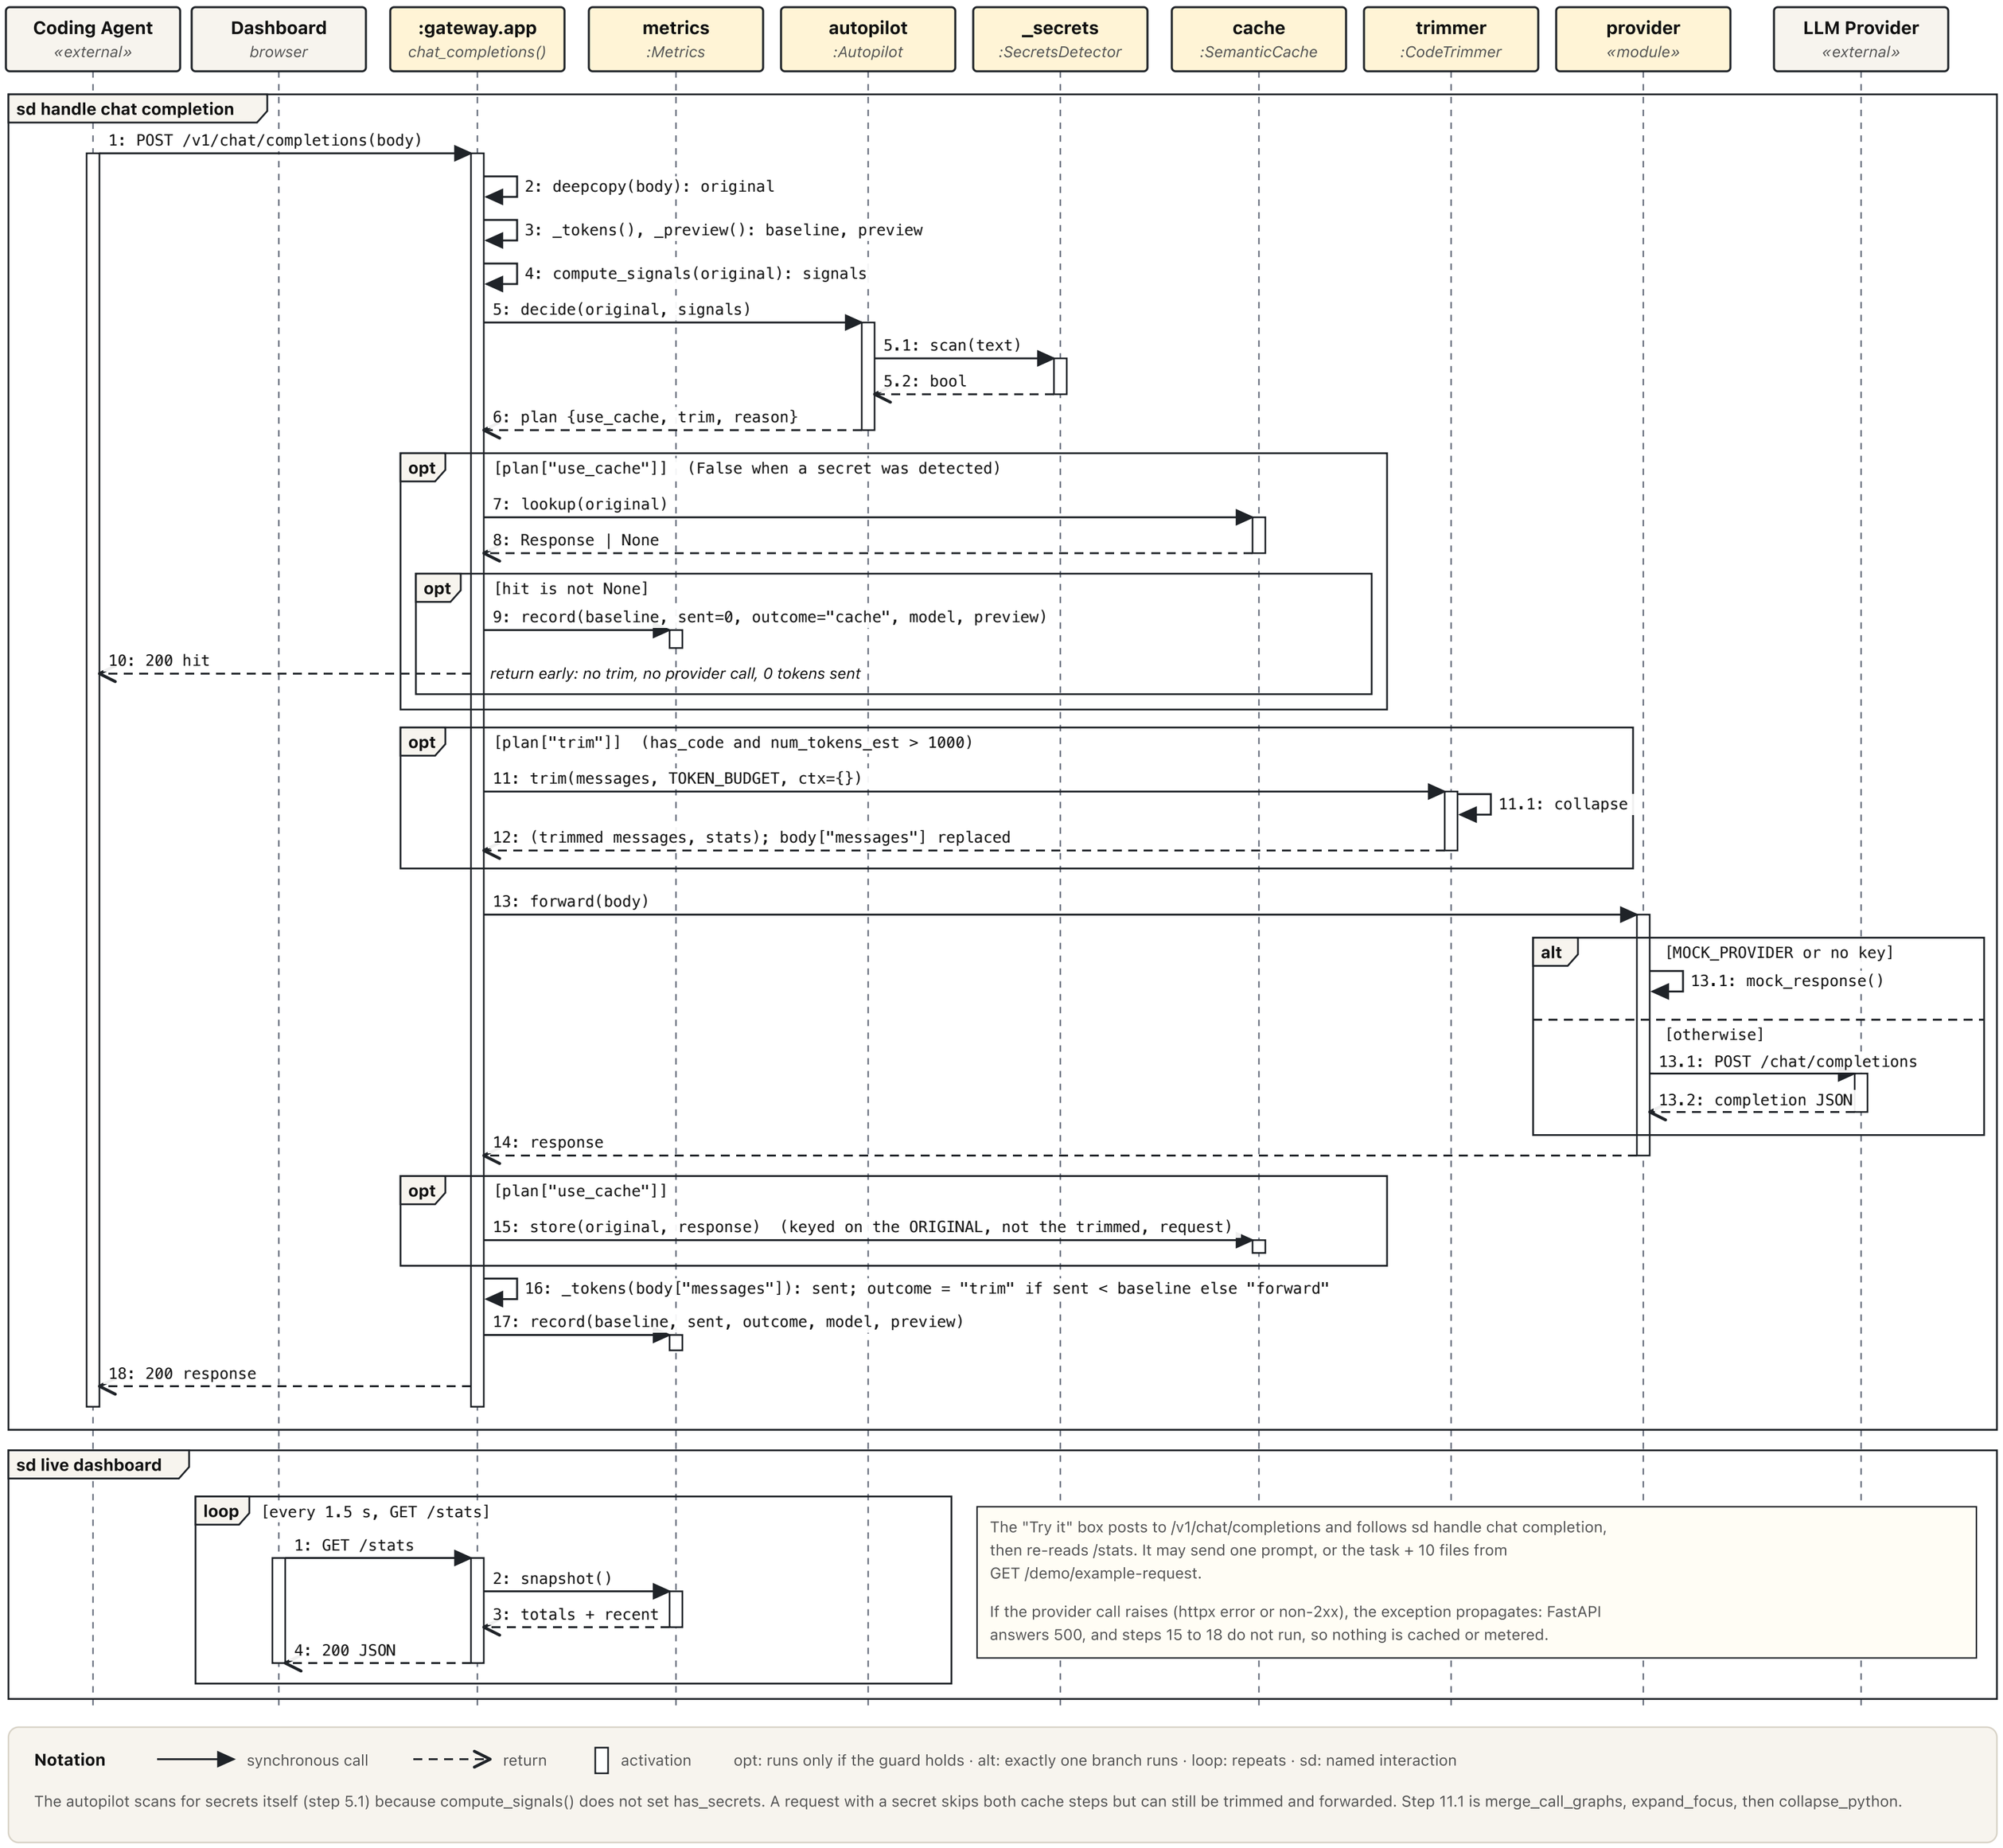

Notation synchronous call · return · activation · opt: runs only if the guard holds · alt: exactly one branch runs · loop: repeats · sd: named interaction

The autopilot scans for secrets itself (step 5.1) because compute_signals() does not set has_secrets. A request with a secret skips both cache steps but can still be trimmed and forwarded. Step 11.1 is merge_call_graphs, expand_focus, then collapse_python.