Session 7

Q. 1) create a table called Restaurant with columns: id, name, location and cuisine. Apply NOT NULLL constraint to name and location and make id the PRIMARY KEY.

Ans. create table restaurant

(id int(11) auto_increment primary key, name varchar(100) not null, location varchar(255) not null, cuisine varchar(255));

Q. 2) Create a table called FoodOrder with columns: order_id, restaurant_id, user_id and order_total. Set order_id as PRIMARY KEY and add a FOREIGN KEY constraint on restaurant_id referencing Restaurant(id).

Ans. create table foodorder

(order_id int(11) auto_increment primary key, restaurant_id int(11), user_id int(11), order_total int(11),

foreign key(restaurant_id) references restaurant(id));

Q. 3) Insert 6 rows into a table called SpotifyUser with columns: user_id, username, email and subscription_type. Ensure that username is UNIQUE and email is NOT NULL. Hint: Use the UNIQUE and NOT NULL constraints when creating the table.

Ans. create table spotifyUser

(user_id int primary key auto_increment, user_name varchar(100) unique, email varchar(100) not null, subscription_type varchar(100));

insert into spotifyUser

(user_name, email, subscription_type)

values

('shah_agam', 'agam@example.com', 'Premium plan'),

('rohit_sharma', 'rohit@example.com', 'Basic plan'),

('alia Bhatt', 'alia@example.com', 'Monthly plan'),

('ranbir_kapoor', 'ranbir@example.com', 'Free Plan'),

('king', 'king@example.com', 'Premium Plan'),

('k_l_rahul', 'rahul@example.com', 'Yearly plan');

Q. 4) Create a VIEW named TopSpendersView that shows usernames and order_total from a FoodOrder table where order_total is greater than 1000.

Ans. insert into foodorder

(user_id, order_total)

values

(101, 3000),

(102, 1000),

(103, 500);

create view topSpendersView as

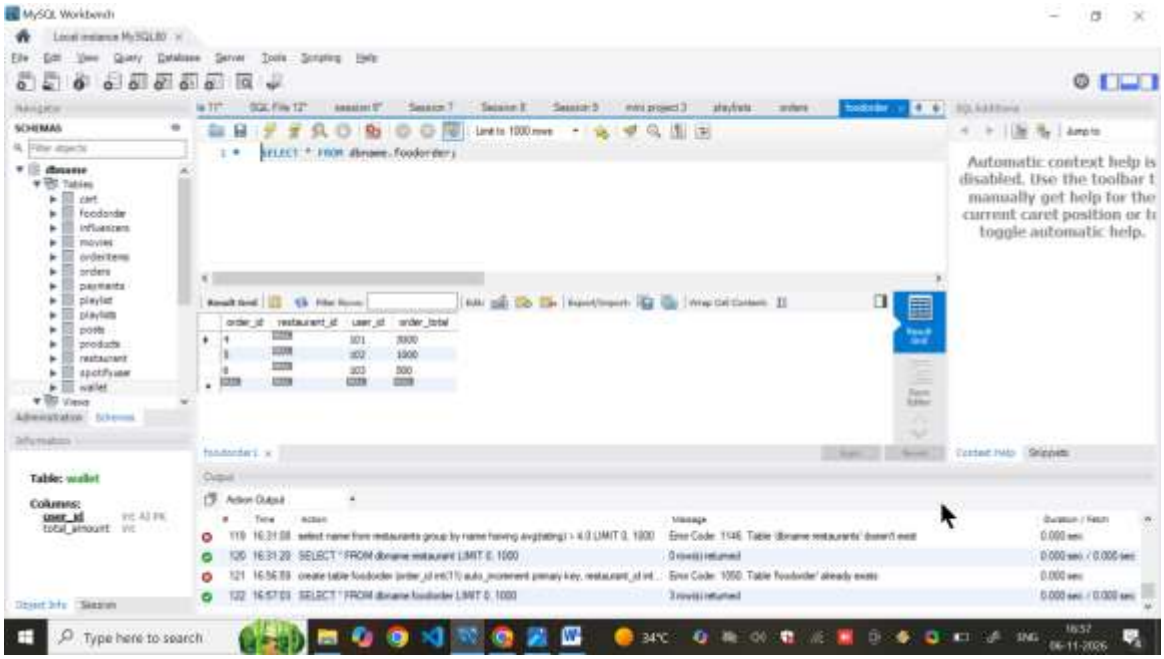
select foodorder.user_id, foodorder.order_total

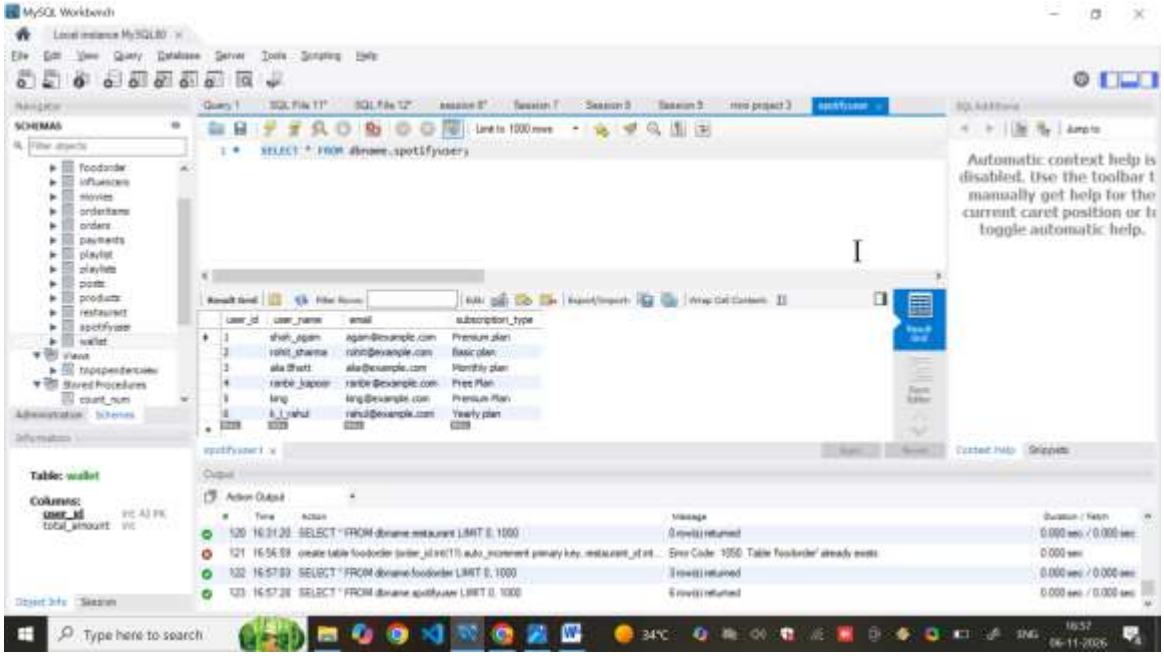
from foodorder where order_total > 1000;

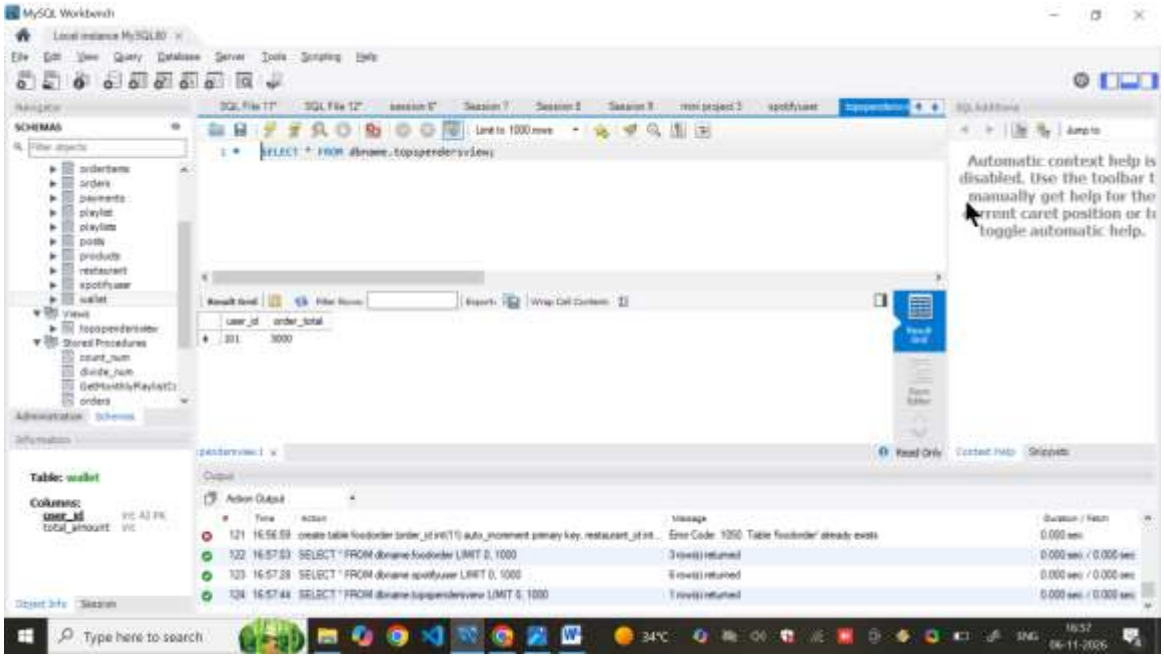
Q. 5) Write a SQL query to list all users from the TopSpendersView who have spent more than 2000, sorted by order_total decending. Only use the TopSpendersView for your query, not the original FoodOrder table.

Ans. select * from topspendersview where order_total > 2000

order by order_total desc;




MySQL Workbench
SELECT * FROM dbname.spotifyuser;
Table: wallet
Columns:
user_id
total_amount
Type here to search


MySQL Workbench
SELECT * FROM dbname.topspendersview;
Table: wallet
Columns:
user_id
total_amount
Type here to search