Session 8

Q. 1) Write a PL/SQL block that declares two variables: one for a user's name (VARCHAR2) and one for their age (NUMBER). Assign values and print both using DBMS_OUTPUT.PUT_LINE.

Ans. delimiter $$

```
create procedure students()

begin

declare user_name varchar(20);

declare user_age int;

set user_name = 'virat_kohli05';

set user_age = 38;

select user_name as name , user_age as age;

end $$

delimiter ;


call students();
```

Q. 2) Create a PL/SQL block that uses an IF statement to check if a given order amount is above 500. If yes, print 'Eligible for free delivery', else print 'Delivery charges apply'.

Ans. delimiter $$

```
create procedure orders(in order_amount int)

begin

declare order_print varchar(100);

if order_amount > 500 then

set order_print = 'eligible for free delivery';

else

set order_print = 'delivery charges apply';
```

```
end if;

select order_amount as amount, order_print as message;

end $$

delimiter ;


call orders(600);

call orders(400);
```

Q. 3) Write a PL/SQL block that users a simple LOOP to print the numbers 1 to 5 using DBMS_OUTPUT_LINE Hint: Use a counter variable and EXIT WHEN comdition inside the loop.

Ans.
```
delimiter $$

create procedure count_num(in max_num int)

begin

declare counter int default 1;

while counter <= max_num do

select counter as numbers;

set counter = counter + 1;

end while;

select order_amount as amount, order_print as message;

end $$

delimiter ;


call count_num(5);
```

Q. 4) Declare a cursor in PL/SQl to select all product names from a table called PRODUCTS. Fetch each product name and print it using DBMS_OUTPUT.PUT_LINE Hint: Assume the PRODUCTS table has a column PRODUCT_NAME.

Ans. create table products

(id int auto_increment primary key, product_name varchar(255));

insert into products

(product_name)

values

('mobiles'),

('Tv'),

('Refrigerator'),

('fan'),

('computers');

delimiter $$

create procedure product()

begin

select product_name as products from products;

end $$

delimiter ;

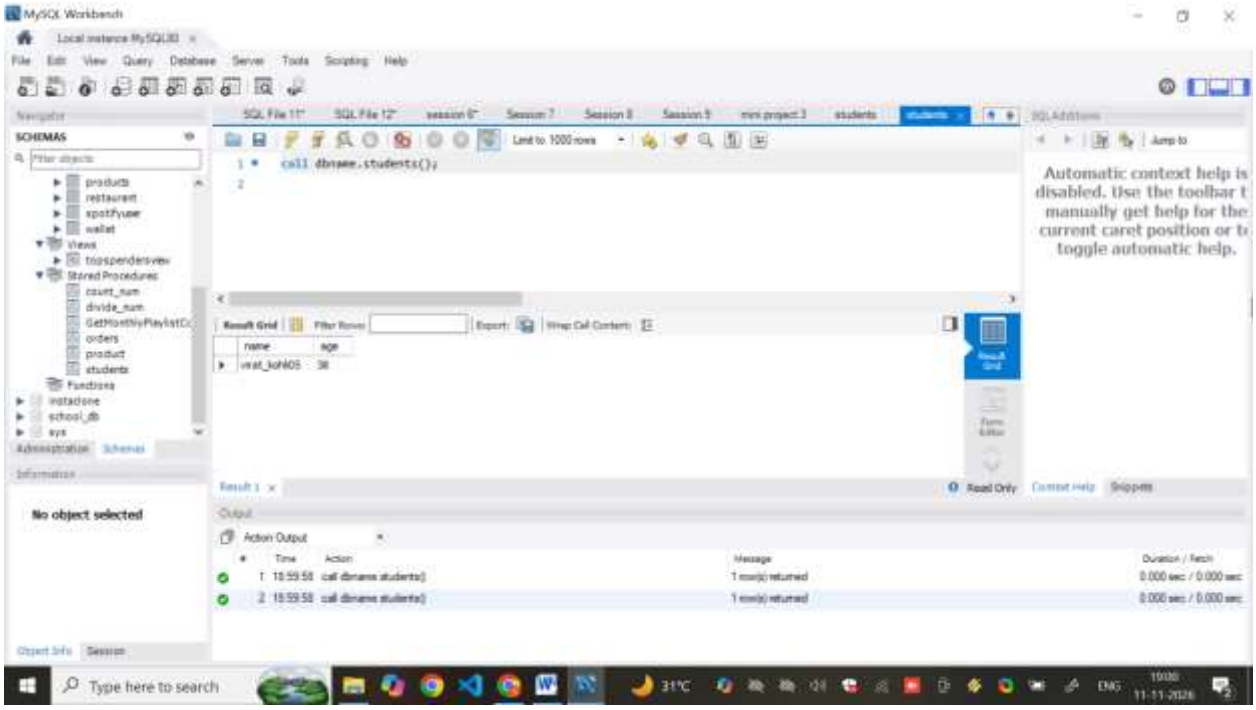
call product();

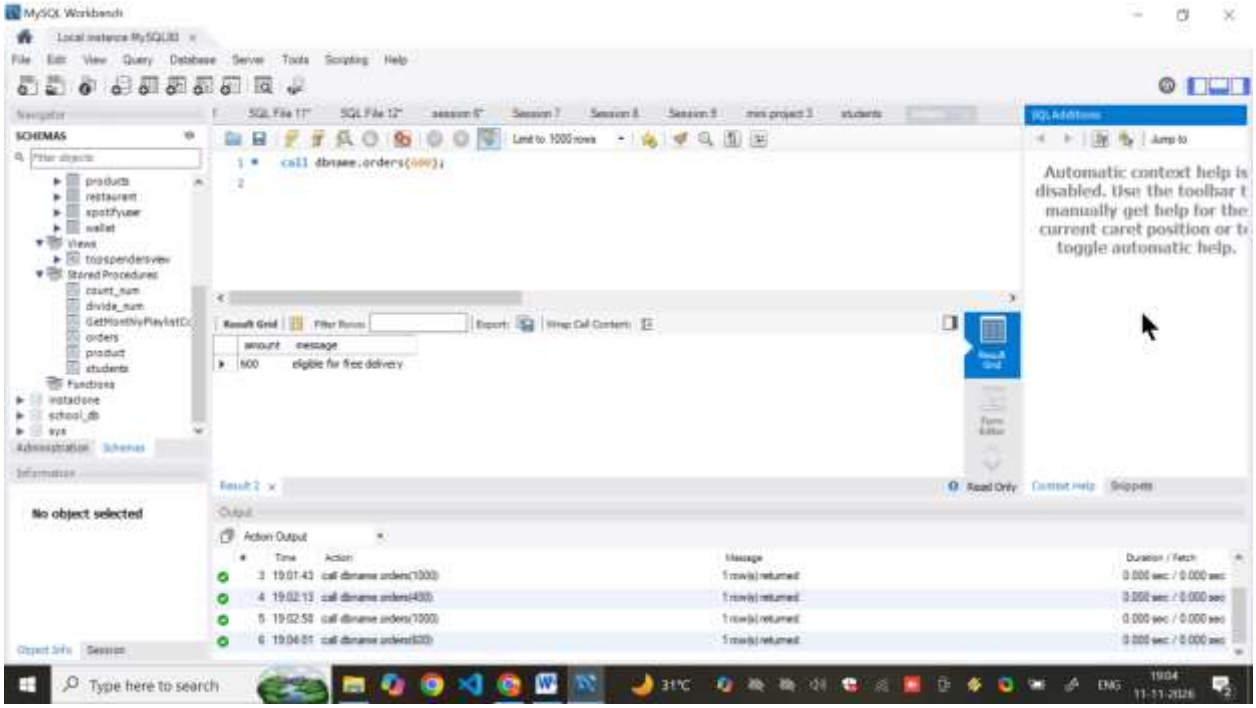
Q. 5) Write a PL/SQL block that tries to divide two numbers entered as variables. If a division by zero occurs, catch the exception and print 'cannot divide by zero'. Otherwise, print the result.

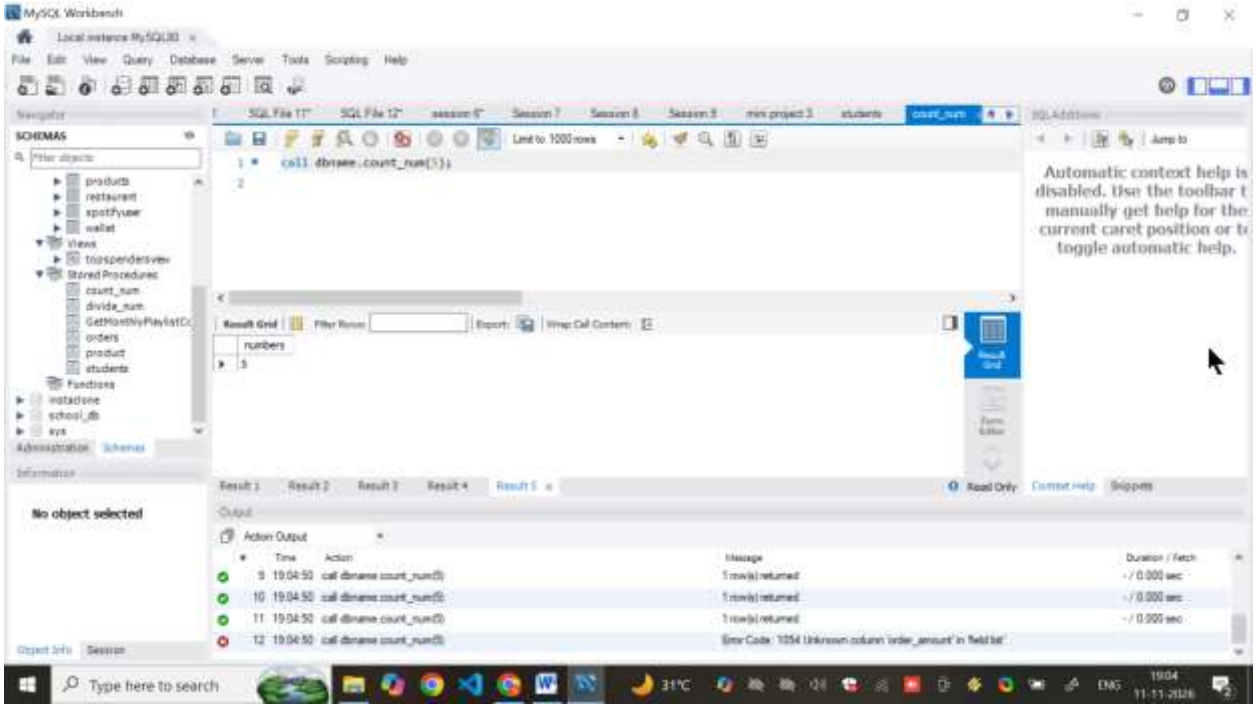
Ans. delimiter $$

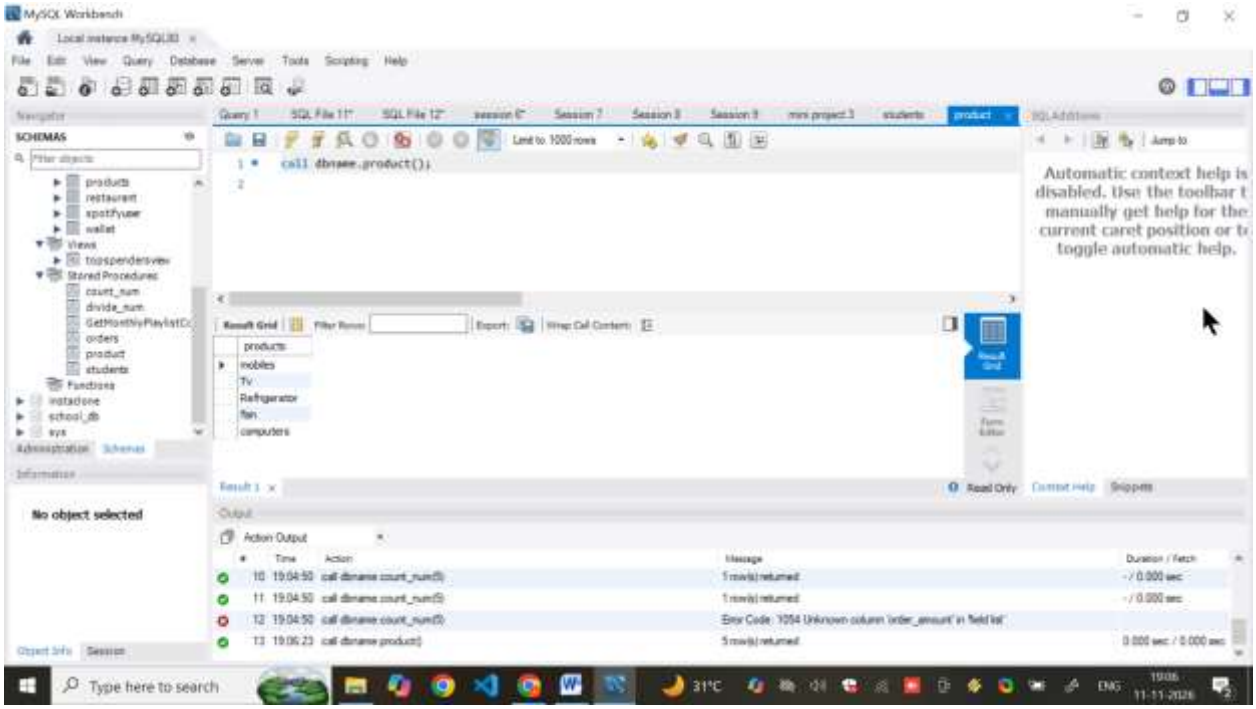
```
create procedure divide_num(num1 int, num2 int)
begin
declare result_num decimal(10,2);
if num2 = 0 then
select 'can not divide by zero' as message;
else
set result_num = num1/num2;
end if;
select result_num as result;
end $$
delimiter ;

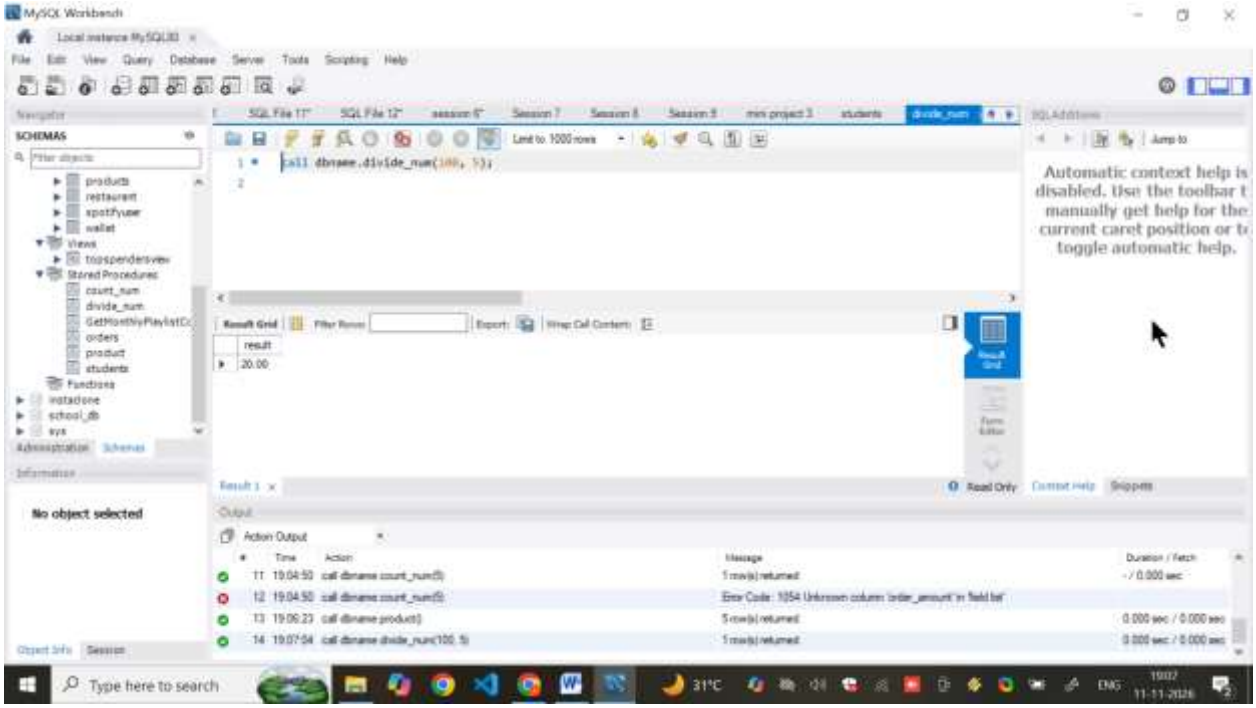
call divide_num(100, 0);
call divide_num(100,5);
```




MySQL Workbench
call dbname.orders(600);
amount
message
600
eligible for free delivery
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Type here to search


MySQL Workbench
call dbname.count_num(5);
numbers
5
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Type here to search


MySQL Workbench
call dbname.product();
products
mobiles
Tv
Refrigerator
fan
computers
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Type here to search


MySQL Workbench
call dbname.divide_num(100, 5);
result
20.00
No object selected
Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or t toggle automatic help.
Type here to search