




OAuth 2.0 Configuration

1. Create a data type and add records

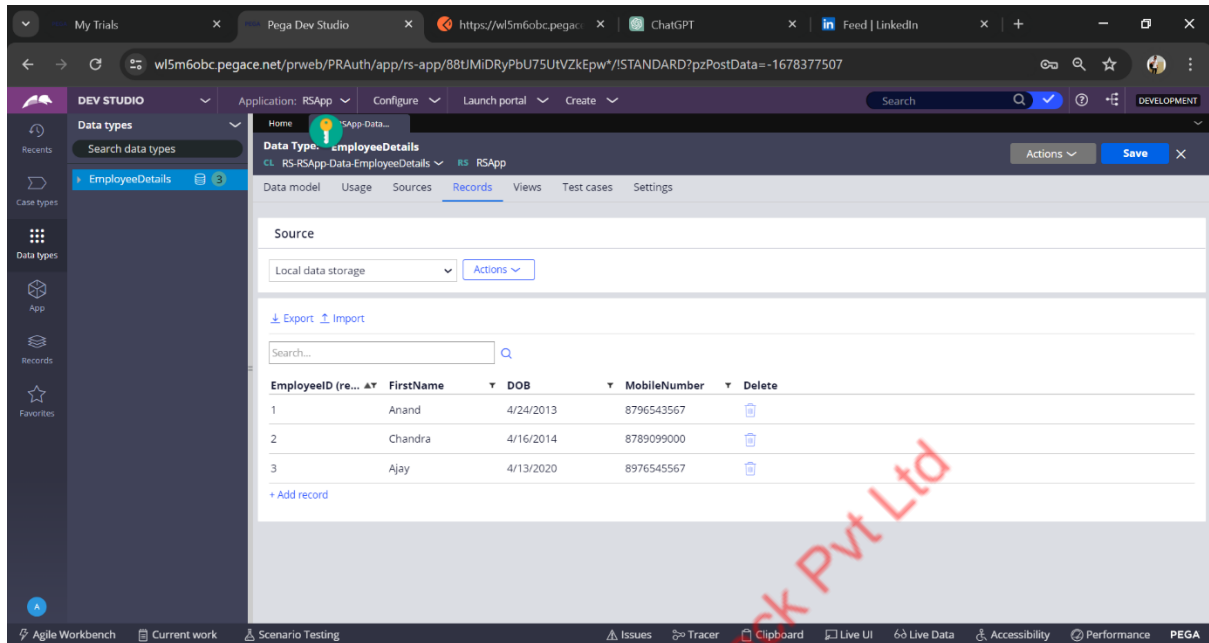



2. Create a class upon Int layer, next create Request and Response page.

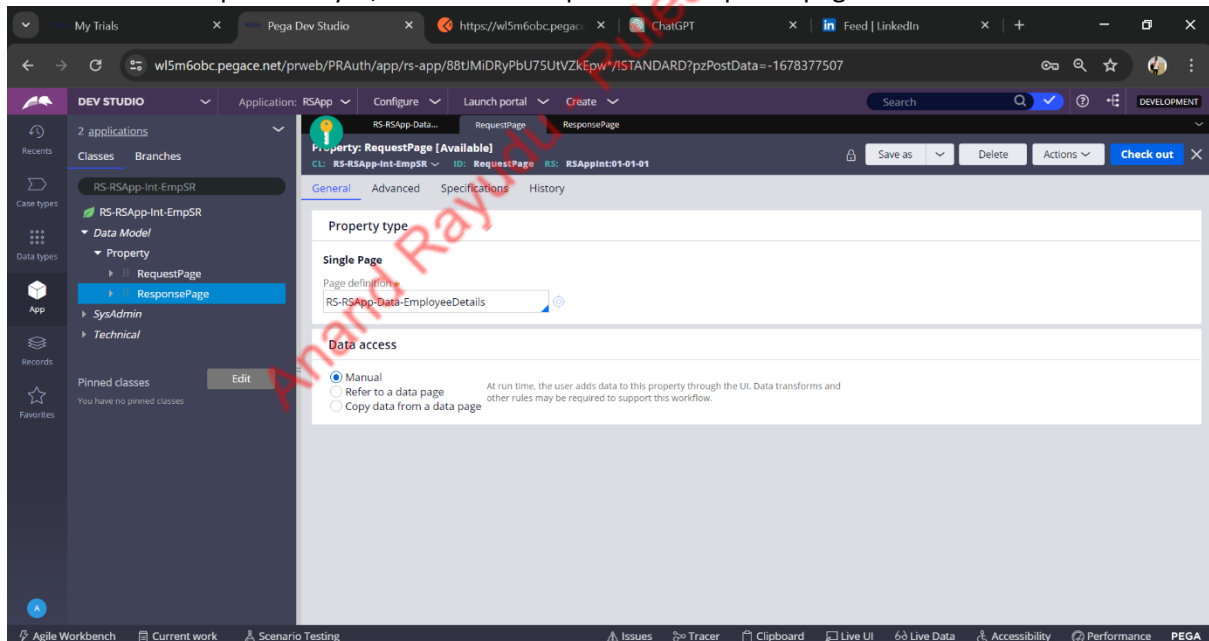

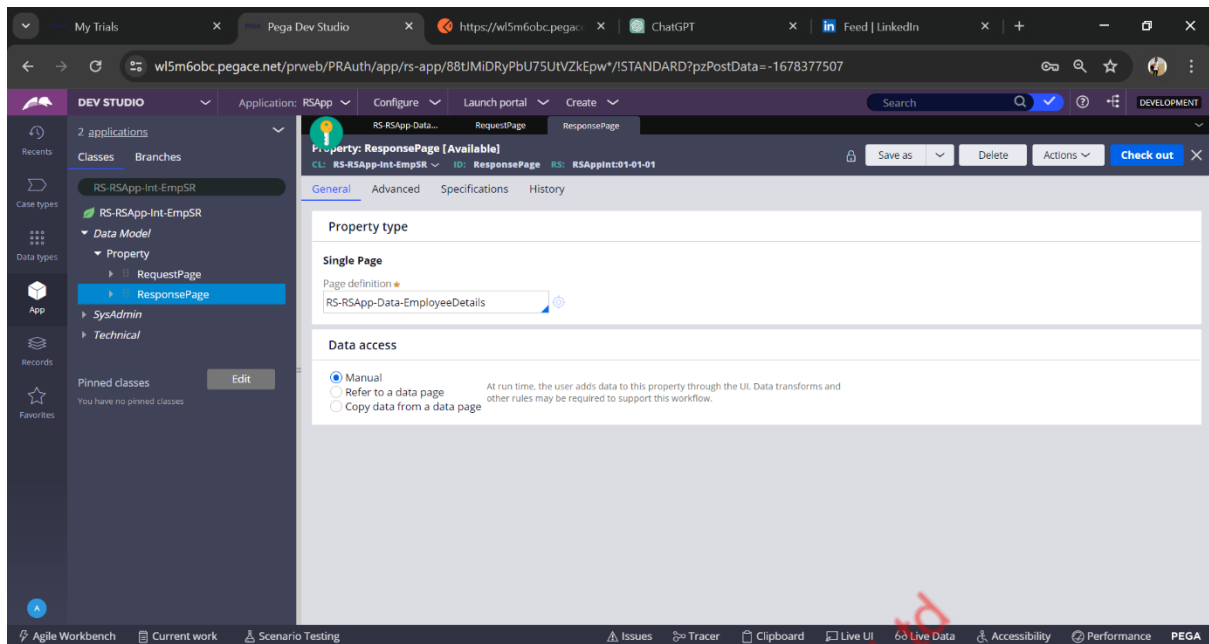


3. Create a service package , Enable the check box ‘Require Authentication’ and select OAuth 2.0 from the dropdown.

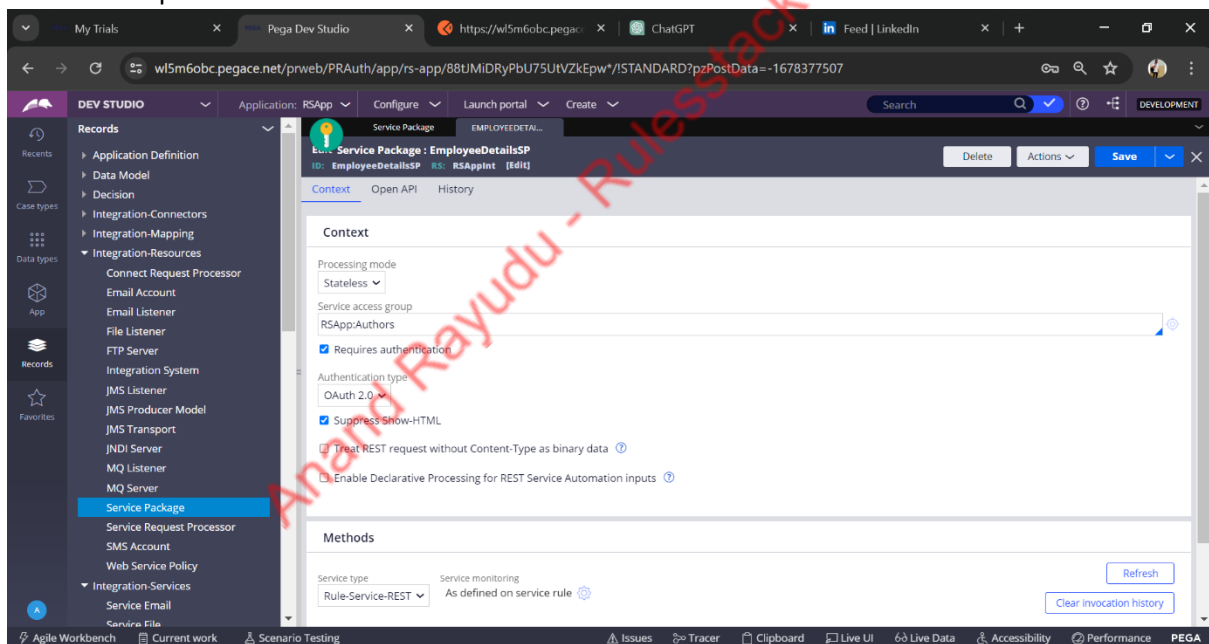


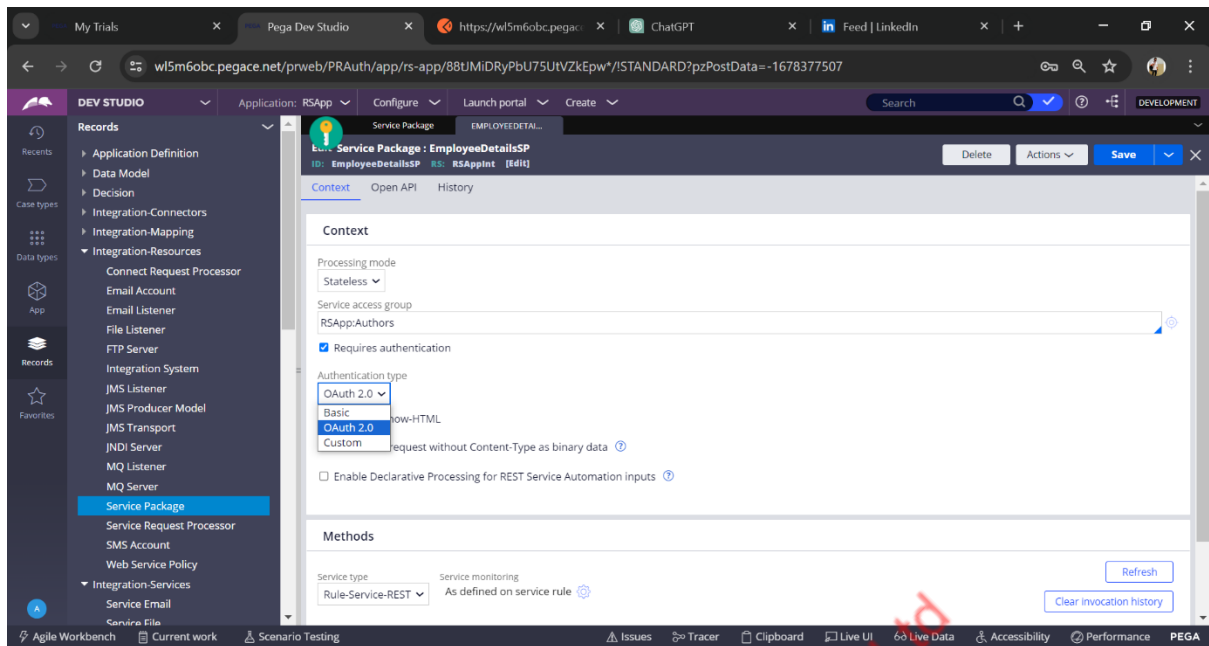


4. Now create a Service REST rule , and map the Parameter to the property of request page.

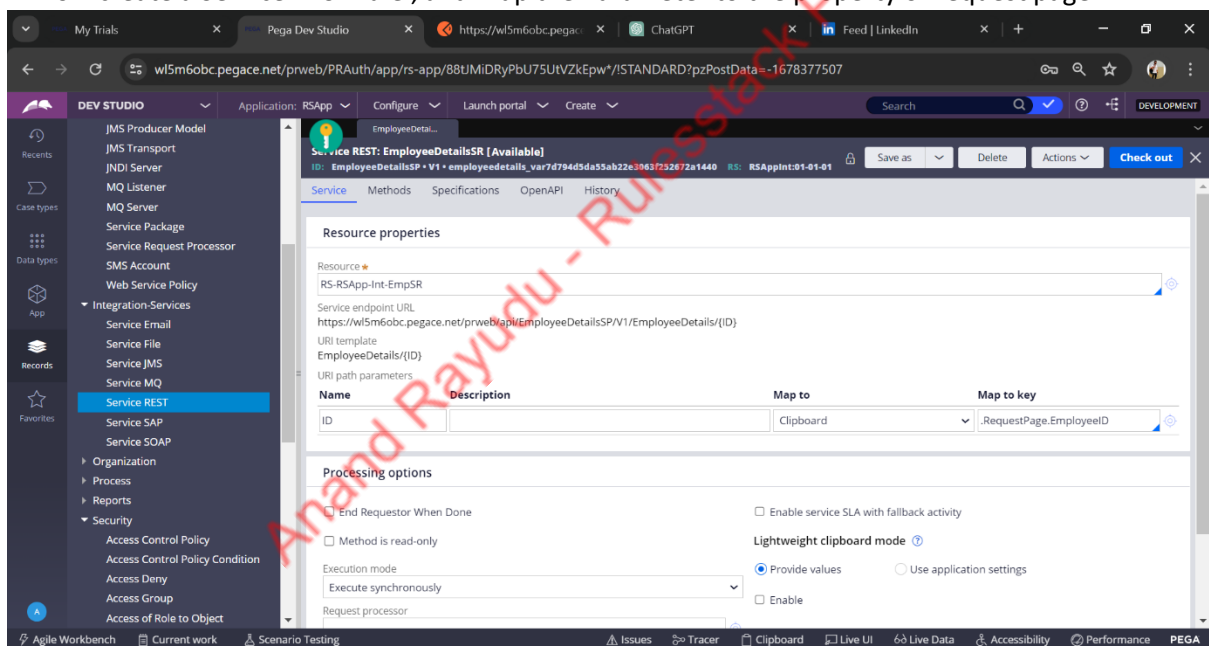

5. Go to methods tab and add Query String .

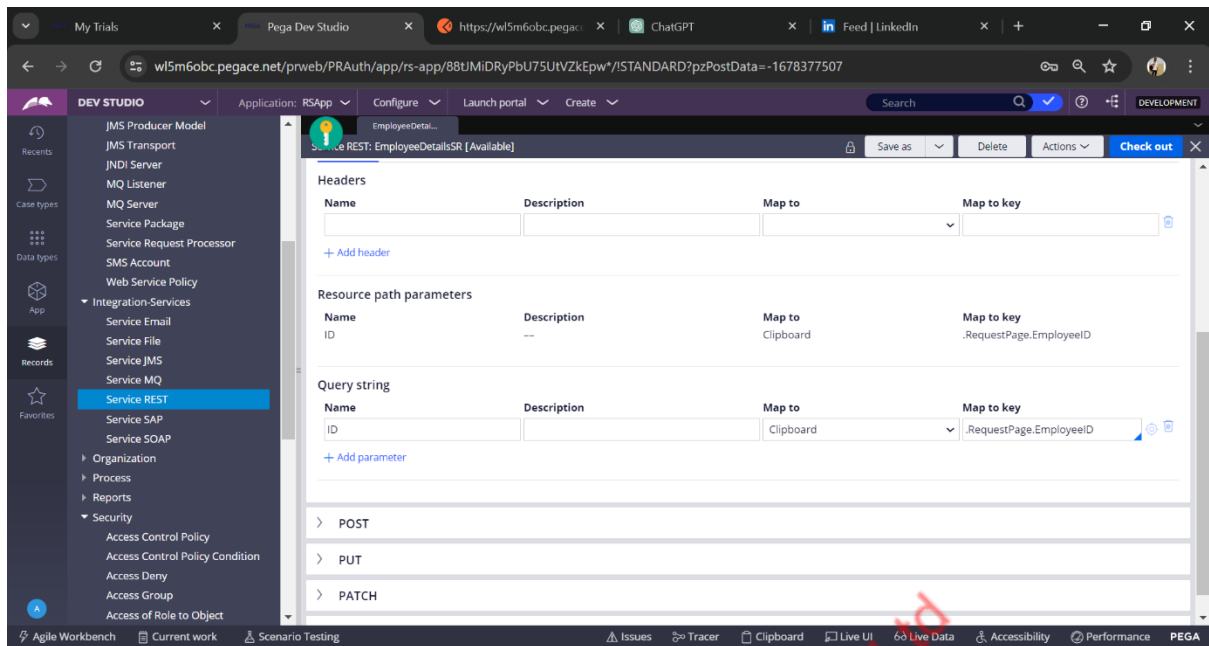

6. Select Get method and create a activity for fetching record based on Emp ID.

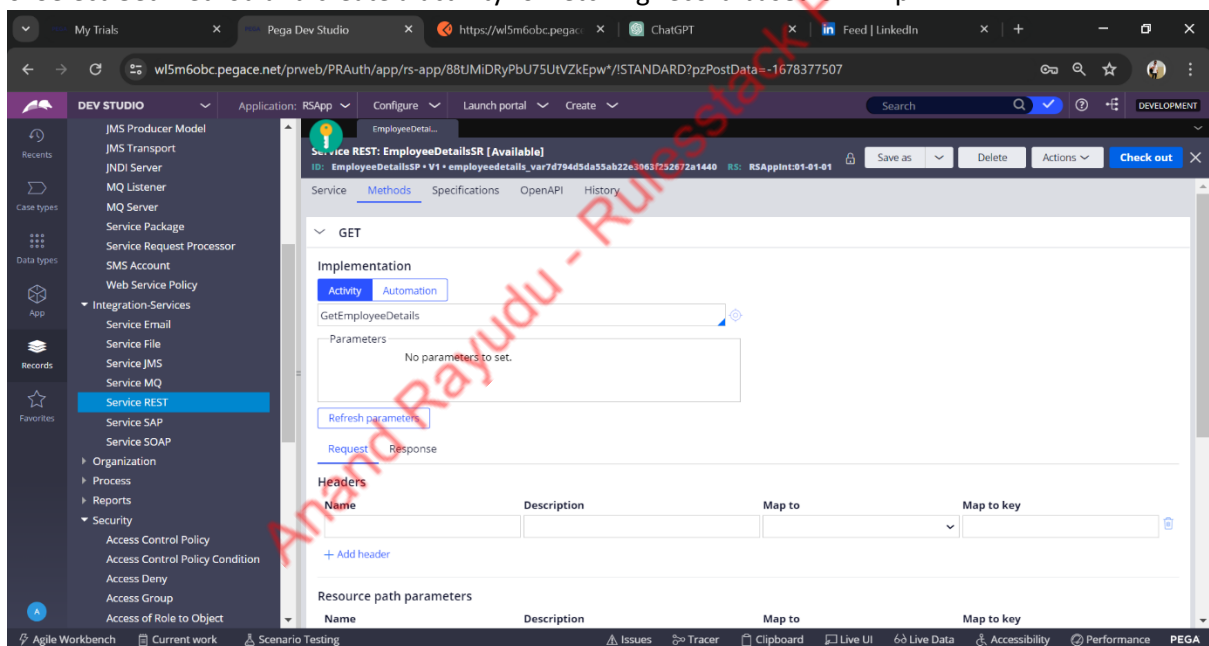

7. Create activity with the following steps.

My Trials Pega Dev Studio https://wl5m6obc.pegac... ChatGPT Feed | LinkedIn

Application: RSApp Configure Launch portal Create

Activity: GetEmployeeDetails [Available]
CL: RS-RSApp-Int-EmpSR ID: GetEmployeeDetails RS: RSAppInt-01-01-01

This record has 1 severe or moderate warning and 1 info warning View

Steps Parameters Pages & Classes Security Test cases Specifications History

1. Loop When Page-New tempEmpDT Create a page Jump

Method Parameters

Name	Value
Data Transform	
PageList	
NewClass	

2. Loop When Obj-Open tempEmpDT Open record Jump

Method Parameters

Name	Value
OpenClass	RS-RSApp-Data-Employee
Lock	☐
ReleaseOnCommit	☐

Agile Workbench Current work Scenario Testing Issues Tracer Clipboard Live UI Live Data Accessibility Performance PEGA

My Trials Pega Dev Studio https://wl5m6obc.pegac... ChatGPT Feed | LinkedIn

Application: RSApp Configure Launch portal Create

Activity: GetEmployeeDetails [Available]
CL: RS-RSApp-Int-EmpSR ID: GetEmployeeDetails RS: RSAppInt-01-01-01

This record has 1 severe or moderate warning and 1 info warning View

PageList
NewClass

2. Loop When Obj-Open tempEmpDT Open record Jump

Method Parameters



Name	Value
OpenClass	RS-RSApp-Data-Employee
Lock	☐
ReleaseOnCommit	☐
LockInfoPage	
Property Name	Property Value
EmployeeID	Primary.RequestPage.EmployeeID


3. Loop When Property-Set tempEmpDT Set property values Jump

Method Parameters


Anand Rayudu - Rules Stack Pvt Ltd

Agile Workbench Current work Scenario Testing Issues Tracer Clipboard Live UI Live Data Accessibility Performance PEGA

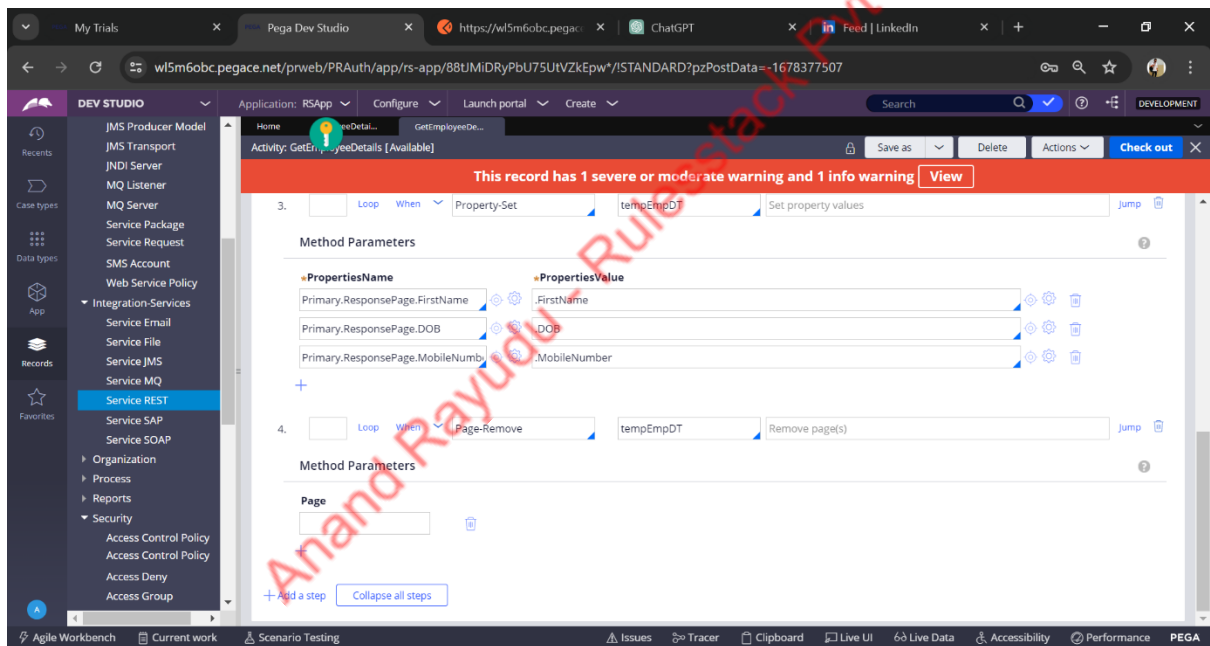
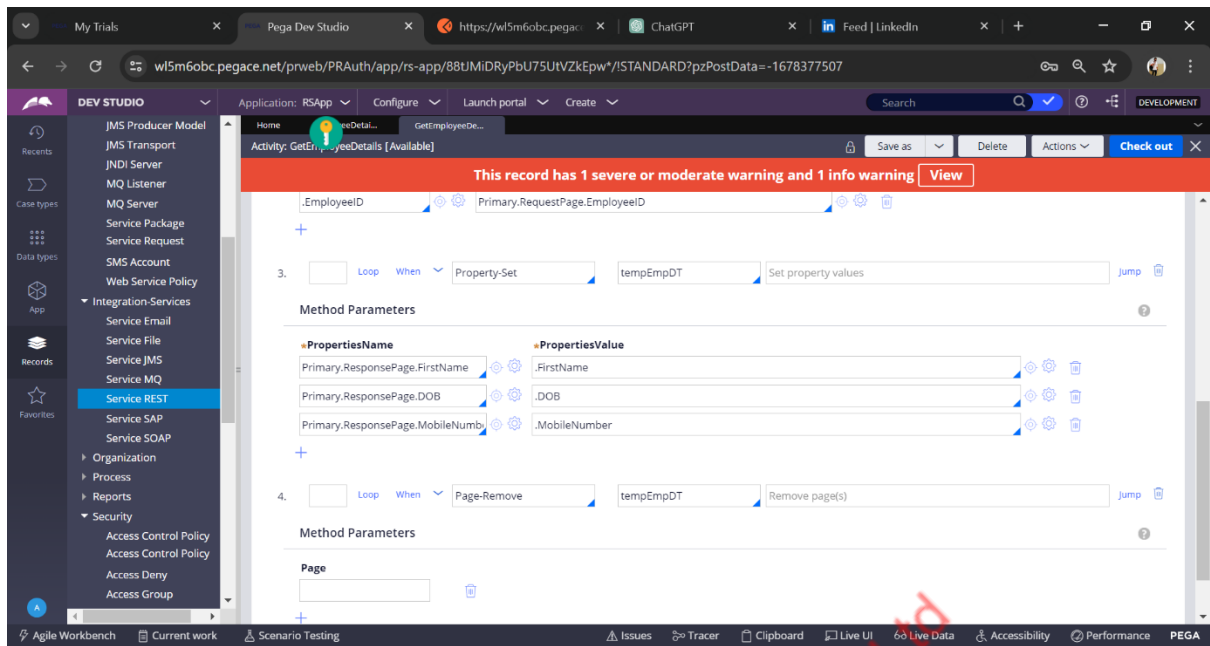


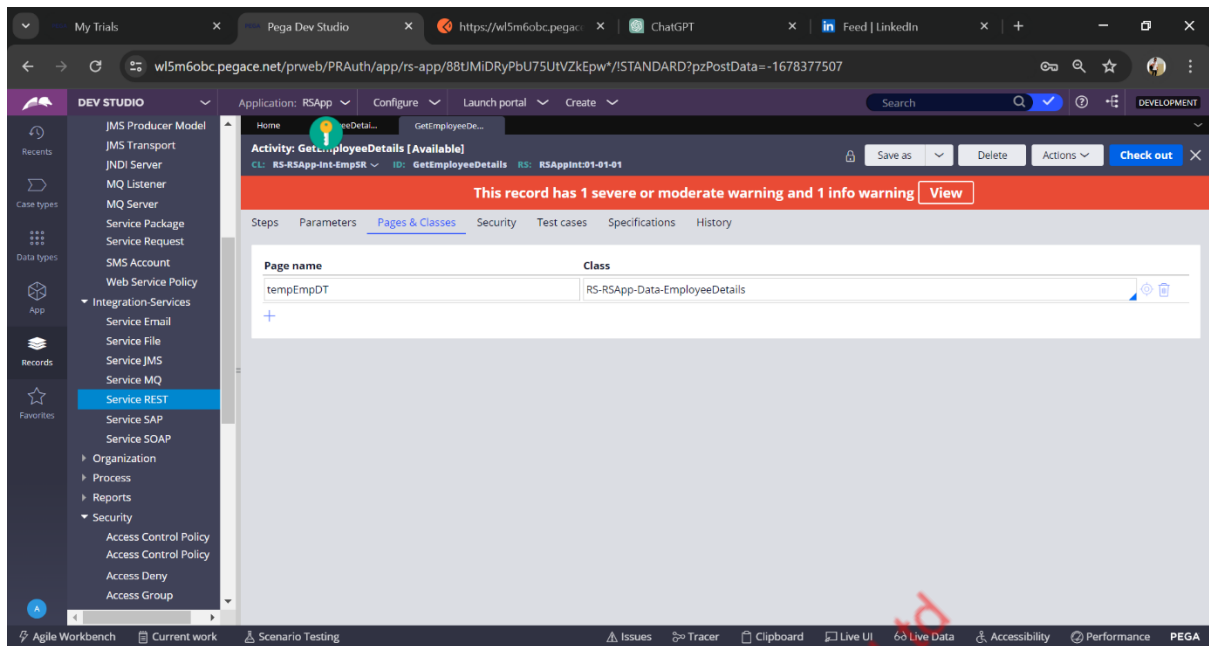

8. After the activity, return back to Get method response tab, and configure as below to get JSON data.

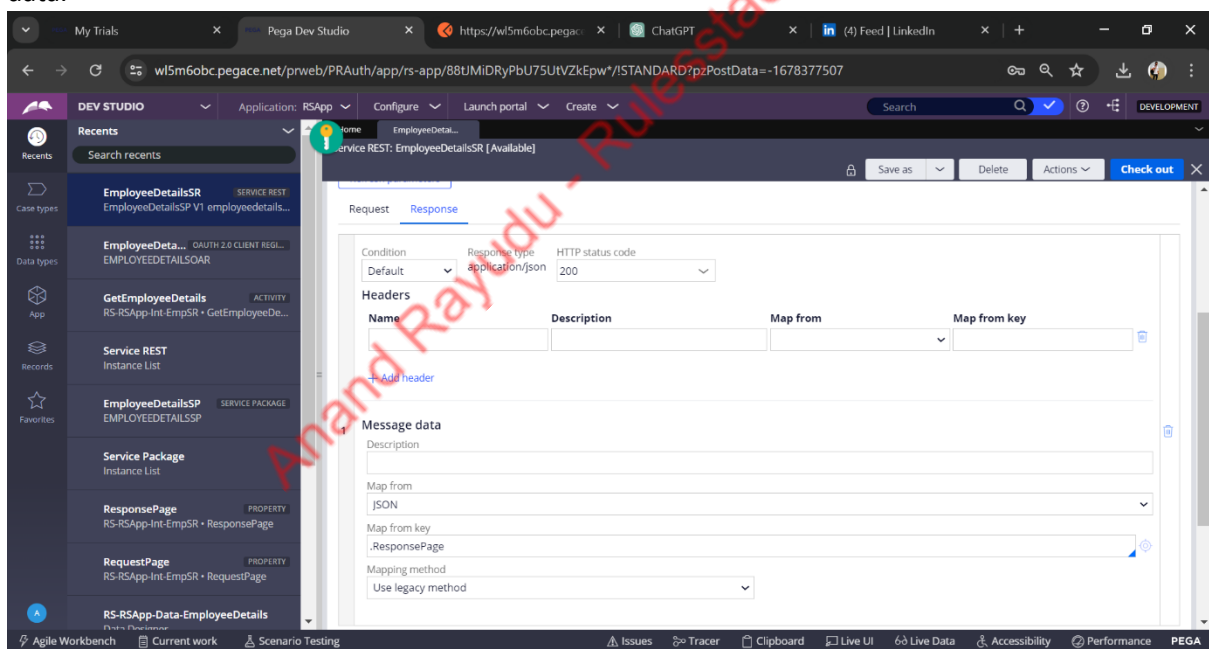


9. Now create a OAuth 2.0 Client Registration rule, click on view and download option

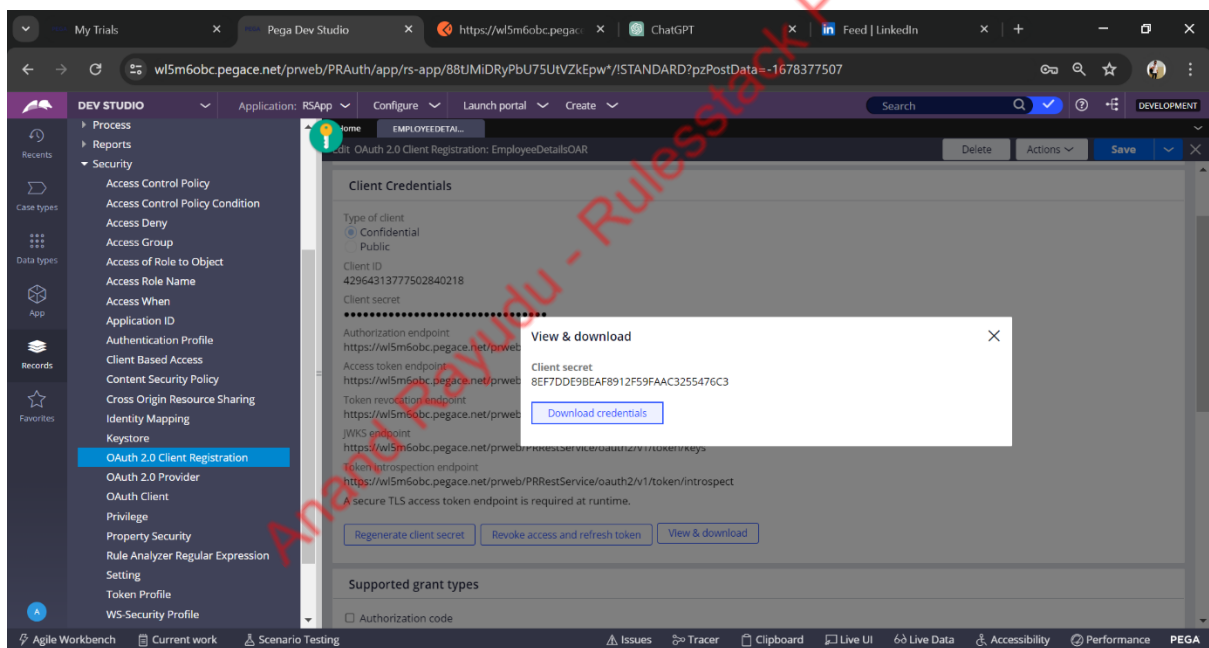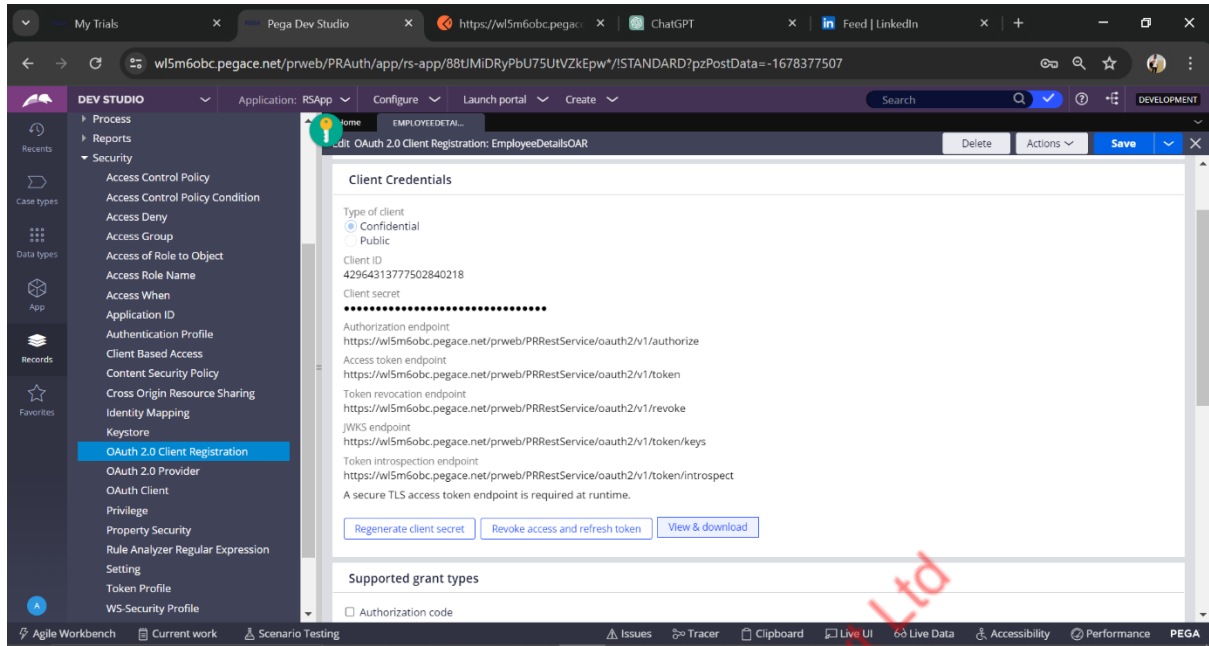


10. Make sure you are having Client ID, Client Secret and Access Token Endpoint.

```
EmployeeDetailsOAR_ClientCredentials (1) - Notepad
File Edit Format View Help
Client ID
4296431377502840218
Client Secret
8EF7DDE9BEAF8912F59FAAC3255476C3
Authorization endpoint
https://w15m60bc.pegace.net/prweb/PRRestService/oauth2/v1/authorize
Access token endpoint
https://w15m60bc.pegace.net/prweb/PRRestService/oauth2/v1/token
Token revocation endpoint
https://w15m60bc.pegace.net/prweb/PRRestService/oauth2/v1/revoke
JWKS endpoint
https://w15m60bc.pegace.net/prweb/PRRestService/oauth2/v1/token/keys
Token introspection endpoint
https://w15m60bc.pegace.net/prweb/PRRestService/oauth2/v1/token/introspect
```


12. Ensure that you selected a grant type and use the same while you are consuming.

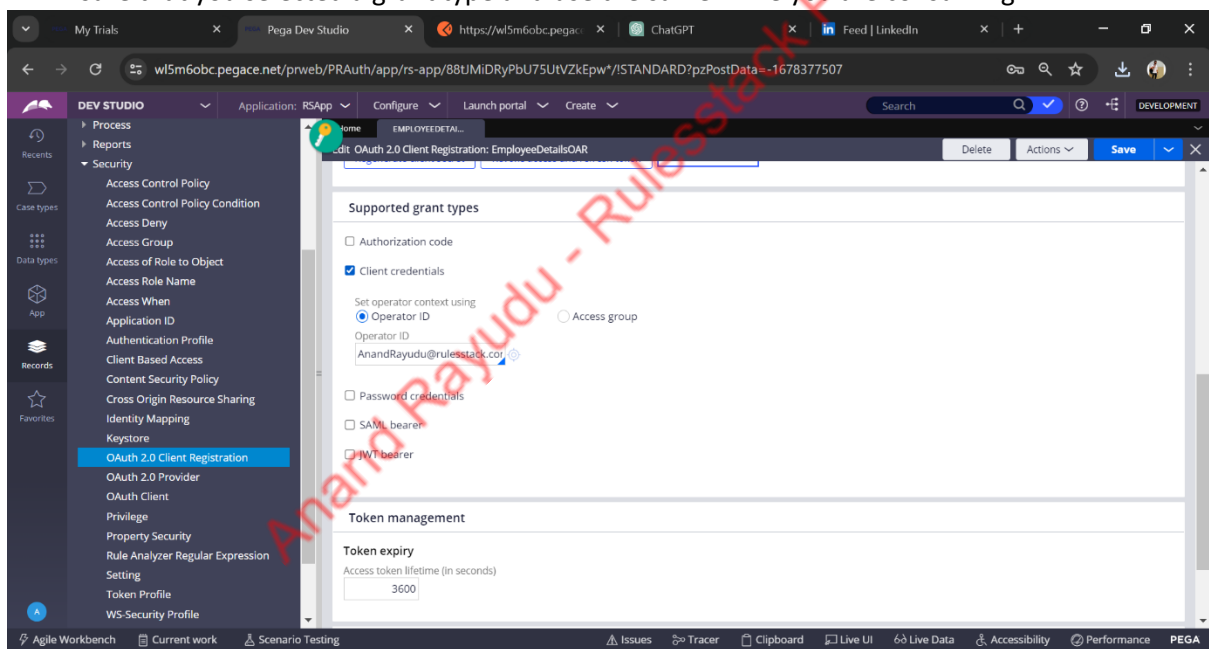


13. Open Postman , give the url and go to authrization tab , provide any Token Name and provide necessary values like Client ID , Client Secret and Access Token URL.

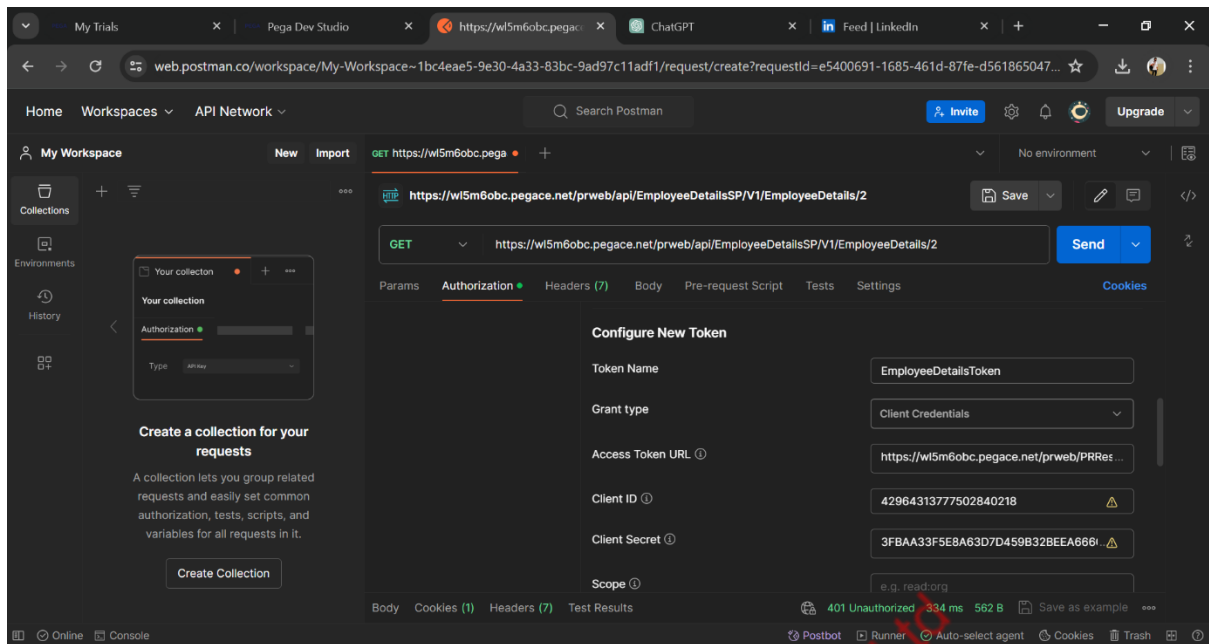


14. Click on Get New Access Token button

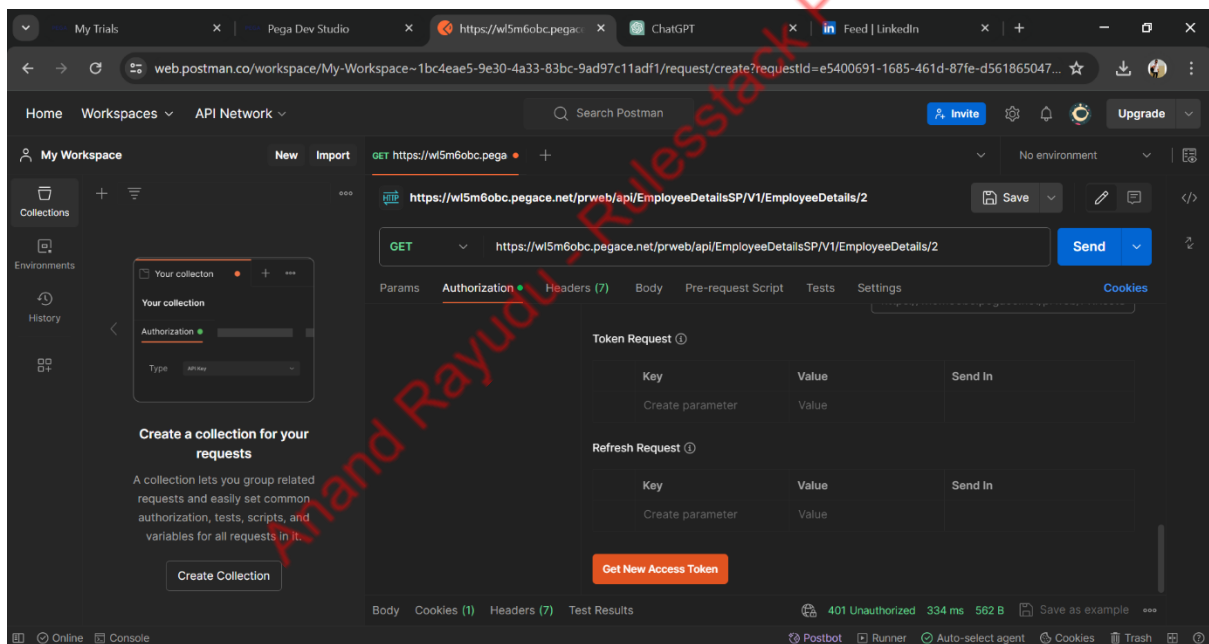


15. Ensure that the Authentication is completed.

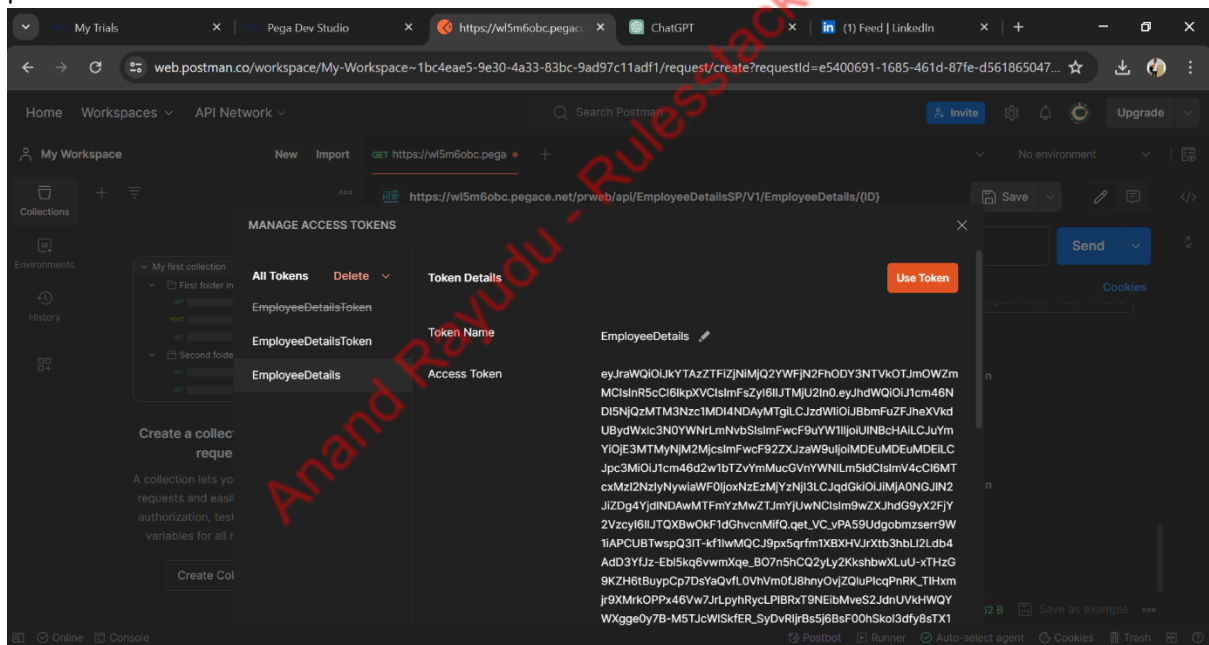


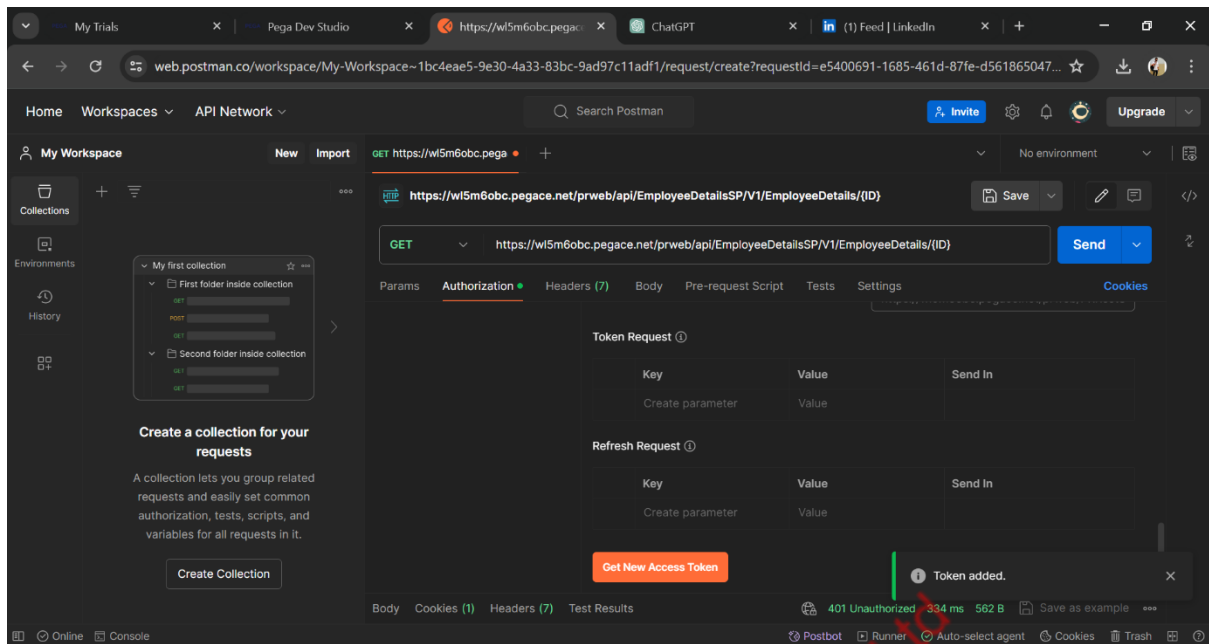


17. Make sure the token is added

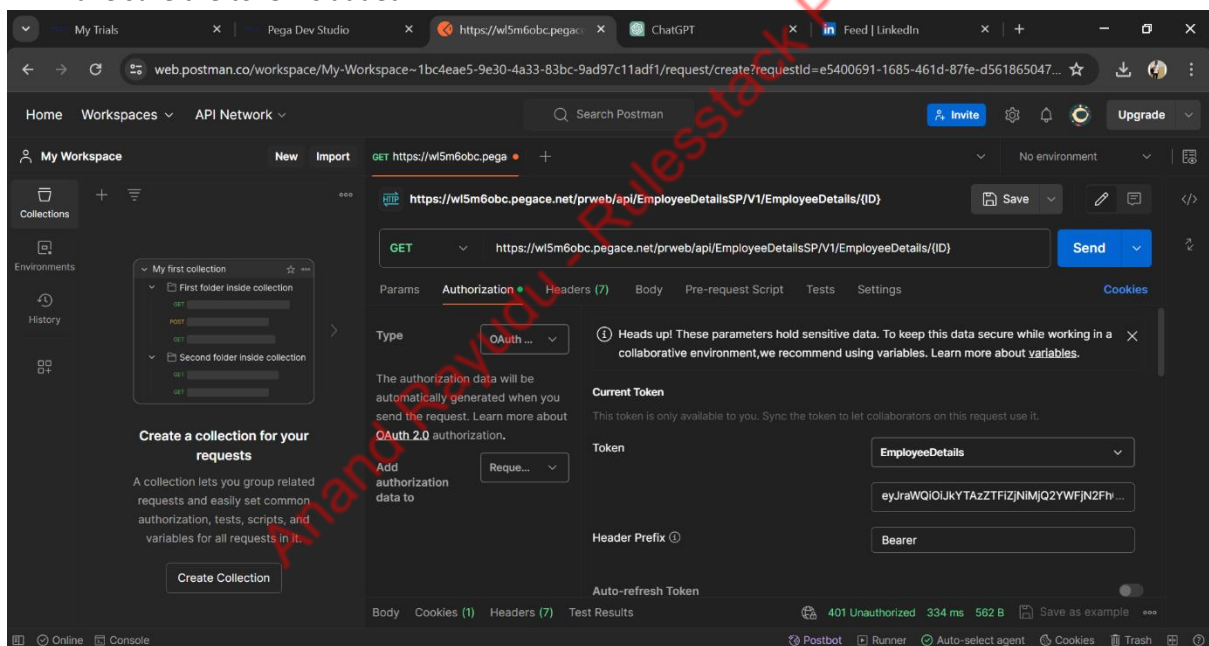


18. Now provide the variable value in the URL and click on send button so that you can see the

respective Employee data.

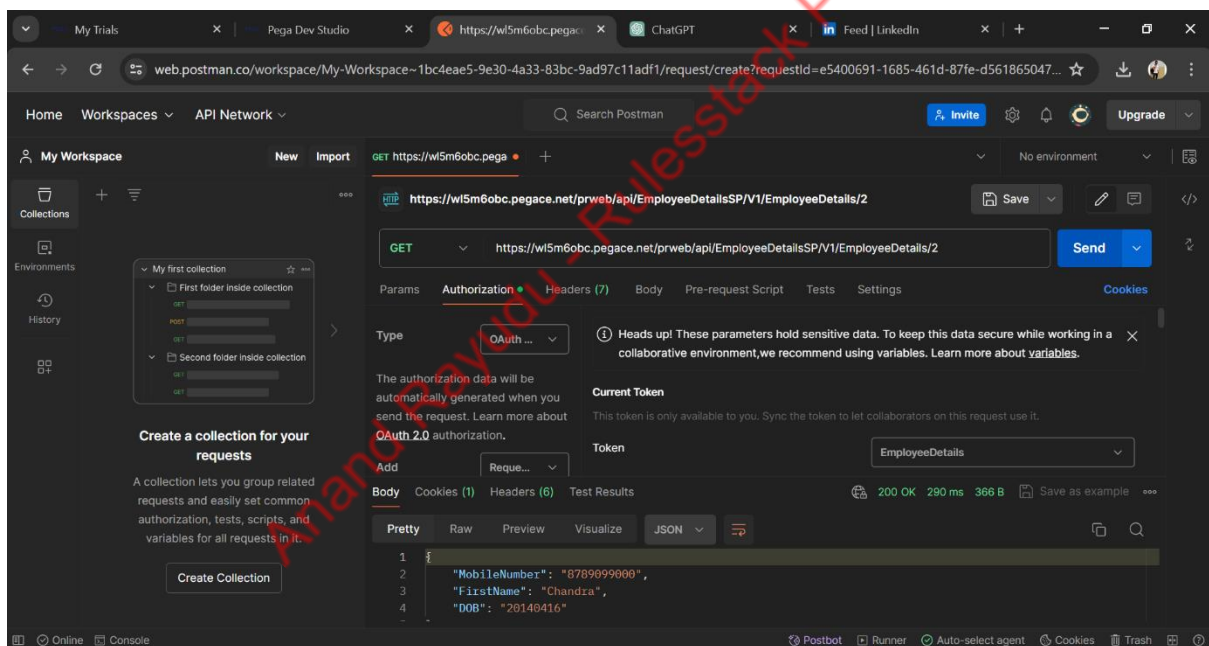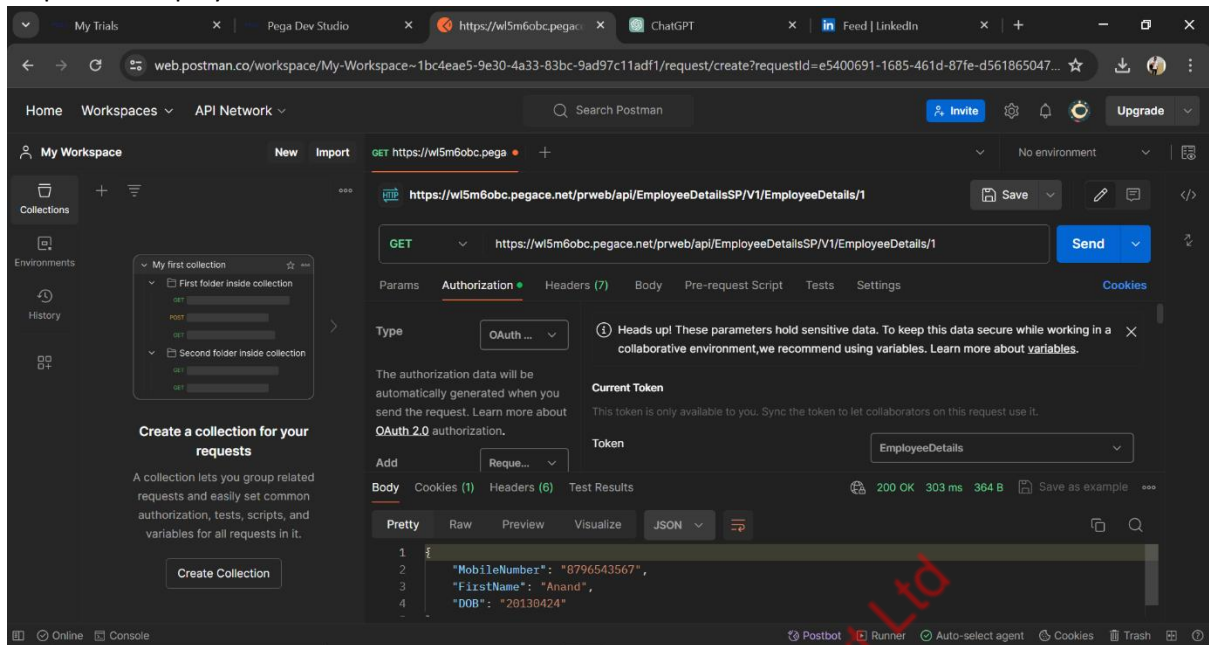

19. Now select Type as No Auth and again click on send button.

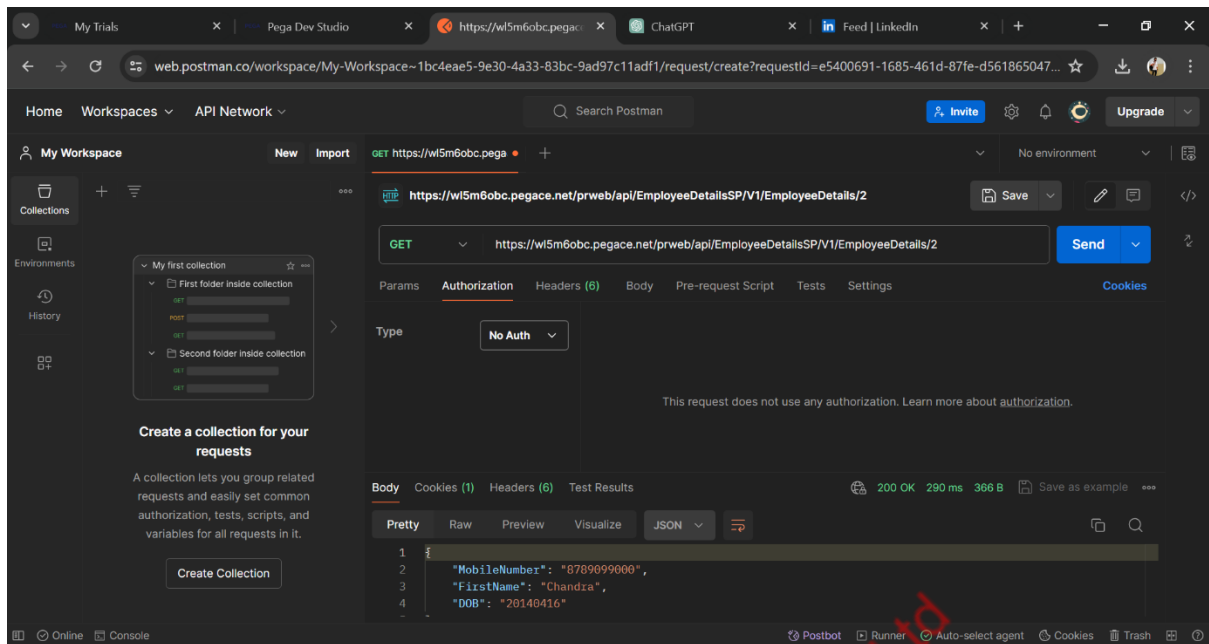

20. We can observe that we received a HTTP response code 401 Unauthorized along with the message as "Invalid Authentication Data".

