

# Use agentproto from your phone

Pair your phone with a running `agentproto serve` daemon and get its **Control Center** — the same session UI you'd open on the computer — as an app-like page on your phone, live-streaming over an end-to-end encrypted tunnel. No public tunnel, no port-forwarding, no account.

[Download this guide as a PDF.](#)

## 1. What you get

---

`agentproto pair offer --qr` prints a QR code. Scan it, confirm a fingerprint, and your phone opens the daemon's Control Center: the live session list, chat, and everything else the daemon serves — proxied straight from the daemon over the pairing, not copied or re-hosted anywhere.

It's safe to route through a broker you don't control because the broker never sees your traffic: pairing is end-to-end encrypted (`pair/v2`), so the rendezvous only ever relays **ciphertext**, and each daemon gets its own browser origin, `<fingerprint>.agentproto.cloud`, so one daemon's pairing can never read another's. See [concepts/pairing.md](#) for the full protocol and threat model.

## 2. Prerequisites

---

- **agentproto ≥ the release that ships pair/v2** on the computer running the daemon. (At the time of writing, `pair/v2` and the per-daemon pair page are on `main` but not yet in a published release — check `agentproto --version` against the latest [CHANGELOG](#) entry.) Don't rely on whether `--qr` is merely recognized — an older CLI can still accept the flag and print a link that 404s. Check the **printed link itself**: it should look like `https://<32-hex-chars>.agentproto.cloud/pair#...`, one origin per daemon. If it instead prints `https://cli.agentproto.sh/pair#...`, or the id/host label is only 16 hex characters, the daemon predates the per-daemon pair page — update agentproto on the computer, restart the daemon, and run `pair offer --qr` again.
- Any phone browser in a **secure context** (Safari or Chrome over HTTPS — which `agentproto.cloud` always is). Pairing needs service workers, so skip private/incognito tabs.

## 3. Pair in 3 steps


---

**On the computer**, with the daemon running:

```
agentproto pair offer --qr
```


This prints a QR for a phone link ( `https://<fingerprint>.agentproto.cloud/pair#...` ) alongside the usual CLI offer, and shows the daemon's fingerprint in the terminal.

**On the phone**, scan the QR with your camera. It opens the pair page, which runs the handshake and shows you the daemon's fingerprint to confirm:

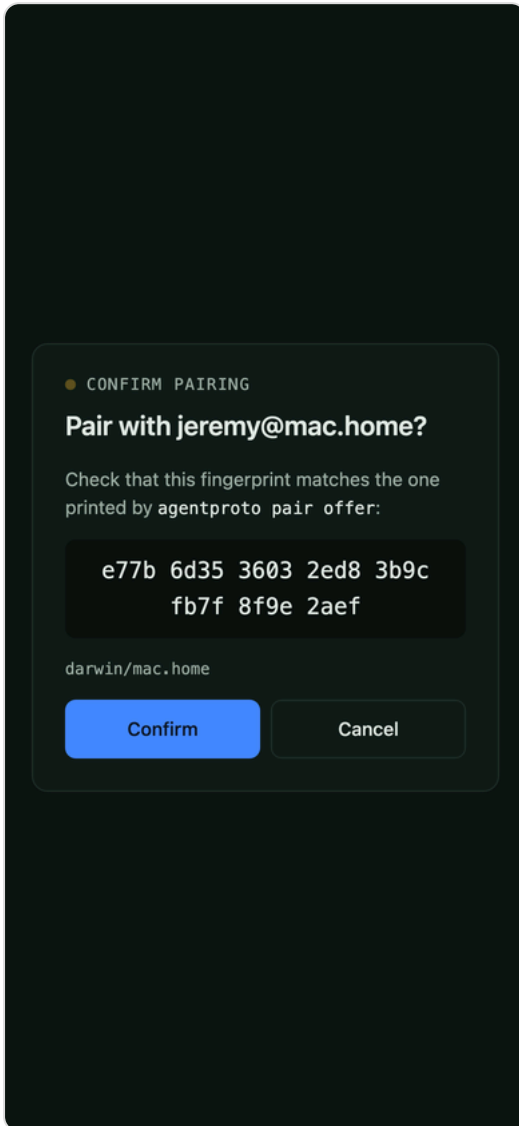

**Check that the fingerprint on the phone matches the one printed in the terminal**, then tap **Confirm**. That's the human check that defeats a swapped or malicious QR — the page refuses to skip it.

The Control Center opens automatically, proxied from the daemon over the encrypted tunnel:

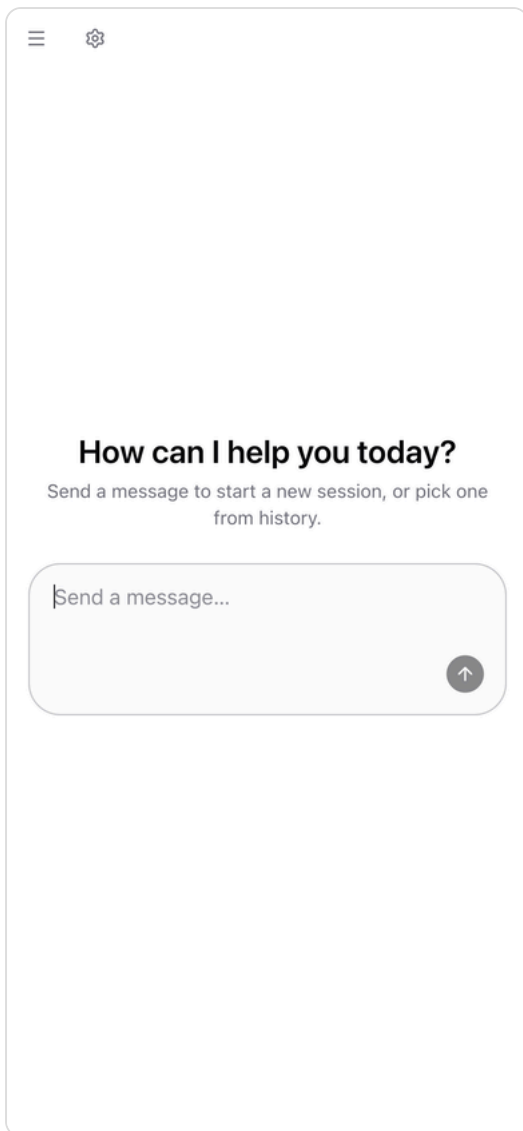

## 4. Using it

---

**Add it to your home screen** (Safari: Share → Add to Home Screen; Chrome: ⋮ → Add to Home screen) for a standalone, full-screen app rather than a browser tab. Opening it later reconnects straight to your daemon.

If the page shows "**Connecting...**", it's opening the tunnel through the rendezvous — this is normal right after a reconnect. If it shows the daemon as **unreachable**, either the daemon isn't running or the computer is asleep; there's nothing to do on the phone — it retries on its own and reconnects automatically once the daemon (and the computer) is back.


## 5. Unpair

---

**From the computer:**

```
agentproto pair ls          # see paired devices, by name/fingerprint
agentproto pair revoke <name> # drop one – it can no longer reconnect
```

The phone doesn't just look offline — it gets told:

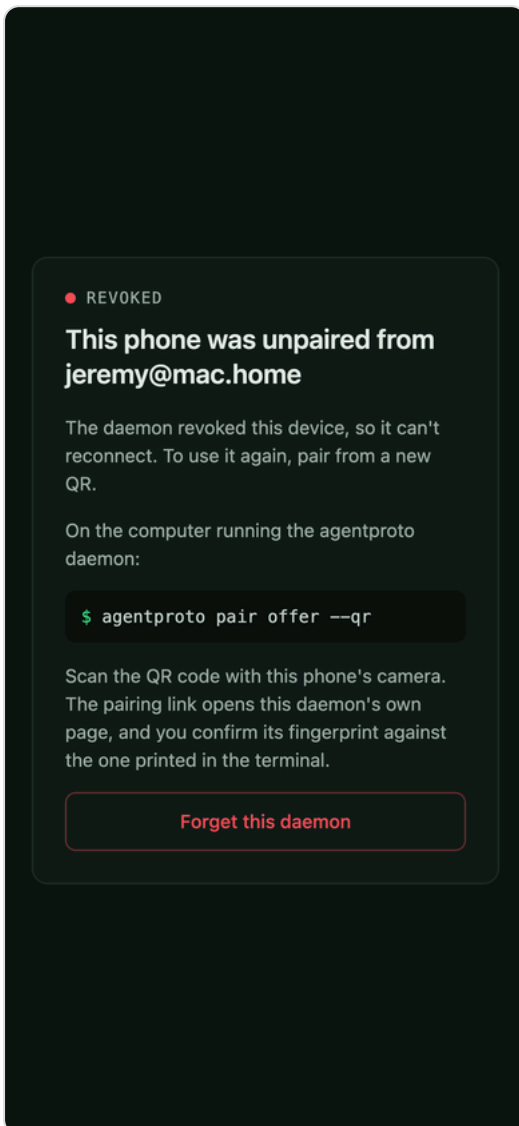


**From the phone:** open the pair page ( /pair ) and tap **Forget** next to a daemon, or **Forget this daemon** on the revoked/outdated screen. This only drops the credential stored on the phone; it doesn't touch the daemon's side, so do both if you want it gone completely.


## 6. Several daemons

---

Each daemon has its **own address** — `<fingerprint>.agentproto.cloud` — and its own separate credential, service worker, and storage on your phone. Opening one daemon's paired address lists only that daemon:

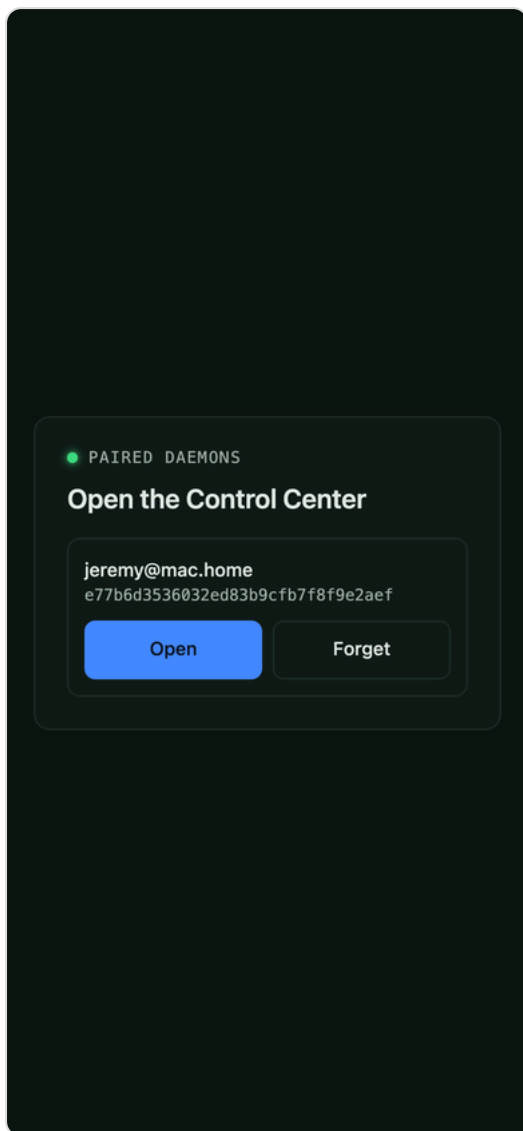

If you scan daemon B's QR while already on daemon A's page (or an old tab still points at A), you'll see **"wrong address"** — nothing is paired, and the page links you to daemon B's own address instead:

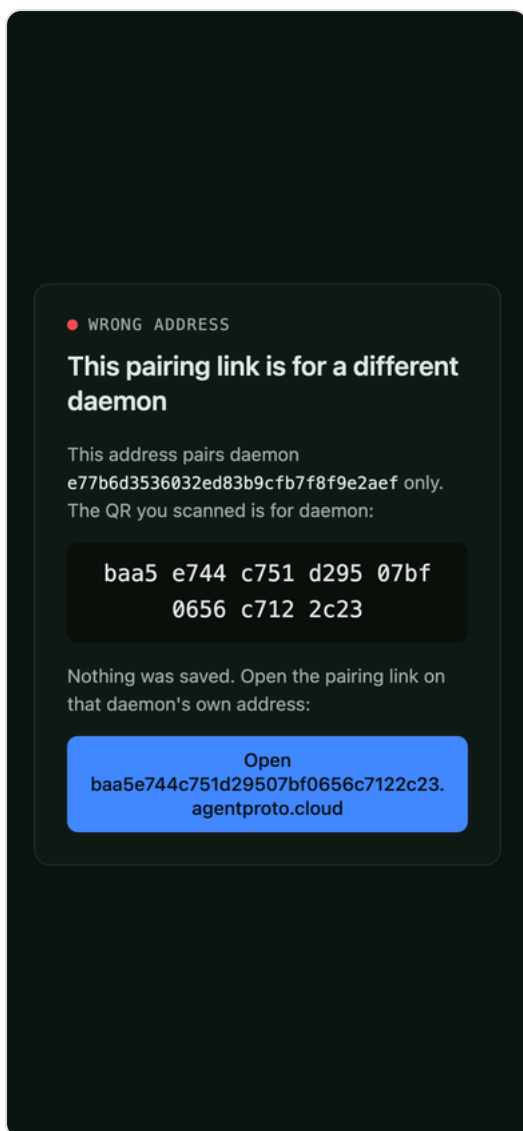

## 7. Troubleshooting

---

- **"Unpaired" / "outdated pairing"** — the daemon no longer accepts this phone's pairing (revoked, or paired under a retired protocol version). Re-pair from a fresh QR: `agentproto pair offer --qr` on the computer, scan again.
- **A 404 on the pairing link** — check the link against `https://<32-hex-chars>.agentproto.cloud/pair#...` (see [Prerequisites](#)). A `https://cli.agentproto.sh/pair#...` link, or a 16-hex-character id/host label, means the daemon predates the per-daemon pair page: update agentproto on the computer, restart the daemon, and get a fresh QR. Otherwise the link likely got mistyped/truncated when copied — get a fresh QR rather than retyping the URL by hand.
- **Offline forever, never reconnects** — check that the daemon process is actually running (`agentproto serve`) and that it can reach `pairing.rendezvous` (the hosted default is `wss://rdv.agentproto.sh/v1`) — a daemon with no network path to the broker can't be found.

- **Corporate/hotel network blocks it** — some networks block WebSocket ( `wss://` ) traffic outright. Try a phone hotspot, or [self-host the broker](#) somewhere reachable from both sides.

See also: [concepts/pairing.md](#) (protocol and threat model), [verbs/pair.md](#) (full command reference), and AIP-59 (the pairing spec) at [agentproto.sh/docs/aip-59](#).

## 8. Self-hosting (short)

---

Both pieces the phone touches can be self-hosted:

- **The pair page** — point `pairing.pairPage` in `config.json` (or `--pair-page` per offer) at your own bundle ( `packages/pair-page` ), using a `{fp}` template in the hostname for one origin per daemon: `"https://{fp}.pair.example.com/pair"` .
- **The rendezvous broker** — run your own with `agentproto rendezvous serve` and set `pairing.rendezvous` to it instead of the hosted default.

See [concepts/pairing.md](#) and [verbs/rendezvous.md](#) for the details.