

Use agentproto from your phone

Pair your phone with a running `agentproto serve` daemon and get its **Control Center** — the same session UI you'd open on the computer — as an app-like page on your phone, live-streaming over an end-to-end encrypted tunnel. No public tunnel, no port-forwarding, no account.

[Download this guide as a PDF.](#)

1. What you get

`agentproto pair offer --qr` prints a QR code. Scan it, confirm a fingerprint, and your phone opens the daemon's Control Center: the live session list, chat, and everything else the daemon serves — proxied straight from the daemon over the pairing, not copied or re-hosted anywhere.

It's safe to route through a broker you don't control because the broker never sees your traffic: pairing is end-to-end encrypted (`pair/v2`), so the rendezvous only ever relays **ciphertext**, and each daemon gets its own browser origin, `<fingerprint>.agentproto.cloud`, so one daemon's pairing can never read another's. See [concepts/pairing.md](#) for the full protocol and threat model.

2. Prerequisites

- **agentproto ≥ the release that ships pair/v2** on the computer running the daemon. (At the time of writing, `pair/v2` and the per-daemon pair page are on `main` but not yet in a published release — check `agentproto --version` against the latest [CHANGELOG](#) entry, or just try `agentproto pair offer --qr`: an older CLI won't recognize `--qr`.)
- Any phone browser in a **secure context** (Safari or Chrome over HTTPS — which `agentproto.cloud` always is). Pairing needs service workers, so skip private/incognito tabs.


3. Pair in 3 steps

On the computer, with the daemon running:

```
agentproto pair offer --qr
```


This prints a QR for a phone link (`https://<fingerprint>.agentproto.cloud/pair#...`) alongside the usual CLI offer, and shows the daemon's fingerprint in the terminal.

On the phone, scan the QR with your camera. It opens the pair page, which runs the handshake and shows you the daemon's fingerprint to confirm:

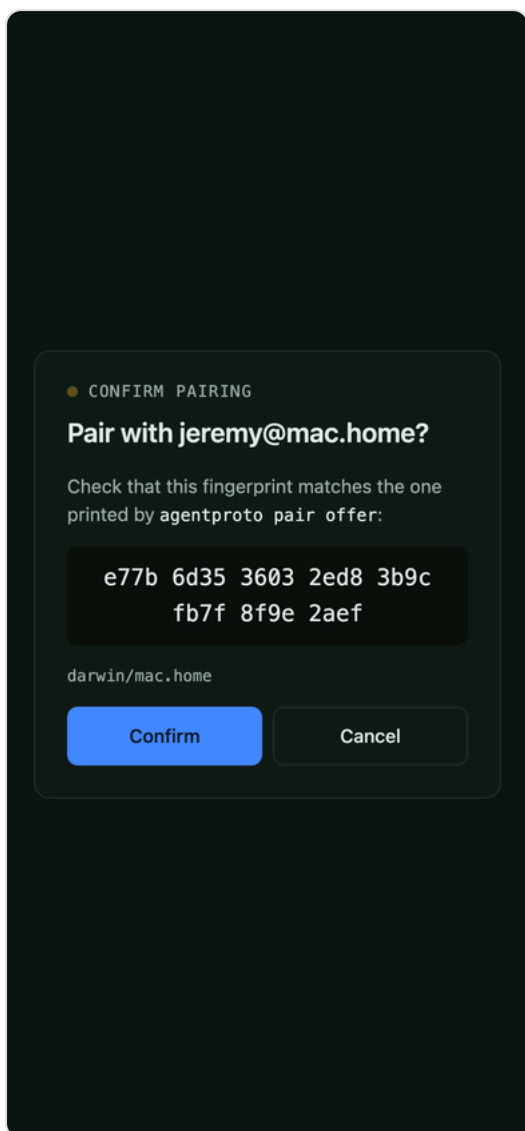

Check that the fingerprint on the phone matches the one printed in the terminal, then tap **Confirm**. That's the human check that defeats a swapped or malicious QR — the page refuses to skip it.

The Control Center opens automatically, proxied from the daemon over the encrypted tunnel:

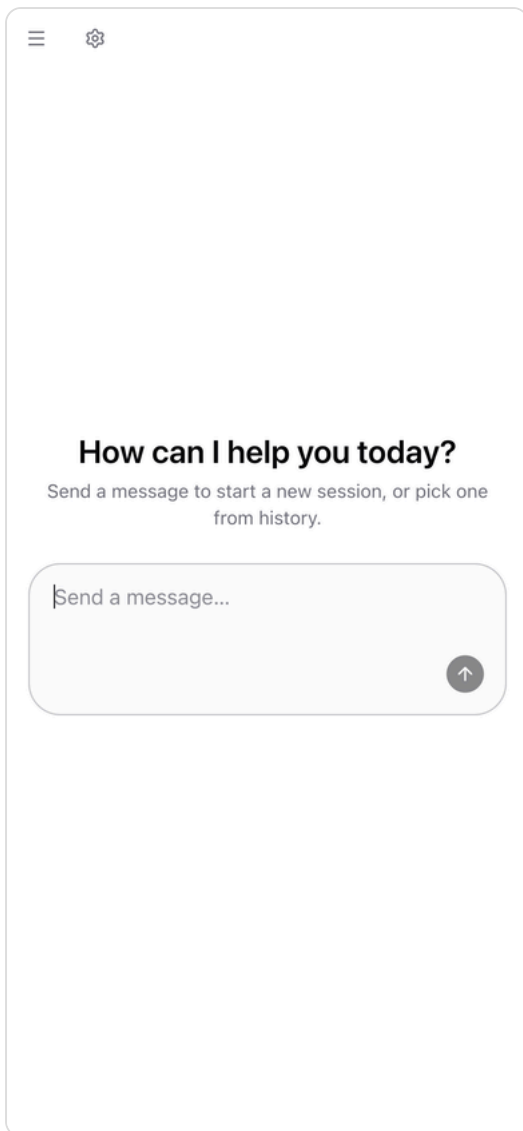

4. Using it

Add it to your home screen (Safari: Share → Add to Home Screen; Chrome: ⋮ → Add to Home screen) for a standalone, full-screen app rather than a browser tab. Opening it later reconnects straight to your daemon.


If the page shows "**Connecting...**", it's opening the tunnel through the rendezvous — this is normal right after a reconnect. If it shows the daemon as **unreachable**, either the daemon isn't running or the computer is asleep; there's nothing to do on the phone — it retries on its own and reconnects automatically once the daemon (and the computer) is back.

5. Unpair

From the computer:

```
agentproto pair ls          # see paired devices, by name/fingerprint
agentproto pair revoke <name> # drop one – it can no longer reconnect
```


The phone doesn't just look offline — it gets told:

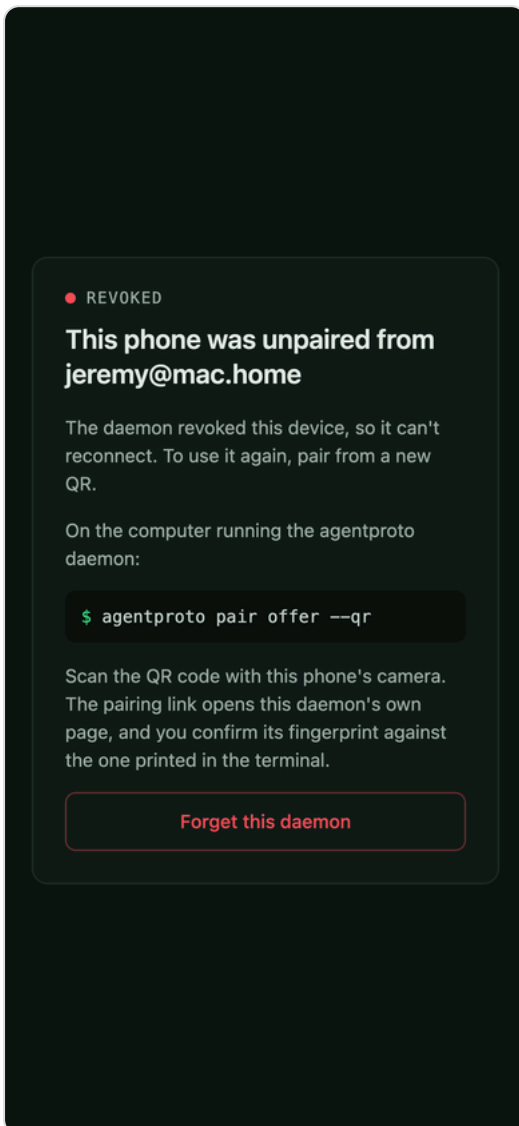


From the phone: open the pair page (/pair) and tap **Forget** next to a daemon, or **Forget this daemon** on the revoked/outdated screen. This only drops the credential stored on the phone; it doesn't touch the daemon's side, so do both if you want it gone completely.

6. Several daemons

Each daemon has its **own address** — `<fingerprint>.agentproto.cloud` — and its own separate credential, service worker, and storage on your phone. Opening one daemon's paired address lists only that daemon:

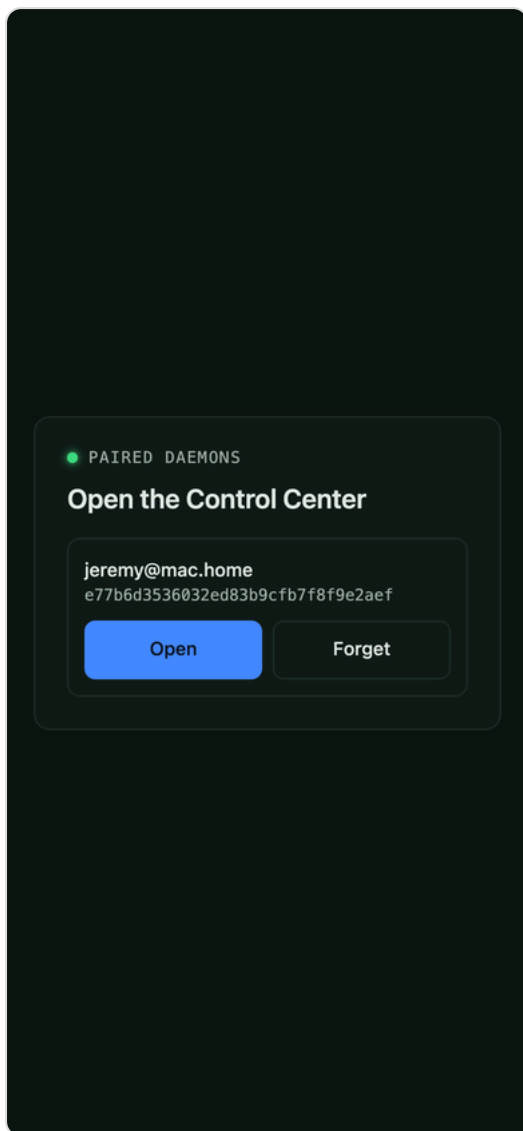

If you scan daemon B's QR while already on daemon A's page (or an old tab still points at A), you'll see **"wrong address"** — nothing is paired, and the page links you to daemon B's own address instead:

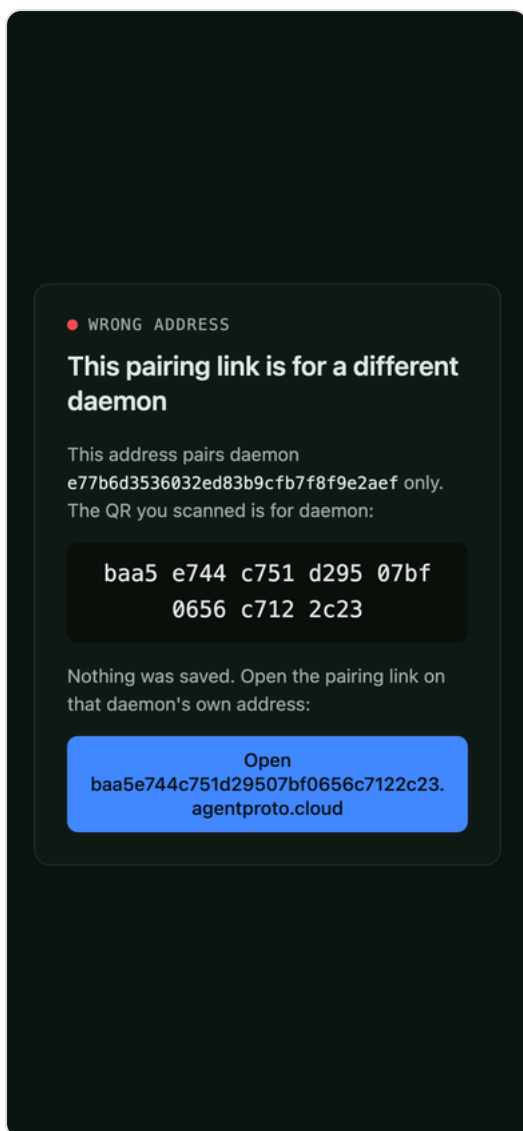

7. Troubleshooting

- **"Unpaired" / "outdated pairing"** — the daemon no longer accepts this phone's pairing (revoked, or paired under a retired protocol version). Re-pair from a fresh QR: `agentproto pair offer --qr` on the computer, scan again.
- **A 404 on the pairing link** — either the daemon is too old (pre-pair/v2 daemons mint a 16-hex-character fingerprint, which the current pair page rejects as an invalid host) or the link got mistyped/truncated when copied. Get a fresh QR rather than retyping the URL by hand.
- **Offline forever, never reconnects** — check that the daemon process is actually running (`agentproto serve`) and that it can reach `pairing.rendezvous` (the hosted default is `wss://rdv.agentproto.sh/v1`) — a daemon with no network path to the broker can't be found.
- **Corporate/hotel network blocks it** — some networks block WebSocket (`wss://`) traffic outright. Try a phone hotspot, or [self-host the broker](#) somewhere reachable from both sides.

See also: [concepts/pairing.md](#) (protocol and threat model), [verbs/pair.md](#) (full command reference), and AIP-59 (the pairing spec) at [agentproto.sh/docs/aip-59](#).

8. Self-hosting (short)

Both pieces the phone touches can be self-hosted:

- **The pair page** — point `pairing.pairPage` in `config.json` (or `--pair-page` per offer) at your own bundle (`packages/pair-page`), using a `{fp}` template in the hostname for one origin per daemon: `"https://{fp}.pair.example.com/pair"` .
- **The rendezvous broker** — run your own with `agentproto rendezvous serve` and set `pairing.rendezvous` to it instead of the hosted default.

See [concepts/pairing.md](#) and [verbs/rendezvous.md](#) for the details.