VULTR AGENT RUSH · BLAST RADIUS ZERO

LinkOps
Data Lab

Ask a question about a CSV. Inspect the plan and Python. Get an answer produced inside a fresh, network-isolated sandbox.

MODEL-PLANNED · CODE-EXECUTED · RESULT-VERIFIED

ONE TASK · FOUR AUDITABLE STEPS

01 PLAN
Vultr Serverless Inference

02 WRITE
Generated Python shown

03 EXECUTE
Disposable Docker sandbox

04 VERIFY
Real output + chart

Hackathon prototype · synthetic sample data · no personal data

01 / PRODUCT FLOW

From question to executed result

A small, visible agent loop makes the work verifiable instead of asking a judge to trust a chat transcript.

01

Ask

“Which product generated the most revenue? Show a chart.”

02

Plan + write

Inference sees the question, column names, and up to five preview rows.

03

Execute

Generated Python reads the full CSV inside a disposable container.

04

Explain

The UI shows actual stdout, code, a chart, and the model’s summary.

DATA HANDLING Sample preview to model · Full file only to the sandbox · No file or prompt in app logs

02 / CONTAINMENT

The execution boundary is the product

Generated code is treated as untrusted. It does not run in the web server or receive the inference key.

VULTR VM · CONTROL PLANE

LinkOps orchestrator

Calls Vultr Inference, creates a one-run container, collects output, explains results, removes the workspace.

API KEY STAYS HERE



FRESH SANDBOX · DESTROYED AFTER EACH RUN

Network	none	Root filesystem	read-only
Memory	512 MB	CPU	0.5 core
Process cap	48	Deadline	15 sec
UID	65534	Secrets	none

03 / VISIBLE PROOF


A judge can inspect every claim

The sample dataset is fictional. The figures below are expected sample output; the demo should be judged against the actual run shown in the app.

EXPECTED OUTPUT · SAMPLE CSV

Studio Mic · $10,500

Largest revenue in the included sample

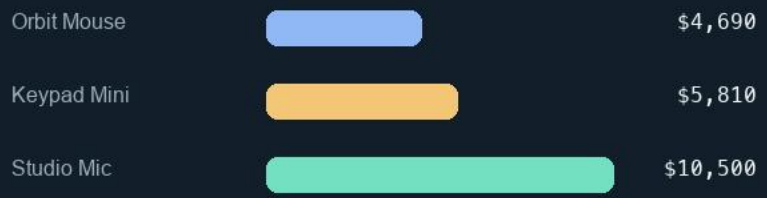

Expected totals for the built-in fictional sample.

LOCAL CONTAINMENT PROBE · VERIFY DEPLOYMENT

Outbound network	network_mode=none	BLOCKED
Write outside workspace	read-only root filesystem	DENIED
Inference key in sandbox	separate container environment	NOT PRESENT
Temporary task volume	cleanup after execution	REMOVED

04 / IMPLEMENTATION

Built for a focused public demo

Before final hand-in, confirm the deployed app, real Vultr inference, and the containment probe against the live VM.

Vultr Cloud Compute

Single-purpose VM hosts the web app, API, Docker control plane, and public HTTPS endpoint.

Vultr Serverless Inference

Creates a task plan and Python script, then summarizes only the sandbox output.

Disposable containers

One fresh Docker container and volume per task; no network route or model secret.

DEMO LIMITS

Hackathon prototype, not a hardened multi-tenant service. No confidential or personal CSVs. The app does not retain uploads or prompts; up to five sample rows are sent to Vultr Inference after consent.